

PO Box 219
14579 Government Road
Larder Lake, Ontario
P0K 1L0, Canada
Phone (705) 643-1122
Fax (705) 643-2191

CJP EXPLORATION INC.

Magnetometer Surveys Over the

JUNO MINE PROPERTY

Coleman Township, Ontario

TABLE OF CONTENTS

1. SURVEY DETAILS3

1.1 PROJECT NAME..... 3

1.2 CLIENT 3

1.3 LOCATION 3

1.4 ACCESS 4

1.5 SURVEY GRID 4

2. SURVEY WORK UNDERTAKEN5

2.1 SURVEY LOG..... 5

2.2 PERSONNEL 5

2.3 SURVEY SPECIFICATIONS..... 5

3. OVERVIEW OF SURVEY RESULTS.....6

3.1 SUMMARY INTERPRETATION..... 6

LIST OF APPENDICES

- APPENDIX A: STATEMENT OF QUALIFICATIONS**
- APPENDIX B: THEORETICAL BASIS AND SURVEY PROCEDURES**
- APPENDIX C: INSTRUMENT SPECIFICATIONS**
- APPENDIX D: LIST OF MAPS (IN MAP POCKET)**

LIST OF TABLES AND FIGURES

Figure 1: Location of Juno Mine Property 3

Figure 2: Claim Map with Juno Mine Property Traverses 4

Table 1: Survey log..... 5

1. SURVEY DETAILS

1.1 PROJECT NAME

This project is known as the **Juno Mine**.

1.2 CLIENT

CJP EXPLORATION INC.
62 2nd Ave.
Larder Lake, Ontario
P0K 1L0

1.3 LOCATION

The Juno Mine Property is located approximately 2.5km southeast of Cobalt, Ontario. The magnetic traverse area is located in Coleman Township and covers mining claim 4217615, within the Larder Lake Mining Division.

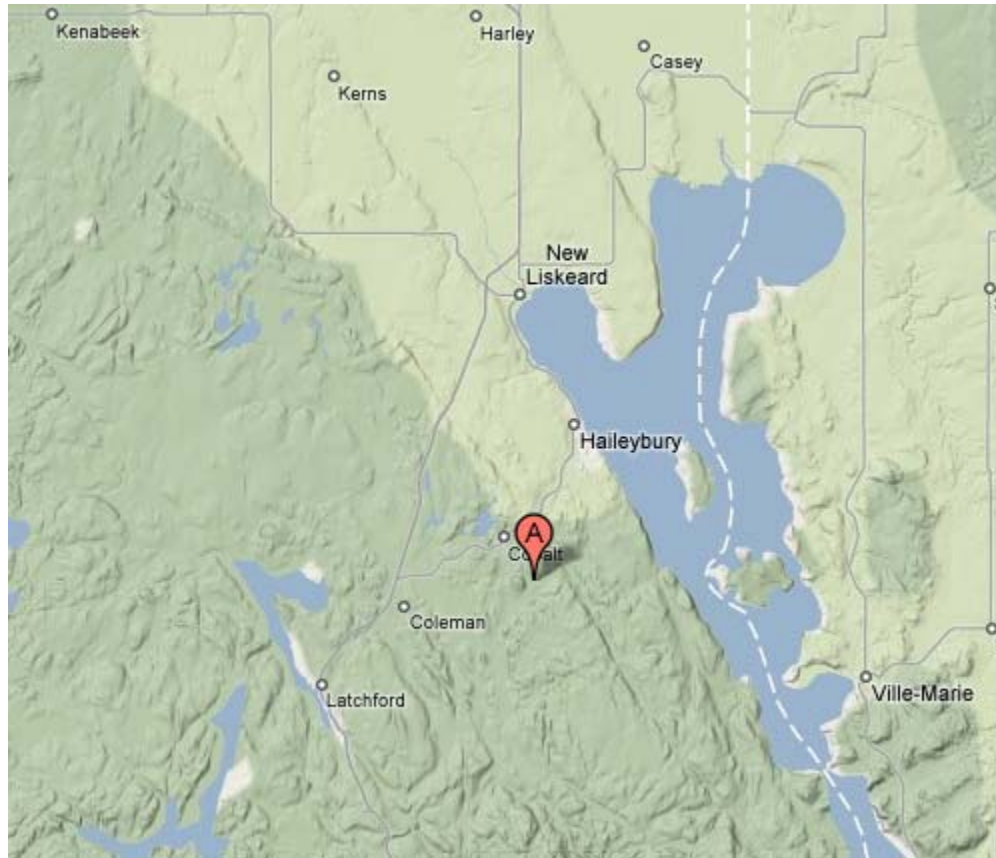


Figure 1: Location of Juno Mine Property

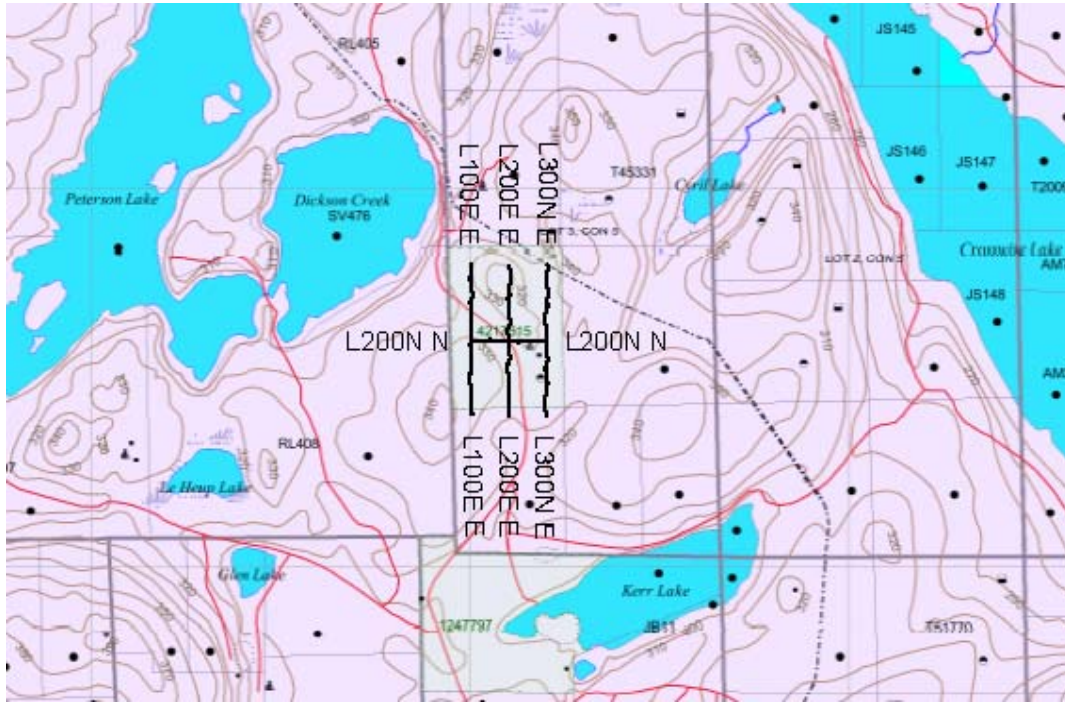


Figure 2: Claim Map with Juno Mine Property Traverses

1.4 ACCESS

Access to the property was via Nipissing Road east from the town of Cobalt. The Kerr Lake road was then travelled north for 700m until the property was reached.

1.5 SURVEY GRID

The traversed lines were established using a GPS in conjunction with the execution of the survey. The GPS operator would establish sample locations while remaining approximately 25m in front of the magnetometer operator. GPS waypoints and magnetic samples were taken every 25m along these controlled traverses. The GPS used was a Garmin 76 with an external antenna for added accuracy.

2. SURVEY WORK UNDERTAKEN

2.1 SURVEY LOG

Date	Description	Line	Min Extent	Max Extent	Total Survey
April 9, 2009	Locate survey area and read magnetic survey.	100E	0	400N	400
		200E	0	400N	400
		300E	0	400N	400
		200N	100E	300E	200

Table 1: Survey log

2.2 PERSONNEL

Barry Allen of Kirkland Lake, conducted all the magnetic data collection and was also responsible for the GPS control and GPS waypoint collection.

2.3 SURVEY SPECIFICATIONS

The survey was conducted with a GSM-19 v7 Overhauser magnetometer with a second GSM-19 magnetometer for a base station mode for diurnal correction.

A total of 1.4 line kilometers of no grid magnetometer was read over the Juno Mine Property on April 9, 2009. This consisted of 112 magnetometer samples taken at a 12.5m sample interval.

3. OVERVIEW OF SURVEY RESULTS

3.1 SUMMARY INTERPRETATION

The survey indicates the general magnetic fabric having an east-west strike.

I recommend following up this survey with detailed mapping and prospecting. This would help identify favorable. The geology compared with the magnetic response would help identify favorable horizons and structures.

APPENDIX A**STATEMENT OF QUALIFICATIONS**

I, C. Jason Ploeger, hereby declare that:

1. I am a geophysicist (non-professional) with residence in Larder Lake, Ontario and am presently employed as president of Larder Geophysics Ltd. of Larder Lake, Ontario.
2. I graduated with a Bachelor of Science degree in geophysics from the University of Western Ontario, in London Ontario, in 1999.
3. I have practiced my profession continuously since graduation in Africa, Bulgaria, Canada, Mexico and Mongolia.
4. I am a member of the Ontario Prospectors Association.
5. I have an interest in the properties or securities of **CJP EXPLORATION INC.**
6. I am responsible for the final processing and validation of the survey results and the compilation of the presentation of this report. The statements made in this report represent my professional opinion based on my consideration of the information available to me at the time of writing this report.

Larder Lake, ON
April 2009



C. Jason Ploeger, B.Sc. (geophysics)
President of Larder Geophysics Ltd.

APPENDIX B

THEORETICAL BASIS AND SURVEY PROCEDURES

TOTAL FIELD MAGNETIC SURVEY

Base station corrected Total Field Magnetic surveying is conducted using at least two synchronized magnetometers of identical type. One magnetometer unit is set in a fixed position in a region of stable geomagnetic gradient, and away from possible cultural effects (i.e. moving vehicles) to monitor and correct for daily diurnal drift. This magnetometer, given the term 'base station', stores the time, date and total field measurement at fixed time intervals over the survey day. The second, remote mobile unit stores the coordinates, time, date, and the total field measurements simultaneously. The procedure consists of taking total magnetic measurements of the Earth's field at stations, along individual profiles, including Tie and Base lines. A 2 meter staff is used to mount the sensor, in order to optimally minimize localized near-surface geologic noise. At the end of a survey day, the mobile and base-station units are linked, via RS-232 ports, for diurnal drift and other magnetic activity (ionospheric and spheric) corrections using internal software.

For the gradiometer application, two identical sensors are mounted vertically at the ends of a rigid fiberglass tube. The centers of the coils are spaced a fixed distance apart (0.5 to 1.0m). The two coils are then read simultaneously, which alleviates the need to correct the gradient readings for diurnal variations, to measure the gradient of the total magnetic field.

VLF Electromagnetic

The frequency domain VLF electromagnetic survey is designed to measure both the vertical and horizontal in-phase (IP) and Quadrature (OP) components of the anomalous field from electrically conductive zones. The sources for VLF EM surveys are several powerful radio transmitters located around the world which generate EM radiation in the low frequency band of 15-25kHz. The signals created by these long-range communications and navigational systems may be used for surveying up to several thousand kilometres away from the transmitter. The quality of the incoming VLF signal can be monitored using the field strength. A field strength above 5pT will produce excellent quality results. Anything lower indicates a weak signal strength, and possibly lower data quality. A very low signal strength (<1pT) may indicate the radio station is down.

The EM field is planar and horizontal at large distances from the EM source. The two components, electric (E) and magnetic (H), created by the source field are orthogonal to each other. E lies in a vertical plane while H lies at right angles to the direction of propagation in a horizontal plane. In order to ensure good coupling, the strike of possible conductors should lie in the direction of the transmitter to allow the H vector to pass through the anomaly, in turn, creating a secondary EM field.

The VLF EM receiver has two orthogonal aeriels which are tuned to the frequency of the transmitting station. The direction of the source station is located by rotating the sensor around a vertical axis until a null position is found. The VLF EM survey procedure consists of taking measurements at stations along each line on the grid. The receiver is rotated about a horizontal axis, right angles to the traverse and the tilt recorded at the null position.

APPENDIX C**GSM 19****Specifications****Overhauser Performance**

Resolution: 0.01 nT
 Relative Sensitivity: 0.02 nT
 Absolute Accuracy: 0.2nT
 Range: 20,000 to 120,000 nT
 Gradient Tolerance: Over 10,000nT/m
 Operating Temperature: -40°C to +60°C

Operation Modes

Manual: Coordinates, time, date and reading stored automatically at min. 3 second interval.
 Base Station: Time, date and reading stored at 3 to 60 second intervals.
 Walking Mag: Time, date and reading stored at coordinates of fiducial.
 Remote Control: Optional remote control using RS-232 interface.
 Input/Output: RS-232 or analog (optional) output using 6-pin weatherproof connector.

Operating Parameters

Power Consumption: Only 2Ws per reading. Operates continuously for 45 hours on standby.
 Power Source: 12V 2.6Ah sealed lead acid battery standard, other batteries available
 Operating Temperature: -50°C to +60°C

Storage Capacity

Manual Operation: 29,000 readings standard, with up to 116,000 optional. With 3 VLF stations: 12,000 standard and up to 48,000 optional.

Base Station: 105,000 readings standard, with up to 419,000 optional (88 hours or 14 days uninterrupted operation with 3 sec. intervals)

Gradiometer: 25,000 readings standard, with up to 100,000 optional. With 3 VLF stations: 12,000, with up to 45,000 optional.

Omnidirectional VLF

Performance Parameters: Resolution 0.5% and range to $\pm 200\%$ of total field. Frequency 15 to 30 kHz.

Measured Parameters: Vertical in-phase & out-of-phase, 2 horizontal components, total field coordinates, date, and time.

Features: Up to 3 stations measured automatically, in-field data review, displays station field strength continuously, and tilt correction for up to $\pm 10^\circ$ tilts.

Dimensions and Weights: 93 x 143 x 150mm and weighs only 1.0kg.

Dimensions and Weights

Dimensions:

Console: 223 x 69 x 240mm

Sensor: 170 x 71mm diameter cylinder

Weight:

Console: 2.1kg

Sensor and Staff Assembly: 2.0kg

Standard Components

GSM-19 magnetometer console, harness, battery charger, shipping case, sensor with cable, staff, instruction manual, data transfer cable and software.

Taking Advantage of a “Quirk” of Physics

Overhauser effect magnetometers are essentially proton precession devices except that they produce an order-of-magnitude greater sensitivity. These "supercharged" quantum magnetometers also deliver high absolute accuracy, rapid cycling (up to 5 readings / second), and exceptionally low power consumption.

The Overhauser effect occurs when a special liquid (with unpaired electrons) is combined with hydrogen atoms and then exposed to secondary polarization from a radio frequency (RF) magnetic field. The unpaired electrons transfer their stronger polarization to hydrogen atoms, thereby generating a strong precession signal-- that is ideal for very high-sensitivity total field measurement. In comparison with proton precession methods, RF signal generation also keeps power consumption to an absolute minimum and reduces noise (i.e. generating RF frequencies are well out of the bandwidth of the precession signal).

In addition, polarization and signal measurement can occur simultaneously - which enables faster, sequential measurements. This, in turn, facilitates advanced statistical averaging over the sampling period and/or increased cycling rates (i.e. sampling speeds).

The unique Overhauser unit blends physics, data quality, operational efficiency, system design and options into an instrumentation package that ... exceeds proton precession and matches costlier optically pumped cesium capabilities.

APPENDIX C**GARMIN GPS 76****GPS Performance**

Receiver: WAAS-enabled, 12 parallel channel GPS receiver continuously tracks and uses up to 12 satellites to compute and update your position

Navigation Features

Waypoints/icons: 500 with name and graphic symbol, 10 nearest (automatic), 10 proximity
Routes: 50 reversible routes with up to 50 points each, plus MOB and TracBack® modes
Tracks: Automatic track log; 10 saved tracks let you retrace your path in both directions
Trip computer: Current speed, average speed, resettable max. speed, trip timer and trip distance
Alarms: Anchor drag, approach and arrival, off-course, proximity waypoint, shallow water and deep water
Tables: Built-in celestial tables for best times to fish and hunt, sun and moon rise, set and location
Map datums: More than 100 plus user datum
Position format: Lat/Lon, UTM/UPS, Maidenhead, MGRS, Loran TDs and other grids, including user grid

Acquisition times

Warm: Approximately 15 seconds
Cold: Approximately 45 seconds
AutoLocate®: Approximately 2 minutes
Update rate: 1/second, continuous

GPS accuracy

Position: < 15 meters, 95% typical*
Velocity: 0.05 meter/sec steady state

WAAS accuracy

Position: < 3 meters, 95% typical*
Velocity: 0.05 meter/sec steady state

Power

Source: Two "AA" batteries (not included)
Battery Life: Up to 16 hours

Physical

Size: 2.7"W x 6.2"H x 1.2"D (6.9 x 15.7 x 3.0 cm)
Weight: 7.7 ounces

Display

1.6"W x 2.2"H (4.1 x 5.6 cm)
 180 x 240 pixels, high-contrast

FSTN with bright backlighting

Case:	Fully gasketed, high-impact plastic alloy, waterproof to IEC 529 IPX7 standards
Interfaces:	RS232 with NMEA 0183, RTCM 104 DGPS data format and proprietary Garmin®
Antenna:	Built-in quadrifilar, with external antenna connection (MCX)
Differential:	DGPS (USCG and WAAS capable)
Temperature range:	5°F to 158°F (-15°C to 70°C)
Dynamics:	6 g's
User data storage:	Indefinite, no memory battery required

Specifications obtained from www.garmin.com




APPENDIX D

LIST OF MAPS (IN MAP POCKET)

Posted profiled TFM plan map (1:2500)

- 1) CJP-JUNO-MAG-CONT

TOTAL MAPS=1

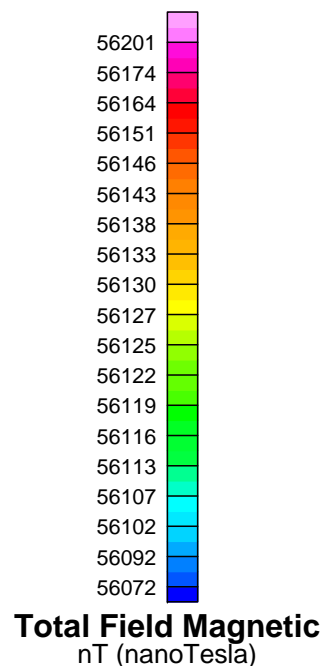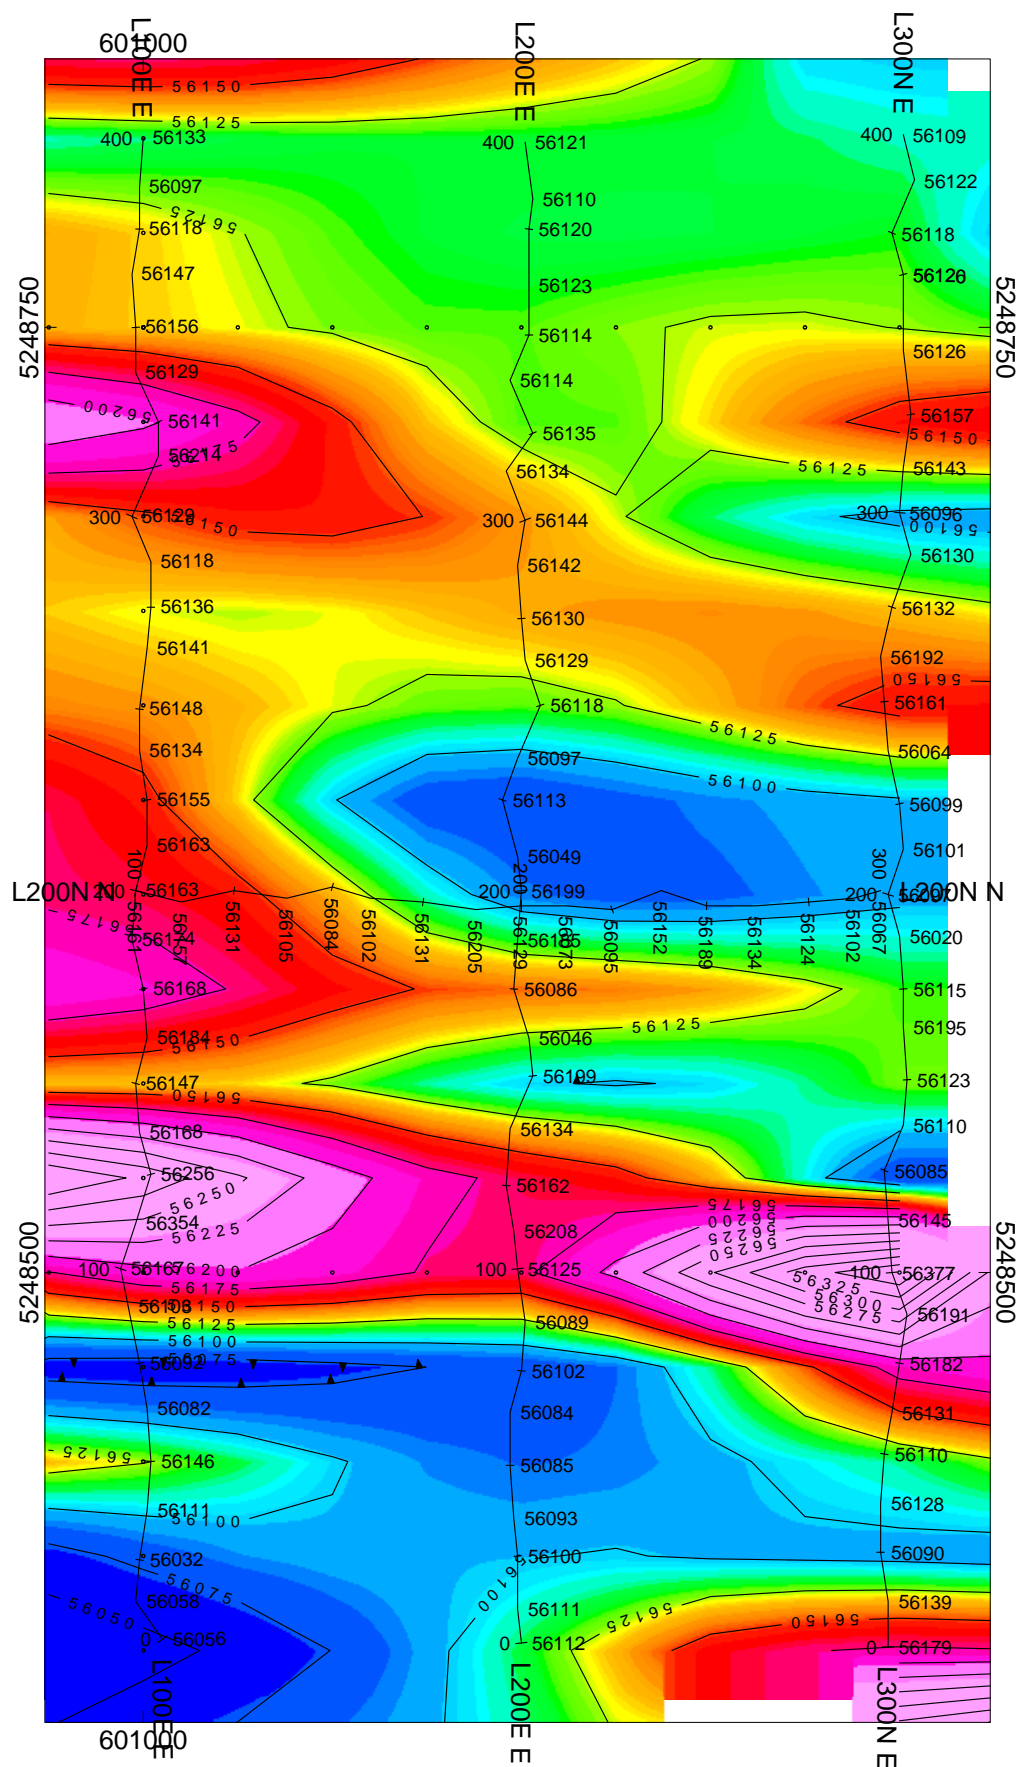


CJP EXPLORATION INC.

JUNO MINE
Coleman Township, Ontario

TOTAL FIELD MAGNETIC CONTOURED PLAN MAP
Base Station Corrected

Posting Level: 0nT
Field Inclination/Declination: 74degN/12degW
Station Separation: 25 meters
Total Field Magnetic Contours: 25nT

GSM-19 OVERHAUSER MAGNETOMETER/VLF v7

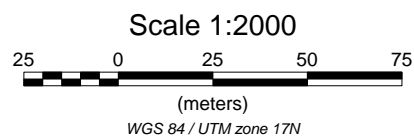

Receiver Operated By: Barry Allen
GPS Operated By: Barry Allen
Processed by: C Jason Ploeger, B.Sc.
Map Drawn By: C Jason Ploeger, B.Sc.
April 9, 2009



CJP-JUNO-MAG-CONT