


**Report on a Drilling Program  
On the Hope Lake Property,  
Lobstick Bay Area, Ontario  
for  
Cabo Mining Enterprises Corp.**

2.31842

**March 30, 2006      Seymour M. Sears, P.Geo.**

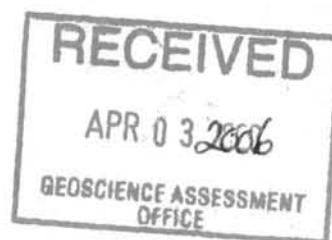

## SUMMARY

The Hope Lake Gold property was acquired by Cabo Mining Enterprises Corp. in June of 2004. It is located in the Nestor Falls – Sioux Narrows area of the Kenora Mining Division, northwestern Ontario.

The property is mainly underlain by mafic volcanic rocks that are part of the Populus Volcanic Group of rocks (Trowell et al, 1980). In the claim group, these rocks lie on the western margin of the Hope Lake Granitic Stock. The volcanic rocks are locally intruded by gabbroic sills and dykes as well as quartz-feldspar porphyry bodies. Numerous occurrences of gold are known to occur on the property. These are generally hosted within zones of ankerite-quartz alteration, often accompanied by shearing, sericitization and pyrite.

A brief geological mapping program was carried out in July, 2004 designed to examine the geological character of some of the known mineralization in order to design a more extensive and effective exploration program (Sears, 2004). One new gold prospect was located (Fairservice Occurrence) in an area near the northeast end of Mushkasu Lake, and several other zones containing anomalous gold values were identified.

During March of 2005, a magnetometer survey was carried out on a portion of the claims and two areas were stripped by an excavator (Sears, 2005).

In June of 2005, nine holes totalling 1050 metres were drilled to test several carbonate-quartz-pyrite alteration zones exposed in several old prospects between Mushkasu Lake and Porphyry Lake. Only weakly anomalous gold values were detected in these holes.

**TABLE OF CONTENTS**

	PAGE
SUMMARY.....	i
TABLE OF CONTENTS .....	ii
INTRODUCTION.....	1
PROPERTY LOCATION AND ACCESS.....	1
TOPOGRAPHY AND VEGETATION.....	4
EXPLORATION HISTORY.....	4
REGIONAL AND PROPERTY GEOLOGY .....	5
DRILL PROGRAM AND RESULTS .....	7
CONCLUSIONS AND RECOMMENDATIONS .....	8
REFERENCES.....	9

**TABLE OF FIGURES**

Fig. 1. REGIONAL LOCATION MAP .....	2
Fig. 2. CLAIM LOCATION MAP.....	3
Fig. 4. Geological Map .....	6
Fig. 4. DRILL HOLE LOCATION MAP .....	Back Pocket

## INTRODUCTION

This work report on the Hope Lake Property (Figures 1, 2), has been prepared on behalf of Cabo Mining Enterprises Corp. of Vancouver, B. C. The content of this report is based on supervision, interpretation and core logging carried out between June 15<sup>th</sup> and July 31<sup>st</sup>, 2005 by Seymour M. Sears, P.Geo. of Sudbury, Ontario and Jack Partington of Thunder Bay, Ontario. The drilling program was completed by Norex Drilling Ltd. of Thunder Bay, Ontario and assaying by Accurassay Laboratory in Thunder Bay, Ontario.

## PROPERTY LOCATION AND ACCESS

The Hope Lake Property is located 65 km southeast of Kenora, Ontario in the Lobstick Bay Map Area. It consists of 14 contiguous, unpatented mining claims containing 109 units. The claims are shown on Figure 2, a portion of claim Index Map G-2627 where they are numbered as follows:

<b>Claim #</b>	<b>Units</b>	<b>#</b>	<b>Hectares</b>	<b>Anniversary Date</b>
1178320	1		16	June 30, 2005
1220618	1		16	June 30, 2005
1220653	2		32	May 10, 2006
1248205	15		240	July 31, 2004
1248206	2		32	October 09, 2004
1248207	3		48	October 09, 2004
3005688	14		224	April 03, 2005
3005689	16		256	April 03, 2005
3005690	4		64	April 03, 2005
3005691	15		240	April 03, 2005
3005692	6		96	April 03, 2005
3005693	15		240	April 03, 2005
3005694	12		192	April 03, 2005
3005695	3		48	April 03, 2005
<b>TOTAL</b>		<b>109</b>	<b>1744</b>	

Access is by means of the Maybrun Mine road that departs eastwards from Highway 71 at a point approximately 60 km south of Kenora. The Maybrun Mine road is a gravelled forestry access road that is reasonably well maintained and can be accessible on a year round basis. A number of recent logging roads provide very good local access for exploration purposes.



Figure 1: Regional Location Map of Ontario

Date / Time of Issue: Fri Sep 23 05:55:12 EDT 2005


**TOWNSHIP / AREA**  
**LOBSTICK BAY AR****PLAN**  
**G-2627****ADMINISTRATIVE DISTRICTS / DIVISIONS**

Mining Division  
Land Titles/Registry Division  
Ministry of Natural Resources District

Kenora  
KENORA  
KENORA

**TOPOGRAPHIC**


Land Tenure  
Freehold Patent  
Leasehold Patent  
Surface And Mining Rights  
Surface Rights Only  
Mining Rights Only  
Licence of Occupation  
Uses Not Specified  
Surface And Mining Rights  
Surface Rights Only  
Mining Rights Only  
Natural Gas Pipeline  
Utilities  
Tower

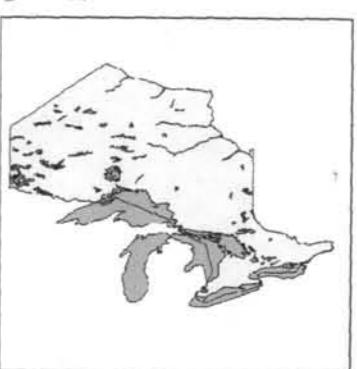

LAND TENURE WITHDRAWALS  
1234  
Areas Withdrawn from Disposal  
Mining Act Withdrawal Types  
Wam Surface And Mining Rights Withdrawn  
Wm Mining Rights Only Withdrawn  
Order In Council Withdrawal Types  
W'sam Surface And Mining Rights Withdrawn  
W'sm Mining Rights Only Withdrawn  
W'm Mining Rights Only Withdrawn

No

Scale 1:64000  
1km 2km 3km

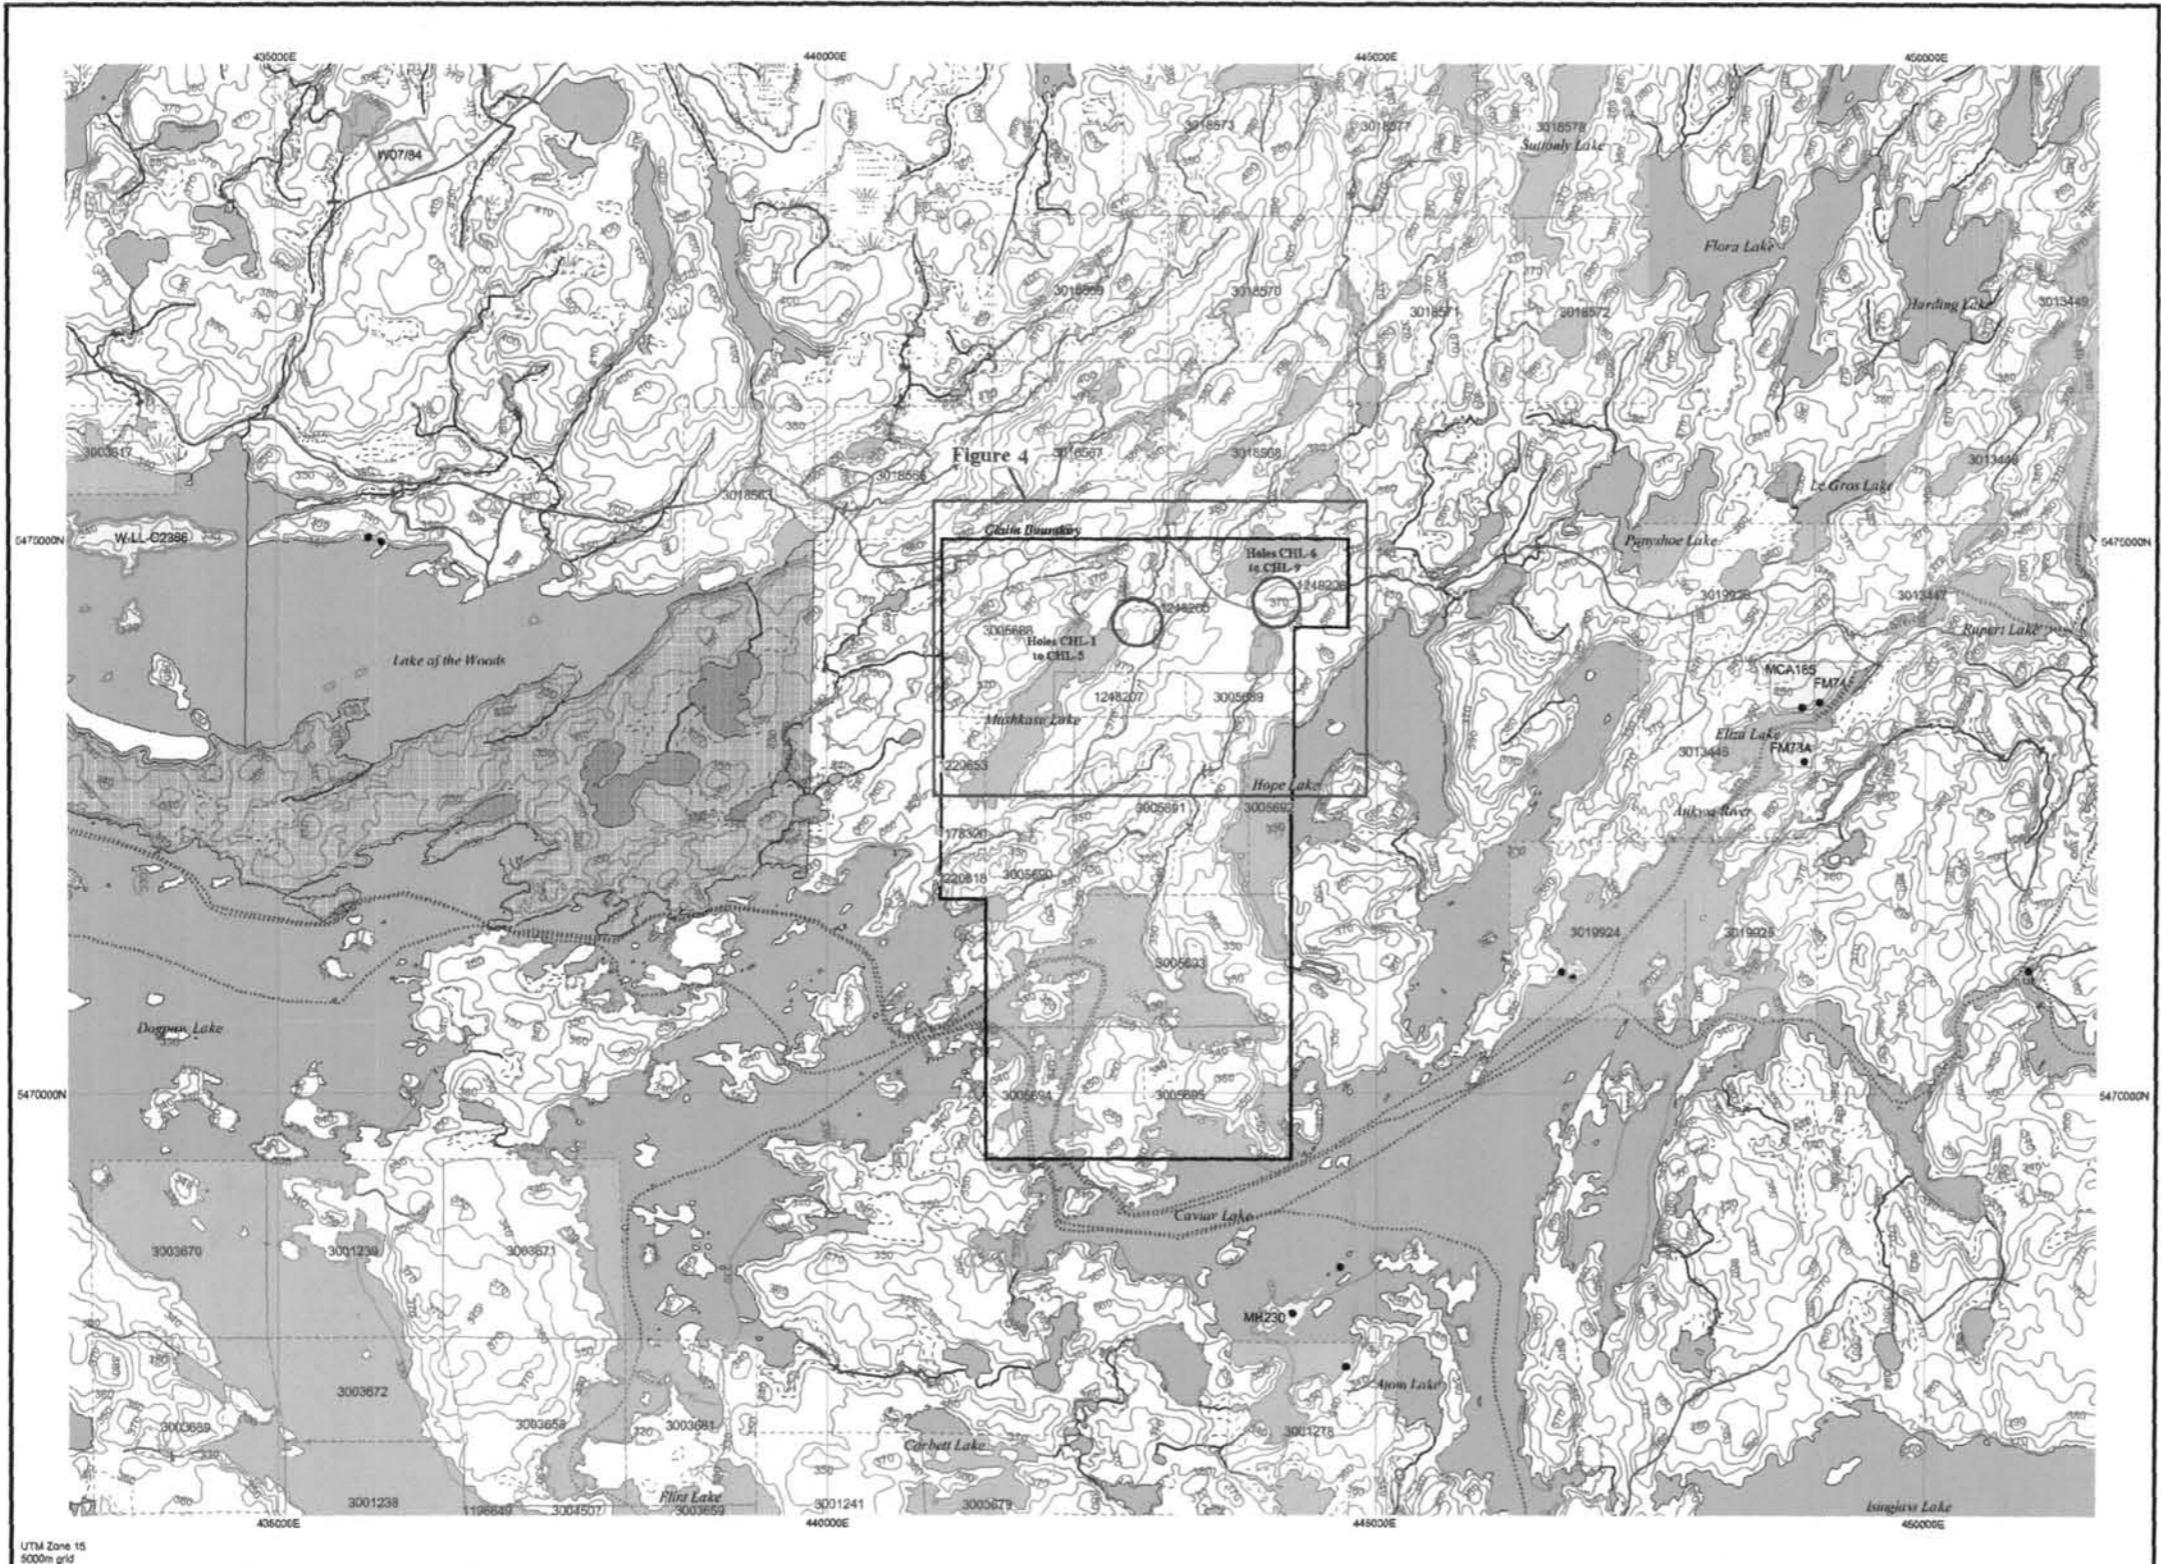**CABO MINING ENTERPRISES CORP.****Claim Map of the Lobstick Bay Map Area  
Showing Hope Lake Property****Figure 2**

Those wishing to stake mining claims should consult with the Provincial Mining Recorders' Office of the Ministry of Northern Development and Mines for additional information on the status of the lands shown hereon. This map is not intended for navigational, survey, or land title determination purposes as the information shown on this map is compiled from various sources. Completeness and accuracy are not guaranteed. Additional information may also be obtained through the local Land Titles or Registry Office, or the Ministry of Natural Resources.

The information shown is derived from digital data available in the Provincial Mining Recorders' Office at the time of downloading from the Ministry of Northern Development and Mines web site.

**General Information and Limitations**

Contact Information:  
Provincial Mining Recorders' Office  
Willard Green Miller Centre 933 Ramsey Lake Road  
Sudbury ON P3E 6B5  
Home Page: [www.mndm.gov.on.ca/MNDMMINES/LANDS/minmapge.htm](http://www.mndm.gov.on.ca/MNDMMINES/LANDS/minmapge.htm)

Toll Free  
Tel: 1 (888) 415-9845 ext 578#  
Fax: 1 (877) 670-1444

Map Datum: NAD 83  
Projection: UTM (6 degree)  
Topographic Data Source: Land Information Ontario  
Mining Land Tenure Source: Provincial Mining Recorders' Office

This map may not show unregistered land tenure and interests in land including certain patents, leases, easements, right of ways, flooding rights, licences, or other forms of disposition of rights and interest from the Crown. Also certain land tenure and land uses that restrict or prohibit free entry to stake mining claims may not be illustrated.

## TOPOGRAPHY AND VEGETATION

Topography on the property is generally flat to rolling with local bedrock ledges. Maximum relief in the area is approximately 25 metres. In general the claim group contains three parallel, northeast trending ridges separated by swamps or small lakes, the largest being Mushkasu Lake. Overburden is shallow to moderate over most of the property. All drainage is generally towards the southeast into Caviar Lake.

## EXPLORATION HISTORY

Exploration in the Lobstick Bay Map Area has been sporadic since the early 1900's. Two near-by mineral deposits have been identified, the Maybrun Cu – Au prospect lying 9 kms east and the Nuinsco-Cameron Lake Au deposit, 14 kms to the south. The earliest significant Au discovery that occurs within the Hope Lake claim group is the Grand Chibougamu occurrence, in claim 3005695, (in the southern part of the claim group, Caviar Lake), which was discovered and explored by stripping and trenching in 1948-1949. In 1987, Tanqueray Resources Ltd acquired this occurrence and carried out ground magnetometer and VLF-EM surveys, an orientation humus geochemical survey, geological mapping in a small area immediately surrounding the prospect and 11 diamond drill holes (2321 feet). Between 1992 and 1994, Champion Bear Resources Ltd completed linecutting, a ground magnetometer survey, stripping and sampling.

In 1983, R. Fairservice made a gold discovery in the northern part of the claim group (northeast of Mushkasu Lake), within the area covered by this report. Work in this area has been completed by several major companies since 1983 as summarized below:

- 1983-1984 Noranda Exploration – Linecutting, geological mapping, prospecting, ground magnetometer survey, and IP survey.
- 1985-1986 BP Selco – Geological mapping, VLF-EM, and IP surveys; Diamond drilling (11 holes).
- 1987-1988 Granges Exploration Inc -15 drill holes (1452m).
- 1989-1990 Placer Dome – 4 drill holes.

The Hope Lake property occurs within an area mapped by the Ontario Geological Survey (P. 2595) (Johns et al, 1984) (Thompson, 1964). An airborne geophysical survey carried out on behalf of the OGS included Hope Lake (1987 maps 80998, 81001).

Cabo Mining Enterprises acquired the property in the spring of 2004 and carried out a sampling program in the summer of the same year to verify zones of known mineralization. In the spring of 2005, a ground magnetometer survey and excavator stripping program was carried out in selected parts of the property (Sears; April, 2005).


## **REGIONAL AND PROPERTY GEOLOGY**

The Hope Lake Claim Group lies within a wedge of Archean aged metavolcanic rocks that is located between the Atikwa and Dryberry granitic batholiths (Figure 3). The rocks consist mainly of northeast trending pillowd to massive mafic volcanics that are considered to be a part of the “Populus Volcanics”, one of three groups of rocks as defined by Trowell et al (OGS, 1980) that occur in this area. A granitic pluton referred to as the Hope Lake Stock (Heimlich, 1966) occupies the eastern edge of the claim group. Numerous smaller felsic to ultramafic dykes and small bodies intrude the volcanic rocks on the property. The claims lie near the junction of two major structural features, the southeast trending Cameron Lake-Pipestone Lake Fault and the northeast trending Wabigoon Fault Zone. These structures are considered to have played major roles in the localization of gold mineralization in the area.

Numerous gold prospects occur within the claim group and in the immediate area. Currently, the most notable of these is the Cameron Lake deposit of Nuinsco Resources Ltd., located approximately 12 km south of the property within a similar geological setting. Most of the gold occurrences within the area are of the Cameron Lake type – silicified and carbonated alteration zones within mafic volcanics.

Three target areas have been moderately explored within the Hope Lake Claim Group. These include the Grand Chibougamu, the Mushkasu Lake, and the Porphyry Lake zones. All of these gold prospects are thought to occur within structurally controlled shear zones with intense carbonate alteration and silica flooding. The current drill program was designed to test several quartz carbonate zones located in the Mushkasu Lake and Porphyry Lake areas in the northern part of the property near the Maybrun Mine road.

**Figure 3: Local area geology showing Cabo's Hope Lake and adjacent properties (after OGS Map 2443)**

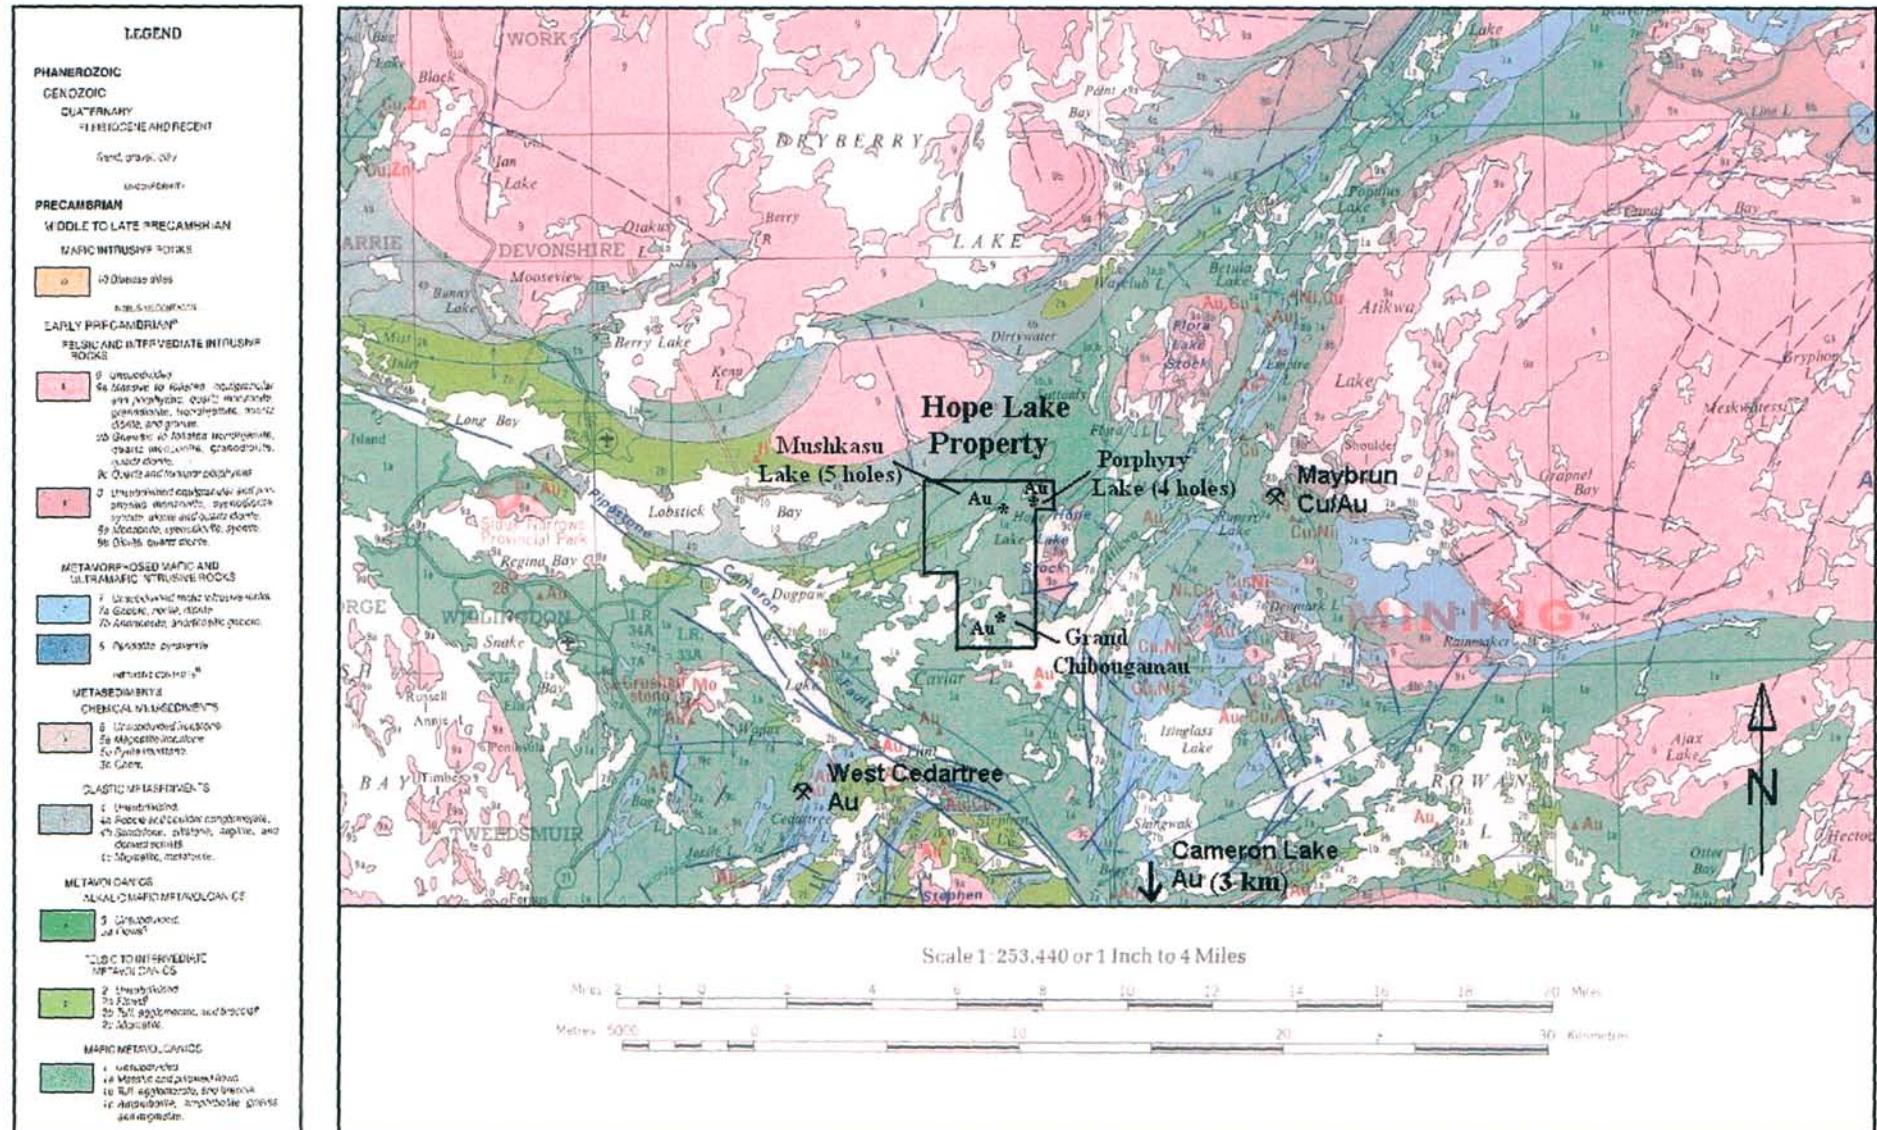

## DRILL PROGRAM AND RESULTS

The 2005 Hope Lake drilling consisted of 9 holes completed between June 15<sup>th</sup> and June 25<sup>th</sup>, 2005. The holes tested targets in two separate parts of the property; 5 holes were located at the northeast end of Muskashu Lake and 4 holes were located south of Porphyry Lake (and north of the Maybrun Road) in the northeast corner of the claim group. The drill hole locations are shown on Figure HL-4; the drill logs, cross-sections and assay results are in Appendix I.

Table 1 presents a summary of the best gold intersections in this phase of drilling.

**Table 1: Summary of Results for Au**

Hole #	Target	From (m)	To (m)	Width (m)	Au (g/t)
CHL-1	Fairservice Showing – Muskashu Lake	5.0	6.0	1.0	0.253
CHL-2	Fairservice Showing – Muskashu Lake	5.6	6.3	0.7	2.298
CHL-3	Sericite Schist Zone – Muskashu Lake (Including)	9.1	27.44	18.3	0.249
		21.0	21.8	0.8	1.182
CHL-4	Sericite Schist Zone – Muskashu Lake	8.5	9.1	0.6	0.195
CHL-5	Muskashu Lake Geophysical Anomaly		No	significant	values
CHL-6	Galena Zone A – Porphyry Lake (Including)	6.9	11.4	4.5	0.427
		7.4	8.0	0.6	1.231
CHL-7	Galena Zone A – Porphyry Lake	6.9	7.6	0.7	0.287
CHL-8	Galena Zone B – Porphyry Lake Unexposed Zone	5.6	6.5	0.9	0.441
		66.7	68.6	1.9	0.389
CHL-9	Galena Zone B – Porphyry Lake	25.4	25.8	0.4	1.81

Holes CHL-1 to CHL-5 tested three targets defined by prospecting, old drilling and ground geophysical surveys (mag & IP) completed by previous workers. The most interesting results were from a quartz-sericite schist horizon in the upper part of Hole CHL-3 which assayed 0.249 g/t Au over an 18.3 metre wide interval. A second hole (CHL-4) drilled at a steeper angle beneath CHL-3 intersected a similar zone although much more weakly developed and containing only minor gold. This zone may plunge towards the east and thus was not intersected in the second hole.

It is felt that both of the target zones in the northeast end of Mushkasu Lake area are structurally complex and additional detailed drilling is required.

Holes CHL-6 to CHL-9 tested two gold bearing zones (quartz-carbonate-pyrite) near the Maybrun road on the south side of Porphyry Lake. Although encouraging looking quartz-carbonate-pyrite zones were intersected in the drill holes (similar to gold bearing zones in surface exposures), only weakly elevated Au values were obtained. The best intersection was 1.81 g/t Au over a length of 0.4 metres in a previously undiscovered zone in Hole CHL-9.

## **CONCLUSIONS AND RECOMMENDATIONS**

Although the current drill program intersected only minor gold mineralization, both of the targets tested have economic gold values at surface and appear to have good potential to develop along strike or down dip. They should be tested by surface stripping and additional close spaced drilling.

Sudbury, Ontario  
March 30, 2006

Respectfully submitted,

Seymour M. Sears, P.Geo.

## REFERENCES

Heimlich, R.A.

1966: The Hope Lake stock, Lake of the Woods Region, Ontario; The Canadian Mineralogist, Volume 8, Part 5, p620-637.

Johns, G.W., Goods, D.J., and Davison, J.G.

1984: Precambrian Geology of the Long Bay – Lobstick Bay Area, Kenora District; Ontario Geological Survey, Map P.2595 (rev), Geological Series Preliminary Map, Scale 1:15840 (1inch to ¼ mile), Geology 1982-1983.

Sears, S.M.

2004: Report on a Mapping and Prospecting Program on the Hope Lake Property; assessment report for Cabo Mining Corp.

2005: Report on a Work Program on the Hope lake Property, Lobstick Bay Area, Ontario; Assessment Report for Cabo Mining Enterprises Corp.

Trowell, N.F., Blackburn, C.E. and Edwards, G.R.

1980: Preliminary Synthesis of the Savant Lake-Crow Lake Metavolcanic-Metasedimentary Belt, Northwestern Ontario and its Bearing upon Mineral Exploration; Ontario Geological Survey, Miscellaneous Paper 89.

Various Assessment Reports on file at the Kenora Resident Geologists Office

## **APPENDIX I**

(Drill Logs, X-Sections, Assay Results)

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-1  
 UTM COORDINATES:  
 EASTING: 442780  
 NORTHING: 5474334  
 ELEVATION: 355

CLAIM #: 1248205  
 BEARING: 350°  
 INCLINATION: -45°  
 TOTAL DEPTH: 104 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 15, 2005  
 FINISH: June 16, 2005

PAGE # 1 of 3

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	----	---	---	---	---
0	1.5	Overburden (Casing to 3.0 Metres)					
1.5	6.5	SERICITE-ANKERITE-QUARTZ SCHIST: Pale yellowish green to grey; 5 - 10% quartz stringers from white to blue grey with Pyrite, Chalcopyrite.	6102 6103 6104 6105 6106 6107 6108 6109	2.0 2.9 3.2 4.0 5.0 5.2 5.6 6.0	2.1 3.2 4.0 5.0 5.2 5.6 6.0 6.4	0.1 0.3 0.8 1.0 0.2 0.4 0.4 0.4	0.034 0.161 0.015 0.009 0.289 0.132 0.358 0.012
6.5	8.1	DIORITE/SHEARED QUARTZ GABBRO: Brownish grey to yellowish; strongly altered (saussurite-carbonate silica); fine grained; deformed to massive; broken and limonitic locally.					
8.1	13.0	SHEARED AND DEFORMED ZONE: Fine grained mafic to intermediate rock; strongly sericitized locally; highly carbonated, chloritic locally; lower contact gradational over 1.0 metres. 9.5 - 10.4: Sericite Schist. 11.1 - 11.5: White quartz veining makes up 60% of rock; less than 1% Pyrite.	6111 6112	9.4 11.15	10.4 11.55	1.0 0.4	0.005 0.008
13.0	15.8	GABBRO: Coarse to fine grained; massive dark grey green; fractured with calcite veinlets in upper coarse grained half, becoming fine grained towards bottom.					

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		--	--	--	--	--
15.8	18.2	MAFIC VOLCANIC/SHEARED GABBRO: Fine grained, dark grey green; lower contact appears to be chilled or metamorphosed; foliation at 50 – 60 degrees to C/A.					
18.2	23.0	QUARTZ GABBRO: Upper contact 70 degrees, lower contact vague - gradational over .1 metres; Massive; medium to fine grained; dark grey green except in alteration zone near centre. 20.1 - 22.0: Altered Zone; intensely carbonated zone (ankerite) with scattered quartz veinlets and stringers, appears to be a quartz porphyry; 5% Pyrite overall; pale yellowish grey green. (Bob's New Zone?).	6113 6114 6115	20.1 21.0 21.5	21.0 21.5 22.1	0.9 0.5 0.6	0.014 0.016 0.005
23.0	33.0	DEFORMED ZONE: Weakly to moderately sheared, fine grained to medium grained gabbro, (may be volcanic rock locally); foliation at 45 degrees to C/A; moderately carbonated overall, local zones of multiple calcite stringers and veinlets; contacts gradational. 25.7 - 26.8: Strongly sheared zone with layering of chlorite bands and siliceous bands; local quartz stringers; local calcite +/- quartz veinlets and streaks, both with minor pyrite.	12295	25.7 26.8	26.8	1.1	0.005
33.0	39.8	GABBRO: Massive to weakly foliated; fine to medium grained; moderately to strongly carbonated; local calcite veinlets, fracture fillings and patches, rare to minor quartz; badly broken core ( i.e. 1/2 of box).					
39.8	43.2	DEFORMED ZONE: Fine grained mafic rock; locally extremely silicified as very fine grained "chilled margin" type of material, often with quartz and sulphides, may be a wallrock xenolith that has been variably metamorphosed.	6116 6117	39.9 41.45	40.0 41.55	0.1 0.1	0.005 0.005

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		--	--	--	--	--
43.2	70.0	GABBRO: Massive to foliated, similar to above section (33.0 - 39.8); lower contact gradational over 1.0 metres. 54.5 - 57.45: Deformed zone with local calcite, chlorite stringers with associated Pyrite. 56.15 - 57.45: Is highly sheared with 5% calcite +/- quartz stringers and < 1% Pyrite as schistosity plane stringers; 55 degrees to C/A. 65.1 - 65.3: Quartz-epidote veinlet zone (25% quartz) with minor Pyrite; 60 degrees to C/A.	12296 12297 6118	56.15 56.75 65.1	56.75 57.38 65.35	0.6 0.6 0.25	0.005 0.009 0.005
70.0	104.0	DEFORMED ZONE: Deformed Gabbro; sheared, carbonated, chloritic; shearing foliation at 42 degrees to C/A; Py is either highly scattered or rare. 80.8: Gabbro; similar to above (43.2 - 70.0); Local, rare calcite veinlet zone up to 5 cm. with associated chlorite.	6119 6120 6121 6123 6124 6125 6126 6127 6128	72.6 73.0 74.0 75.0 76.0 77.0 78.0 79.0 80.0	73.0 74.0 75.0 76.0 77.0 78.0 79.0 80.0 80.4	0.4 1.0 1.0 1.0 1.0 1.0 1.0 1.0 0.4	0.005 0.005 0.005 0.005 0.007 0.018 0.006 0.006 0.005

104.0 E.O.H.

Core temporarily stored in gravel pit on claim# 1248207

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-2  
 UTM COORDINATES:  
 EASTING: 442780  
 NORTHING: 5474334  
 ELEVATION: 355

CLAIM #: 1248205  
 BEARING: 350°  
 INCLINATION: -60°  
 TOTAL DEPTH: 131 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 16, 2005  
 FINISH: June 17, 2005

PAGE # 1 of 4

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	---	---	---	---	---
0	2.8	Casing to 4.0 Metres					
2.8	7.6	SERICITE-ANKERITE-QUARTZ SCHIST: Pale green; fine grained; shearing at 30 degrees to C/A; scattered Qtz-calcite veinlets up to 1 cm. wide; limonite staining on many fractures (calcium/Fe); no Qtz pheno's visible. Mixture of Qtz-Feldspar, (Qtz being the grey-dark grey silica member, F-spar the white); upper contact irregular 60 degrees, lower at 75 degrees to C/A; Py, Cpy and Po. Some Py is blonde in colour, Po is dark copper colour and magnetic; Distortion where Qtz stringers/veinlets cut through an epidote rich matrix; minor calcite. Strongly sausseritized; very fine grained; local zones of altered beige-pale green; less altered is grey and still very fine grained; three minor calcium stringers; local scattered Py.	6130 6131 6132 6133 6134	3.5 4.0 5.0 5.6 6.3	4.0 5.0 5.6 6.3 7.0	0.5 1.0 0.6 0.7 0.7	0.035 0.005 0.120 2.298 0.005
7.6	11.5	SHEARED QUARTZ GABBRO: Grey; medium grained; only 'ghosts' of pheno's remaining; both upper and lower contact at 50 degrees to C/A; scattered Py; slightly darker grey with more calcite veinlets.	6154	10.1	10.3	0.2	0.005
11.5	17.0	GABBRO: Grey green to pale green; scattered calcite veinlets/blebs at various angles; scattered Py; upper contact irregular, vague, but given 60 degrees to C/A.					

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
17.0	19.5	SHEARED GABBRO: Varies from grey to grey-green with 'layering'; very siliceous; very fine grained - medium grained; sparse Py. Upper contact 60 degrees, lower at 45 degrees to C/A. Little calcite in remainder of unit. 18.3 - 18.42: Quartz Vein - Qtz stringers zone; about 45 degrees to C/A; grey with white calcite; partial Py stringers.	6135	18.2	18.4	0.2	0.034
19.5	24.45	GABBRO: Sheared and deformed; pale to medium grey green; fine to medium grained; strongly carbonated (disseminated and calcite filled fractures); lower contact sheared for 0.5 metres, 40 degrees to C/A.					
24.45	25.9	QUARTZ FELDSPAR PORPHYRY DYKE: Highly sausseritized feldspar phenocrysts up to 3 mm. where visible, quartz porphyrocrysts up to 3 mm., generally smaller and make up less than 10% of porphyrocrysts. 24.8 - 25.2: Ankerite zone with narrow quartz veinlet and 3% Pyrite.	12278	24.8	25.2	0.4	0.000
25.9	26.8	PSEUDOBRECCIA: Unsure of the protolith, but now consists of rounded mafic clasts up to 1 cm. (generally <i>in situ</i> ) in a matrix of calcite and finer grained fragments of mafic rock.					
26.8	42.4	DEFORMED ZONE: Fine grained mafic volcanic or gabbro, sheared, deformed, locally; highly carbonated; locally sericitized; scattered calcite +/- quartz vein and veinlet zones with associated sulphides, ankerite. 29.1 - 29.2: Deformed quartz-calcite vein, 5 cm. wide at 15 - 30 degrees to C/A; chloritic and Pyritic margins. 30.5 - 31.1: Zone is highly carbonated, pyritic, with two 5 - 10 cm. wide	12279 12280 12281 12282 12283 12284 12285	29.0 30.5 33.6 34.2 34.8 34.8 36.3	29.3 31.1 34.2 34.8 35.3 36.7 38.9	0.3 0.6 0.6 0.6 0.5 0.4 0.4	0.014 0.005 0.005 0.005 0.005 0.008 0.020

## **Cabo Mining Enterprises Corp.**

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
			12291	98.6	99.1	0.5	0.008
			12292	99.1	99.9	0.8	N/A
			12293	99.9	100.4	0.5	0.005
115.6	119.85	DEFORMED ZONE: Upper contact 45 degrees to C/A has been placed on margin of a mini 6 cm. quartz porphyry vein; highly siliceous, highly banded either by layering or stretching (shearing). Scattered Py. 117.7 - 117.9: Qtz Vein Zone; Qtz is grey and highly distorted; Py, Cpy?	6150	117.7	117.9	0.2	0.025
			6151	119.0	119.85	0.85	0.005
119.85	122.2	QUARTZ PORPHYRY: Pink in colour; scattered Qtz veinlets; scattered fine grained Py; upper contact very shallow at 10 degrees, lower is about 50 degrees to C/A.	6152	119.85	121.0	1.15	0.007
			6153	121.0	122.2	1.2	0.005
122.2	131.0	GABBRO: Similar to last few metres of above mafic unit (42.4 - 115.6). Grey in colour; scattered Py.					
		131.0 E.O.H.					

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-3  
 UTM COORDINATES:  
 EASTING: 442750  
 NORTHING: 5474186  
 ELEVATION: 350

CLAIM #: 1248205  
 BEARING: 350°  
 INCLINATION: -45°  
 TOTAL DEPTH: 104 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 17, 2005  
 FINISH: June 18, 2005

PAGE # 1 of 4

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	----	---	---	---	----
0	6.0	Casing (Overburden)					
6.0	10.5	GABBRO: Medium grey green; moderately to strongly foliated (sheared) at 50 degrees to the C/A; local narrow sericitized zones with associated quartz and pyrite, 1 - 3% Pyrite throughout as disseminated grains and patches along foliation planes; weakly carbonated in upper part; lower contact broken but gradational. 7.6 - 8.25: Sericite schist (pale green) with 4 - 5% quartz stringers and veinlets; quartz is greasy and grey. 9.1 - 10.0: Sericite schist; pale green; 4 - 5% quartz stringers and 3 - 4% pyrite from 9.4 - 10.0.	6155 6156	7.6 9.1	8.25 10.0	0.65 0.9	0.052 0.443
10.5	27.4	SERICITE SCHIST: Pale green to yellowish; locally bluish grey due to quartz stringers and veinlets; strong foliation from 45 - 55 degrees to C/A; local zones of grey to dark grey-bluish quartz stringers and veinlets with associated Pyrite; quartz stringers are often highly folded or deformed; some narrow stringers are at lower angle to core axis (due to folding etc.). 10.5 - 10.8: Quartz-Pyrite Zone, 15% blue grey quartz; irregular patches and stringers. 12.35 - 14.35: Up to 10% quartz as stringers and narrow folded veinlets; grey to blue grey, 3 v- 5% Pyrite overall as patches and streaks along foliation plane. 15.25 - 15.4: Up to 40% quartz-calcite as stringers and flooding.	6157 6158 6159 6160 6161 6162 6163 6164 6165 6166 6167 6168	10.5 10.8 11.55 12.35 13.0 13.0 13.8 14.5 14.5 17.15 17.5 17.5 18.2 18.2	10.8 11.55 12.35 13.0 13.8 14.5 15.4 16.4 17.15 17.5 18.2 19.0	0.3 0.75 0.8 0.65 0.8 0.7 0.9 1.0 0.75 0.35 0.7 0.8	0.111 0.043 0.393 0.680 0.133 0.048 0.178 0.005 0.851 0.058 0.260 0.174

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		----	---	---	---	---
		16.4 - 17.15: Pyritic Zone; up to 5% Pyrite as streaks along foliation and Deformation planes; scattered quartz stringers including a 3 cm. veinlet at 16.9.	6169	19.0	19.7	0.7	0.563
		17.5 - 18.2: Siliceous Zone; very fine grained; grey; with 5% narrow quartz stringers; minor calcite filled fractures.	6170	19.7	20.2	0.5	0.407
		18.2 - 19.0: Pyrite-quartz stringer zone; 10 - 15% quartz, 3- 5% Pyrite.	6171	20.2	21.0	0.8	0.089
		19.0 - 19.5: Sericite schist; minor quartz; 2 - 3% Pyrite.	6172	21.0	21.8	0.8	1.182
		19.5 - 19.7: Dark grey to black quartz vein; irregular angles to C/A (70 and 135 degrees); probably re-occurring at 20.05.	6173	21.8	22.6	0.8	0.065
		19.7 - 20.05: Sericite schist as above (19.0 - 19.5).	6174	22.6	23.4	0.8	0.179
		20.05 - 20.2: Dark grey to black quartz vein at 45 and 25 degrees to C/A; minor Pyrite patches and grains as above.	6175	23.4	24.3	0.9	0.005
		20.25 - 21.8: Highly deformed zone; quartz sericite schist; folded and quartz flooded locally; 10% quartz; 1 - 2% calcite; 2 - 3% Pyrite.	6176	24.3	25.4	1.1	0.005
		21.8 - 23.4: Deformed zone; weaker than above (20.25 - 21.8) with a blue grey quartz stringer, folded, coming in and out of core, locally; 2 - 5% quartz; 2 - 3% Pyrite.	6177	25.4	26.4	1.0	0.007
		23.4 - 26.4: Weakly sericitized zone; pale green with 30 - 40% fine grained darker green zones; gradational contacts, 1 - 2% Pyrite as streaks along foliation planes.	6178	26.4	27.4	1.0	0.277
		26.4 - 27.4: Quartz (20%) sericite schist zone; 3 - 5% Pyrite; quartz as stringers and flooding; pale to yellowish green; lower contact gradational over 20 cm..					
27.4	71.0	GABBRO: Varily altered, sheared and deformed; generally medium to dark grey green; fine to coarse grained; local intensely deformed, sericitized and quartz bearing zones with associated Pyrite; epidotized locally; carbonated throughout; 1 - 2% disseminated Pyrite throughout; scattered zones of calcite veinlets of varying intensity; lower contact irregular; very weak fabric at 45 - 55 degrees to C/A. 29.2 - 30.0: Deformed zone; quartz, sericite; Pyrite. 46.0 - 47.0: Intense calcite veinlets (20% of rock) in carbonated gabbro.	6179	29.2	30.0	0.8	0.491

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	64.3 - 71.0: Deformed, contact zone; 5% of rock is calcite filled fractures with associated chlorite and Pyrite; zone is fine grained, pale grey green.	---	---	---	---	---
71.0	76.0	QUARTZ FELDSPAR PORPHYRY: Pale grey to faint greenish; massive texture; 5% small (up to 3 mm.) quartz phenocrysts in with epidotized feldspar up to 6 mm. in a strongly epidotized matrix; very low mafic mineral content; less than 1% disseminated, fine Pyrite; lower contact broken but appears to be sharp at 50 degrees to the C/A.	---	---	---	---	---
76.0	96.2	GABBRO: Similar to above ( 27.4 - 71.0); generally slightly more foliated than above the Q.F.P. dyke; scattered calcite stringer zones, occasionally with quartz, epidote; locally chloritic, scattered disseminated Pyrite, less than 1% overall; lower contact sharp at 45 degrees to the C/A. 76.0 - 81.0: Deformed zone; pale grey green; 5% calcite filled fractures with chlorite patches and margins, similar to the zone on the other side of the Q.F.P. unit (64.3 - 71.0). 92.0 - 96.2: Deformed zone; dark grey, brownish tint; strong foliation at 45 degrees to the C/A; scattered narrow calcite veinlets at 90 degrees to C/A; scattered minor quartz-epidote patches or veinlets.	---	---	---	---	
96.2	103.2	QUARTZ FELDSPAR PORPHYRY: Similar to above (71.0 - 76.0) except slightly cream coloured and contains scattered narrow quartz-calcite veinlets; quartz phenocrysts up to 5 mm.; deformed near centre; contains scattered fractures defined by dark grey streaks; weakly hematitized (or f-spar stained) near centre; includes a 3 cm. quartz veinlet at 70 degrees to C/A at 85.95; lower contact sharp at 60 degrees to the C/A.	---	---	---	---	

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	----	---	---	---	----
103.2	104.0	GABBRO: Strongly foliated, weakly to moderately sericitized; medium to pale grey green; up to 5% fine disseminated Pyrite; foliation at 60 degrees to the C/A.  104.0 E.O.H.					

# Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-4  
 UTM COORDINATES:  
 EASTING: 442750  
 NORTHING: 5474186  
 ELEVATION: 350

CLAIM #: 1248205  
 BEARING: 350°  
 INCLINATION: -65°  
 TOTAL DEPTH: 101 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 18, 2005  
 FINISH: June 19, 2005

PAGE # 1 of 3

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	---	---	---	---	---
0	6.3	Overburden					
6.3	7.6	GABBRO: Medium grey green, strongly foliated at 35 degrees to the C/A; up to 5% quartz calcite stringers, minor Pyrite/Pyrrhotite; lower contact gradational over 0.5 metres.					
7.6	25.0	SERICITE SCHIST: Pale green to locally yellowish, locally medium grey green; local narrow zones of quartz-calcite stringers with associated Pyrite; strong foliation from 30 – 40 degrees to the C/A; zone is similar but less altered than the same zone in the overlying hole (CHL-3); 1 - 2% Pyrite overall as patches, grains and streaks along foliation planes; local Pyrrhotite in the upper part of the zone. 8.0 - 9.1: Quartz-calcite vein zone; 10% quartz, 10% calcite in folded zone; 2 - 5% Pyrite; less than 1% Pyrrhotite. 9.1 - 10.3: Highly deformed zone; highly sericitized. 10.3 - 18.8: Moderately to weakly sericitized; includes local zones of medium green, weakly altered material and scattered quartz-calcite vein and stringer zones. 11.3 - 11.4: Quartz-calcite zone; 5% qtz, 5% calcite, 2 - 3% Pyrite. 12.3 - 12.6: Strongly sericitized zone with 5% quartz-calcite stringers. 12.8 - 13.4: Strongly sericitized zone with 5% quartz-calcite stringers; folded. 16.3: A 2 cm. dark grey folded qtz stringer.	6180 6181 6182 6183 6184 6185 6186 6187 6188 6189 6190 6191 6192 6193 6194	7.9 8.5 9.1 9.7 10.3 11.3 12.3 13.3 14.3 15.3 16.3 17.3 18.2 18.8 22.5 23.0 24.4 25.1	8.5 9.1 9.7 10.3 11.3 12.3 13.3 14.3 15.3 16.3 17.3 18.2 18.8 0.6 0.5 0.7	0.6 0.6 0.6 0.6 1.0 1.0 1.0 1.0 1.0 1.0 1.0 0.9 0.6 0.5 0.7	0.075 0.195 0.008 0.029 0.009 0.179 0.009 0.005 0.005 0.005 0.005 0.011 0.042 0.168 0.156

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	<p>16.7 - 18.2: Strongly sericitized zone with scattered quartz and quartz-calcite stringers and patches; 2 - 3% Pyrite as patches and stringers.</p> <p>18.5 - 18.6: Quartz-calcite veining (50%) in highly sericitized zone; 5% Py.</p> <p>18.8 - 25.0: Pale to medium grey green, moderately sericitized zone with local zones of quartz-calcite stringers.</p> <p>22.5 - 23.0: Strongly sericitized zone with 20% quartz-calcite flood veining, minor Pyrite.</p> <p>24.4 - 25.1: Quartz-calcite flooded zone; 30% quartz, 20% calcite in sericitized rock; 2 - 3% Pyrite; lower contact broken.</p>	---	---	---	---	---
25.0	99.7	<p><b>GABBRO:</b></p> <p>Medium grey green, fine to coarse grained; weakly foliated to massive; carbonated generally throughout, up to 1% disseminated Pyrite overall as disseminated grains; local zones of intense calcite filled fractures; local bands of fine grained, amygdaloidal mafic volcanic in upper section; unit becomes weakly porphyritic below 83.0 metres; sparse feldspar porphocrysts up to 1 cm.; lower contact irregular.</p> <p>27.4 - 27.7: Quartz sericitized zone (10% quartz) in sheared amygdaloidal volcanic.</p> <p>29.4 - 30.0: Inclusion of amygdaloidal mafic volcanic; fine grained; strongly foliated; 38 degrees to C/A.</p> <p>59.3: A 6 cm. Qtz-calcite veinlet; 45 degrees to C/A; chloritic, barren.</p> <p>60.4 - 60.6: Qtz-calcite-chlorite vein zone; barren; broken.</p> <p>61.4 - 61.7: Deformed zone with calcite, qtz, chlorite; broken, barren.</p> <p>62.7 - 65.3: Fault zone; very low angle to C/A; probably less than 0.5 metres wide with a 1 - 5 cm. qtz-calcite-chlorite veinlet along the footwall, a 10 cm. chloritic wall.</p> <p>71.2: A 5 cm. calcite-qtz vein with chloritic zone; 60 degrees to the C/A; trace Py.</p> <p>71.8: A 2 cm. calcite-qtz veinlet at 60 degrees to the C/A.</p> <p>81.6 - 82.5: Strongly carbonated zone; 10 - 20% calcite as flooding, veinlets and disseminated;</p>	6195	27.4	27.7	0.3	0.148

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	trace Pyrite; strongly foliated at 35 - 40 degrees to the C/A. 92.7 - 99.7: Deformed zone; fractured with several qtz-calcite-chlorite veins and patches. 92.7 - 92.8: Quartz-calcite-chlorite vein zone; 40 - 60 degrees to C/A; barren. 93.0 - 93.25: Quartz-feldspar-ankerite patches in a chloritic fracture zone; trace Pyrite. 96.3: A 9 cm. quartz-chlorite vein zone; 40 - 50 degrees to the C/A; barren.	---	---	---	---	---
99.7	101.0	QUARTZ FELDSPAR PORPHYRY: Light grey to faint greenish, quartz phenocrysts up to 3 mm., generally smaller make up 1 - 2% of unit, feldspar is moderately sausseritized, up to 3 mm. where visible; less than 1%, disseminated Pyrite; massive texture.					
		101.0 E.O.H.					

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE

HOLE #: CHL-5

UTM COORDINATES:

EASTING: 442775

NORTHING: 5474100

ELEVATION: 350

CLAIM #: 1248205

BEARING: 300°

INCLINATION: -45°

TOTAL DEPTH: 200 m

CORE SIZE: NQ

LOGGED BY: S. Sears

DRILLED BY: Norex Drilling Ltd.

SURVEY TYPE: Acid Test

START: June 19, 2005

FINISH: June 20, 2005

PAGE # 1 of 4

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	---	---	---	---	---
0	5.0	Overburden					
5.0	92.3	GABBRO: Medium grey green; fine to medium grained; variably deformed; cut by varying amounts of calcite veinlets and fracture fillings; local quartz-calcite veins and patches with chlorite, Pyrite; typically contains less than 1% Pyrite as disseminated grains; generally massive texture but containing local foliated zones; occasional porphyritic zones containing feldspar porphyrocrysts up to 1 cm.; local fine grained zones that may be inclusions of mafic volcanic or may be related to deformation. 9.1 - 9.4: Calcite-quartz-epidote vein; 25 degrees to C/A; chloritic streaks and margins; barren. 11.4 - 12.0: Fractured zone; fault; minor calcite, quartz. 13.2 - 14.5: Deformed zone; strongly carbonated; scattered quartz-epidote veining. 20.7 - 21.1: Quartz-calcite filled fracture zone in broken, epidotized wallrock. 35.7 - 36.5: Fine grained zone; highly carbonated, probable mafic volcanic inclusions; contacts 65 - 70 degrees to the C/A. 37.5 - 41.8: Fine grained, highly foliated zone; may be shear zone or may be a mafic volcanic inclusion; strongly carbonated (disseminated and as fine stringers and veinlets); local quartz-calcite vein zones; 1 - 2% Pyrite as disseminated grains, patches and plating along schistosity planes; chloritic. 48.6 - 52.0: Moderately foliated, strongly carbonated zone; 60 degrees to C/A.	6196 6197 6198 6199 6200 6201	41.0 61.4 62.2 63.0 63.7 64.3	41.8 62.2 63.0 63.7 64.3 64.8	0.8 0.8 0.8 0.7 0.6 0.5	0.005 0.005 0.005 0.005 0.005 0.005

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
		53.0: Below this point, unit contains sparse feldspar porphyrocrysts. 55.5 - 75.5: Moderately to strongly foliated zone; variably sheared and sericitized; strongly carbonated in upper and lower portions, sericitized and silicified in core; foliation from 40 - 50 degrees to C/A; locally deformed. 61.4 - 64.8: Sericite schist; pale grey green to yellowish; includes a quartz carbonate flooded zone from 63.0 - 64.3; 1 - 2% Pyrite. 90.0 - 92.3: Deformed and strongly foliated contact zone; strongly carbonated; 50 to 60 degrees to the C/A; chloritic shear planes.					
92.3	95.7	QUARTZ FELDSPAR PORPHYRY: Pale grey to faint greenish; relatively fine grained, massive texture; quartz phenocrysts up to 3 mm., make up to 10% of rock, remainder being sausseritized feldspar and fine grained felsic material; contacts irregular 50 - 60 degrees to the C/A; several narrow white quartz veinlets (up to 1 cm.) in lower half metre; chloritized mafic inclusion from 95.25 to 95.35.					
95.7	116.5	GABBRO: Similar to above (5.0 - 92.3); lower contact at 58 degrees to the C/A. 95.7 - 99.6: Deformed contact zone; strongly carbonated; contains 2 - 3% calcite filled fractures and stringers; minor quartz. 115.7 - 116.5: Deformed contact zone; strongly carbonated; 5 - 10% calcite-quartz stringers and veinlets; minor Pyrite.					

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		--	--	--	--	--
116.5	131.9	<p>QUARTZ FELDSPAR PORPHYRY:            Pale grey with a cream coloured tint; quartz phenocrysts up to 3 mm. make up 5 - 10% of zone; less than 1% disseminated Pyrite; massive texture overall, but contains a network of narrow grey to bluish grey quartz veinlets and fracture fillings throughout; unit contains highly sheared inclusions of mafic material; lower contact at 48 degrees to the C/A.</p> <p>118.2 - 120.0: Sheared mafic rock; foliation at 50 degrees to the C/A; strongly carbonated; barren.</p> <p>125.0 - 126.1: Sheared mafic rock; similar to above; 55 degrees to the C/A; sericitic; less than 1% Pyrite.</p>					
131.9	200.0	<p>GABBRO:            Similar to above, but containing increasing amounts of sparsely distributed feldspar porphyrocrysts up to 1 cm. across.</p> <p>131.9 - 133.8: Deformed zone; strongly carbonated; up to 5% calcite veinlets and stringers.</p> <p>139.3 - 139.4: Quartz-calcite-sericite vein; irregular; minor Pyrite.</p> <p>140.0 - 140.3: Deformed zone with 5% calcite-quartz-sericite veinlets; minor Pyrite; irregular orientation to C/A.</p> <p>141.0 - 141.7: Fractured zone with calcite filled fractures, oxidized and locally containing open spaces.</p> <p>144.1 - 146.3: Fault zone; badly broken; 10% fault gouge.</p> <p>157.0 - 162.5: Deformed zone; moderately to weakly foliated at 45 - 55 degrees to the C/A; scattered calcite veinlets.</p>	6202 6203 6204	194.4 195.0 195.7	195.0 195.7 196.4	0.6 0.7 0.7	0.005 0.005 0.005

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
		167.2: Below this point, the unit becomes weakly to strongly foliated from 45 - 55 degrees to C/A (stretching lineation, schistosity, layering of fine calcite stringers) with local, narrow strongly deformed zones; typically contains 3 - 5% calcite veinlets and stringers.					
		171.8 - 172.5: Zone of calcite and quartz stringers.					
		177.5: A 6 cm. zone of 50% calcite, 10% qtz; 45 degrees to C/A; minor pyrite.					
		177.7 - 177.8: Calcite stringer zone; 30% calcite, 5% quartz; minor Pyrite.					
		182.85 - 183.05: Quartz-calcite-epidote veining in chloritic wallrock; 40 - 50 degrees to C/A; minor Pyrite.					
		188.3: A 3 cm. calcite-quartz veinlet at 40 degrees to the C/A.					
		191.7 - 191.8: Quartz-epidote vein at 30 degrees to the C/A; barren.					
		194.4 - 196.4: Sericite schist; strongly sheared at 40 - 45 degrees to C/A; pale green overall.					
		199.6 - 200.0: Calcite-quartz zone; minor Pyrite.					
		200.0 E.O.H.					

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-6  
 GRID "A":  
 EASTING: 285 W  
 NORTHING: 610 S  
 ELEVATION: 360

CLAIM #: 1248205  
 BEARING: 320°  
 INCLINATION: -45°  
 TOTAL DEPTH: 101 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 20, 2005  
 FINISH: June 21, 2005

PAGE # 1 of 4

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	---	---	---	---	---
0	1.0	Overburden					
1.0	4.8	GABBRO: Medium to coarse grained; medium to dark green; relatively massive; scattered narrow calcite-chlorite fracture fillings or stringers that could possibly be pillow margins (but not likely); 1 - 2% disseminated magnetite; lower contact broken but appears to be at 70 degrees to the C/A; chilled margin over 10 cm.. 3.9 - 3.98: Inclusion of fine grained mafic rock.					
4.8	74.3	MAFIC VOLCANIC ROCK: Fine to medium grained; medium to dark grey green; variably carbonated as pervasive, fine grained disseminated grains and as calcite stringers and hairline fractures; weakly to strongly deformed; massive to pillow and amygdaloidal although pillow margins, amygdules and other volcanic textures are often masked or vaguely recognizable due to deformation; alteration includes chlorite-carbonate-Pyrite-sericite in varying degrees; scattered calcite +/- quartz stringers and veinlets make up 1 - 3% of unit; local strongly deformed zones with sericite-quartz; local coarse grained, more massive zones may be gabbroic dykes or sills; unit has a general fabric (schistosity-stretching lineation, layering) from 35 to 60 degrees to the C/A; locally deformed; local sheared zones with calcite-quartz stringers and veinlets with associated sulphides. 5.35 - 7.4: Gabbro sill or coarse mafic flow;	6205 6206 6207 6208 6209 6210 6211 6212 6213 6214 6215 6216 6217 6218	6.9 7.4 8.0 8.4 8.85 9.35 9.85 10.6 11.4 12.2 12.2 33.8 41.6 42.0 42.6	7.4 8.0 8.4 8.85 9.35 9.85 10.6 11.4 12.2 13.0 34.4 42.0 42.6 42.85	0.5 0.6 0.4 0.45 0.5 0.5 0.75 0.8 0.8 0.8 0.6 0.4 0.6 0.25	0.107 1.231 0.000 0.925 0.515 0.410 0.187 0.137 0.012 0.021 0.012 0.005 0.005 0.148

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
		moderately deformed and highly carbonated; lower contact gradational.	6219	53.4	53.7	0.4	0.005
		7.4 - 13.0: Shear zone; moderately to strongly sheared and altered; 2 - 5% Pyrite as coarse cubes and disseminated fine grains; non-magnetic bearing.	6220	49.05	49.45	0.4	0.006
		7.4 - 8.0: Quartz stringers (5% of rock), folded and deformed with trace Pyrite, Galena; wallrock is fine grained chloritic; weakly sericitic and 5% Pyrite.	6223	60.4	61.4	1.0	0.005
		8.0 - 8.4: Sericitized-sausseritized zone with 3 - 4% Py, but no quartz.	6224	61.4	62.1	0.7	0.005
		8.4 - 8.85: Highly sericitized-sausseritized zone with 8 - 10% bluish grey quartz stringers; 4 - 5% Pyrite; scattered Galena streaks and patches in quartz stringers; qtz stringers are highly folded; pale grey green.	6225	62.1	62.5	0.4	0.005
		8.85 - 13.0: Chloritic, carbonated zone; dark grey green; 3 - 5% Pyrite generally as coarse cubes and fine streaks along schistosity planes; lower contact gradational.	6226	62.5	63.4	0.9	0.005
		13.0 - 20.6: Deformed pillow mafic rock; weakly to moderately carbonated; moderately magnetic.	6227	63.4	64.4	1.0	0.012
		20.6 - 22.9: Massive gabbroic flow or sill; contacts 50 degrees to C/A; moderately magnetic.	6228	65.2	65.5	0.3	0.034
		22.9 - 26.85: Deformed; pillow rocks, as above (13.0 - 20.6).	6229	66.4	66.9	0.5	0.056
		26.85 - 27.25: Massive gabbroic flow as above (20.6 - 22.9).	6230	71.0	71.2	0.2	0.122
		27.25 - 29.4: Deformed, pillow mafic rock as above (22.9 - 26.85).					
		29.4 - 31.2: Massive gabbroic flow as above (26.85 - 27.25) except moderately deformed in centre.					
		31.2 - 33.8: Deformed zone, possibly gabbroic unit; highly carbonated, epidotized; weak foliation developing towards bottom; 40 - 45 degrees to C/A.					
		33.8 - 34.4: Highly deformed zone; strong shear fabric at 30 - 40 degrees to the C/A; includes two 2 to 3 cm. quartz veins (pinkish orange to white and several narrow calcite-quartz veinlets; 3 - 5% Pyrite.					
		34.4 - 36.7: Deformed zone as above (31.2 - 33.8).					
		36.7 - 39.1: Massive to weakly foliated gabbroic rock,					

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	probable massive flow or sill.	--	--	--	--	--
39.1	65.7	Deformed, coarse grained pillowd; locally amygdaloidal flows; possible massive flow layers, masked by deformation; variable foliation defined by stretching lineation and local schistosity, from 35 - 50 degrees to the C/A; weakly to strongly carbonated; local more highly deformed zones with calcite and quartz veining and stringers.	--	--	--	--	--
41.6	42.85	Highly deformed zone with quartz-calcite patches and stringers and a 20 cm. white quartz vein ( 42.6 - 42.85); 2 - 3% Pyrite as coarse cubes and disseminated patches adjacent to quartz-calcite stringers; quartz vein (42.6 - 42.85) contains streaks and fracture coatings of Pyrite and fine black mineral (tourmaline?)	--	--	--	--	--
49.1		A 3 cm. qtz vein at 90 degrees to C/A.	--	--	--	--	--
49.2	49.3	Qtz-calcite vein zone (20%); blue grey with Pyrite up to 5%.	--	--	--	--	--
50.1		A 7 cm. irregular calcite-qtz lens; bluish grey portions; trace Pyrite; vuggy; sausseritized margins and inclusions.	--	--	--	--	--
51.7		A 3 to 7 cm. calcite-qyz vein; similar to above (50.1).	--	--	--	--	--
52.4		A 10 cm. calcite-qtz-sausserite vein as above (51.7).	--	--	--	--	--
53.4	53.7	Zone of several blue grey quartz veinlets with Pyritic margins.	--	--	--	--	--
60.4	64.4	Highly deformed; abundant calcite-qtz-epidote patches and veins; scattered Pyrite.	--	--	--	--	--
64.15	64.28	Quartz vein with chlorite-Pyrite streaks and inclusions; hematite altered patches.	--	--	--	--	--
65.7	74.3	Fine grained zone, contact metamorphic zone or massive mafic unit; gabbroic texture, relatively massive; weak local fabric; includes several narrow white quartz veins and hairline calcite filled fractures and stringers; lower contact reverse to the general fabric at 130 degrees to the C/A.	--	--	--	--	--
65.3		A 5 cm. qtz vein; 50 degrees to the C/A; Pyritic margins and inclusions.	--	--	--	--	--
71.0	71.2	Quartz vein, white; appears to be an 8 cm. vein that crosses the core, then folds back along the core axis for an additional 12 cm.; Pyritic margins; dark chloritic inclusions.	--	--	--	--	--

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		----	---	---	---	---
74.3	79.0	QUARTZ FELDSPAR PORPHYRY: Pale to medium faint brownish green; highly deformed (fractured with fine grained, dark coloured solution breccia); very sparse quartz phenocrysts; 3 - 4% disseminated Pyrite; Pyrite also as streaks along fracture planes; upper contact at 130 degrees, lower at 100 degrees to the C/A (not parallel to weak foliation, which is 50 - 60 degrees to the C/A; rare quartz veinlets.	6231	76.0	77.0	1.0	0.068
79.0	101.0	MAFIC VOLCANIC ROCKS: Highly deformed, mainly pillowd flows; fine to medium grained; medium to dark grey green; locally mottled due to carbonated and sausseritized zones; similar to above zone (39.1 - 74.3); cut by an extensive network of calcite +/- quartz stringers, veinlets and hairline fractures; locally amygdaloidal; locally relatively massive. 86.8 - 87.0: Quartz vein, similar to 71.0 - 71.2; a 7 cm. white quartz vein crossing the core and folding back into the plane of the core for another 13 cm.; chloritic streaks, Pyritic margins. 88.0 - 88.4: Quartz-feldspar porphyry dyke, similar to above unit ( 74.3 - 79.0); but deformed; 3 - 4% fine Pyrite; irregular contacts.	6232 6233 6234	86.8 87.1 88.0	87.1 88.0 88.9	0.3 0.9 0.9	0.007 0.006 0.006
		101.0 E.O.H.					

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-7  
 GRID 'A':  
 EASTING: 285 W  
 NORTHING: 610 S  
 ELEVATION: 360

CLAIM #: 1248205  
 BEARING: 320°  
 INCLINATION: -65°  
 TOTAL DEPTH: 116 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 21, 2005  
 FINISH: June 22, 2005

PAGE # 1 of 3

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	---	---	---	---	---
0	1.0	Overburden					
1.0	4.3	GABBRO: Relatively massive, dark green; weakly carbonated; strongly magnetic; medium to coarse grained; calcite stringers, increasing towards bottom; gradational lower contact.					
4.3	102.6	MAFIC VOLCANIC ROCKS: Highly deformed, medium to dark grey green; fine to coarse grained; generally weakly to strongly magnetic, with local non-magnetic zones; 1 - 2% calcite and calcite-quartz stringers, veinlets and hairline fracture filling; local sheared and altered zones; generally weak to moderate foliation from 30 – 40 degrees to the C/A; becoming amygdaloidal, pillowed and epidotized below 22.0. 4.3 - 5.3: Weakly deformed; minor calcite stringers; fine grained. 5.3 - 11.0: Strongly deformed, carbonated; 2 - 4% Pyrite, 2 - 3% calcite and calcite-quartz stringers and hairline fractures. 6.9 - 7.6: Sericite-quartz-sulphide zone; 20 - 25% quartz veining and flooding; 4 - 5% Pyrite; scattered Galena as grains and streaks in bluish grey quartz veinlets; the host rock is yellowish green sericitized and sausseritized rock that may have once been a quartz feldspar porphyry. 11.0 - 13.5: Weakly deformed, fine grained, scattered calcite stringers. 13.5 - 22.0: Weakly deformed; similar to above ( 11.0 - 13.5) but with only a faint foliation; fine grained.	6235 6236 6237 6238 6239 6240 6241 6242 6243 6244 6247 6248	5.3 6.1 6.9 7.6 8.4 9.2 10.0 35.0 42.9 49.0 66.65 69.6	6.1 6.9 7.6 8.4 9.2 10.0 11.0 35.45 43.25 49.4 67.5 70.3	0.8 0.8 0.7 0.8 0.8 0.8 1.0 0.45 0.35 0.4 0.85 0.7	0.064 0.046 0.287 0.197 0.073 0.027 0.008 0.019 0.005 0.077 0.006 0.011

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
		22.0 - 53.0: Generally very weakly deformed, amygdaloidal, coarse pillowed mafic volcanic rocks; moderately epidotized, scattered calcite veinlets and stringers.					
		25.1 - 25.35: Quartz vein; bullish, white, coarse crystalline; ragged margins at 55 - 65 degrees to the C/A; minor Pyrite, rare black inclusions (fine grained tourmaline or amphibole); fine grained Pyritic rock is overlying 10 cm., underlying 10 cm. is a calcite quartz zone (50% calcite) with associated Pyrite.					
		41.1: A 2 cm. qtz-calcite vein; 75 degrees to C/A.					
		42.9 - 43.25: Deformed zone with 3 quartz veinlets, 1 to 3 cm. wide with calcite veinlets and 1 - 3% Pyrite.					
		49.0 - 49.4: Quartz vein; 20 - 30 degrees to the C/A; Pyritic and calcite bearing margins.					
		53.0 - 70.5: Moderately sheared and deformed, pillowed, amygdaloidal volcanic rocks, less epidotized and much less visible textural structures than in overlying zone (22.0 - 53.0); includes interlayered massive layers; very strongly carbonated; medium grey green.					
		59.0 - 61.1: Massive, medium grained gabbro.					
		66.65 - 67.45: Quartz vein; bullish, white, coarse crystalline; very rare Pyrite, very rare black fine grained (tourmaline?) inclusions.					
		69.7: A 3 - 4 cm. pinkish orange quartz vein.					
		70.0: A 1 - 2 cm. qtz vein; broken; 40 - 50 degrees to the C/A.					
		70.15 - 70.25: White quartz vein; 60 - 65 degrees to the C/A; scattered inclusions of Pyrite and fine grained black material (tourmaline?).					
		70.5 - 99.0: Weakly deformed, coarse grained epidotized rocks; amygdaloidal; coarse pillowed; local coarse grained massive layers, probable massive flows; similar to (22.0 - 53.0).					
		99.0 - 102.6: Moderately to strongly deformed mafic volcanic rock, similar to above (53.0 - 70.5); carbonated; 3 - 4% narrow calcite stringers and hairline fracture fillings in the upper part; a contact metamorphosed zone.					

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
102.6	108.0	QUARTZ FELDSPAR PORPHYRY: Creamy dark greyish green; highly altered (grayish quartz-chloritic) fine grained streaks and patches forming a pseudobreccia texture; the center is relatively massive, whereas the contacts are moderately foliated at 30 - 35 degrees to the C/A; 2 - 3% disseminated Pyrite, scattered magnetite (weakly magnetic).					
108.0	116.0	MAFIC VOLCANIC ROCKS: Medium to dark grey green, fine to medium grained; similar to the rocks overlying the quartz-porphyry dyke (70.5 - 108.0) except only weakly carbonated and a lesser amount of calcite-qtz stringers. 108.0 - 111.0: Highly deformed, fine grained; dark grey green. 111.0 - 112.3: Coarse grained gabbroic unit; relatively massive; contacts vague. 112.3 - 116.0: Highly deformed fine grained, medium grey green; slightly bleached towards bottom; relatively uncarbonated; contains sparse coarse aggregates of Pyrrhotite up to 5 mm. in diameter.					
		116.0 E.O.H.					

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-8  
 GRID 'A':  
 EASTING: 350 W  
 NORTHING: 640 S  
 ELEVATION: 357

CLAIM #: 1248205  
 BEARING: 320°  
 INCLINATION: -45°  
 TOTAL DEPTH: 128 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 22, 2005  
 FINISH: June 23, 2005

PAGE # 1 of 4

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	----	---	---	---	----
0	3.0	Overburden					
3.0	22.2	ALTERED MAFIC VOLCANICS:  Pale to medium grey green; fine to rarely medium grained; weakly carbonated; highly saussertized, variably sericitic; locally chloritic and silicified; moderately to highly deformed; general fabric defined by stretching lineation, schistosity and layering from 50 - 55 degrees to the C/A; locally from 0 - 180 degrees; scattered calcite +/- quartz stringers and fracture fillings, less than 1% of core; local calcite-epidote +/- quartz zones, usually with associated Pyrite; locally sericite schist with associated quartz veining and Pyrite; badly broken until 5.0 metres, some of this section lost or ground; lower contact sharp at 55 degrees to the C/A.  3.0 - 5.0: Broken core consisting mainly of weathered silicified mafic rock; badly broken, only 40% recovery. 5.0 - 5.7: Sericitized rock with 10 - 20% quartz; 1 - 2% Pyrite. 5.7 - 8.0: Sericite schist with quartz veining locally; well developed in upper section, becoming less altered with increasing depth. 5.7 - 6.5: Quartz flooded zone; 50% quartz, 47% seericitized and sauseritized wall rock xenoliths; 2 - 3% Pyrite; rare Galena in quartz veining as tiny patches and streaks. 7.6 - 7.8: Silicified zone; 30% quartz with Pyrite and trace Galena. 13.95 - 14.2: Calcite-epidote-quartz vein zone; irregular contacts but 70 - 90 degrees to C/A; minor Pyrite. 20.25 - 20.4: Calcite-epidote quartz vein zone similar to above ( 13.95 - 14.2).	6249 6250 6077 6078 6079 6080	5.0 5.6 6.5 7.0 7.6 13.95	5.6 6.5 7.0 7.6 8.0 14.2	0.6 0.9 0.5 0.6 0.4 0.25	0.086 0.441 0.019 0.011 0.062 0.005

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	---	---	---	---	---
22.2	26.6	QUARTZ FELDSPAR PORPHYRY: Fine to medium grained, massive except strong foliation defined by thinly layered, fine grained grey siliceous-sausseritic streaks throughout at 50 - 55 degrees to the C/A; quartz phenocrysts up to 3% of rock, up to 3 mm. across, generally smaller; 1 - 2% disseminated patches and grains of Pyrite; lower contact vague at 50 degrees to the C/A.					
26.6	127.2	MAFIC VOLCANIC ROCKS: Fine to coarse grained; medium to dark green; moderately magnetic; generally weakly to non-carbonated; variably sausseritized; weakly to strongly foliated; pillowied, locally amygdaloidal; scattered calcite and calcite-epidote-quartz stringers and veinlets. 26.6 - 27.2: Sericitized contact zone, with associated calcite and quartz veining; 1 - 2% Pyrite. 27.2 - 28.8: Foliated and weakly deformed zone; carbonated; 50 degrees to the C/A; gradational lower contact. 28.8 - 43.5: Weakly deformed zone; pillowied, amygdaloidal mafic volcanics; local quartz veining scattered narrow calcite-epidote +/- qtz stringers and veinlets; lower contact gradational. 43.5 - 60.5: Highly deformed and altered zone; fine grained, foliated (55 - 60 degrees to the C/A); strongly carbonated zone; locally sericitic and sausseritized; local quartz vein zones; local Pyritic zones. 44.7 - 50.9: Altered zone (calcite-Pyrite-chlorite-sausserite, local sericite). 45.3 - 45.6: An 8 - 10 cm. quartz vein; deformed; irregular contacts; Pyritic margins and Pyrite-chlorite inclusions; 2% ankerite patches; 20 - 30 degrees to the C/A. 46.8 - 47.9: 3 - 5% Pyrite as patches and streaks. 47.9 - 48.0: White quartz vein; 99% milky white coarse crystalline quartz with sparse Pyrite-chlorite inclusions; 1% ankerite patches. 49.6 - 49.7: A 2 - 3 cm. quartz-calcite vein (50% white qtz + calcite, 50% dark grey to black quartz) with coarse Pyrite margins;	6081 6082 6083 6084 6085 6086 6087 6088 6089 6090 6091 6092 6093 6094 6095 6096 6097 6098 6099 6100 12251 12252 12253 12254	26.6 35.7 44.7 45.6 46.3 47.0 47.9 48.6 49.4 50.1 66.7 67.3 67.3 68.2 68.2 70.6 71.0 71.0 71.6 71.6 71.9 73.0 73.0 73.5 74.0 79.5 88.6 92.85 119.3 126.9	27.2 36.0 45.6 46.3 47.0 47.9 48.6 49.4 50.1 50.9 67.3 68.2 68.6 71.0 71.6 71.9 73.0 73.5 74.0 80.4 89.0 93.15 119.9 127.8	0.6 0.3 0.9 0.7 0.7 0.9 0.7 0.8 0.7 0.8 0.6 0.9 0.4 0.4 0.6 0.3 1.1 0.5 0.5 0.9 0.4 0.3 0.6 0.9	0.284 0.012 0.022 0.023 0.011 0.005 0.030 0.057 0.009 0.008 0.357 0.476 0.244 0.068 0.008 0.084 0.012 0.039 0.006 0.007 0.023 0.005 0.005 0.145

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--						
		30 degrees to C/A. 50.8: A 6 cm. quartz-calcite vein; 70 degrees to the C/A. 52.0 - 60.5: Relatively undeformed, dark to medium green; pillowled to massive mafic volcanic; only weakly carbonated. 60.5 - 75.0: Highly deformed and locally altered zone similar to 43.5 - 60.5. 66.7 - 67.9: Pyritic zone; highly sheared with scattered quartz veining, including one from 67.15 - 67.3 that contains 5 - 10% wallrock inclusions and 2 - 3% Pyrite. 68.2 - 68.6: Sausseritized and sericitic zone with 5 - 10% quartz calcite veining; 2 - 3% Pyrite. 71.0 - 71.6: Quartz vein; white, coarse crystalline, with 1 - 2% inclusions of Pyrite, chlorite; local ankerite patches; upper contact sharp at 70 degrees to the C/A, lower vague at 70 degrees to C/A. 71.6 - 71.9: Quartz sericite zone; 40% qtz, 5% calcite, 1 - 2% Pyrite inclusions, patches, streaks. 71.9 - 73.0: Relatively barren mafic rock. 73.0 - 73.5: Quartz vein zone (20 - 25%) in silicified and strongly carbonated rock; 2 - 3% Pyrite. 73.5 - 75.0: Deformed rock; carbonated; calcite stringers, minor Pyrite. 75.0 - 109.7: Relatively undeformed, pillowled to massive; coarse grained, medium to dark green mafic volcanic rock; scattered quartz veinlets and calcite stringers. 79.5 - 80.4: Silicified zone (quartz-sausserite-calcite); highly deformed; 1 - 2% Pyrite. 88.75: A 2 cm. qtz-ankerite veinlet; 60 degrees to the C/A; 2 - 3% Pyrite in footwall and hanging wall. 92.85 - 93.15: Deformed zone with 30% quartz calcite vein in epidotized and carbonated wallrock; 45 degrees to the C/A.					

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	109.7 - 112.2: Highly deformed, foliated zone (45 - 50 degrees to the C/A), similar to above zone (60.5 - 75.0) except no quartz veining. 112.2 - 127.2: Relatively undeformed, pillowd and massive mafic volcanic rocks; similar to above (75.0 - 109.7).	---	---	---	---	---
127.2	128.0	QUARTZ FELDSPAR PORPHYRY: Pale grey to buff coloured; pseudobreccia texture due to medium grey, fine grained alteration streaks and fracture fillings; 1 - 2% Pyrite; contact vague at 65 - 75 degrees to the C/A and to shearing; Pyrite in the first 30 cm. of hanging wall, trace Chalcopyrite.					
		128.0 E.O.H.					

## Cabo Mining Enterprises Corp.

PROPERTY NAME: HOPE LAKE  
 HOLE #: CHL-9  
 GRID 'A':  
 EASTING: 350 W  
 NORTHING: 640 S  
 ELEVATION: 357

CLAIM #: 1248205  
 BEARING: 320°  
 INCLINATION: -65°  
 TOTAL DEPTH: 65 m  
 CORE SIZE: NQ

LOGGED BY: S. Sears  
 DRILLED BY: Norex Drilling Ltd.  
 SURVEY TYPE: Acid Test  
 START: June 23, 2005  
 FINISH: June 24, 2005

PAGE # 1 of 3


<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	-----	----	---	---	---	---
0	3.5	Overburden					
3.5	25.8	ALTERED MAFIC VOLCANICS:  Pale to medium grey green; fine to medium grained; weakly carbonated; highly sausseritized, variably sericitic; locally chloritic and silicified; moderately to highly deformed; general fabric defined by stretching lineation, schistosity and layering from 30 - 45 degrees to the C/A; scattered calcite +/- qtz stringers and fracture fillings, less than 1% of core; local calcite-epidote +/- quartz zones, usually with associated Pyrite; locally sericite schist with associated quartz veining and Pyrite.  3.5 - 5.6: Badly broken core; recovered core consists of weathered, silicified mafic rock.  5.6 - 6.0: Sericitized rock with 2 - 3% Pyrite. 6.0 - 6.7: Quartz vein; white; Pyrite patches and streaks near contacts; relatively barren; coarse crystalline in center. 6.7 - 7.3: Sericite-quartz zone; quartz flooding in a sericitized wallrock; 1 - 2% Pyrite; 40% quartz, grey and white. 7.3 - 8.0: Sericite schist; minor quartz (less than 5%). 8.0 - 8.5: Sericite schist; 20% quartz veining. 8.5 - 10.3: Sericitized and carbonated rock; minor quartz stringers (very rare), trace Pyrite; moderately carbonated. 10.3 - 12.6: Weakly sericitized, carbonated rock. 12.6 - 25.8: Moderately deformed, fine grained, chloritic; weakly carbonated. 17.3 - 17.6: Calcite-epidote-quartz vein; vuggy; irregular contacts.	12255 12256 12257 12258 12259 12260 12261 12262 12263 12264	5.6 6.0 6.7 7.3 7.3 8.0 8.5 9.4 9.4 24.6 25.4	6.0 6.7 7.3 8.0 8.5 9.4 9.7 10.3 25.4 25.8	0.4 0.7 0.6 0.7 0.5 0.9 0.3 0.6 0.8 0.4	N/A N/A N/A 0.041 0.071 0.005 0.005 0.005 0.056 1.811


## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--	24.6 - 25.8: Highly deformed and altered contact zone, including 20% quartz veining and 3 - 4% Pyrite in the lower 0.4 metres.	---	---	---	---	---
25.8	32.2	QUARTZ FELDSPAR PORPHYRY: Fine to medium grained; massive, except for fine grained sausseritized and siliceous (grey) streaks and matrix in a faintly developed pseudobreccia; especially in contact zones; lower 0.6 metres is strongly foliated 30 - 35 degrees to the core axis; sericitized lower contact zone; 1 - 2% disseminated Pyrite throughout; quartz veining in lower 0.5 metres as well as 0.3 metres into footwall.	12265	31.7	32.2	0.5	0.429
32.2	65.0	MAFIC VOLCANIC ROCKS: Varily altered and deformed; fine to coarse grained; pale to dark grey green; very strongly carbonated as pervasive grains and stringers, veinlets and hairline fracture fillings; scattered quartz veining usually associated with more deformed zones with associated Pyrite; unit was a pillowed to massive mafic volcanic sequence. 41.2 - 41.9: Quartz vein; white, coarsely crystalline, sparse Pyrite streaks and patches, particularly towards margins; contacts irregular 45 - 135 degrees to C/A; wallrocks are fractured and deformed, strongly carbonated and Pyritic. 47.45 - 47.55: Quartz vein; white; 3 - 4% Pyrite; irregular contacts 65 - 75 degrees to the C/A; Pyritic margins; scattered calcite-quartz veinlets (5%) in the underlying 0.9 metres. 52.1 - 52.65: Quartz vein; white; coarse crystalline;	12266 12267 12268 12269 12270 12271 12272 12273 12274 12275 12276 12277	32.2 40.6 41.15 41.9 47.3 47.6 51.7 52.1 53.9 57.1 58.2 64.1	32.5 41.15 41.9 42.4 47.6 48.5 52.1 52.7 54.6 58.2 58.9 64.5	0.3 0.55 0.75 0.5 0.3 0.9 0.4 0.6 0.7 1.1 0.7 0.4	0.079 0.008 0.031 0.009 0.097 0.005 0.115 0.058 0.105 0.005 0.005 0.005

## Cabo Mining Enterprises Corp.

<i>From</i>	<i>To</i>	<i>Lithological Description</i>	<i>Sample #</i>	<i>From</i>	<i>To</i>	<i>Width</i>	<i>Au (gm/t)</i>
--	--		---	---	---	---	---
		scattered Pyrite patches, particularly along margins; the overlying 0.4 metres contains 10% qtz-calcite veinlets and 2 - 3% Pyrite.					
		53.9 - 54.6: Very strongly carbonated zone with a 20 cm. section (54.1 - 54.3) of quartz flooding; chloritic and sericitic inclusions in quartz; 2 - 3% Pyrite.					
		54.6 - 65.0: Zone contains local massive to semi-massive stringer zones of Pyrite and 1 - 2% disseminated Pyrrhotite/Pyrite with local calcite-quartz stringers.					
		58.7 - 58.85: Calcite-epidote-quartz vein; 50 - 60 degrees to C/A; minor Pyrite.					
		64.7 - 64.95: Calcite-epidote-quartz vein; minor Pyrite.					
		65.0 E.O.H.					

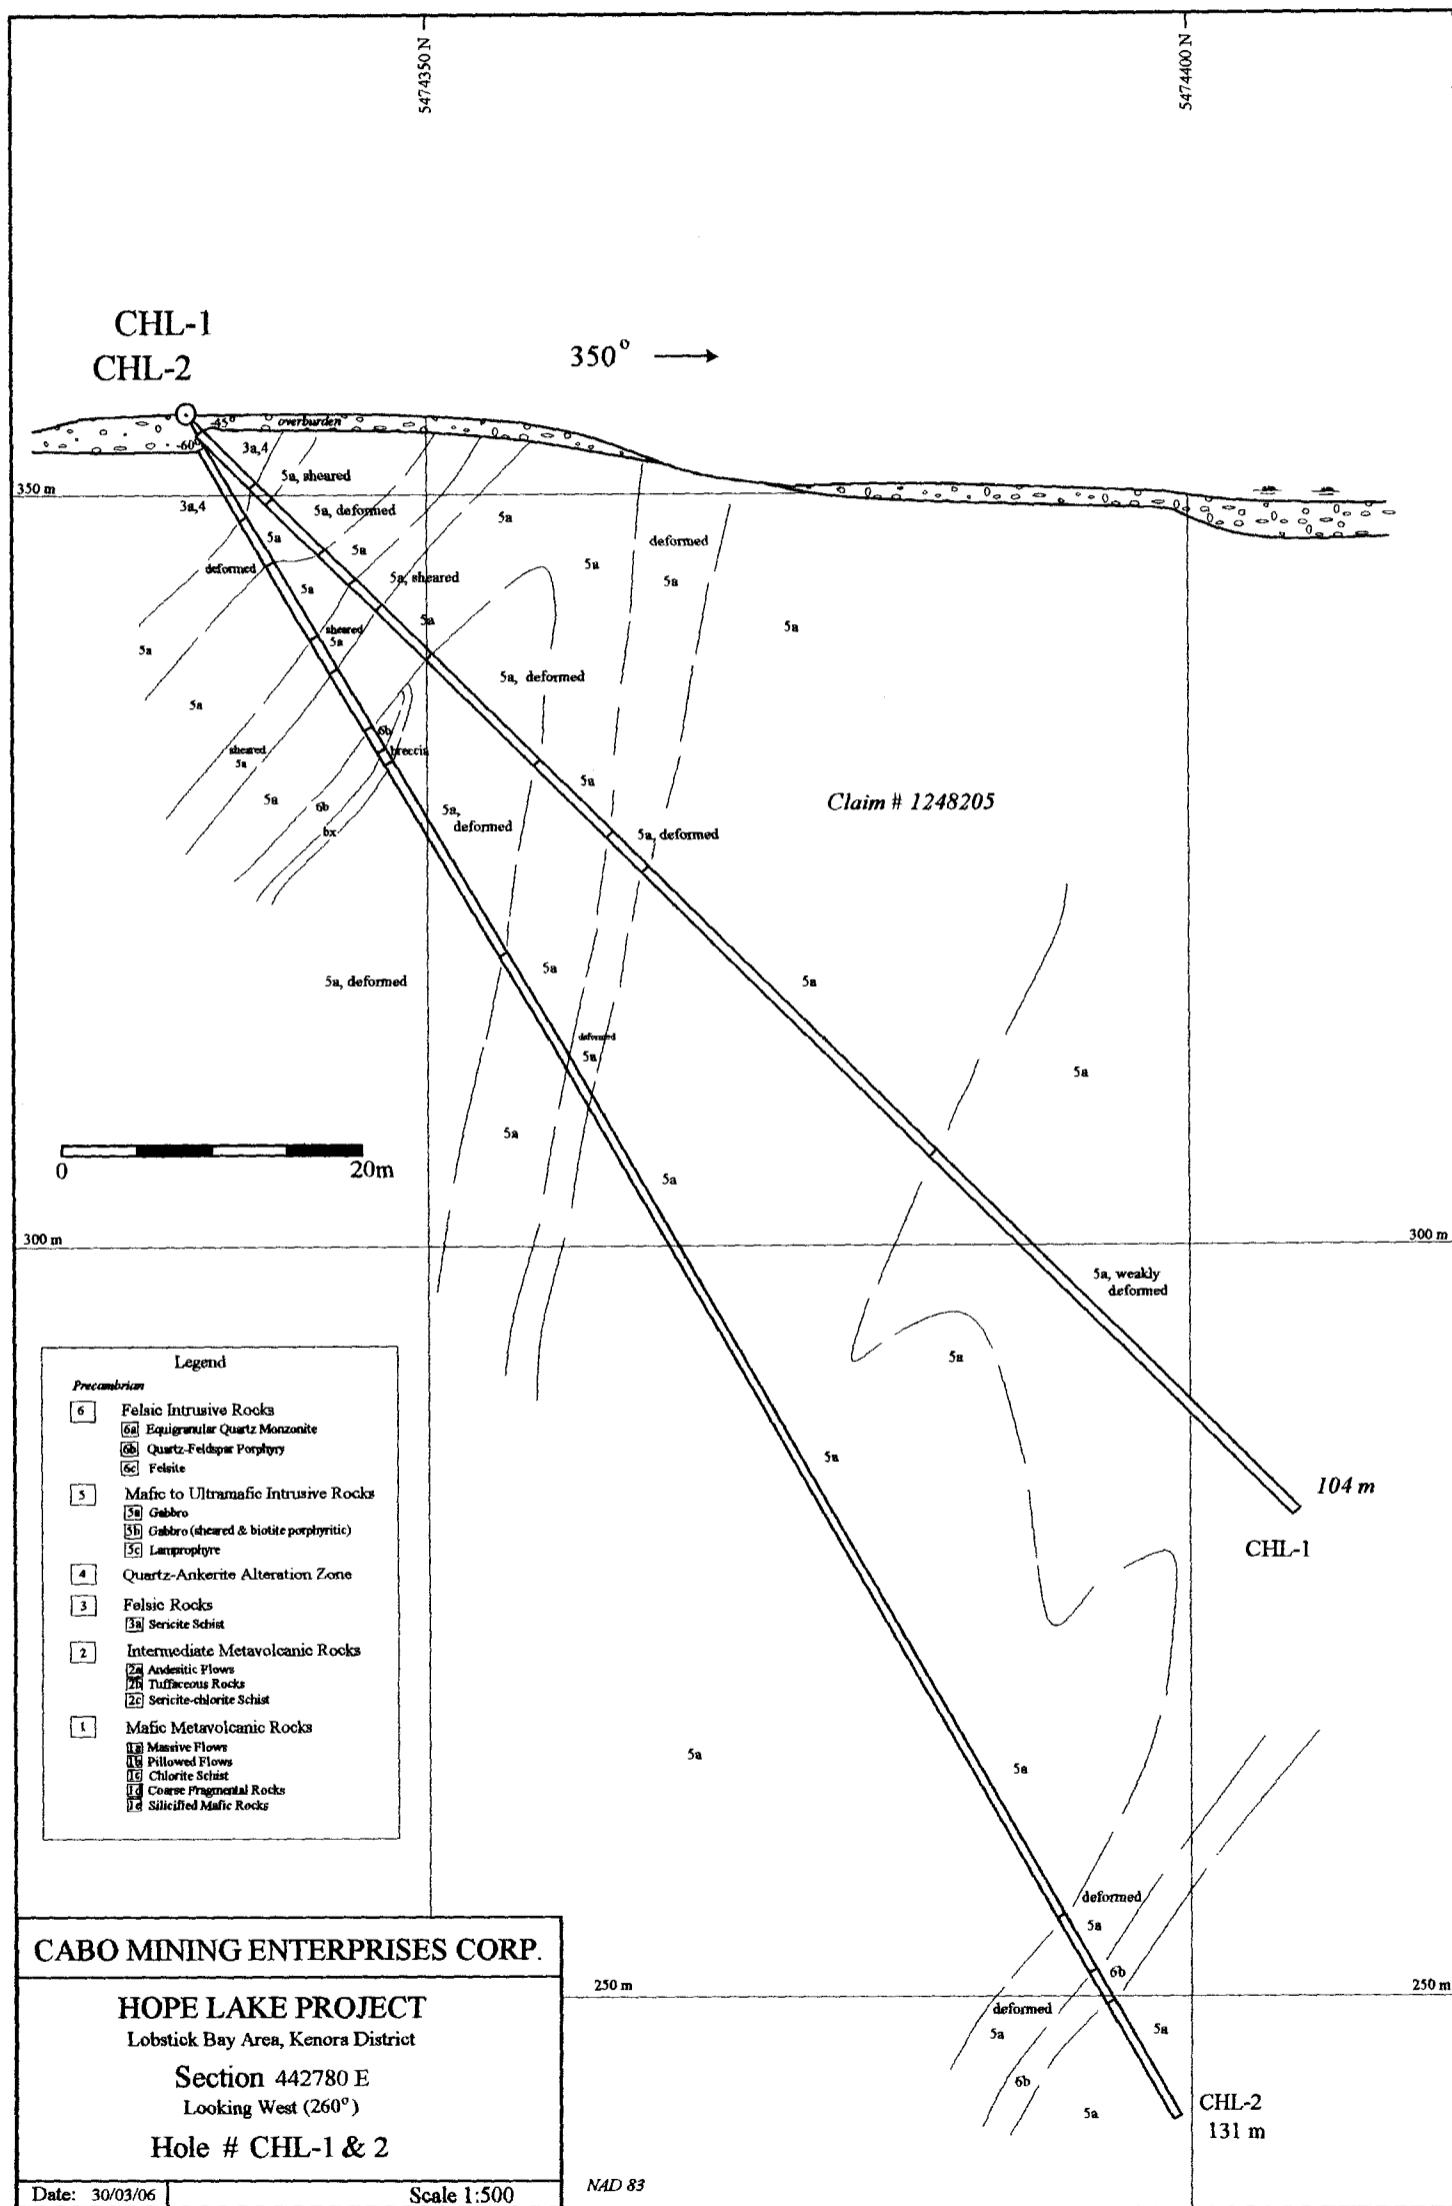


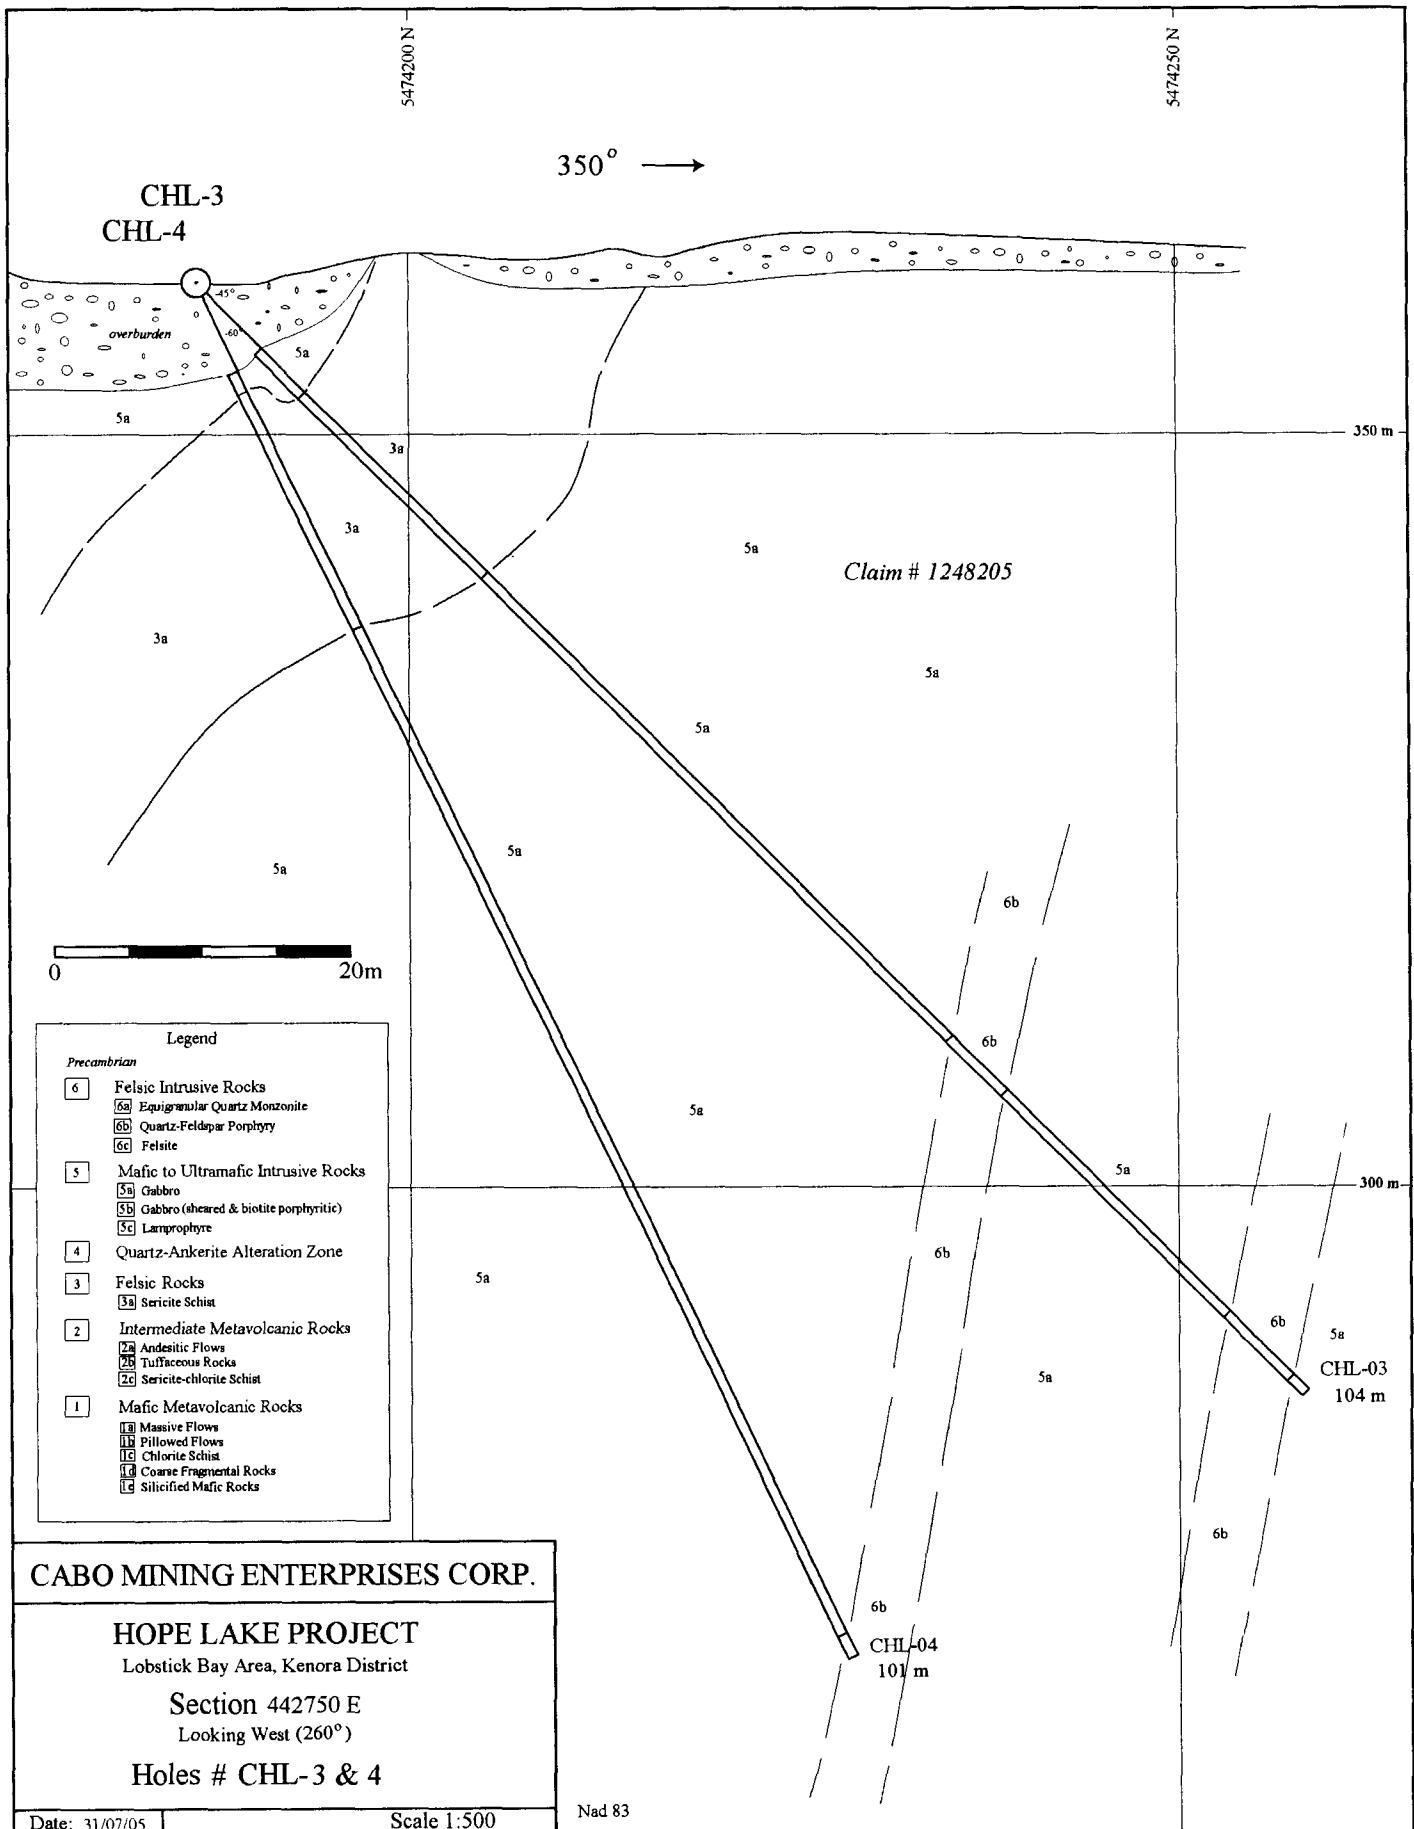



442650 E

442700 E

442750 E

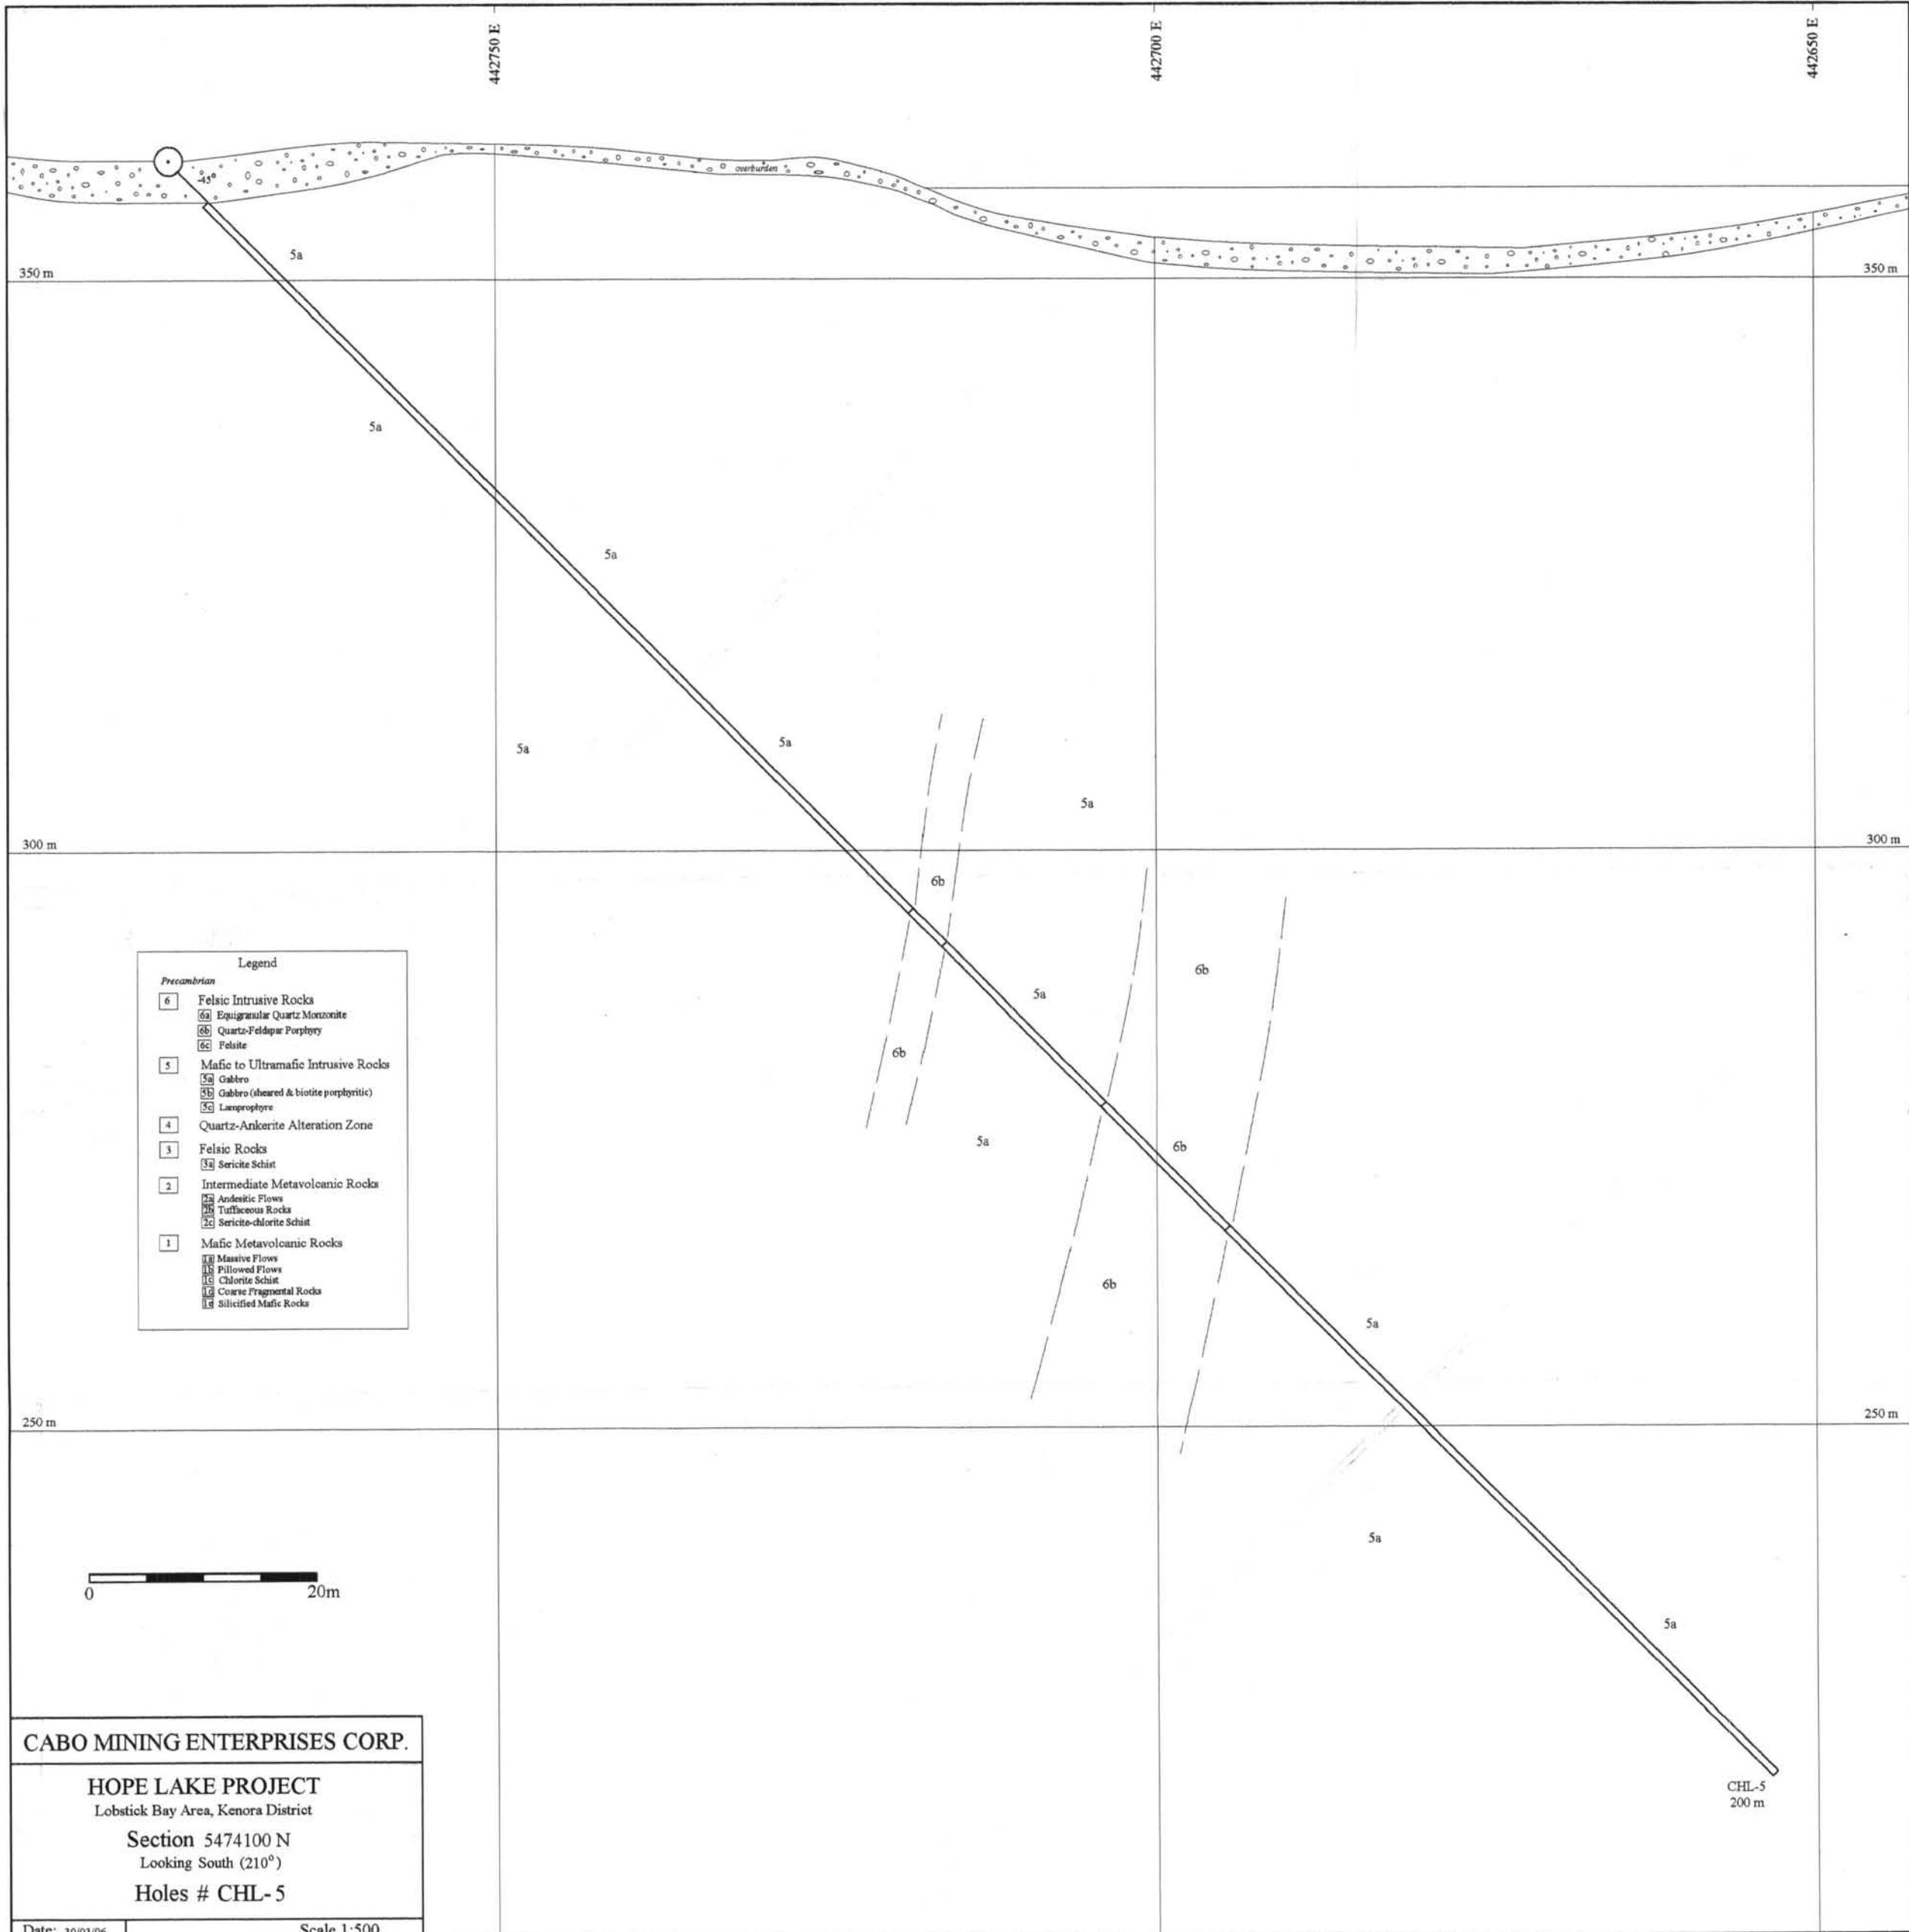

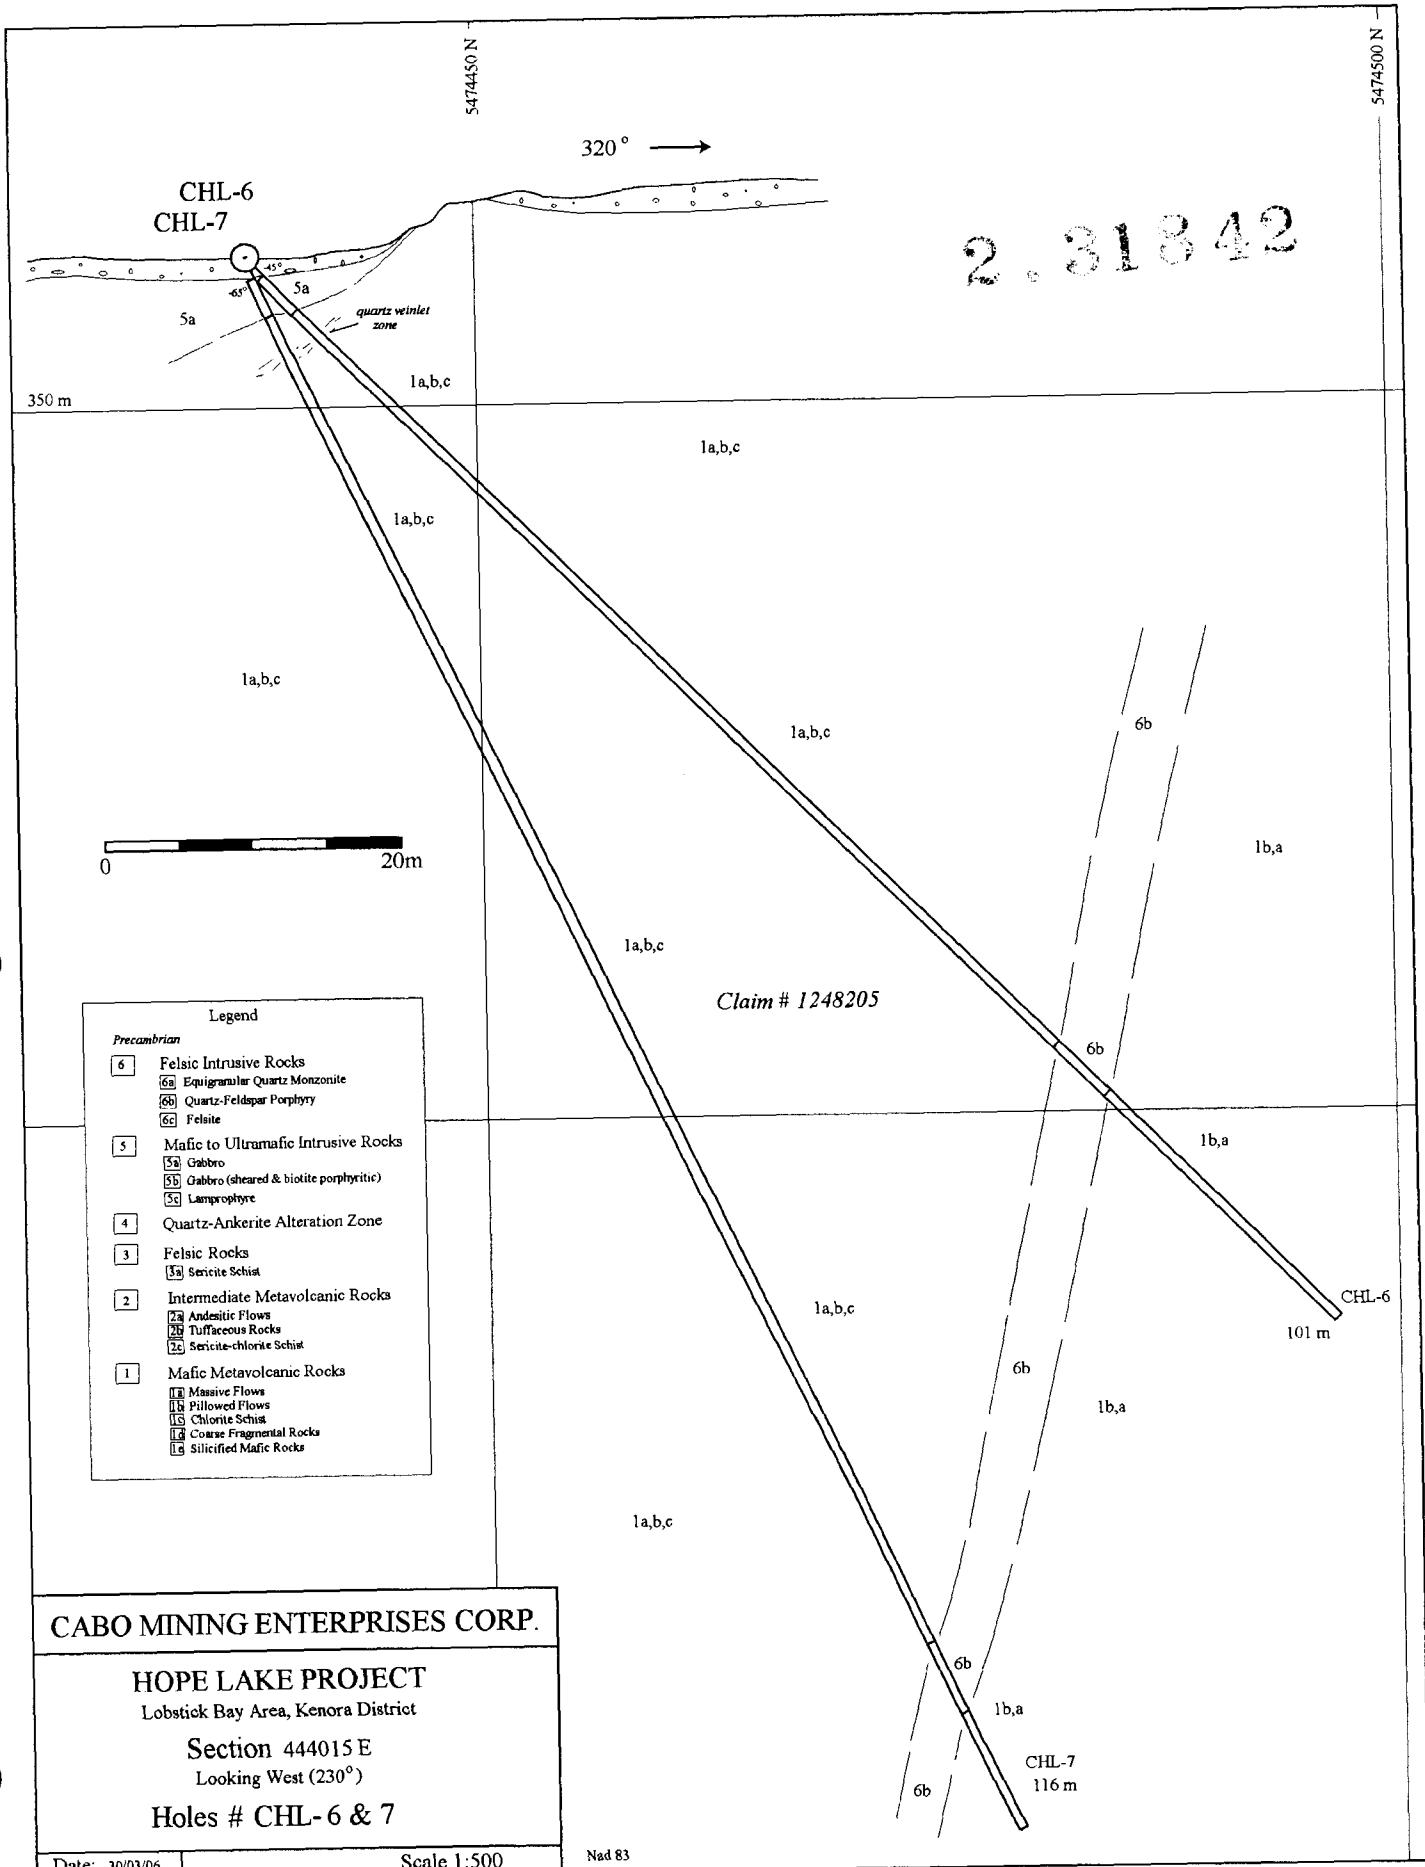

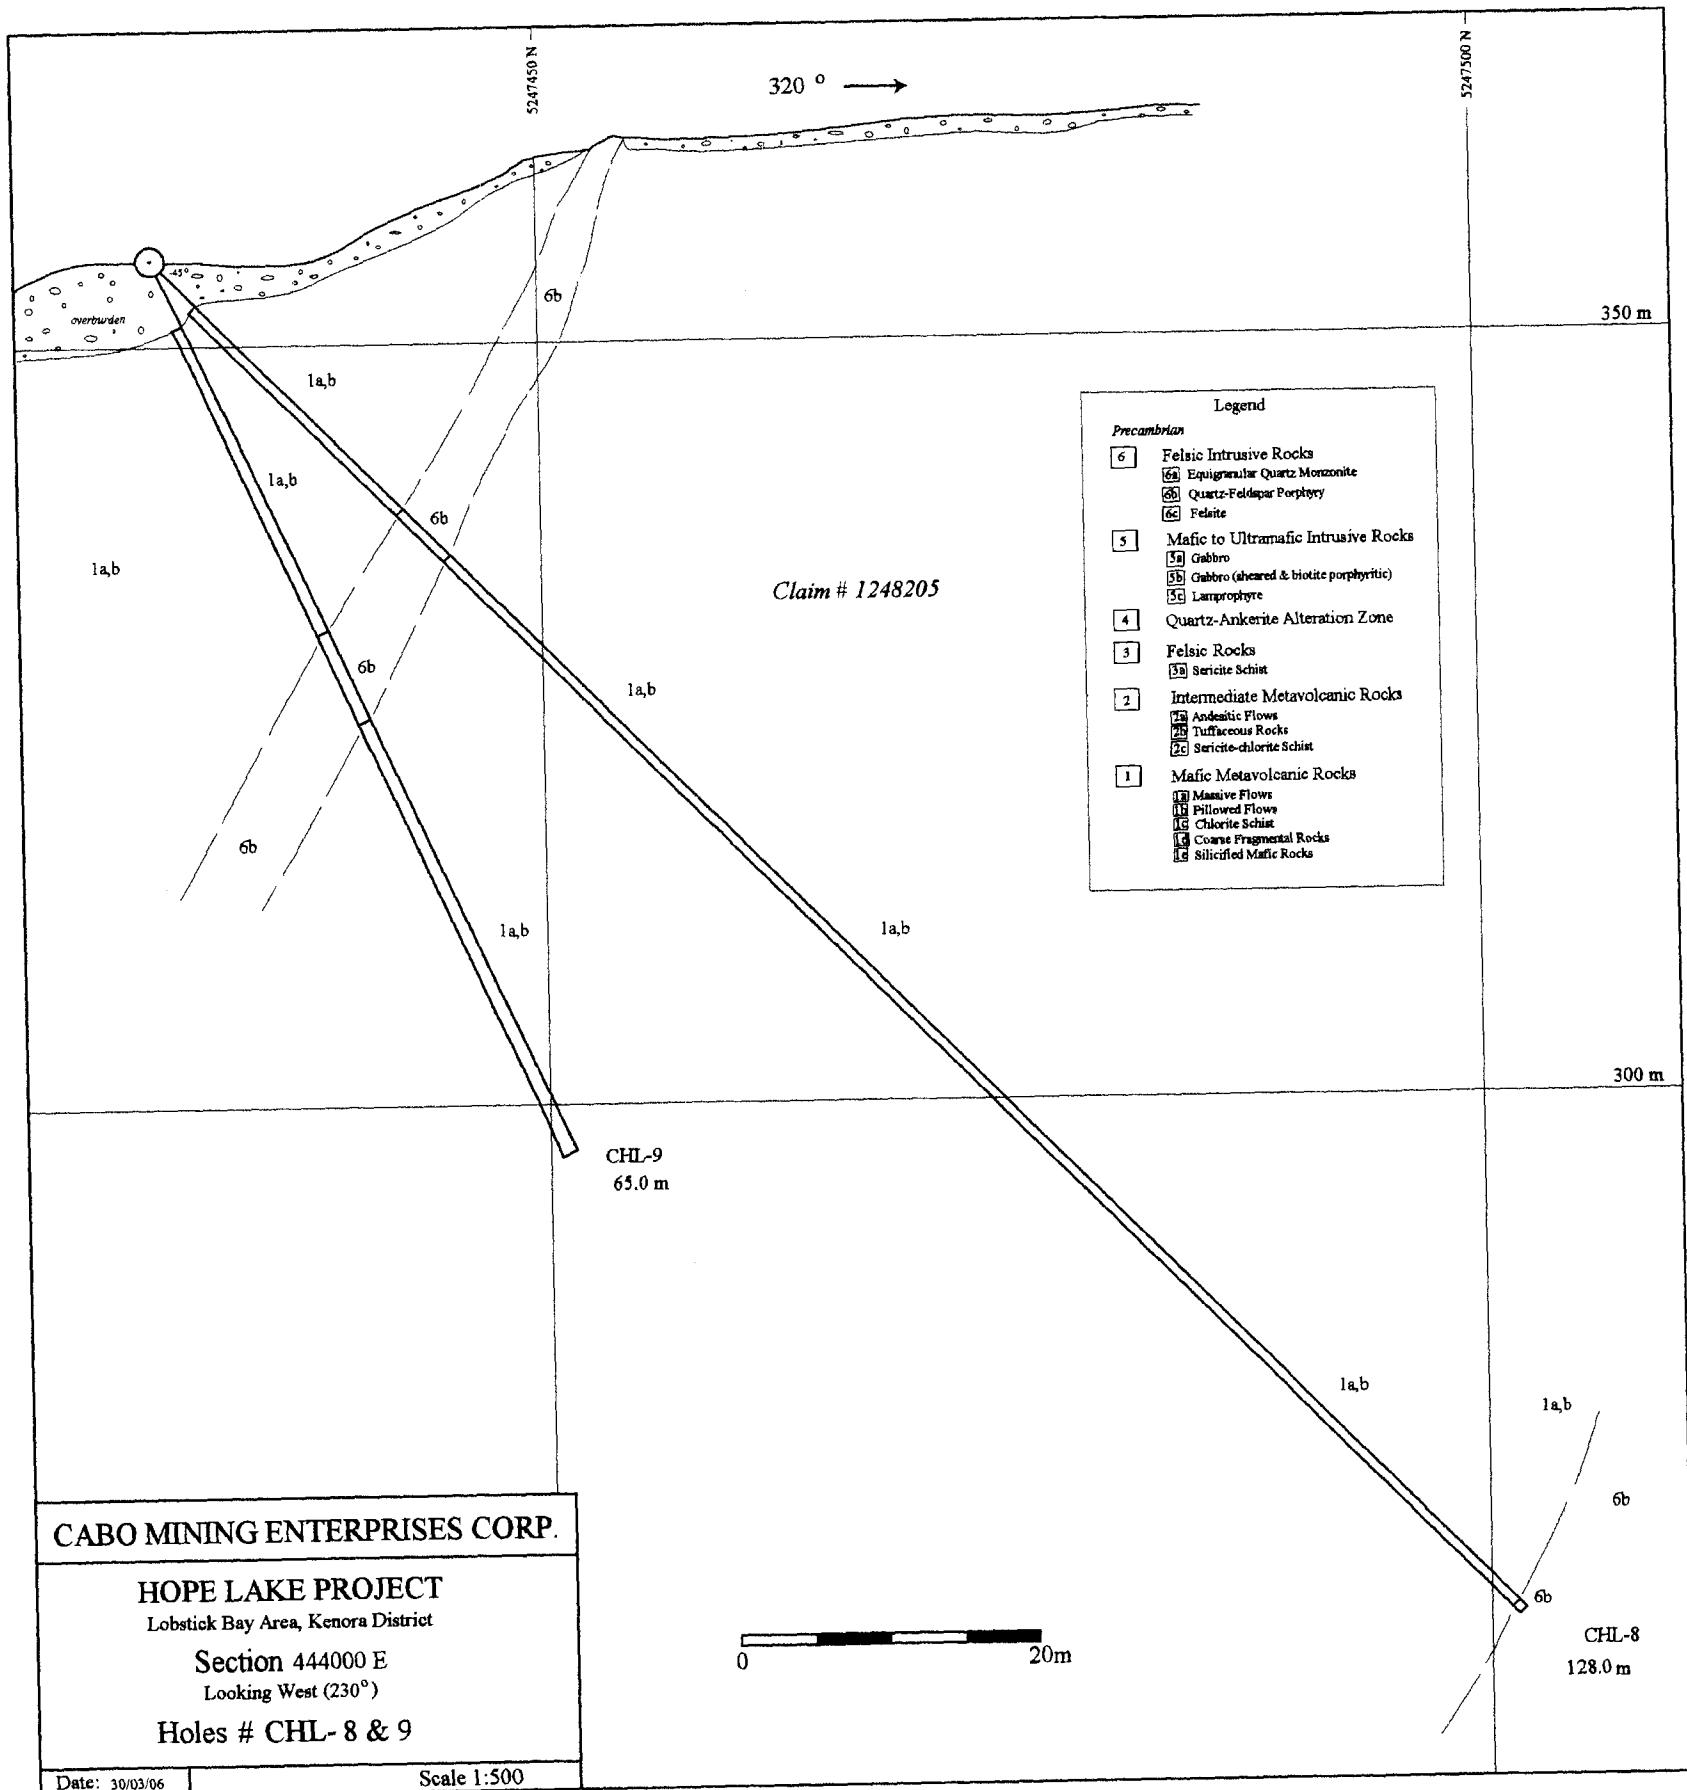



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B 1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 04-Jul-05  
 Date Completed : 12-Jul-05  
 Job # 200540997  
 Reference : Hope Lake  
 Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74424	6002	21	<0.001	0.021
74425	6004	1459	0.043	1.459
74426	6005	111	0.003	0.111
74427	6006	<5	<0.001	<0.005
74428	6007	99	0.003	0.099
74429	6008	19	<0.001	0.019
74430	6009	<5	<0.001	<0.005
74431	6010	589	0.017	0.589
74432	6011	<5	<0.001	<0.005
74433	6012	22	<0.001	0.022
74434 Check	6012	31	<0.001	0.031
74435	6013	23	<0.001	0.023
74436	6014	194	0.006	0.194
74437	6015	<5	<0.001	<0.005
74438	6016	<5	<0.001	<0.005
74439	6017	<5	<0.001	<0.005
74440	6018	502	0.015	0.502
74441	6019	127	0.004	0.127
74442	6020	18	<0.001	0.018
74443	6021	<5	<0.001	<0.005
74444	6022	109	0.003	0.109
74445 Check	6022	91	0.003	0.091
74446	6023	<5	<0.001	<0.005

*NOT FROM  
THESE  
HOLES*

PROCEDURE CODES: AL4A1S, AL4ICPAR

Page 1 of 9

Certified By:


 Derek Demlaniuk H.B.Sc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 04-Jul-05  
 Date Completed : 12-Jul-05  
 Job # 200540997  
 Reference : Hope Lake  
 Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)	
74447	6024	16	<0.001	0.016	
74448	6025	<5	<0.001	<0.005	
74449	6026	<5	<0.001	<0.005	
74450	6027	6	<0.001	0.006	
74451	6028	NOT FROM THESE HOLE	<5	<0.001	<0.005
74452	6029	59	<0.001	<0.005	
74453	6030	355	0.010	0.355	
74454	6031	7	<0.001	0.007	
74455	6033	<5	<0.001	<0.005	
74456 Check	6033	10	<0.001	0.010	
74457	6034	22	<0.001	0.022	
74458	6035	6	<0.001	0.006	
74459	6036	8	<0.001	0.008	
74460	6037	111	0.003	0.111	
74461	6038	510	0.015	0.510	
74462	6039	12	<0.001	0.012	
74463	6040	28	<0.001	0.028	
74464	6041	<5	<0.001	<0.005	
74465	6042	6	<0.001	0.006	
74466	6043	5	<0.001	0.005	
74467 Check	6043	7	<0.001	0.007	
74468	6044	<5	<0.001	<0.005	
74469	6045				

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 2 of 9

Certified By:

Derek Demianuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 04-Jul-05  
 Date Completed : 12-Jul-05  
 Job # 200540997  
 Reference : Hope Lake  
 Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74470	6046	6	<0.001	0.006
74471	6047	14	<0.001	0.014
74472	6049	7	<0.001	0.007
74473	6050	55	0.002	0.055
74474	6051	41	0.001	0.041
74475	6052	7	<0.001	0.007
74476	6053	137	0.004	0.137
74477	6054	8	<0.001	0.008
74478 Check	6054	<5	<0.001	<0.005
74479	6055	23	<0.001	0.023
74480	6056	52	0.002	0.052
74481	6057	40	0.001	0.040
74482	6059	50	0.001	0.050
74483	6060	83	0.002	0.083
74484	6061	70	0.002	0.070
74485	6062	82	0.002	0.082
74486	6063	37	0.001	0.037
74487	6064	14	<0.001	0.014
74488	6065	26	<0.001	0.026
74489 Check	6065	22	<0.001	0.022
74490	6066	36	0.001	0.036
74491	6067	<5	<0.001	<0.005
74492	6068	54	0.002	0.054

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

Page 3 of 9

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 04-Jul-05  
 Date Completed : 12-Jul-05  
 Job # 200540997  
 Reference : Hope Lake  
 Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74493	6069	27	<0.001	0.027
74494	6070	30	<0.001	0.030
74495	6071	63	0.002	0.063
74496	6072	208	0.006	0.208
74497	6073	65	0.002	0.065
74498	6074	<5	<0.001	<0.005
74499	6077	19	<0.001	0.019
74500 Check	6077	<5	<0.001	<0.005
74501	6078	11	<0.001	0.011
74502	6079	62	0.002	0.062
74503	6080	5	<0.001	0.005
74504	6081	284	0.008	0.284
74505	6082	12	<0.001	0.012
74506	6083	22	<0.001	0.022
74507	6084	23	<0.001	0.023
74508	6085	11	<0.001	0.011
74509	6086	<5	<0.001	<0.005
74510	6087	30	<0.001	0.030
74511 Check	6087	37	0.001	0.037
74512	6088	57	0.002	0.057
74513	6089	9	<0.001	0.009
74514	6090	8	<0.001	0.008
74515	6091	357	0.010	0.357

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 4 of 9

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B 1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 04-Jul-05  
 Date Completed : 12-Jul-05  
 Job # 200540997  
 Reference : Hope Lake  
 Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74516	6092	476	0.014	0.476
74517	6093	244	0.007	0.244
74518	6094	68	0.002	0.068
74519	6095	8	<0.001	0.008
74520	6096	84	0.002	0.084
74521	6097	12	<0.001	0.012
74522 Check	6097	9	<0.001	0.009
74523	6098	39	0.001	0.039
74524	6099	6	<0.001	0.006
74525	6100	7	<0.001	0.007
74526	6101	9	<0.001	0.009
74527	6102	34	<0.001	0.034
74528	6103	161	0.005	0.161
74529	6104	15	<0.001	0.015
74530	6105	9	<0.001	0.009
74531	6106	289	0.008	0.289
74532	6107	132	0.004	0.132
74533 Check	6107	133	0.004	0.133
74534	6108	358	0.010	0.358
74535	6109	12	<0.001	0.012
74536	6110	9	<0.001	0.009
74537	6111	<5	<0.001	<0.005
74538	6112	8	<0.001	0.008

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 5 of 9

Certified By:

Derek Demlaniuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B 1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 04-Jul-05  
Date Completed : 12-Jul-05  
Job # 200540997  
Reference : Hope Lake  
Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74539	6113	14	<0.001	0.014
74540	6114	16	<0.001	0.016
74541	6115	<5	<0.001	<0.005
74542	6116	<5	<0.001	<0.005
74543	6117	<5	<0.001	<0.005
74544 Check	6117	<5	<0.001	<0.005
74545	6118	<5	<0.001	<0.005
74546	6119	<5	<0.001	<0.005
74547	6120	<5	<0.001	<0.005
74548	6121	<5	<0.001	<0.005
74549	6122	<5	<0.001	<0.005
74550	6123	<5	<0.001	<0.005
74551	6124	7	<0.001	0.007
74552	6180	75	0.002	0.075
74553	6181	195	0.006	0.195
74554	6182	8	<0.001	0.008
74555 Check	6182	20	<0.001	0.020
74556	6183	29	<0.001	0.029
74557	6184	9	<0.001	0.009
74558	6185	179	0.005	0.179
74559	6186	9	<0.001	0.009
74560	6187	<5	<0.001	<0.005
74561	6188	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 04-Jul-05  
 Date Completed : 12-Jul-05  
 Job # 200540997  
 Reference : Hope Lake  
 Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74562	6189	<5	<0.001	<0.005
74563	6190	<5	<0.001	<0.005
74564	6191	11	<0.001	0.011
74565	6192	42	0.001	0.042
74566 Check	6192	21	<0.001	0.021
74567	6193	168	0.005	0.168
74568	6194	156	0.005	0.156
74569	6195	148	0.004	0.148
74570	6205	107	0.003	0.107
74571	6206	1231	0.036	1.231
74572	6208	925	0.027	0.925
74573	6209	515	0.015	0.515
74574	6210	410	0.012	0.410
74575	6211	187	0.005	0.187
74576	6212	137	0.004	0.137
74577 Check	6212	131	0.004	0.131
74578	6213	12	<0.001	0.012
74579	6214	21	<0.001	0.021
74580	6215	12	<0.001	0.012
74581	6216	<5	<0.001	<0.005
74582	6217	<5	<0.001	<0.005
74583	6218	148	0.004	0.148
74584	6219	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 7 of 9

 Certified By: 

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B 1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 04-Jul-05  
Date Completed : 12-Jul-05  
Job # 200540997  
Reference : Hope Lake  
Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74585	6220	6	<0.001	0.006
74586	6223	<5	<0.001	<0.005
74587	6224	<5	<0.001	<0.005
74588 Check	6224	<5	<0.001	<0.005
74589	6225	<5	<0.001	<0.005
74590	6226	<5	<0.001	<0.005
74591	6227	12	<0.001	0.012
74592	6228	34	0.001	0.034
74593	6229	56	0.002	0.056
74594	6230	122	0.004	0.122
74595	6231	68	0.002	0.068
74596	6232	7	<0.001	0.007
74597	6233	6	<0.001	0.006
74598	6234	6	<0.001	0.006
74599 Check	6234	8	<0.001	0.008
74600	6235	64	0.002	0.064
74601	6236	46	0.001	0.046
74602	6237	287	0.008	0.287
74603	6238	197	0.006	0.197
74604	6239	73	0.002	0.073
74605	6240	27	<0.001	0.027
74606	6241	8	<0.001	0.008
74607	6242	19	<0.001	0.019

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 8 of 9

Certified By:

Derek Demianuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



## Certificate of Analysis

Tuesday, July 12, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B 1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 04-Jul-05  
Date Completed : 12-Jul-05  
Job # 200540997  
Reference : Hope Lake  
Sample #: 181 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
74608	6243	5	<0.001	0.005
74609	6244	77	0.002	0.077
74610 Check	6244	74	0.002	0.074
74611	6247	6	<0.001	0.006
74612	6248	11	<0.001	0.011
74613	6249	86	0.003	0.086
74614	6250	441	0.013	0.441
74615	6255	213	0.006	0.213
74616	6256	47	0.001	0.047
74617	6257	97	0.003	0.097
74618	12251	23	<0.001	0.023
74619	12252	<5	<0.001	<0.005
74620	12253	<5	<0.001	<0.005
74621 Check	12253	19	<0.001	0.019
74622	12254	145	0.004	0.145

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 9 of 9

Certified By:

Derek Demianuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/12/2005 04:30 PM



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

*NOT from THESE HOLES*

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74424	6002	<1	0.27	182	<1	62	<1	0.64	<10	13	123	16	1.01	0.21	<1	0.13	427	2	0.03	36	427	13	<10	<5	0.01	<10	28	<100	<1	<2	<10	3	52
74425	6004	5	0.31	>8,000	<1	64	<1	0.22	118	24	278	6	1.91	0.25	<1	0.05	169	1	0.05	28	387	16	<10	<5	<0.01	14	21	<100	<1	<2	<10	2	18
74426	6005	<1	0.31	1987	<1	48	<1	0.25	11	4	129	12	0.54	0.26	<1	0.03	<100	<1	0.03	7	358	6	<10	<5	0.01	<10	69	<100	<1	<2	<10	2	10
74427	6006	<1	0.49	104	<1	61	<1	0.33	<10	7	144	17	1.71	0.25	<1	0.21	413	2	0.04	22	470	28	<10	<5	0.01	<10	26	<100	<1	<2	<10	3	33
74428	6007	<1	0.48	426	<1	61	<1	0.22	<10	12	80	32	1.36	0.25	<1	0.17	344	2	0.02	22	433	43	<10	<5	0.01	<10	21	<100	<1	<2	<10	5	30
74429	6008	15	0.52	1246	<1	76	<1	0.14	<10	15	341	46	2.37	0.26	<1	0.21	475	2	0.03	34	275	964	<10	<5	0.01	16	26	<100	<1	<2	<10	4	354
74430	6009	<1	0.60	171	<1	58	<1	0.10	<10	16	80	63	2.90	0.22	2	0.33	501	2	0.02	36	319	61	<10	<5	0.01	19	19	<100	<1	<2	<10	4	104
74431	6010	2	0.56	>8,000	<1	49	<1	0.09	178	92	165	149	6.62	0.19	<1	0.30	656	5	0.02	146	405	55	13	<5	0.01	42	18	113	<1	<2	<10	4	755
74432	6011	<1	0.62	1396	<1	48	<1	0.10	<10	36	90	112	4.81	0.22	6	0.37	521	2	0.03	70	517	31	<10	<5	0.01	24	19	488	<1	2	<10	4	287
74433	6012	<1	0.45	7049	<1	55	<1	0.13	38	18	180	45	3.00	0.24	<1	0.17	344	2	0.03	40	498	10	<10	<5	<0.01	20	16	<100	<1	<2	<10	4	44
74434	6012	<1	0.44	6695	<1	53	<1	0.12	38	17	174	43	2.86	0.23	<1	0.16	329	2	0.03	38	481	9	<10	<5	<0.01	19	16	<100	<1	<2	<10	4	43
74435	6013	<1	0.30	2671	<1	53	<1	0.13	14	17	117	35	1.64	0.21	<1	0.05	370	2	0.03	28	468	5	<10	<5	<0.01	12	14	<100	<1	<2	<10	5	6
74436	6014	<1	0.30	2649	<1	54	<1	0.08	14	13	389	26	1.32	0.22	<1	0.02	194	3	0.03	27	341	4	<10	<5	<0.01	11	17	<100	<1	<2	<10	3	3
74437	6015	<1	0.53	448	<1	43	<1	0.27	<10	15	123	68	3.09	0.23	<1	0.27	503	3	0.04	46	654	10	<10	<5	0.01	20	20	<100	<1	<2	<10	4	137
74438	6016	<1	0.61	26	<1	33	<1	0.85	<10	6	238	7	1.95	0.19	18	0.57	754	1	0.05	22	407	40	<10	<5	0.02	14	30	<100	<1	<2	<10	3	279
74439	6017	<1	0.59	1014	<1	34	<1	0.12	<10	25	217	42	2.66	0.18	5	0.36	368	2	0.04	34	330	8	<10	<5	0.01	16	15	<100	<1	<2	<10	5	52
74440	6018	<1	0.43	>8,000	<1	160	<1	0.40	73	17	169	4	1.21	0.36	<1	0.02	127	5	0.04	33	653	5	<10	<5	0.01	10	26	<100	<1	<2	<10	3	52
74441	6019	<1	0.26	996	<1	68	<1	0.65	<10	4	132	4	0.43	0.15	<1	0.02	315	<1	0.06	20	528	3	<10	<5	<0.01	<10	44	<100	<1	<2	<10	5	5
74442	6020	<1	0.39	401	<1	105	<1	0.29	<10	8	211	24	1.18	0.25	<1	0.08	139	1	0.06	31	493	4	<10	<5	<0.01	<10	43	<100	<1	<2	<10	3	5
74443	6021	<1	0.09	442	<1	16	<1	0.21	<10	2	319	7	0.40	0.04	<1	0.01	<100	<1	0.03	7	103	2	<10	<5	<0.01	<10	17	<100	<1	<2	<10	3	8
74444	6022	<1	0.14	6568	<1	15	<1	1.71	36	28	202	2	0.81	0.05	<1	0.03	493	<1	0.04	24	607	3	<10	<5	<0.01	<10	13	<100	<1	<2	<10	<1	1
74445	6022	<1	0.14	6762	<1	16	<1	1.77	37	29	209	2	0.83	0.05	<1	0.03	512	<1	0.04	24	642	2	<10	<5	<0.01	<10	45	<100	<1	<2	<10	4	7

Certified By:  
Derek Demianiuk, H.Bsc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

*NOT FROM THESE ACES*

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74446	6023	<1	0.06	1974	<1	2	<1	1.74	11	7	249	3	0.50	<0.01	<1	0.02	509	<1	0.02	11	508	1	<10	<5	<0.01	<10	47	<100	<1	4	<10	4	2
74447	6024	<1	0.32	2178	<1	70	<1	0.44	12	9	402	28	1.25	0.18	<1	0.08	129	1	0.02	18	612	4	<10	<5	0.01	<10	19	<100	<1	<2	<10	4	5
74448	6025	<1	0.43	290	<1	96	<1	1.16	<10	9	111	33	1.48	0.25	<1	0.14	287	1	0.04	16	829	5	<10	<5	0.01	11	29	<100	<1	<2	<10	5	9
74449	6026	<1	0.22	7	<1	36	<1	0.62	<10	2	394	9	0.70	0.10	<1	0.06	254	1	0.05	11	267	3	<10	<5	<0.01	<10	23	<100	<1	<2	<10	5	9
74450	6027	<1	0.11	6	<1	9	<1	0.60	<10	12	257	167	4.33	0.03	<1	0.05	851	<1	0.03	115	<100	9	<10	<5	<0.01	26	21	<100	<1	<2	<10	2	2
74451	6028	<1	0.05	5	<1	4	<1	0.17	<10	1	618	8	0.62	<0.01	<1	0.02	<100	2	0.03	11	<100	<1	<10	<5	<0.01	14	14	<100	<1	<2	<10	<1	<1
74452	6029	<1	0.26	10	<1	19	<1	0.49	<10	2	289	8	0.74	0.06	<1	0.13	232	<1	0.04	11	257	2	<10	<5	<0.01	<10	26	<100	<1	<2	<10	1	10
74453	6030	<1	0.51	25	<1	44	<1	1.41	<10	6	283	11	1.73	0.14	<1	0.34	640	<1	0.06	29	473	4	<10	<5	0.01	11	45	<100	<1	<2	<10	3	31
74454	6031	<1	0.34	396	<1	32	<1	0.77	<10	4	199	13	0.86	0.10	<1	0.17	263	<1	0.05	15	335	3	<10	<5	<0.01	<10	32	<100	<1	<2	<10	2	13
74455	6033	<1	0.37	63	<1	42	<1	0.57	<10	2	367	8	0.97	0.13	<1	0.19	291	1	0.06	15	247	3	<10	<5	0.01	<10	29	<100	<1	<2	<10	2	13
74456	6033	<1	0.37	58	<1	42	<1	0.57	<10	3	373	8	0.99	0.13	<1	0.19	295	1	0.06	15	243	2	<10	<5	0.01	<10	29	<100	<1	<2	<10	2	14
74457	6034	<1	0.28	9	<1	48	<1	0.68	<10	2	207	19	0.89	0.14	<1	0.11	317	<1	0.05	24	217	3	<10	<5	<0.01	<10	28	<100	<1	<2	<10	2	14
74458	6035	<1	0.45	88	<1	95	<1	0.27	<10	4	207	21	1.10	0.27	<1	0.14	153	2	0.04	15	170	3	<10	<5	0.01	<10	16	<100	<1	<2	<10	1	6
74459	6036	<1	0.36	93	<1	69	<1	0.32	<10	2	86	19	0.86	0.24	<1	0.10	133	2	0.02	8	<100	4	<10	<5	<0.01	<10	10	<100	<1	<2	<10	9	32
74460	6037	<1	0.30	168	<1	69	<1	0.53	<10	3	203	10	0.64	0.18	<1	0.04	187	3	0.04	18	595	2	<10	<5	0.01	<10	22	<100	<1	<2	<10	4	4
74461	6038	<1	0.44	35	<1	109	<1	0.36	<10	6	91	43	1.35	0.32	<1	0.08	138	1	0.04	42	1184	4	<10	<5	0.01	<10	25	143	<1	<2	<10	20	
74462	6039	<1	0.51	260	<1	65	<1	0.14	<10	26	180	218	2.95	0.19	<1	0.24	403	2	0.03	63	318	6	<10	<5	0.01	13	11	443	<1	<2	<10	8	20
74463	6040	1	0.73	19	<1	47	<1	0.39	<10	46	108	230	5.49	0.18	12	0.52	1269	2	0.04	128	770	18	<10	<5	0.01	15	18	2590	<1	11	<10	4	112
74464	6041	1	0.82	44	<1	9	<1	0.26	<10	63	184	282	7.64	0.04	18	0.62	1807	1	0.03	168	449	17	<10	<5	0.02	28	7	2086	<1	<2	<10	9	325
74465	6042	1	0.86	24	<1	2	<1	0.20	<10	42	178	159	7.04	<0.01	19	0.68	1038	1	0.02	132	664	10	<10	<5	0.03	25	<5	1822	<1	14	<10	14	223
74466	6043	<1	0.84	46	<1	7	<1	0.30	<10	49	127	281	7.05	0.02	14	0.60	1474	1	0.03	121	976	11	<10	<5	0.03	22	<5	2108	<1	<2	<10	12	246
74467	6043	<1	0.84	42	<1	7	<1	0.29	<10	47	124	269	6.96	0.02	13	0.59	1427	1	0.03	119	972	11	<10	<5	0.02	24	<5	1849	<1	12	<10	11	238

Certified By:  
Derek Demianiuk, H.Bsc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

*NOT FROM THESE HOLES*

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accr. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74468	6044	1	0.86	9	<1	2	<1	0.41	<10	41	131	963	7.16	<0.01	15	0.63	1139	1	0.02	133	1057	11	<10	<5	0.02	29	<5	1506	<1	<2	<10	9	204
74469	6045	<1	0.76	59	<1	208	<1	2.62	<10	12	227	26	4.23	1.02	14	0.70	1220	<1	0.03	88	536	15	<10	<5	0.01	11	55	1427	<1	<2	<10	7	190
74470	6046	<1	0.53	698	<1	100	<1	0.82	<10	8	43	7	1.09	0.52	<1	0.27	360	<1	0.04	15	383	11	<10	<5	0.01	<10	24	393	<1	<2	<10	5	42
74471	6047	<1	0.51	2669	<1	83	<1	3.04	15	12	25	2	1.35	0.47	<1	0.34	1472	<1	0.04	9	585	18	<10	<5	<0.01	<10	64	434	<1	<2	<10	7	53
74472	6049	<1	0.45	67	<1	72	<1	0.53	<10	6	144	18	1.79	0.47	<1	0.24	742	2	0.03	11	166	29	<10	<5	<0.01	<10	13	371	<1	<2	<10	9	46
74473	6050	<1	0.30	2260	<1	29	<1	0.21	13	33	174	58	2.80	0.20	<1	0.14	784	<1	0.04	32	120	21	<10	<5	<0.01	15	12	142	<1	<2	<10	1	35
74474	6051	<1	0.53	204	<1	83	<1	0.90	<10	11	156	23	2.28	0.60	<1	0.26	743	2	0.04	18	423	41	<10	<5	<0.01	<10	14	870	<1	<2	<10	11	154
74475	6052	<1	0.33	13	<1	33	<1	0.20	<10	5	57	15	1.16	0.21	<1	0.06	<100	<1	0.02	9	283	41	<10	<5	<0.01	10	9	<100	<1	<2	<10	2	87
74476	6053	<1	0.47	29	<1	48	<1	0.13	<10	9	112	25	1.87	0.26	<1	0.16	231	1	0.04	16	413	58	<10	<5	<0.01	11	11	<100	<1	<2	<10	3	92
74477	6054	<1	0.59	345	<1	54	<1	1.11	<10	12	101	25	1.72	0.27	<1	0.35	594	1	0.04	28	400	10	<10	<5	0.01	<10	22	298	<1	<2	<10	4	94
74478	6054	<1	0.56	361	<1	44	<1	1.14	<10	12	104	27	1.73	0.22	<1	0.35	579	1	0.04	29	408	11	<10	<5	<0.01	<10	21	184	<1	<2	<10	4	98
74479	6055	<1	0.46	386	<1	42	<1	1.49	<10	6	145	30	1.14	0.26	<1	0.17	499	1	0.04	13	347	9	<10	<5	<0.01	<10	22	<100	<1	<2	<10	4	276
74480	6056	<1	0.55	192	<1	61	<1	0.88	<10	10	95	20	1.75	0.24	<1	0.34	517	<1	0.03	19	467	27	<10	<5	<0.01	<10	20	351	<1	<2	<10	5	106
74481	6057	1	0.53	1054	<1	70	<1	0.16	<10	29	172	49	4.06	0.24	<1	0.32	464	1	0.03	35	643	326	<10	<5	<0.01	23	11	142	<1	<2	<10	7	701
74482	6059	<1	0.79	42	<1	54	<1	0.50	<10	42	132	73	5.20	0.20	12	0.65	848	<1	0.11	114	660	12	<10	<5	0.01	12	32	2149	<1	25	<10	10	142
74483	6060	<1	0.79	41	<1	202	<1	2.38	<10	41	196	51	5.26	0.79	30	0.65	1363	1	0.16	114	612	12	<10	<5	0.02	<10	61	2785	<1	32	<10	13	127
74484	6061	<1	0.83	75	<1	168	<1	2.45	<10	37	123	42	5.86	0.52	27	0.65	1507	1	0.25	100	642	14	<10	<5	0.02	11	96	2050	<1	23	<10	14	111
74485	6062	<1	0.78	33	<1	199	<1	0.75	<10	48	224	78	4.81	1.14	23	0.55	723	<1	0.20	115	772	10	<10	<5	0.02	<10	40	3363	<1	52	<10	12	83
74486	6063	<1	0.76	40	<1	156	<1	0.52	<10	56	158	93	5.29	0.70	21	0.62	913	<1	0.11	136	827	13	<10	<5	0.02	11	21	2850	<1	50	<10	13	74
74487	6064	<1	0.82	729	<1	73	<1	0.35	<10	49	182	42	5.51	0.35	21	0.70	862	<1	0.07	127	730	11	<10	<5	0.02	16	17	1428	<1	32	<10	12	129
74488	6065	<1	0.67	136	<1	39	<1	0.33	<10	17	130	33	2.80	0.13	5	0.50	595	1	0.04	46	301	60	<10	<5	0.01	<10	17	644	<1	3	<10	10	146
74489	6065	<1	0.68	110	<1	40	<1	0.34	<10	16	137	35	2.90	0.13	6	0.51	619	1	0.04	49	313	62	<10	<5	0.01	<10	18	663	<1	3	<10	10	151

Certified By  
Derek Demianiuk, H.B.Sc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

*NOT FROM THESE HOLES*

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74490	6066	<1	0.67	28	<1	15	<1	0.90	<10	14	351	44	3.74	0.03	<1	0.55	882	1	0.02	48	227	9	<10	<5	0.03	15	24	581	<1	6	<10	7	68
74491	6067	<1	0.43	4	<1	57	<1	0.32	<10	12	183	19	1.41	0.22	<1	0.22	251	1	0.05	27	458	11	<10	<5	<0.01	<10	20	332	<1	<2	<10	3	24
74492	6068	<1	0.75	15	<1	34	<1	0.16	<10	39	131	100	4.95	0.21	2	0.56	909	<1	0.02	66	666	44	<10	<5	0.01	10	6	1606	<1	50	<10	11	204
74493	6069	<1	0.82	11	<1	18	<1	0.12	<10	43	88	100	6.50	0.12	10	0.64	1237	<1	0.02	62	577	22	<10	<5	0.02	22	<5	1390	<1	79	<10	10	153
74494	6070	<1	0.85	29	<1	17	<1	0.11	<10	40	112	96	6.15	0.10	12	0.65	1402	<1	0.02	69	547	21	<10	<5	0.02	20	5	1404	<1	69	<10	10	187
74495	6071	<1	0.84	33	<1	18	<1	0.14	<10	40	81	72	6.51	0.10	13	0.64	1608	<1	0.02	68	617	21	<10	<5	0.02	21	5	1551	<1	69	<10	11	253
74496	6072	2	0.78	12	<1	30	<1	0.12	<10	58	153	285	7.91	0.10	8	0.65	1840	1	0.01	95	447	37	<10	<5	0.02	42	<5	1200	<1	65	<10	9	441
74497	6073	<1	0.78	73	<1	244	<1	0.22	<10	45	458	118	7.53	0.63	19	0.69	1562	<1	0.05	141	187	16	<10	<5	0.03	33	25	1689	<1	89	<10	7	157
74498	6074	<1	0.25	33	<1	32	<1	0.50	<10	5	316	27	1.14	0.09	<1	0.09	205	<1	0.07	12	211	12	<10	<5	<0.01	<10	34	117	<1	<2	<10	1	13
74499	6077	<1	0.34	5	<1	26	<1	2.07	<10	6	101	22	1.29	0.24	<1	0.40	329	1	0.02	9	364	4	<10	<5	<0.01	<10	29	<100	<1	3	<10	4	20
74500	6077	<1	0.32	5	<1	25	<1	2.02	<10	5	96	21	1.25	0.23	<1	0.39	322	<1	0.02	9	360	3	<10	<5	<0.01	<10	29	<100	<1	3	<10	4	19
74501	6078	<1	0.54	6	<1	37	<1	2.69	<10	12	88	30	2.24	0.35	<1	0.54	418	1	0.02	17	446	5	<10	<5	0.01	14	32	<100	<1	<2	<10	4	50
74502	6079	<1	0.48	3	<1	31	<1	2.70	<10	7	119	16	1.35	0.23	<1	0.36	316	1	0.02	9	281	4	<10	<5	0.01	<10	32	<100	<1	2	<10	4	33
74503	6080	<1	0.38	<3	<1	9	<1	7.68	<10	7	150	7	1.10	0.05	<1	0.28	723	<1	0.02	8	311	8	<10	<5	0.01	<10	32	<100	<1	2	<10	4	37
74504	6081	<1	0.54	30	<1	63	<1	4.46	<10	16	71	20	2.17	0.30	<1	0.47	650	1	0.02	24	649	6	<10	<5	0.01	11	78	434	<1	10	<10	6	55
74505	6082	<1	0.53	3	<1	16	<1	2.57	<10	18	319	44	3.12	0.12	<1	0.56	702	<1	0.04	21	320	3	<10	<5	0.02	<10	23	1985	<1	65	<10	10	41
74506	6083	<1	0.66	<3	<1	4	<1	2.99	<10	26	112	191	3.89	0.02	<1	0.68	807	<1	0.04	20	286	5	<10	<5	0.02	16	77	804	<1	74	<10	4	91
74507	6084	<1	0.74	<3	<1	3	<1	3.78	<10	32	88	91	5.43	0.01	5	0.76	1088	<1	0.03	24	399	7	<10	<5	0.03	21	122	1215	<1	122	<10	5	98
74508	6085	<1	0.72	<3	<1	4	<1	3.46	<10	32	61	113	4.96	0.01	3	0.72	1060	<1	0.03	23	359	6	<10	<5	0.03	16	91	1133	<1	118	<10	4	93
74509	6086	<1	0.70	10	<1	30	<1	2.54	<10	39	126	202	5.13	0.09	<1	0.67	807	<1	0.04	31	403	7	<10	<5	0.02	22	80	798	<1	50	10	4	155
74510	6087	<1	0.16	<3	<1	10	<1	0.41	<10	4	288	58	1.05	0.02	<1	0.12	116	1	0.02	8	123	6	<10	<5	<0.01	<10	14	<100	<1	4	<10	<1	11
74511	6087	<1	0.16	<3	<1	12	<1	0.43	<10	5	324	65	1.15	0.02	<1	0.12	126	1	0.03	9	135	7	<10	<5	<0.01	<10	15	100	<1	5	<10	<1	11

Certified By  
Derek Demianiuk, H.Bsc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74512	6088	<1	0.68	5	<1	36	<1	3.71	<10	31	90	151	4.79	0.10	<1	0.69	950	<1	0.02	35	353	7	<10	<5	0.02	26	117	557	<1	50	<10	4	70
74513	6089	<1	0.67	<3	<1	27	<1	3.18	<10	30	100	123	4.92	0.06	2	0.69	937	<1	0.03	37	335	6	<10	<5	0.02	21	83	782	<1	94	<10	4	129
74514	6090	<1	0.73	<3	<1	6	<1	2.44	<10	38	108	167	5.21	0.04	6	0.78	973	<1	0.04	39	334	7	<10	<5	0.03	17	56	1154	<1	144	<10	4	117
74515	6091	<1	0.68	<3	<1	29	<1	4.49	<10	28	96	120	4.43	0.15	<1	0.62	1179	<1	0.01	30	297	12	<10	<5	0.01	21	103	444	<1	33	<10	4	77
74516	6092	1	0.69	<3	<1	26	<1	4.97	<10	28	82	97	4.89	0.16	1	0.61	1401	<1	0.02	30	296	10	<10	<5	0.02	23	126	644	<1	50	<10	4	80
74517	6093	1	0.55	5	<1	35	<1	4.54	<10	27	136	129	4.18	0.17	<1	0.53	1322	1	0.02	27	239	12	<10	<5	0.01	23	130	360	<1	30	<10	4	44
74518	6094	<1	0.63	<3	<1	15	<1	4.32	<10	25	91	65	4.53	0.10	<1	0.63	1231	<1	0.03	28	323	8	<10	<5	0.02	26	110	<100	1	62	<10	3	77
74519	6095	<1	0.04	<3	<1	7	<1	0.35	<10	1	432	10	0.47	<0.01	<1	0.03	113	<1	0.03	6	<100	20	<10	<5	<0.01	<10	13	<100	<1	<2	<10	<1	11
74520	6096	<1	0.40	11	<1	19	<1	3.37	<10	23	134	179	3.96	0.11	<1	0.56	1052	3	0.05	26	442	9	<10	<5	0.01	24	111	<100	<1	22	<10	4	37
74521	6097	<1	0.62	5	<1	18	<1	4.74	<10	30	84	27	5.07	0.16	<1	0.66	1278	<1	0.03	34	377	9	<10	<5	<0.01	33	124	205	<1	88	<10	5	79
74522	6097	<1	0.61	<3	<1	15	<1	4.23	<10	26	72	23	4.55	0.13	<1	0.63	1105	<1	0.02	30	331	7	<10	<5	<0.01	29	104	177	<1	77	<10	5	73
74523	6098	<1	0.58	3	<1	41	<1	4.41	<10	23	159	71	3.80	0.20	<1	0.53	1022	<1	0.02	26	897	9	<10	<5	0.02	20	111	279	<1	24	<10	7	45
74524	6099	<1	0.66	<3	<1	39	<1	4.23	<10	29	66	51	4.31	0.16	<1	0.62	1090	<1	0.02	29	333	5	<10	<5	0.02	<10	64	1734	<1	40	<10	9	74
74525	6100	<1	0.55	<3	<1	17	<1	3.74	<10	25	203	178	2.76	0.09	<1	0.52	971	<1	0.03	26	175	5	<10	<5	0.02	<10	29	2329	<1	61	<10	6	47
74526	6101	<1	0.77	<3	<1	23	<1	4.04	<10	31	82	116	4.71	0.12	4	0.64	999	<1	0.01	58	366	5	<10	<5	0.02	<10	71	613	<1	22	<10	4	56
74527	6102	<1	0.21	51	<1	11	<1	5.00	<10	40	221	371	2.97	0.12	<1	0.62	1053	8	0.02	28	229	5	<10	<5	<0.01	20	45	<100	<1	28	<10	3	296
74528	6103	<1	0.12	6	<1	7	<1	4.03	<10	8	141	30	2.39	0.09	<1	0.59	572	<1	0.02	15	234	2	<10	<5	<0.01	17	44	<100	<1	35	<10	1	33
74529	6104	<1	0.64	21	<1	12	<1	4.19	<10	34	114	117	4.82	0.15	4	0.75	1073	<1	0.02	51	266	7	<10	<5	<0.01	30	42	<100	<1	30	<10	2	84
74530	6105	<1	0.64	23	<1	10	<1	4.06	<10	28	108	84	4.36	0.12	5	0.77	903	<1	0.01	46	191	5	<10	<5	<0.01	27	44	<100	<1	28	<10	2	66
74531	6106	1	0.22	8	<1	13	<1	5.28	<10	17	186	99	3.23	0.14	<1	0.65	896	1	0.02	31	181	5	<10	<5	<0.01	22	82	<100	<1	36	<10	3	93
74532	6107	<1	0.42	5	<1	23	<1	3.40	<10	66	55	107	4.70	0.23	<1	0.64	730	1	0.02	84	337	8	<10	<5	<0.01	28	71	<100	<1	14	<10	4	106
74533	6107	<1	0.42	<3	<1	22	<1	3.35	<10	66	54	102	4.64	0.22	<1	0.64	717	1	0.02	82	337	8	<10	<5	<0.01	27	70	<100	<1	14	<10	3	106

Certified By:  
Derek Demianuk, H.Bsc.

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

 \* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74534	6108	<1	0.27	4	<1	16	<1	4.23	<10	29	194	170	3.09	0.17	<1	0.52	666	2	0.02	36	238	6	<10	<5	<0.01	18	81	<100	<1	14	<10	3	100
74535	6109	<1	0.22	6	<1	20	<1	2.91	<10	6	84	22	1.22	0.17	<1	0.30	484	<1	0.03	9	323	2	<10	<5	<0.01	<10	52	<100	<1	4	<10	3	39
74536	6110	<1	0.76	<3	<1	16	<1	4.32	<10	30	100	92	4.90	0.09	5	0.64	1213	<1	<0.01	55	327	6	<10	<5	0.02	23	72	574	<1	25	<10	4	52
74537	6111	<1	0.54	13	<1	27	<1	2.00	<10	14	87	22	1.52	0.15	<1	0.37	342	<1	0.03	18	380	2	<10	<5	0.01	12	32	<100	<1	<2	<10	3	43
74538	6112	<1	0.70	9	<1	26	<1	6.38	<10	20	211	74	3.35	0.10	1	0.62	980	<1	0.01	35	207	5	<10	<5	0.02	19	161	125	<1	22	<10	5	63
74539	6113	<1	0.39	9	<1	133	<1	3.30	<10	20	49	99	3.32	0.30	<1	0.62	736	2	0.04	18	2176	10	<10	<5	0.01	19	288	<100	<1	15	<10	10	25
74540	6114	<1	0.34	10	<1	176	<1	3.10	<10	20	68	134	3.60	0.36	<1	0.69	803	<1	0.03	21	2050	8	<10	<5	<0.01	21	325	<100	<1	24	<10	10	40
74541	6115	<1	0.63	<3	<1	88	<1	4.22	<10	35	330	63	4.07	0.18	<1	0.91	965	<1	0.03	129	1223	9	<10	<5	0.01	24	369	124	<1	66	<10	7	43
74542	6116	<1	0.56	9	<1	5	<1	0.62	<10	41	320	172	3.91	<0.01	<1	0.43	315	2	0.07	24	426	11	<10	<5	0.02	11	12	1084	<1	9	<10	13	98
74543	6117	<1	0.79	29	<1	33	<1	1.64	<10	49	56	302	4.74	0.19	14	0.77	371	2	0.02	32	345	9	<10	<5	0.01	28	16	<100	<1	<2	<10	4	29
74544	6117	<1	0.80	26	<1	33	<1	1.66	<10	44	54	311	4.78	0.19	15	0.77	376	2	0.02	32	347	8	<10	<5	0.01	30	16	<100	1	<2	<10	4	29
74545	6118	<1	0.72	3	<1	11	<1	4.25	<10	28	219	74	3.28	0.01	3	0.72	820	<1	0.02	55	150	2	<10	<5	0.03	<10	35	2446	<1	28	<10	5	36
74546	6119	<1	0.44	<3	<1	67	<1	1.40	<10	5	129	12	0.97	0.22	<1	0.28	193	<1	0.06	11	193	3	<10	<5	<0.01	<10	38	<100	<1	2	<10	1	16
74547	6120	<1	0.28	3	<1	74	<1	1.24	<10	2	207	9	0.66	0.22	<1	0.13	140	<1	0.07	5	201	4	<10	<5	<0.01	<10	51	<100	<1	<2	<10	2	11
74548	6121	<1	0.22	3	<1	57	<1	1.42	<10	2	128	30	0.72	0.18	<1	0.16	166	4	0.06	3	198	4	<10	<5	<0.01	<10	72	<100	<1	<2	<10	2	10
74549	6122	<1	0.25	<3	<1	63	<1	1.35	<10	2	218	10	0.68	0.19	<1	0.11	142	2	0.07	5	197	5	<10	<5	<0.01	<10	61	<100	<1	<2	<10	2	10
74550	6123	<1	0.74	<3	<1	17	<1	4.58	<10	31	76	101	4.88	0.10	5	0.66	1318	<1	0.01	54	307	7	<10	<5	0.02	21	77	854	<1	24	<10	4	49
74551	6124	<1	0.29	3	<1	68	<1	1.33	<10	3	239	9	0.73	0.21	<1	0.09	135	16	0.07	5	199	4	<10	<5	<0.01	11	55	<100	<1	<2	<10	2	9
74552	6180	<1	0.40	<3	<1	30	<1	5.54	<10	16	51	63	2.60	0.29	<1	0.31	652	1	0.02	16	352	6	<10	<5	0.01	17	116	<100	<1	5	<10	5	50
74553	6181	<1	0.24	<3	<1	25	<1	8.06	<10	17	57	140	2.53	0.24	<1	0.21	764	<1	0.01	17	257	8	<10	<5	<0.01	13	130	<100	<1	20	<10	4	23
74554	6182	<1	0.26	<3	<1	23	<1	1.44	<10	3	89	38	1.07	0.22	<1	0.26	236	<1	0.03	6	275	2	<10	<5	<0.01	<10	24	<100	<1	<2	<10	2	10
74555	6182	<1	0.27	<3	<1	23	<1	1.36	<10	3	90	37	1.04	0.22	<1	0.26	230	1	0.03	6	275	3	<10	<5	<0.01	<10	24	<100	<1	<2	<10	2	10

Certified By:   
Derek Demianiuk, H.Bsc.

Cabo Mining Corp.  
 Date Created: 05-07-18 12:03 PM  
 Job Number: 200540997  
 Date Received: 7/4/2005  
 Number of Samples: 181  
 Type of Sample: Core  
 Date Completed: 7/12/2005  
 Project ID: Hope Lake

\* The results included on this report relate only to the items tested  
 \* This Certificate of Analysis should not be reproduced except in full, without the written approval  
 of the laboratory.  
 \*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74556	6183	<1	0.39	5	<1	29	<1	2.45	<10	11	61	40	2.00	0.33	<1	0.39	362	<1	0.02	15	421	3	<10	<5	<0.01	12	33	<100	<1	<2	<10	4	18
74557	6184	<1	0.30	4	<1	25	<1	2.38	<10	6	41	32	1.77	0.26	<1	0.40	382	1	0.02	12	394	4	<10	<5	<0.01	11	34	<100	<1	3	<10	3	18
74558	6185	<1	0.41	6	<1	27	<1	3.12	<10	8	67	23	1.98	0.32	<1	0.41	470	<1	0.02	12	394	4	<10	<5	0.01	13	36	<100	<1	2	<10	4	19
74559	6186	<1	0.38	6	<1	23	<1	3.19	<10	8	44	29	1.88	0.27	<1	0.39	453	<1	0.02	11	345	4	<10	<5	<0.01	13	34	<100	<1	2	<10	4	26
74560	6187	<1	0.44	7	<1	22	<1	2.64	<10	8	54	11	2.00	0.27	<1	0.42	362	<1	0.02	13	393	4	<10	<5	<0.01	13	29	<100	<1	<2	<10	4	22
74561	6188	<1	0.47	13	<1	18	<1	2.20	<10	10	38	5	2.06	0.24	<1	0.46	320	<1	0.02	13	384	4	<10	<5	<0.01	14	25	<100	<1	<2	<10	3	16
74562	6189	<1	0.50	11	<1	17	<1	2.02	<10	11	76	21	2.27	0.21	<1	0.49	358	<1	0.03	14	414	4	<10	<5	<0.01	13	27	<100	<1	<2	<10	3	23
74563	6190	<1	0.39	7	<1	24	<1	2.26	<10	11	53	23	2.06	0.28	<1	0.47	328	<1	0.02	15	443	4	<10	<5	<0.01	14	34	<100	<1	3	<10	3	29
74564	6191	<1	0.37	<3	<1	31	<1	2.03	<10	9	102	25	1.94	0.32	<1	0.41	314	<1	0.02	13	474	4	<10	<5	<0.01	<10	34	<100	<1	2	<10	4	16
74565	6192	<1	0.51	4	<1	31	<1	1.40	<10	11	55	24	2.27	0.24	<1	0.39	226	<1	0.02	14	433	4	<10	<5	<0.01	15	27	<100	<1	<2	<10	3	59
74566	6192	<1	0.51	3	<1	30	<1	1.36	<10	11	61	24	2.24	0.23	<1	0.39	223	<1	0.02	16	431	4	<10	<5	<0.01	15	26	<100	<1	<2	<10	3	55
74567	6193	<1	0.41	5	<1	31	<1	2.78	<10	11	116	44	2.23	0.29	<1	0.50	565	2	0.02	17	497	8	<10	<5	<0.01	14	53	<100	<1	4	<10	4	42
74568	6194	<1	0.52	<3	<1	34	<1	2.58	<10	21	160	118	2.85	0.23	<1	0.48	344	2	0.02	26	406	6	<10	<5	<0.01	18	62	<100	<1	<2	<10	4	66
74569	6195	<1	0.52	4	<1	61	<1	2.94	<10	12	190	30	2.29	0.23	<1	0.65	579	2	0.03	27	479	5	<10	<5	<0.01	13	95	<100	<1	14	<10	4	22
74570	6205	<1	0.78	<3	<1	10	<1	4.17	<10	34	60	116	4.85	0.02	<1	0.74	940	<1	0.03	38	357	6	<10	<5	0.02	11	116	1427	<1	96	<10	5	66
74571	6206	2	0.66	9	<1	42	<1	3.81	<10	31	136	151	4.53	0.13	<1	0.69	929	<1	0.03	35	257	19	<10	<5	0.01	17	126	708	<1	58	10	3	81
74572	6208	3	0.50	4	<1	44	<1	3.42	<10	30	85	185	4.75	0.18	<1	0.69	1010	<1	0.03	35	283	416	<10	<5	<0.01	31	135	<100	<1	29	<10	3	66
74573	6209	<1	0.70	12	<1	40	<1	3.96	<10	36	96	168	5.22	0.14	<1	0.71	1165	<1	0.02	39	299	12	<10	<5	0.01	25	124	691	<1	65	<10	3	71
74574	6210	<1	0.68	9	<1	22	<1	3.41	<10	29	82	127	4.82	0.08	<1	0.69	1097	<1	0.03	30	317	14	<10	<5	0.02	20	105	796	<1	75	15	3	62
74575	6211	<1	0.76	5	<1	18	<1	4.35	<10	32	106	114	5.15	0.08	<1	0.74	1207	<1	0.03	33	351	11	<10	<5	0.02	14	158	1423	<1	123	<10	5	75
74576	6212	<1	0.77	4	<1	29	<1	3.81	<10	35	102	94	5.23	0.13	<1	0.77	1097	1	0.03	34	257	11	<10	<5	0.03	12	104	1648	<1	121	15	5	75
74577	6212	<1	0.77	7	<1	34	<1	4.28	<10	39	110	108	5.72	0.15	<1	0.78	1237	1	0.03	37	287	13	<10	<5	0.02	15	121	1879	<1	133	15	6	79

Certified By:  
  
 Derek Demianiuk, H.B.Sc.

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

 \* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li %	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74578	6213	<1	0.78	<3	<1	40	<1	3.87	<10	38	119	104	5.51	0.19	<1	0.79	1336	<1	0.03	37	307	9	<10	<5	0.03	10	87	2247	<1	127	<10	9	78
74579	6214	<1	0.79	<3	<1	104	<1	3.57	<10	42	93	84	5.90	0.51	<1	0.81	1481	<1	0.03	35	393	7	<10	<5	0.03	<10	62	4311	<1	148	<10	14	79
74580	6215	<1	0.68	3	<1	48	<1	4.25	<10	34	125	90	4.33	0.40	2	0.67	1150	<1	0.04	33	396	5	<10	<5	0.02	<10	62	3207	<1	88	<10	12	73
74581	6216	<1	0.61	<3	<1	49	<1	6.22	<10	28	89	74	3.57	0.62	<1	0.56	1587	<1	0.03	23	517	6	<10	<5	0.02	<10	52	2915	<1	83	<10	13	51
74582	6217	<1	0.69	<3	<1	40	<1	2.68	<10	32	107	25	3.94	0.58	<1	0.66	958	<1	0.02	29	344	3	<10	<5	0.01	<10	27	3126	<1	68	<10	7	75
74583	6218	<1	0.19	<3	<1	5	<1	0.90	<10	6	478	20	1.06	0.04	<1	0.15	210	1	0.02	10	134	2	<10	<5	<0.01	<10	6	793	<1	13	<10	2	7
74584	6219	<1	0.69	<3	<1	3	<1	4.02	<10	38	149	62	4.86	0.02	<1	0.66	1414	<1	0.03	32	268	4	<10	<5	0.03	<10	12	3575	<1	106	<10	9	67
74585	6220	<1	0.70	<3	<1	12	<1	3.07	<10	39	140	96	4.29	0.12	<1	0.67	1271	<1	0.04	33	355	4	<10	<5	0.02	<10	10	3797	<1	106	<10	11	77
74586	6223	<1	0.70	<3	<1	5	<1	4.00	<10	36	121	95	4.88	0.04	<1	0.68	1495	<1	0.03	32	300	6	<10	<5	0.02	<10	16	3269	<1	88	<10	8	79
74587	6224	<1	0.68	<3	<1	4	<1	4.45	<10	31	93	43	3.97	0.04	<1	0.63	1378	<1	0.02	30	305	3	<10	<5	0.02	<10	27	3042	<1	64	<10	7	74
74588	6224	<1	0.70	<3	<1	5	<1	4.97	<10	34	101	47	4.38	0.05	<1	0.65	1534	<1	0.02	32	338	5	<10	<5	0.02	<10	29	3327	<1	71	<10	8	79
74589	6225	<1	0.66	<3	<1	5	<1	4.24	<10	31	139	55	4.24	0.03	<1	0.64	1290	<1	0.02	28	282	5	<10	<5	0.03	<10	26	3227	<1	84	<10	8	78
74590	6226	<1	0.74	<3	<1	13	<1	4.08	<10	39	93	93	4.80	0.19	<1	0.71	1437	<1	0.03	33	374	4	<10	<5	0.02	<10	31	4065	<1	92	<10	11	88
74591	6227	<1	0.72	<3	<1	17	<1	3.40	<10	35	134	155	4.73	0.23	<1	0.71	1348	<1	0.03	31	267	5	<10	<5	0.03	<10	25	3133	<1	98	<10	9	107
74592	6228	<1	0.71	4	<1	33	<1	3.68	<10	34	149	150	4.82	0.35	2	0.75	1115	<1	0.04	24	302	7	<10	<5	0.03	<10	37	3304	<1	129	<10	13	67
74593	6229	<1	0.74	5	<1	5	<1	2.52	<10	32	122	205	4.80	0.03	<1	0.75	867	<1	0.03	21	226	5	<10	<5	0.02	<10	50	2594	<1	109	<10	9	57
74594	6230	<1	0.65	6	<1	6	<1	2.89	<10	22	362	411	3.55	0.02	<1	0.63	645	209	0.04	18	<100	8	<10	<5	0.02	64	127	896	<1	59	<10	2	31
74595	6231	<1	0.44	7	<1	177	<1	2.45	<10	12	61	30	2.36	0.35	<1	0.53	676	2	0.05	10	1551	16	<10	<5	0.01	11	424	210	<1	11	<10	12	34
74596	6232	<1	0.63	<3	<1	14	<1	2.60	<10	20	283	110	3.21	0.04	<1	0.58	947	75	0.03	18	642	5	<10	<5	0.02	19	16	1531	<1	57	<10	7	44
74597	6233	<1	0.72	<3	<1	15	<1	3.29	<10	32	66	165	4.45	0.11	1	0.69	1288	<1	0.03	23	241	6	<10	<5	0.05	<10	22	2085	<1	80	<10	7	64
74598	6234	<1	0.69	<3	<1	60	<1	3.53	<10	35	130	246	4.82	0.37	2	0.68	1198	<1	0.03	35	177	7	<10	<5	0.06	<10	22	2555	<1	86	<10	6	62
74599	6234	<1	0.70	<3	<1	63	<1	3.67	<10	37	134	257	4.99	0.40	4	0.69	1254	<1	0.03	35	188	8	<10	<5	0.06	<10	24	2761	<1	92	<10	6	63

Certified By  
  
 Derek Demianiuk, H.B.Sc.

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
74600	6235	<1	0.72	4	<1	65	<1	4.25	<10	31	70	87	4.55	0.30	<1	0.68	936	<1	0.04	34	448	8	<10	<5	0.05	<10	76	2086	<1	92	12	8	58
74601	6236	<1	0.75	<3	<1	53	<1	3.02	<10	26	75	52	4.35	0.19	<1	0.65	773	<1	0.09	12	1360	11	<10	<5	0.07	<10	106	1325	<1	39	<10	8	79
74602	6237	<1	0.38	30	<1	21	<1	2.63	<10	17	149	152	3.30	0.06	<1	0.57	765	4	0.08	13	683	66	<10	<5	0.03	14	115	312	<1	23	13	4	37
74603	6238	<1	0.71	15	<1	26	<1	4.24	<10	31	81	127	4.59	0.10	<1	0.69	970	<1	0.05	33	525	15	<10	<5	0.05	13	170	1053	<1	88	11	6	64
74604	6239	<1	0.75	6	<1	43	<1	4.30	<10	31	70	100	4.48	0.16	<1	0.70	951	<1	0.04	33	412	10	<10	<5	0.05	12	150	1266	<1	104	<10	6	59
74605	6240	<1	0.74	3	<1	32	<1	4.40	<10	34	79	107	4.62	0.12	<1	0.71	1000	5	0.04	42	348	9	<10	<5	0.05	13	115	1380	<1	110	<10	7	69
74606	6241	<1	0.73	<3	<1	45	<1	3.80	<10	32	78	96	4.82	0.05	<1	0.70	1036	<1	0.05	31	597	8	<10	<5	0.05	<10	76	1738	<1	115	<10	11	75
74607	6242	<1	0.38	4	<1	13	<1	2.72	<10	12	364	23	1.70	0.07	<1	0.29	530	1	0.04	15	406	5	<10	<5	0.07	<10	11	1023	<1	31	<10	6	20
74608	6243	<1	0.60	<3	<1	29	<1	4.05	<10	30	81	93	3.98	0.17	<1	0.58	1028	<1	0.03	29	284	7	<10	<5	0.03	<10	17	2536	<1	76	<10	10	63
74609	6244	<1	0.38	5	<1	18	<1	2.10	<10	17	440	41	1.99	0.09	<1	0.31	497	4	0.03	17	332	6	<10	<5	0.05	<10	15	961	<1	19	<10	6	25
74610	6244	1	0.39	5	<1	19	<1	2.15	<10	17	460	42	2.04	0.09	<1	0.32	510	4	0.04	17	338	7	<10	<5	0.05	<10	16	997	<1	19	<10	6	25
74611	6247	<1	0.19	<3	<1	9	<1	0.59	<10	4	346	16	0.87	0.04	<1	0.15	192	3	0.02	10	<100	4	<10	<5	0.02	<10	13	217	<1	8	<10	<1	8
74612	6248	<1	0.64	<3	<1	15	<1	3.76	<10	30	135	59	4.26	0.06	<1	0.60	1053	<1	0.09	30	295	6	<10	<5	0.07	<10	48	2052	<1	112	<10	10	62
74613	6249	<1	0.55	5	<1	21	<1	1.69	<10	6	148	28	1.48	0.19	<1	0.38	279	2	0.03	10	319	22	<10	<5	0.04	<10	25	<100	<1	<2	<10	3	45
74614	6250	1	0.32	6	<1	17	<1	2.75	<10	5	312	36	1.35	0.11	<1	0.30	413	3	0.06	11	292	179	<10	<5	0.03	11	43	<100	<1	4	<10	2	78
74615	6255	<1	0.66	7	<1	27	<1	2.43	<10	10	85	6	2.04	0.20	<1	0.52	389	2	0.04	13	357	19	<10	<5	0.03	12	33	<100	<1	3	<10	3	91
74616	6256	<1	0.07	<3	<1	4	<1	0.24	<10	1	538	14	0.53	0.02	<1	0.03	<100	2	0.02	9	<100	26	<10	<5	0.01	<10	7	<100	<1	<2	<10	<1	13
74617	6257	<1	0.19	4	<1	19	<1	3.56	<10	5	187	32	1.08	0.10	<1	0.28	421	2	0.06	9	241	24	<10	<5	0.02	<10	78	<100	<1	9	<10	3	21
74618	12251	<1	0.71	4	<1	54	<1	4.62	<10	36	96	142	4.88	0.23	2	0.63	1501	<1	0.02	33	356	10	<10	<5	0.03	<10	61	2101	<1	45	<10	11	72
74619	12252	<1	0.61	<3	<1	26	<1	3.86	<10	24	163	70	3.07	0.24	<1	0.60	989	<1	0.03	21	274	6	<10	<5	0.05	<10	40	1883	<1	64	<10	6	52
74620	12253	<1	0.65	5	<1	51	<1	4.25	<10	43	86	76	4.43	0.21	<1	0.61	1050	<1	0.02	31	283	7	<10	<5	0.04	<10	30	2431	<1	63	<10	13	59
74621	12253	<1	0.63	4	<1	47	<1	4.24	<10	42	81	76	4.37	0.20	<1	0.60	1039	<1	0.02	30	279	6	<10	<5	0.04	<10	29	2213	<1	61	<10	12	59

Certified By:  
Derek Demianuk, H.B.Sc.

**Accurassay  
Laboratories** Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-18 12:03 PM

Job Number: 200540997

Date Received: 7/4/2005

Number of Samples: 181

Type of Sample: Core

Date Completed: 7/12/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag	Al	As	B	Ba	Be	Ca	Cd	Co	Cr	Cu	Fe	K	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Sb	Se	Si	Sn	Sr	Ti	Tl	V	W	Y	Zn
		ppm	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	%	%	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm		
74622	12254	<1	0.59	<3	<1	95	<1	3.71	<10	17	77	57	2.87	0.24	<1	0.51	760	2	0.05	15	913	10	<10	<5	0.05	15	192	352	<1	16	<10	8	48

Certified By  
Derek Demianiuk, H.Bsc.



## Certificate of Analysis

Monday, July 18, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B 1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 11-Jul-05  
 Date Completed : 18-Jul-05  
 Job # 200541074  
 Reference : Hope Lake  
 Sample #: 86 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
77654	6125	18	<0.001	0.018
77655	6126	6	<0.001	0.006
77656	6127	6	<0.001	0.006
77657	6128	<5	<0.001	<0.005
77658	6129	10	<0.001	0.010
77659	6130	35	0.001	0.035
77660	6131	<5	<0.001	<0.005
77661	6132	120	0.003	0.120
77662	6133	2298	0.067	2.298
77663	6134	<5	<0.001	<0.005
77664 Check	6134	<5	<0.001	<0.005
77665	6135	34	<0.001	0.034
77666	6136	<5	<0.001	<0.005
77667	6137	<5	<0.001	<0.005
77668	6138	<5	<0.001	<0.005
77669	6139	<5	<0.001	<0.005
77670	6140	<5	<0.001	<0.005
77671	6141	<5	<0.001	<0.005
77672	6142	<5	<0.001	<0.005
77673	6143	<5	<0.001	<0.005
77674	6144	<5	<0.001	<0.005
77675 Check	6144	<5	<0.001	<0.005
77676	6145	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demlaniuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

Page 1 of 5

AL903-0437-07/18/2005 09:59 PM



## Certificate of Analysis

Monday, July 18, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 11-Jul-05  
 Date Completed : 18-Jul-05  
 Job # 200541074  
 Reference : Hope Lake  
 Sample #: 86 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
77677	6146	<5	<0.001	<0.005
77678	6147	5	<0.001	0.005
77679	6148	<5	<0.001	<0.005
77680	6149	<5	<0.001	<0.005
77681	6150	25	<0.001	0.025
77682	6151	<5	<0.001	<0.005
77683	6152	7	<0.001	0.007
77684	6153	<5	<0.001	<0.005
77685	6154	<5	<0.001	<0.005
77686 Check	6154	14	<0.001	0.014
77687	6155	52	0.002	0.052
77688	6156	443	0.013	0.443
77689	6157	111	0.003	0.111
77690	6158	43	0.001	0.043
77691	6159	393	0.011	0.393
77692	6160	680	0.020	0.680
77693	6161	133	0.004	0.133
77694	6162	48	0.001	0.048
77695	6163	178	0.005	0.178
77696	6164	<5	<0.001	<0.005
77697 Check	6164	<5	<0.001	<0.005
77698	6165	851	0.025	0.851
77699	6166	58	0.002	0.058

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demianiuk H.BSc., Laboratory Manager

Page 2 of 5

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-07/18/2005 09:59 PM



## Certificate of Analysis

Monday, July 18, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 11-Jul-05  
Date Completed : 18-Jul-05  
Job # 200541074  
Reference : Hope Lake  
Sample #: 86 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
77700	6167	260	0.008	0.260
77701	6168	174	0.005	0.174
77702	6169	563	0.016	0.563
77703	6170	407	0.012	0.407
77704	6171	89	0.003	0.089
77705	6172	1182	0.034	1.182
77706	6173	65	0.002	0.065
77707	6174	179	0.005	0.179
77708 Check	6174	228	0.007	0.228
77709	6175	<5	<0.001	<0.005
77710	6176	<5	<0.001	<0.005
77711	6177	7	<0.001	0.007
77712	6178	277	0.008	0.277
77713	6179	491	0.014	0.491
77714	6196	<5	<0.001	<0.005
77715	6197	<5	<0.001	<0.005
77716	6198	<5	<0.001	<0.005
77717	6199	<5	<0.001	<0.005
77718 Check	6199	<5	<0.001	<0.005
77719	6200	<5	<0.001	<0.005
77720	6201	<5	<0.001	<0.005
77721	6202	<5	<0.001	<0.005
77722	6203	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demianuk H.BSc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

Page 3 of 5

AL903-0437-07/18/2005 09:59 PM



## Certificate of Analysis

Monday, July 18, 2005


Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 11-Jul-05  
 Date Completed : 18-Jul-05  
 Job # 200541074  
 Reference : Hope Lake  
 Sample #: 86 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
77723	6204	<5	<0.001	<0.005
77724	12258	41	0.001	0.041
77725	12259	71	0.002	0.071
77726	12260	<5	<0.001	<0.005
77727	12261	<5	<0.001	<0.005
77728	12262	<5	<0.001	<0.005
77729	12263	56	0.002	0.056
77730	12264	1811	0.053	1.811
77731 Check	12264	1599	0.047	1.599
77732	12265	429	0.013	0.429
77733	12266	79	0.002	0.079
77734	12267	8	<0.001	0.008
77735	12268	31	<0.001	0.031
77736	12269	9	<0.001	0.009
77737	12270	97	0.003	0.097
77738	12271	<5	<0.001	<0.005
77739	12272	115	0.003	0.115
77740	12273	58	0.002	0.058
77741 Check	12273	69	0.002	0.069
77742	12274	105	0.003	0.105
77743	12275	<5	<0.001	<0.005
77744	12276	<5	<0.001	<0.005
77745	12277	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

  
 Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

Page 4 of 5

AL903-0437-07/18/2005 09:59 PM



## Certificate of Analysis

Monday, July 18, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B 1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 11-Jul-05  
Date Completed : 18-Jul-05  
Job # 200541074  
Reference : Hope Lake  
Sample #: 86 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
77746	6221	9508	0.277	9.508
77747	6245	9548	0.279	9.548

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

Page 5 of 5

AL903-0437-07/18/2005 09:59 PM


Cabo Mining Corp.  
 Date Created: 05-07-21 02:56 PM  
 Job Number: 200541074  
 Date Received: 7/11/2005  
 Number of Samples: 86  
 Type of Sample: Core  
 Date Completed: 7/18/2005  
 Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
 of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag	Al	As	B	Ba	Be	Ca	Cd	Co	Cr	Cu	Fe	K	Li	Mg	Mn	Mo	Na	Ni	P	Pb	Sb	Se	Si	Sn	Sr	Ti	Tl	V	W	Y	Zn
		ppm	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	%	%	ppm	%	ppm	ppm	%	ppm	ppm	ppm	ppm	%	ppm	ppm	ppm	ppm	ppm	ppm	ppm		
77654	6125	<1	0.19	19	24	44	<1	1.12	<10	2	100	8	0.65	0.14	<1	0.12	127	1	0.05	5	171	4	<10	<5	0.02	<10	52	<100	<1	<2	<10	1	<1
77655	6126	<1	0.21	8	27	55	<1	1.24	<10	2	98	5	0.58	0.17	<1	0.12	135	<1	0.05	3	200	3	<10	<5	0.02	<10	48	<100	<1	<2	<10	2	<1
77656	6127	<1	0.21	10	28	48	<1	1.29	<10	2	115	5	0.65	0.14	<1	0.12	142	<1	0.06	4	205	3	<10	<5	0.02	<10	47	<100	<1	<2	<10	1	<1
77657	6128	<1	0.62	13	34	5	<1	9.45	<10	21	116	48	2.96	<0.01	12	0.65	1206	<1	0.03	40	129	2	<10	<5	0.02	<10	81	<100	<1	65	<10	5	<1
77658	6129	<1	0.81	3	43	18	<1	4.15	<10	39	90	124	6.03	0.12	21	0.84	1211	<1	0.01	65	406	5	<10	<5	0.03	14	68	727	<1	32	<10	4	<1
77659	6130	<1	0.68	20	43	12	<1	4.38	<10	31	97	135	5.23	0.12	23	1.00	1258	<1	0.02	46	236	3	<10	<5	0.01	18	50	<100	<1	39	<10	2	19
77660	6131	<1	0.68	20	38	9	<1	3.58	<10	27	87	84	4.62	0.10	23	0.96	991	<1	0.02	40	266	3	<10	<5	0.01	14	37	<100	<1	32	<10	1	15
77661	6132	<1	0.49	21	41	12	<1	4.89	<10	35	75	101	5.07	0.12	8	0.92	1095	<1	0.02	51	225	4	<10	<5	<0.01	15	75	<100	<1	40	<10	2	18
77662	6133	<1	0.15	15	34	10	<1	3.20	<10	32	121	205	3.41	0.08	<1	0.57	474	3	0.04	41	399	6	<10	<5	<0.01	<10	66	<100	<1	25	<10	2	214
77663	6134	<1	0.31	5	23	15	<1	2.68	<10	6	66	22	1.90	0.13	<1	0.47	508	<1	0.03	11	310	2	<10	<5	0.01	<10	46	<100	<1	7	<10	3	<1
77664	6134	<1	0.32	6	25	16	<1	2.86	<10	7	69	24	2.03	0.14	1	0.49	546	<1	0.03	12	337	2	<10	<5	0.01	<10	50	<100	<1	7	<10	3	<1
77665	6135	<1	0.57	8	31	37	<1	2.69	<10	22	110	123	2.82	0.16	2	0.46	340	<1	0.01	20	371	3	<10	<5	0.02	<10	32	<100	<1	<2	<10	3	324
77666	6136	<1	0.82	<3	46	57	<1	3.99	<10	37	135	121	6.12	0.22	27	0.90	1039	<1	0.01	79	492	4	<10	<5	0.03	<10	107	691	<1	28	<10	5	4
77667	6137	<1	0.29	<3	26	43	<1	1.54	<10	3	97	9	0.56	0.16	<1	0.12	150	<1	0.05	4	186	<1	<10	<5	0.02	<10	31	<100	<1	<2	<10	2	<1
77668	6138	<1	0.27	7	27	50	<1	1.30	<10	2	93	8	0.51	0.17	<1	0.07	117	<1	0.05	3	186	2	<10	<5	0.02	<10	32	<100	<1	<2	<10	1	<1
77669	6139	<1	0.25	6	25	55	<1	1.23	<10	2	96	8	0.51	0.19	<1	0.09	131	<1	0.05	2	189	2	<10	<5	0.02	<10	39	<100	<1	<2	<10	1	<1
77670	6140	<1	0.23	6	21	54	<1	1.14	<10	2	101	11	0.54	0.18	<1	0.09	122	<1	0.05	2	189	3	<10	<5	0.02	<10	40	<100	<1	<2	<10	1	<1
77671	6141	<1	0.22	5	20	54	<1	1.17	<10	2	99	3	0.53	0.18	<1	0.09	129	<1	0.05	2	182	2	<10	<5	0.02	<10	40	<100	<1	<2	<10	1	<1
77672	6142	<1	0.21	4	26	51	<1	1.14	<10	2	94	5	0.56	0.16	<1	0.10	132	<1	0.05	3	183	2	<10	<5	0.02	<10	38	<100	<1	<2	<10	1	<1
77673	6143	<1	0.21	6	26	51	<1	1.18	<10	2	107	4	0.56	0.16	<1	0.11	133	<1	0.05	2	182	2	<10	<5	0.02	<10	39	<100	<1	<2	<10	1	<1
77674	6144	<1	0.20	6	24	48	<1	1.16	<10	2	101	4	0.54	0.16	<1	0.10	125	<1	0.05	2	189	2	<10	<5	0.02	<10	36	<100	<1	<2	<10	1	<1
77675	6144	<1	0.20	7	24	49	<1	1.16	<10	2	102	4	0.54	0.16	<1	0.10	125	<1	0.05	3	184	2	<10	<5	0.01	<10	36	<100	<1	<2	<10	1	<1

Certified By:   
 Derek Demianiuk, H.B.Sc.

Cabo Mining Corp.

Date Created: 05-07-21 02:56 PM

Job Number: 200541074

Date Received: 7/11/2005

Number of Samples: 86

Type of Sample: Core

Date Completed: 7/18/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
77676	6145	<1	0.21	4	23	52	<1	1.23	<10	2	99	4	0.59	0.17	<1	0.12	140	<1	0.05	2	203	2	<10	<5	0.01	<10	40	<100	<1	<2	<10	1	<1
77677	6146	<1	0.22	5	20	52	<1	1.22	<10	2	96	5	0.56	0.17	<1	0.11	136	<1	0.05	2	197	2	<10	<5	0.02	<10	39	<100	<1	<2	<10	1	<1
77678	6147	<1	0.40	6	26	42	<1	1.48	<10	6	114	14	1.16	0.12	1	0.32	218	<1	0.05	11	195	2	<10	<5	0.01	<10	40	<100	<1	7	<10	2	<1
77679	6148	<1	0.48	4	31	38	<1	1.58	<10	7	117	16	1.37	0.10	3	0.41	246	<1	0.05	15	196	2	<10	<5	0.01	<10	35	156	<1	10	<10	2	<1
77680	6149	<1	0.81	<3	39	25	<1	3.79	<10	32	78	68	5.97	0.15	19	0.81	1045	<1	0.01	53	412	4	<10	<5	0.03	10	72	758	<1	24	<10	4	<1
77681	6150	<1	0.21	20	35	15	<1	6.06	<10	20	100	41	3.66	0.10	<1	0.95	934	<1	0.01	48	159	4	<10	<5	<0.01	12	97	<100	<1	62	<10	2	<1
77682	6151	<1	0.63	19	36	24	<1	4.49	<10	27	130	56	4.44	0.11	17	0.97	870	<1	0.02	59	206	4	<10	<5	0.02	11	123	<100	<1	35	<10	3	<1
77683	6152	<1	0.19	3	22	59	<1	1.17	<10	2	97	5	0.55	0.15	<1	0.12	139	<1	0.04	2	179	3	<10	<5	0.01	<10	55	<100	<1	<2	<10	1	100
77684	6153	<1	0.22	<3	29	67	<1	1.27	<10	2	99	4	0.46	0.17	<1	0.08	136	<1	0.05	2	195	4	<10	<5	0.01	<10	71	<100	<1	<2	<10	1	31
77685	6154	<1	0.68	9	37	28	<1	2.89	<10	18	72	55	2.85	0.16	9	0.60	441	1	0.01	23	397	3	<10	<5	0.01	<10	41	<100	<1	<2	<10	3	41
77686	6154	<1	0.69	9	36	32	<1	3.01	<10	20	77	58	2.99	0.18	10	0.62	466	1	0.01	24	409	3	<10	<5	0.01	<10	43	<100	<1	<2	<10	3	32
77687	6155	<1	0.27	8	38	46	<1	3.36	<10	7	87	24	1.92	0.23	<1	0.47	464	1	0.03	10	668	5	<10	<5	<0.01	<10	75	184	<1	10	<10	8	109
77688	6156	<1	0.29	26	42	66	<1	2.70	<10	14	78	35	3.08	0.25	<1	0.53	405	3	0.03	16	995	8	<10	<5	0.01	<10	102	<100	<1	8	<10	8	88
77689	6157	<1	0.32	6	44	68	<1	3.63	<10	22	73	134	4.30	0.18	<1	0.71	649	2	0.04	29	1208	12	<10	<5	<0.01	11	159	<100	<1	17	<10	7	458
77690	6158	<1	0.28	<3	40	36	<1	3.74	<10	11	47	40	3.57	0.26	<1	0.62	594	<1	0.03	9	1187	5	<10	<5	0.01	<10	64	<100	<1	12	<10	7	106
77691	6159	<1	0.30	<3	37	34	<1	3.23	<10	7	46	33	3.46	0.28	<1	0.59	492	<1	0.02	8	1095	5	<10	<5	0.01	<10	58	<100	<1	8	<10	9	<1
77692	6160	<1	0.23	11	35	22	<1	3.54	<10	22	58	78	3.78	0.20	<1	0.57	462	<1	0.03	17	885	7	<10	<5	0.01	10	55	<100	<1	13	<10	6	<1
77693	6161	<1	0.24	18	35	23	<1	3.60	<10	13	95	49	2.99	0.22	<1	0.46	454	<1	0.02	13	789	6	<10	<5	0.01	<10	58	<100	<1	9	<10	7	<1
77694	6162	<1	0.25	5	38	26	<1	4.38	<10	20	53	78	3.93	0.23	<1	0.52	567	1	0.02	16	995	6	<10	<5	0.01	10	65	<100	<1	13	<10	8	122
77695	6163	<1	0.23	11	31	24	<1	3.97	<10	11	59	49	2.93	0.21	<1	0.46	573	1	0.02	18	806	4	<10	<5	0.01	<10	74	<100	<1	12	<10	8	131
77696	6164	<1	0.32	9	39	24	<1	3.57	<10	16	50	57	3.48	0.20	<1	0.62	791	<1	0.02	22	513	4	<10	<5	<0.01	<10	60	<100	<1	13	<10	4	33
77697	6164	<1	0.33	9	38	26	<1	3.56	<10	15	50	56	3.49	0.22	<1	0.62	794	<1	0.03	22	513	5	<10	<5	<0.01	<10	60	<100	<1	12	<10	4	31

Certified By:  
Derek Demianiuk, H.Bsc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-21 02:56 PM

Job Number: 200541074

Date Received: 7/11/2005

Number of Samples: 86

Type of Sample: Core

Date Completed: 7/18/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
77698	6165	<1	0.27	11	40	31	<1	3.08	<10	18	99	86	3.72	0.23	<1	0.50	558	1	0.02	18	776	10	<10	<5	0.01	<10	61	<100	<1	8	<10	6	226
77699	6166	<1	0.26	14	35	29	<1	1.47	<10	6	71	33	1.67	0.21	<1	0.31	278	<1	0.04	7	431	3	<10	<5	0.01	<10	26	<100	<1	2	<10	4	<1
77700	6167	<1	0.25	6	38	23	<1	1.92	<10	9	103	53	2.25	0.15	<1	0.41	368	<1	0.05	13	433	3	<10	<5	<0.01	<10	40	<100	<1	5	<10	3	<1
77701	6168	<1	0.30	19	37	34	<1	3.12	<10	14	94	77	2.74	0.26	<1	0.31	392	1	0.02	14	704	7	<10	<5	0.01	<10	60	<100	<1	5	<10	7	84
77702	6169	<1	0.30	44	37	33	<1	2.34	<10	4	142	36	1.48	0.26	<1	0.25	283	<1	0.02	7	1049	3	<10	<5	0.01	<10	44	<100	<1	2	<10	6	108
77703	6170	<1	0.29	16	33	35	<1	2.04	<10	6	104	17	1.23	0.26	<1	0.25	269	2	0.02	7	656	3	<10	<5	0.01	<10	34	<100	<1	<2	<10	5	90
77704	6171	<1	0.30	12	35	36	<1	1.88	<10	12	75	50	2.50	0.26	<1	0.37	287	1	0.02	16	593	7	<10	<5	0.01	<10	37	<100	<1	2	<10	5	185
77705	6172	<1	0.24	37	39	25	<1	3.96	<10	16	98	60	3.35	0.21	<1	0.65	539	2	0.02	26	664	9	<10	<5	<0.01	<10	86	<100	<1	16	<10	6	35
77706	6173	<1	0.26	<3	32	30	<1	1.77	<10	6	77	43	1.67	0.23	<1	0.33	281	<1	0.03	9	379	3	<10	<5	0.01	<10	32	<100	<1	2	<10	4	<1
77707	6174	<1	0.26	<3	39	24	<1	1.77	<10	13	83	92	2.64	0.20	<1	0.38	260	<1	0.03	16	488	5	<10	<5	<0.01	<10	35	<100	<1	3	<10	4	<1
77708	6174	<1	0.26	<3	35	25	<1	1.71	<10	13	79	91	2.59	0.20	<1	0.37	253	<1	0.03	15	471	4	<10	<5	<0.01	<10	33	<100	<1	3	<10	4	<1
77709	6175	<1	0.28	<3	36	25	<1	1.47	<10	8	83	38	1.89	0.19	<1	0.35	244	<1	0.04	10	466	3	<10	<5	<0.01	<10	27	<100	<1	3	<10	3	<1
77710	6176	<1	0.51	5	35	26	<1	2.01	<10	9	64	18	2.27	0.24	4	0.64	266	<1	0.02	12	427	2	<10	<5	0.01	<10	42	<100	<1	3	<10	3	<1
77711	6177	<1	0.61	6	37	28	<1	2.34	<10	15	56	34	3.10	0.28	7	0.71	384	<1	0.02	18	514	3	<10	<5	0.01	<10	48	<100	<1	3	<10	3	<1
77712	6178	<1	0.31	29	44	36	<1	2.74	<10	19	148	122	2.75	0.24	<1	0.60	397	3	0.02	21	402	6	<10	<5	<0.01	<10	68	<100	<1	7	<10	5	<1
77713	6179	<1	0.47	22	38	40	<1	3.27	<10	17	113	80	2.55	0.28	6	0.56	421	2	0.02	18	384	4	<10	<5	<0.01	<10	74	<100	<1	3	<10	5	<1
77714	6196	<1	0.79	3	47	92	<1	4.09	<10	31	207	69	4.75	0.16	16	0.96	839	3	0.01	66	255	4	<10	<5	0.03	15	131	142	<1	28	<10	4	3
77715	6197	<1	0.71	23	51	16	<1	4.58	<10	35	148	44	5.68	0.16	16	0.99	969	<1	0.01	63	226	6	<10	<5	0.01	17	55	<100	<1	31	<10	3	<1
77716	6198	<1	0.51	6	36	21	<1	2.49	<10	10	68	29	2.36	0.22	4	0.59	412	<1	0.02	13	420	2	<10	<5	0.01	<10	32	<100	<1	3	<10	4	<1
77717	6199	<1	0.42	6	35	17	<1	1.71	<10	16	162	69	2.23	0.17	2	0.42	271	<1	0.02	18	367	3	<10	<5	<0.01	<10	26	<100	<1	<2	<10	4	<1
77718	6199	<1	0.41	6	29	17	<1	1.69	<10	17	153	66	2.24	0.16	2	0.41	270	<1	0.02	18	365	3	<10	<5	<0.01	<10	26	<100	<1	<2	<10	3	<1
77719	6200	<1	0.24	4	29	15	<1	5.38	<10	20	87	120	2.63	0.13	<1	0.44	657	4	0.02	23	313	3	<10	<5	<0.01	<10	101	<100	<1	18	<10	5	<1

Certified By  
Derek Demianiuk, H.B.Sc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-21 02:56 PM

Job Number: 200541074

Date Received: 7/11/2005

Number of Samples: 86

Type of Sample: Core

Date Completed: 7/18/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm	
77720	6201	<1	0.65	15	39	24	<1	4.15	<10	25	191	33	4.12	0.12	20	1.00	823	<1	0.02	53	821	4	<10	<5	0.01	10	107	<100	<1	31	<10	4	<1	
77721	6202	<1	0.69	15	41	14	<1	4.44	<10	34	115	92	5.13	0.15	21	1.01	1029	<1	0.01	71	201	5	<10	<5	0.01	15	89	<100	<1	31	<10	2	<1	
77722	6203	<1	0.66	8	42	21	<1	3.86	<10	28	95	79	4.64	0.12	19	1.02	999	<1	0.02	58	182	4	<10	<5	0.01	13	206	<100	<1	31	<10	2	<1	
77723	6204	<1	0.50	9	43	88	<1	3.32	<10	20	99	45	3.58	0.14	7	0.87	805	<1	0.04	42	500	11	<10	<5	<0.01	<10	407	<100	<1	21	<10	4	<1	
77724	12258	<1	0.55	9	41	38	<1	3.11	<10	11	82	51	1.80	0.31	5	0.48	376	<1	0.02	15	452	5	<10	<5	<0.01	<10	44	<100	<1	3	<10	5	<1	
77725	12259	<1	0.59	4	38	29	<1	1.83	<10	8	99	27	1.65	0.22	7	0.45	232	<1	0.02	12	347	3	<10	<5	0.01	<10	29	185	<1	<2	<10	3	<1	
77726	12260	<1	0.75	3	44	24	<1	2.72	<10	20	59	28	3.08	0.26	19	0.68	358	4	0.02	24	641	<1	<10	<5	0.01	<10	26	1765	<1	2	<10	6	52	
77727	12261	<1	0.62	<3	38	20	<1	3.53	<10	13	95	95	1.94	0.19	11	0.47	338	2	0.02	16	330	2	<10	<5	0.01	<10	34	731	<1	<2	<10	7	8	
77728	12262	<1	0.62	<3	30	25	<1	2.35	<10	10	83	14	1.68	0.25	10	0.45	269	<1	0.02	13	403	2	<10	<5	0.02	<10	19	1053	<1	<2	<10	5	<1	
77729	12263	<1	0.72	8	43	40	<1	4.55	<10	22	53	70	4.13	0.23	11	0.72	847	<1	0.02	11	904	4	<10	<5	0.01	<10	119	632	<1	26	<10	6	<1	
77730	12264	<1	0.43	156	35	41	<1	4.95	<10	25	86	99	3.61	0.24	4	0.54	809	<1	0.01	17	518	10	<10	<5	<0.01	<10	116	<100	<1	16	<10	5	<1	
77731	12264	<1	0.44	159	35	41	<1	5.12	<10	26	88	102	3.68	0.24	4	0.55	830	<1	0.01	17	531	11	<10	<5	<0.01	<10	120	<100	<1	17	<10	5	<1	
77732	12265	<1	0.23	22	30	33	<1	2.19	<10	8	94	10	1.72	0.21	<1	0.50	323	4	0.04	10	367	4	<10	<5	0.01	<10	83	<100	<1	10	<10	3	<1	
77733	12266	<1	0.56	<3	31	35	<1	3.08	<10	10	72	12	1.71	0.28	5	0.46	328	4	0.02	14	404	2	<10	<5	0.01	<10	48	243	<1	5	<10	4	<1	
77734	12267	<1	0.67	<3	53	17	<1	5.66	<10	35	49	52	5.75	0.08	16	0.82	1172	<1	0.04	27	1590	5	<10	<5	0.03	<10	93	2874	<1	109	<10	14	22	
77735	12268	<1	0.35	5	41	15	<1	1.52	<10	11	211	55	1.79	0.07	2	0.31	294	<1	0.03	10	334	2	<10	<5	0.01	<10	24	595	<1	13	<10	4	<1	
77736	12269	<1	0.70	<3	55	47	<1	4.57	<10	32	59	109	5.04	0.24	14	0.76	1021	<1	0.03	25	765	3	<10	<5	0.02	<10	66	3043	<1	56	<10	12	10	
77737	12270	<1	0.71	18	59	12	<1	4.11	<10	35	186	97	4.85	0.09	15	0.87	938	5	0.03	44	187	7	<10	<5	0.02	<10	88	1654	<1	50	<10	7	10	
77738	12271	<1	0.72	<3	68	18	<1	5.35	<10	48	81	191	6.20	0.30	22	0.96	1285	<1	0.04	66	426	5	<10	<5	0.03	<10	122	3030	<1	126	<10	13	26	
77739	12272	<1	0.80	14	58	13	<1	5.38	<10	43	74	132	6.15	0.12	26	1.07	1241	<1	0.02	64	242	7	<10	<5	0.02	<10	18	191	201	<1	110	<10	4	13
77740	12273	<1	0.45	8	41	12	<1	2.01	<10	14	216	33	2.33	0.10	4	0.63	445	8	0.03	22	136	4	<10	<5	0.02	<10	79	367	<1	32	<10	2	<1	
77741	12273	<1	0.45	8	37	11	<1	2.00	<10	14	217	33	2.32	0.09	4	0.63	438	8	0.03	22	137	3	<10	<5	0.02	<10	78	359	<1	32	<10	2	<1	

Certified By:  
Derek Demianiuk, H.Bsc.



Mineral Assay Division of Assay Laboratory Services Inc.

1046 GORHAM STREET THUNDER BAY, ONTARIO P7B 5X5 PHONE: (807) 626-1630 FAX: (807) 623-6820 EMAIL: assay@accurassay.com WEB: www.accurassay.com

Cabo Mining Corp.

Date Created: 05-07-21 02:56 PM

Job Number: 200541074

Date Received: 7/11/2005

Number of Samples: 86

Type of Sample: Core

Date Completed: 7/18/2005

Project ID: Hope Lake

\* The results included on this report relate only to the items tested

\* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Sb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
77742	12274	<1	0.73	27	44	13	<1	4.63	<10	36	80	87	4.90	0.17	18	0.94	1045	1	0.04	49	581	4	<10	<5	0.03	<10	92	1645	<1	83	<10	7	7
77743	12275	<1	0.82	<3	47	12	<1	0.91	<10	39	128	166	6.64	0.04	26	1.01	823	<1	0.03	50	336	4	<10	<5	0.03	<10	6	2253	<1	68	<10	8	84
77744	12276	<1	0.79	<3	45	5	<1	3.93	<10	41	119	99	5.74	0.02	30	1.02	1226	<1	0.03	38	364	6	<10	<5	0.03	<10	30	4353	<1	128	<10	14	29
77745	12277	<1	0.54	<3	28	22	<1	6.82	<10	14	75	25	1.99	0.06	3	0.37	1018	<1	0.01	7	670	2	<10	<5	<0.01	<10	64	1345	<1	39	<10	9	<1
77746	6221	<1	0.85	42	51	15	<1	1.19	<10	45	122	170	6.67	0.15	54	0.97	1658	<1	0.04	61	295	6	<10	<5	0.02	22	39	<100	<1	37	<10	2	34
77747	6245	<1	0.85	41	44	14	<1	1.11	<10	43	116	162	6.37	0.15	51	0.96	1570	<1	0.03	57	282	5	<10	<5	0.01	20	36	<100	<1	34	<10	2	32

Certified By  
Derek Demianuk, H.B.Sc.



## Certificate of Analysis

2 . 21842

Friday, September 23, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 02-Sep-05  
Date Completed : 23-Sep-05  
Job # 200541559  
Reference :

Sample #: 4 Rock

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
105994	12294		No Sample	
105995	12295	<5	<0.001	<0.005
105996	12296	<5	<0.001	<0.005
105997	12297	8	<0.001	0.008
105998 Check	12297	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 1 of 1

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-09/23/2005 03:31 PM

Cabo Mining Corp.

Date Created: 05-09-20 09:15 AM

Job Number: 200541559

Date Received: 9/2/2005

Number of Samples: 4

Type of Sample: Rock

Date Completed:

Project ID:

\* The results included on this report relate only to the items tested

 \* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accr. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Bi ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
No Sample Received																																	
105994	12294																																
105995	12295	<1	2.99	<3	36	75	<1	7	8.33	<10	4	163	139	5.78	0.42	10	2.68	1445	<1	0.02	42	1103	<1	13	0.07	<10	250	2868	<1	185	108	17	221
105996	12296	<1	3.54	<3	51	<1	<1	6	5.19	<10	6	223	112	5.95	<0.01	9	2.39	1498	<1	0.03	64	295	<1	10	0.06	<10	20	3160	<1	199	109	12	222
105997	12297	<1	4.61	<3	57	<1	<1	<5	5.61	<10	5	297	117	6.80	<0.01	18	3.75	1370	<1	<0.01	75	263	<1	11	0.03	<10	25	2225	<1	225	128	10	219
105998	12297	<1	4.52	<3	56	<1	<1	<5	5.31	<10	2	203	111	6.58	<0.01	17	3.66	1314	<1	<0.01	71	253	<1	18	0.03	<10	24	2213	<1	220	119	10	213

Certified By:   
 Derek Demianiuk, H.Bsc.



## Certificate of Analysis

Wednesday, September 28, 2005

Cabo Mining Corp.  
 Suite 20-289 Cedar St.  
 Sudbury, ON, CA  
 P3B1M8  
 Ph#: (705) 560-0286  
 Fax#: (705) 560-7468  
 Email

Date Received : 26-Jul-05

Date Completed :

Job # 200541218

Reference : Hope Lake

Sample #: 144 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
84765	6001	40	0.001	0.040
84766	6003	<5	<0.001	<0.005
84767	6032	<5	<0.001	<0.005
84768	6048	9	<0.001	0.009
84769	6058	<5	<0.001	<0.005
84770	12278	21	<0.001	0.021
84771	12279	14	<0.001	0.014
84772	12280	<5	<0.001	<0.005
84773	12281	<5	<0.001	<0.005
84774	12282	<5	<0.001	<0.005
84775 Check	12282	7	<0.001	0.007
84776	12283	<5	<0.001	<0.005
84777	12284	<5	<0.001	<0.005
84778	12285	20	<0.001	0.020
84779	12286	11	<0.001	0.011
84780	12287	27	<0.001	0.027
84781	12288	<5	<0.001	<0.005
84782	12289	<5	<0.001	<0.005
84783	12290	<5	<0.001	<0.005
84784	12291	8	<0.001	0.008
84785	12292		No Sample	
84786 Check	12292		No Sample	
84787	12293	<5	<0.001	<0.005

PROCEDURE CODES: AL4Au3, AL4ICPAR

Page 1 of 7

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

AL903-0437-09/28/2005 07:40 AM



## Certificate of Analysis

Wednesday, September 28, 2005

Cabo Mining Corp.  
Suite 20-289 Cedar St.  
Sudbury, ON, CA  
P3B1M8  
Ph#: (705) 560-0286  
Fax#: (705) 560-7468  
Email

Date Received : 26-Jul-05

Date Completed :

Job # 200541218

Reference : Hope Lake

Sample #: 144 Core

Accurassay #	Client Id	Au ppb	Au oz/t	Au g/t (ppm)
84788	12362	<5	<0.001	<0.005
84789	12363	<5	<0.001	<0.005
84790	12364	<5	<0.001	<0.005
84791	12365	<5	<0.001	<0.005
84792	12366	<5	<0.001	<0.005
84793	12367	<5	<0.001	<0.005
84794	12368	<5	<0.001	<0.005
84795	12369	6	<0.001	0.006
84796	12370	23	<0.001	0.023
84797 Check	12370	21	<0.001	0.021
84798	12371	107	0.003	0.107
84799	12372	38	0.001	0.038
84800	12373	8	<0.001	0.008
84801	12374	<5	<0.001	<0.005
84802	12375	140	0.004	0.140
84803	12376	751	0.022	0.751
84804	12377	336	0.010	0.336
84805	12378	124	0.004	0.124
84806	12379	70	0.002	0.070
84807	12380	<5	<0.001	<0.005
84808 Check	12380	<5	<0.001	<0.005
84809	12381	365	0.011	0.365
84810	12382	8	<0.001	0.008

PROCEDURE CODES: AL4Au3, AL4ICPAR

Certified By:

Derek Demianiuk H.Bsc., Laboratory Manager

The results included on this report relate only to the items tested

The Certificate of Analysis should not be reproduced except in full, without the written approval of the laboratory

Page 2 of 7

AL903-0437-09/28/2005 07:40 AM

Cabo Mining Corp.

Date Created: 05-09-01 09:19 PM

Job Number: 200541218

Date Received: 7/26/2005

Number of Samples: 144

Type of Sample: Core

Date Completed:

Project ID: Hope Lake

*These samples not  
from these holes*

\* The results included on this report relate only to the items tested

 \* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
84765	6001	3	0.83	80	48	45	1	0.28	<10	3	483	32	2.43	0.30	12	0.21	466	10	0.06	18	246	20	18	0.04	<10	12	294	6	5	76	5	141
84766	6003	1	0.29	8	50	28	1	0.72	<10	4	860	22	1.51	0.09	9	0.10	278	10	0.06	24	272	2	29	0.04	<10	32	<100	5	6	57	2	2
84767	6032	2	0.36	7	44	43	2	0.57	<10	5	951	23	2.27	0.16	8	0.06	264	12	0.09	25	317	5	32	0.04	<10	35	<100	9	6	68	3	<1
84768	6048	5	3.04	34	60	442	2	4.70	<10	7	669	22	3.92	2.60	41	2.58	1420	<1	0.06	98	419	222	17	0.06	<10	203	2261	7	36	122	<1	95
84769	6058	2	0.98	59	52	202	2	0.15	<10	6	302	29	3.29	0.35	18	0.45	434	10	0.05	21	491	35	8	0.04	<10	17	306	6	4	97	11	97
84770	12278	2	1.00	13	53	233	2	5.12	<10	7	172	107	5.09	0.43	11	1.63	1134	<1	0.06	20	3325	6	5	0.05	<10	345	171	7	22	138	16	27
84771	12279	<1	2.89	11	52	100	2	4.05	<10	5	241	100	6.80	0.24	26	1.99	880	<1	0.02	27	677	5	8	0.05	<10	70	641	7	2	170	3	65
84772	12280	<1	1.38	8	55	67	2	4.53	<10	5	337	31	2.93	0.19	13	0.80	779	<1	0.12	24	558	<1	11	0.06	<10	88	959	5	12	89	2	41
84773	12281	<1	1.83	5	55	43	1	3.96	<10	4	377	65	4.07	0.11	19	1.33	697	<1	0.04	18	480	<1	18	0.04	<10	41	853	5	7	119	2	47
84774	12282	1	2.52	15	57	41	2	0.52	<10	7	219	154	5.35	0.14	28	1.85	430	<1	0.03	31	743	<1	7	0.04	<10	11	845	5	<2	127	<1	79
84775	12282	<1	2.38	10	41	39	2	0.48	<10	6	179	136	5.16	0.13	25	1.74	410	<1	0.02	31	712	<1	6	0.04	<10	11	689	5	3	123	<1	80
84776	12283	2	1.61	10	42	48	1	4.83	<10	4	186	23	3.02	0.20	18	1.06	596	<1	0.03	17	572	<1	<5	0.06	<10	89	873	8	7	97	<1	49
84777	12284	<1	1.78	10	46	45	1	6.10	<10	3	297	4	3.34	0.19	17	1.12	671	<1	0.05	23	527	<1	9	0.06	<10	86	1269	7	10	102	1	39
84778	12285	7	1.79	9	43	47	2	2.52	79	10	170	168	5.38	0.23	15	1.07	382	<1	0.03	37	569	2688	9	0.05	<10	23	1049	4	4	134	2	2653
84779	12286	<1	3.92	11	47	7	2	6.93	<10	10	280	74	7.20	<0.01	32	3.06	1283	<1	0.05	81	423	7	7	0.09	<10	26	5827	8	147	190	<1	52
84780	12287	<1	3.92	8	40	17	1	7.58	<10	11	347	138	7.16	0.03	35	3.16	1207	<1	0.02	96	308	<1	12	0.11	<10	34	3184	9	83	184	<1	64
84781	12288	<1	2.11	7	51	6	1	7.17	<10	11	218	151	4.80	0.01	13	1.39	1048	<1	0.08	73	358	<1	5	0.09	<10	54	4653	6	48	131	<1	59
84782	12289	<1	2.24	5	48	6	1	1.44	<10	9	151	126	4.82	<0.01	15	1.64	677	<1	0.04	64	317	<1	9	0.09	<10	47	3950	5	30	126	<1	61
84783	12290	<1	2.27	8	48	7	1	8.17	<10	8	164	140	4.81	<0.01	16	1.53	1081	<1	0.05	65	303	<1	7	0.10	<10	96	3645	5	38	130	<1	63
84784	12291	1	2.16	6	45	6	1	8.84	<10	12	194	120	5.04	<0.01	16	1.50	1183	<1	0.05	68	284	<1	14	0.10	<10	51	3110	9	46	136	<1	70
84785	12292																															
84786	12292																															

Certified By  
Derek Demianiuk, H.Bsc.

Cabo Mining Corp.

Date Created: 05-09-01 09:19 PM

Job Number: 200541218

Date Received: 7/26/2005

Number of Samples: 144

Type of Sample: Core

Date Completed:

Project ID: Hope Lake


\* The results included on this report relate only to the items tested

 \* This Certificate of Analysis should not be reproduced except in full, without the written approval  
of the laboratory.

\*The methods used for these analysis are not accredited under ISO/IEC 17025

Accur. #	Client Tag	Ag ppm	Al %	As ppm	B ppm	Ba ppm	Be ppm	Ca %	Cd ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Li ppm	Mg %	Mn ppm	Mo ppm	Na %	Ni ppm	P ppm	Pb ppm	Se ppm	Si %	Sn ppm	Sr ppm	Ti ppm	Tl ppm	V ppm	W ppm	Y ppm	Zn ppm
84787	12293	<1	1.71	6	48	33	1	6.03	<10	10	332	163	4.32	0.18	17	1.22	834	<1	0.08	54	276	<1	8	0.09	<10	35	2092	4	31	121	<1	43
84788	12362	1	1.65	8	41	19	1	4.86	<10	9	198	153	3.95	0.11	16	1.29	807	<1	0.04	54	263	<1	<5	0.08	<10	29	1934	6	30	117	<1	50
84789	12363	<1	0.64	10	50	60	1	0.46	<10	6	443	73	1.56	0.44	17	0.37	119	4	0.11	15	301	2	11	0.04	<10	24	651	6	7	58	<1	6
84790	12364	1	0.50	8	38	63	1	0.23	<10	11	351	101	1.49	0.36	13	0.23	<100	6	0.09	13	245	3	12	0.04	<10	19	500	6	7	126	<1	6
84791	12365	<1	1.04	8	43	164	1	0.35	<10	4	479	18	1.72	0.66	22	0.68	277	<1	0.07	26	581	8	19	0.03	<10	25	772	7	7	60	<1	41
84792	12366	1	0.47	10	44	60	1	0.72	<10	3	336	53	0.99	0.32	17	0.26	<100	6	0.07	9	313	3	13	0.05	<10	26	411	5	7	57	<1	4
84793	12367	<1	0.57	7	49	65	1	0.30	<10	5	512	78	1.24	0.35	17	0.29	<100	6	0.09	13	278	<1	18	0.04	<10	28	443	6	7	51	<1	3
84794	12368	2	0.55	7	49	74	1	0.34	<10	5	388	92	1.30	0.36	18	0.28	<100	6	0.09	12	298	1	15	0.05	<10	33	652	6	8	80	<1	4
84795	12369	1	0.66	8	53	84	1	0.39	<10	11	479	110	1.72	0.43	22	0.32	105	6	0.09	16	336	4	12	0.05	<10	36	786	7	7	91	<1	7
84796	12370	2	0.56	7	48	88	1	0.40	<10	5	385	171	1.43	0.39	14	0.23	103	6	0.09	11	273	2	6	0.05	<10	31	607	4	7	64	<1	7
84797	12370	1	0.69	8	55	104	1	0.48	<10	7	466	213	1.70	0.47	17	0.30	123	6	0.10	14	328	2	15	0.04	<10	37	725	6	7	70	<1	7
84798	12371	6	0.60	23	47	85	1	0.27	<10	73	399	849	4.99	0.41	15	0.28	123	11	0.07	22	278	7	16	0.04	<10	24	568	8	7	165	1	11
84799	12372	3	0.60	15	51	109	1	0.95	<10	17	371	286	2.55	0.46	17	0.25	122	9	0.07	14	313	3	14	0.04	<10	32	607	7	7	87	<1	6
84800	12373	1	0.53	9	48	86	1	0.29	<10	8	382	84	1.26	0.39	15	0.26	<100	6	0.07	11	287	1	14	0.06	<10	25	657	5	7	62	<1	6
84801	12374	1	0.65	15	52	118	1	0.30	<10	18	434	163	2.24	0.46	16	0.26	111	9	0.09	15	298	<1	14	0.05	<10	28	665	4	7	174	1	6
84802	12375	33	0.32	7	47	40	1	0.12	<10	14	150	>5,000	>10.00	0.21	7	0.12	<100	33	0.04	112	225	10	22	0.05	<10	12	268	5	7	708	2	32
84803	12376	42	0.38	421	52	13	2	0.11	<10	755	261	>5,000	>10.00	0.20	8	0.11	272	78	0.02	180	189	49	44	0.03	<10	13	152	10	8	1688	5	54
84804	12377	15	0.25	209	49	11	2	0.12	<10	730	363	948	>10.00	0.14	8	0.04	214	64	0.02	99	230	43	49	0.03	<10	20	229	6	17	818	7	1
84805	12378	7	0.22	32	46	34	2	0.33	<10	178	356	770	>10.00	0.17	5	0.03	130	28	0.06	31	217	14	19	0.04	<10	17	303	8	12	430	3	5
84806	12379	3	0.25	14	42	85	1	0.33	<10	36	346	316	4.98	0.23	8	0.09	<100	16	0.05	17	217	5	11	0.04	<10	21	366	8	9	176	2	3
84807	12380	1	0.35	13	53	130	1	0.48	<10	15	412	91	1.96	0.34	14	0.15	<100	10	0.06	11	251	3	18	0.04	<10	27	431	5	7	76	<1	<1
84808	12380	1	0.28	14	45	99	1	0.38	<10	14	317	76	1.53	0.28	12	0.12	<100	10	0.05	9	208	3	12	0.04	<10	22	337	7	7	68	1	2

These samples not  
from these holes

Certified By:   
Derek Demianiuk, H.B.Sc.

