


REPORT ON 2007 DRILLING  
PAM Property  
Whitney Township,  
Timmins, Ontario

By

TEMEX Resources Corporation  
Suite 1660, 141 Adelaide Street West  
Toronto, Ontario, Canada  
M5H 3L5

May 27, 2008

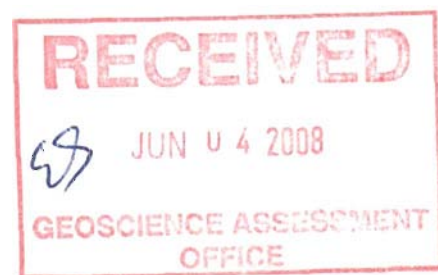

Prepared by:

Henry P Hutteri P.Geol.

2 • 38176

## TABLE OF CONTENTS

1.0	SUMMARY.....	2
2.0	INTRODUCTION.....	4
3.0	PROPERTY DESCRIPTION, LOCATION AND ACCESS.....	4
4.0	PREVIOUS EXPLORATION.....	4
4.1	Broulan Reef Mines.....	6
4.2	Pam Property.....	8
5.0	GEOLOGICAL SETTING.....	9
5.1	Regional Geology.....	9
5.2	Property Geology.....	10
6.0	2007 DRILLING PROGRAM.....	12
7.0	CONCLUSIONS AND RECOMMENDATIONS.....	14
10.0	REFERENCES.....	16

## FIGURES

<i>Figure 1:</i>	Property Location and Regional Geology.....	3
<i>Figure 2:</i>	Claim Location Map.....	5
<i>Figure 3:</i>	Whitney Township Geology Map (after Rhys, 2003).....	11
<i>Figure 4:</i>	PAM Property Geology and Drill Hole Location Map.....	13

## TABLES

<i>Table 1:</i>	2007 Drill Program Statistics.....	17
-----------------	------------------------------------	----

## APPENDICES

APPENDIX 1	Lab Assay Certificates
APPENDIX 2	Vertical Cross-sections of Drill Holes
APPENDIX 3	Drill Logs

## **1.0 SUMMARY**

---

During July and August of 2007, Temex Resources Corporation carried out a 2 hole, 237.5 m diamond drill program on their PAM Property which is currently under option. This drilling program was part of a larger drilling campaign by Temex Resources Corp. on their surrounding PJV optioned ground.

The PAM Property is located within Whitney Township, approximately 3 km north of Porcupine, Ontario and lies within the city limits of Timmins, Ontario. It consists of two unpatented claim units which cover an area of approximately 32 hectares. The property lies approximately 800m west of the head frame of the inactive Broulan Reef mine which has produced a total of 498,932 oz of gold to date. Other former gold producers located to the east of Broulan Reef mine include the Bonetal, Hallnor and Pamour mines.

The PAM property lies within the southern portion of the Abitibi Greenstone Belt of the Superior province of the Canadian Shield which consists of an east-west trending suite of dominantly mafic to felsic metavolcanic, metasedimentary rocks and lesser ultramafic metavolcanic rocks and a variety of granitoid intrusives. The PAM Property lies approximately 1km north of the unconformable contact between the Porcupine Group metasedimentary rocks and the Tisdale metavolcanic rocks, both of which have hosted significant gold-bearing vein systems. The regionally extensive Destor-Porcupine Fault zone lies to the south of this unconformity.

The three main auriferous vein types identified within the Broulan Reef – Pamour Mine structural corridor include steep south dipping veins within mafic volcanic rocks, steeply dipping veins straddling the unconformable volcanic/sediment contact and moderate to shallow north dipping and locally folded hook veins within mafic volcanic rocks (Rhys, 2003). Veining identified to date on the PAM Property consists mainly of south dipping quartz veins and stringers within carbonatized mafic volcanic rocks.

The 2 diamond drill holes completed on the Pam Property during 2007 were designed to test for additional mineralization on structures which are parallel to but lie north of the main Broulan Reef shear. No significant gold values were obtained with the best assay interval yielding 0.23 g/t Au over 0.5 m.

Further drilling is not warranted.

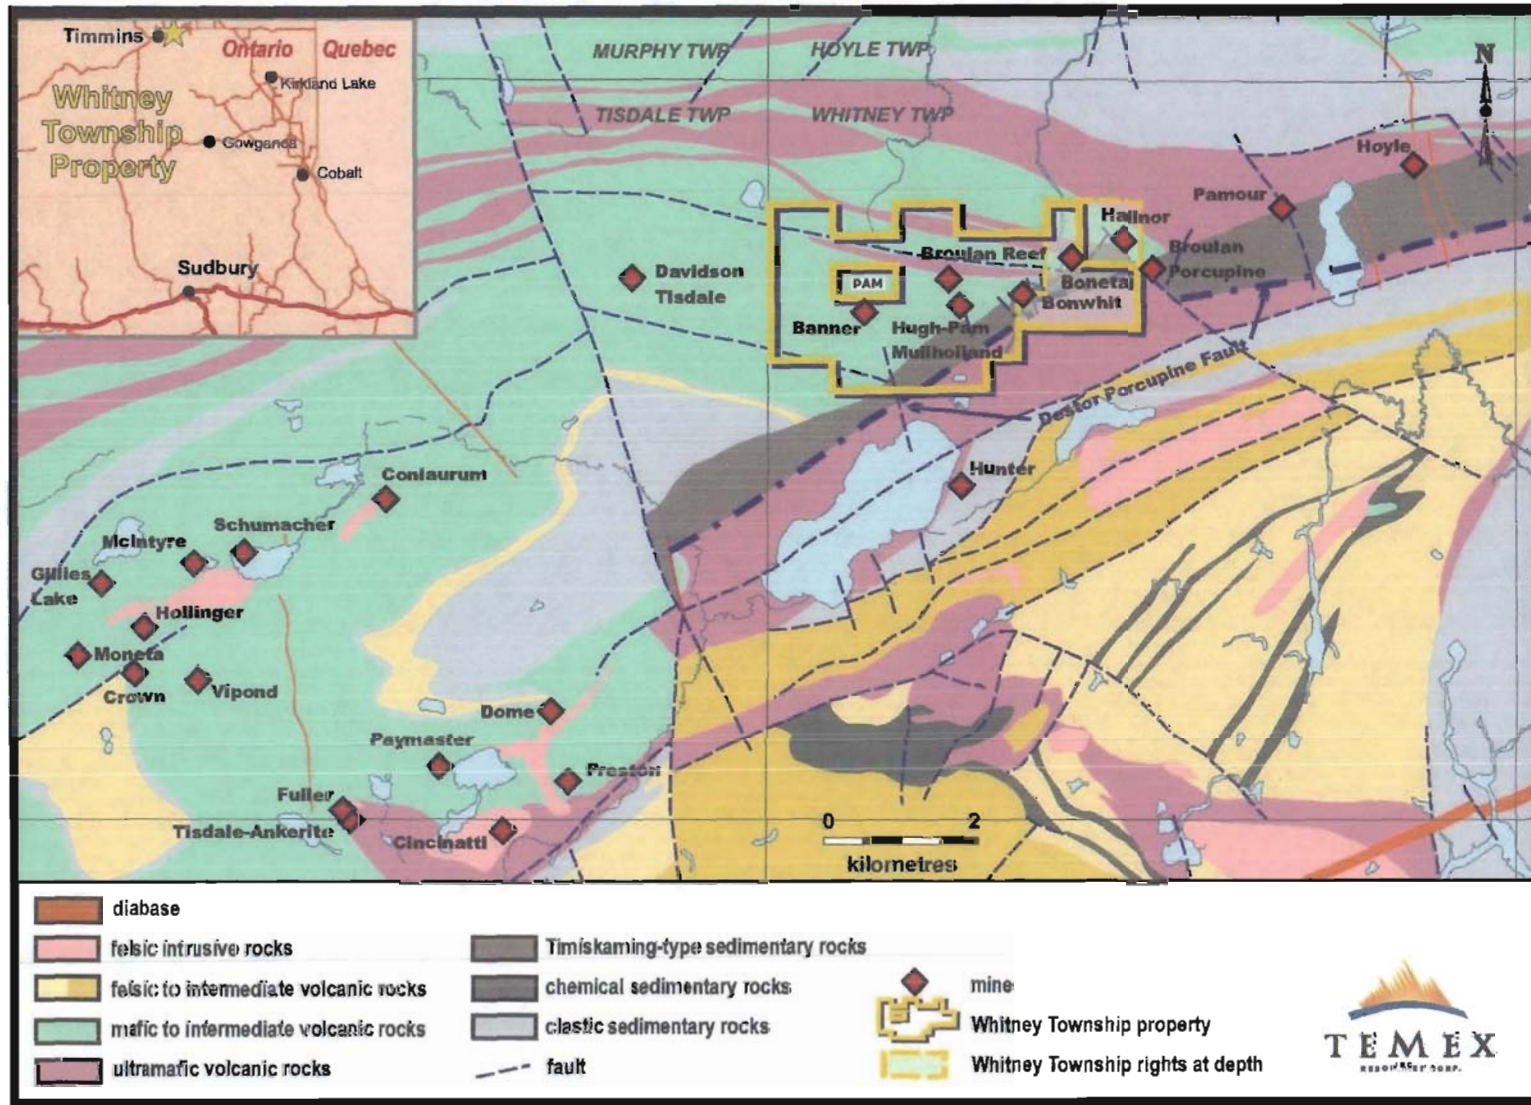


Figure 1. PAM Property Location and Regional Geology Map



## **2.0 INTRODUCTION**

---

Temex Resources Corporation carried out a 2 hole, 237.5 m diamond drilling program on their PAM property during July and August of 2007. The work program was completed on ground which the company currently has an option to earn a 100% interest from Don McHoldings Ltd., 2060014 Ontario Inc., and Duane Parnham of Timmins, Ontario. The work completed on the two unit PAM property was carried out as part of a larger on-going drill program being carried out by Temex Resource Corporation on their Whitney Township Property. The drilling operations were performed by Norex Drilling of Timmins, Ontario and supervised by Henry Hutteri P.Geol. and Karen Kettles P.Geol.

These holes were drilled in order to follow up on previous drill intersections of narrow gold-bearing veins hosted within a carbonate zone and to locate other parallel carbonate zones which may be gold-bearing.

## **3.0 PROPERTY DESCRIPTION, LOCATION AND ACCESS**

---

The Temex Resources Corporation Pam Property covers the N1/2 of the S 1/2 of Lot 11, Concession 5 of Whitney Township, a few km north of Porcupine, Ontario within the Porcupine Mining Division. The property consists of 2 contiguous unpatented mining claim units covering approximately 32 hectares (Figure 2). The property is currently under option from Don McHoldings Ltd., 2060014 Ontario Inc., and Duane Parnham whereby Temex Resources Corp. can earn a 100% interest.

Access to the claims is gained by traveling north 3.5 km from Highway 101 in Porcupine along Florence Street to the Broulan Reef head frame. From here, a secondary gravel road leads westward a distance of approximately 400 m to a major power transmission line. Following this transmission line 600 m to the southwest leads directly onto the southeast corner of the claim group.

## **4.0 PREVIOUS EXPLORATION**

---

The Pam Property lies approximately 1 km northwest of the past producing Broulan Reef gold Mine which was in production from 1939 to 1965. During this time, a significant amount of underground and surface drilling was carried out in the area, mainly on the

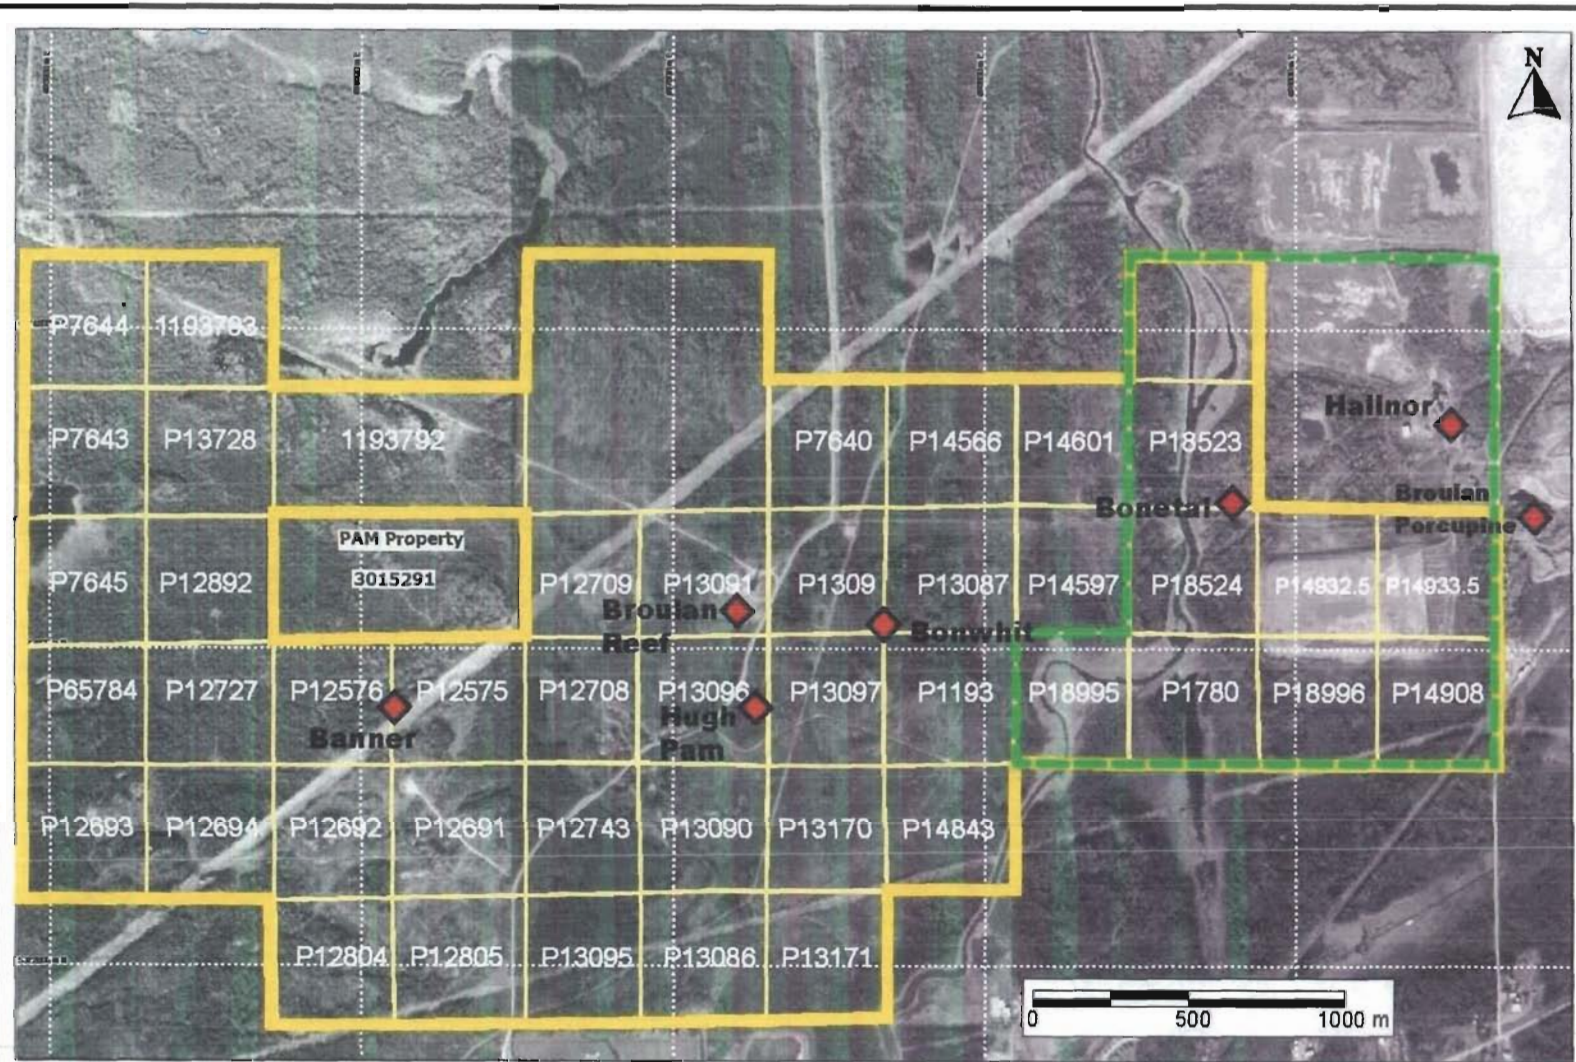


Figure 2. Claim Location Map showing PAM claim group within larger Whitney Township Property.

east-northeast striking Broulan Reef shear/carbonate zone. Approximately seven diamond drill holes and ground geophysical surveying by various companies was carried out previously on the PAM claims which partially cover a parallel carbonate zone located to the north of the main Broulan Reef structure.

#### **4.1 Broulan Reef Mine**

**1915 to 1917-Porcupine Reef Mining Co:** The company carried out diamond drilling and sank the Broulan Reef shaft down to 100 feet and with limited development produced 104 ounces of gold.

**1937- McIntyre Porcupine Mines Ltd:** The company performed surface diamond drilling and exploration.

**1944 to 1951-Porcupine Reef Gold Mines:** Magnetic surveying and 16,000 feet of surface drilling were completed. The shaft was subsequently deepened to a depth of 1058 feet with 13,246 feet of lateral development. During this time, a total of 68,354 ounces of gold were produced.

**1952 to 1965- Broulan Reef Mines Ltd:** The company was formed with the amalgamation of the Broulan Reef, Porcupine Reef, Bonwhit and Bonetal Mines. The shaft was deepened to 2556 feet and a winze was sunk from the 2500 to 2673 foot levels. A total of 430,474 ounces of gold production was achieved. During this time, an exploration drift was driven out to the Banner shaft area to the west on the 650 level with poor results. Exploration failed to find additional ore on the main Broulan Reef structure below the 2500 level and no attempt was made prior to the mine closing in 1965 to locate the extensions of the deep Hallnor veins which were just starting to be developed at that time. All mine buildings were subsequently taken down.

**1960 to 1963- Rollex Mines Ltd:** The company held a small group of claims located immediately to the north of the current PAM option. Four drill holes totalling 2003 feet were drilled to test the Spherulitic "chicken feed" lava horizon crossing through the Rollex claims approximately 1km northwest of the Broulan Reef Shaft, just south of Murphy Road. Although no assays were recorded in the logs, later work carried out on the ground by Kidd Creek Mines reported that one of the Rollex holes yielded an assay interval of 0.94 oz/ton gold over 2.5 feet.

**1983- Kidd Creek Mines Ltd:** The company carried out horizontal loop electromagnetic and magnetic surveying on a group of claims covering the current PAM property. Two drill holes, W51-01 and W51-04 were drilled totalling 1946 feet to test electromagnetic and magnetic anomalies; however no assay results were reported.

**1983 to 1985- Newmont Mines:** The company optioned the Broulan Reef and Hugh Pam properties surrounding but not including the PAM claim group. The company carried out magnetic and Induced Polarization surveys, geological mapping, stripping, basal till geochemistry, litho geochemical surveys, compilation and 4014 feet of surface drilling. No significant assay results were obtained and the property was dropped in 1985.

**1986 to 1987- Mill City Gold Inc:** The company carried out magnetic, VLF-EM, Induced Polarization surveying and Reverse Circulation overburden drilling on a small property located to the north of the Pam claims covering the two former Rollex Mines claims. Of the 44 RC holes, drilled, approximately 13 drill sites appear to lie on the current Temex Whitney Township property. Several significant basal till gold anomalies were obtained with the highest sample yielding an assay of 11276 ppb gold from hole 8819B. Although drilling was recommended, there is no record of any being carried out by the company.

**1986 to 1989- Belmoral Mines:** The company initially conducted geological surveying and 11,259 feet of surface diamond drilling on the C zone area with positive results. They subsequently erected a head frame and rehabilitated the Broulan Reef shaft after dewatering the underground workings. A further 7627 feet of underground drilling produced a reduced C Zone resource of 103,411 tons of 0.114 oz/ton. Additional surface drilling mostly around the current Reef pit target produced a near surface resource of 336,000 tons at 0.043 oz/ton gold. Since Belmoral staff indicated that the drilling significantly underestimated the underground stope grades, they suggested that the Reef pit grade would most likely be closer to 0.114 oz/ton gold. A planned bulk sample for this zone was not carried out due to the program being shut down. Total drilling performed by Belmoral Mines from 1986 to 1989 totalled 40,400 feet from surface and 18,277 feet from underground. A further 2434 feet of drifting, 9 feet of raising and 62 feet of shaft sinking was carried out prior to the mine closing in 1989. The deeper targets were not tested due to the cost over runs from dewatering and mine rehabilitation.

**1990 to 1994- Royal Oak Mines:** The company performed resource calculations on the Reef pit area and the Hugh Pam conglomerate zone and compilation in the area prior to concentrating their efforts on the deep Hallnor vein system.



**1995- Kinross Gold Corporation:** The company acquired all Whitney Township properties from the bankrupt Royal Oak Mines.

**2000 to 2002- Kinross Gold Corporation:** The company completed 40 km of line cutting, magnetic and Induced Polarization surveying along the volcanic/sediment contact between the Broulan Reef and Hallnor mine sites. A total of 34 holes and 5285 m of stratigraphic drilling was carried out initially along the contact area and a further 968 m of drilling in 6 holes was carried out over IP anomalies within the volcanics. Surface geological compilations were also performed during this time.

**2002 to 2003- PJV:** The PJV compiled previous work and then completed a 25 hole drill program totalling 12,971 feet to the south and east of the current Pam property. In addition they completed geochemical sampling of drill core and had a property wide structural study completed by David Rhys.

**2005 to 2006-Temex Resources Corp:** Temex optioned the Whitney Property from the PJV which included both the Hallnor (below 1000') and Broulan Reef properties. During this time, two phases of diamond drilling were completed consisting of 39 holes totalling 6045.4 m which tested the C Zone, Hugh Pam Conglomerate Zone, Reef Pit Zone and the Reef Offset Zone. None of this drilling occurred on the PAM claims. Compilation work was also performed at this time.

## **4.2 Pam Property**

**1964- Hollander Mines:** During 1964, Hollander Mines carried out a program of line cutting, magnetic and horizontal loop electromagnetic surveying over the current PAM property. This was followed by four diamond drill holes totalling 2004 feet (HM-1 to 4). Andesites with minor graphitic shears and sporadic bleaching, minor quartz and sulphides was noted in the drilling. Hole HM-1 was reported to have intersected 0.19 oz/ton over 5.5 feet and 0.11 oz/ton over 2 feet.

**1983- Kidd Creek Mines Ltd:** The company held a large property covering the current 2 unit claim on which they performed line cutting, magnetic and HLEM surveying followed by diamond drilling. Two drill holes, W51-02 and W51-03 were drilled totalling 505.3m. Pillowed and massive mafic volcanic flows were intersected containing local carbonate alteration and minor quartz and sulphides. No assays were reported in the logs.

**1989- Belmoral Mines Ltd:** During 1989, Belmoral Mines Ltd. drilled one hole on ground currently covered by the PAM property totalling 1001 feet. The hole intersected basalts with local carbonate alteration and quartz-carbonate stringers/veins. Although the drill hole undercut hole HM-1, which had two gold-bearing intersections, no significant gold values were obtained.

**1998- 2003 Mike Caron:** During 1998, prospector Mike Caron carried out a program of line cutting, magnetometer and VLF-EM surveying over the two mining units currently comprising the PAM Property. Four VLF electromagnetic anomalies were located. During 2003, geological surveying was carried out on the grid in order to identify the source of the VLF-EM anomalies. Several old trenches and minor quartz veining were located on the property which had little bedrock exposure overall. No conductive horizons were identified.

**2006- Steve Anderson:** During 2006, prospector Steve Anderson acquired the current PAM Property and completed a ground magnetic survey over the two mining units using GPS flagged grid lines. The property was subsequently optioned to Temex Resources Corporation in 2007.

## **5.0 GEOLOGICAL SETTING**

---

### **5.1 Regional Geology**

The Pam property lies within the southern portion of the Abitibi Greenstone Belt of the Superior province of the Canadian Shield which consists of an east-west trending suite of dominantly mafic to felsic metavolcanic, metasedimentary rocks and lesser ultramafic metavolcanic rocks and a variety of granitoid intrusives. Within the Porcupine gold camp, the metavolcanic rocks are divided into two groups, the Deloro and Tisdale Groups (Pyke, 1982). The Deloro group consists of an older calc-alkaline sequence of andesite, basalt, dacite, rhyolitic pyroclastic rocks capped by iron formations and is confined to a larger domal feature to the south, referred to as the Shaw Dome. The younger, overlying Tisdale group consists of basal ultramafic volcanics and basaltic komatiites overlain by a thick sequence of tholeiitic basalts and capped by dacitic volcanoclastics (Pyke, 1982). A major east striking belt of clastic metasediments separate the Tisdale group to the north and Deloro Group to the south, and is bounded on the south side by the regionally extensive Destor-Porcupine Fault. This sedimentary sequence consisting of wackes, siltstones and lesser conglomerate has been divided into two groups referred to as the Porcupine and Timiskaming groups (Piroshco and Kettles, 1991). The two groups of sediments are separated by the Timiskaming Unconformity. The Porcupine Group is the older of the two groups and conformably overlies the Tisdale Group of rocks while the younger

Timiskaming group of sediments forms an angular unconformity with both the Tisdale Group volcanics and Porcupine Group sediments within the Timmins area (Piroshco and Kettles, 1991).

The majority of gold deposits within the Timmins area occur proximal to fault structures or within fault-bounded blocks, and the mineralized vein zones commonly occupy brittle fracture zones in these areas. The more productive faults recognized to date within the Timmins area are the Destor-Porcupine, Dome and Hollinger faults. Several significant gold deposits are also spatially related to the Timiskaming unconformity within the Whitney Township area. These include the Broulan Reef, Bonetal, Hallnor and Pamour Mines. Most mineralized vein structures in the area are associated with carbonate-quartz-sericite-pyrite-albite alteration envelopes that are superimposed on existing, more extensive carbonate and chlorite alteration zones (Piroshco and Kettles, 1991).

## **5.2 Property Geology**

The PAM property lies northwest of the main east-northeast striking Broulan Reef-Bonwhit-Bonetal-Hallnor structural corridor which lies adjacent to the unconformable contact between the younger Timiskaming metasediments to the south and Tisdale metavolcanic rocks to the north. The PAM claim group is underlain mainly by a north dipping sequence of tholeiitic mafic metavolcanic rocks and minor thin, carbonaceous interflow metasediments of the Central Formation of the Tisdale Group of rocks. Diamond drilling has indicated that a south dipping iron carbonate alteration zone with weak quartz veining/stingers and minor erratic gold values occurs in the northern part of the property and that a calcitic carbonate alteration zone passes through the southeast part of the property. Little outcrop exposure exists and cedar and spruce swamps are extensive in the property area. Numerous late, north to northwest striking cross-faults have also disrupted the stratigraphy with local offsets.

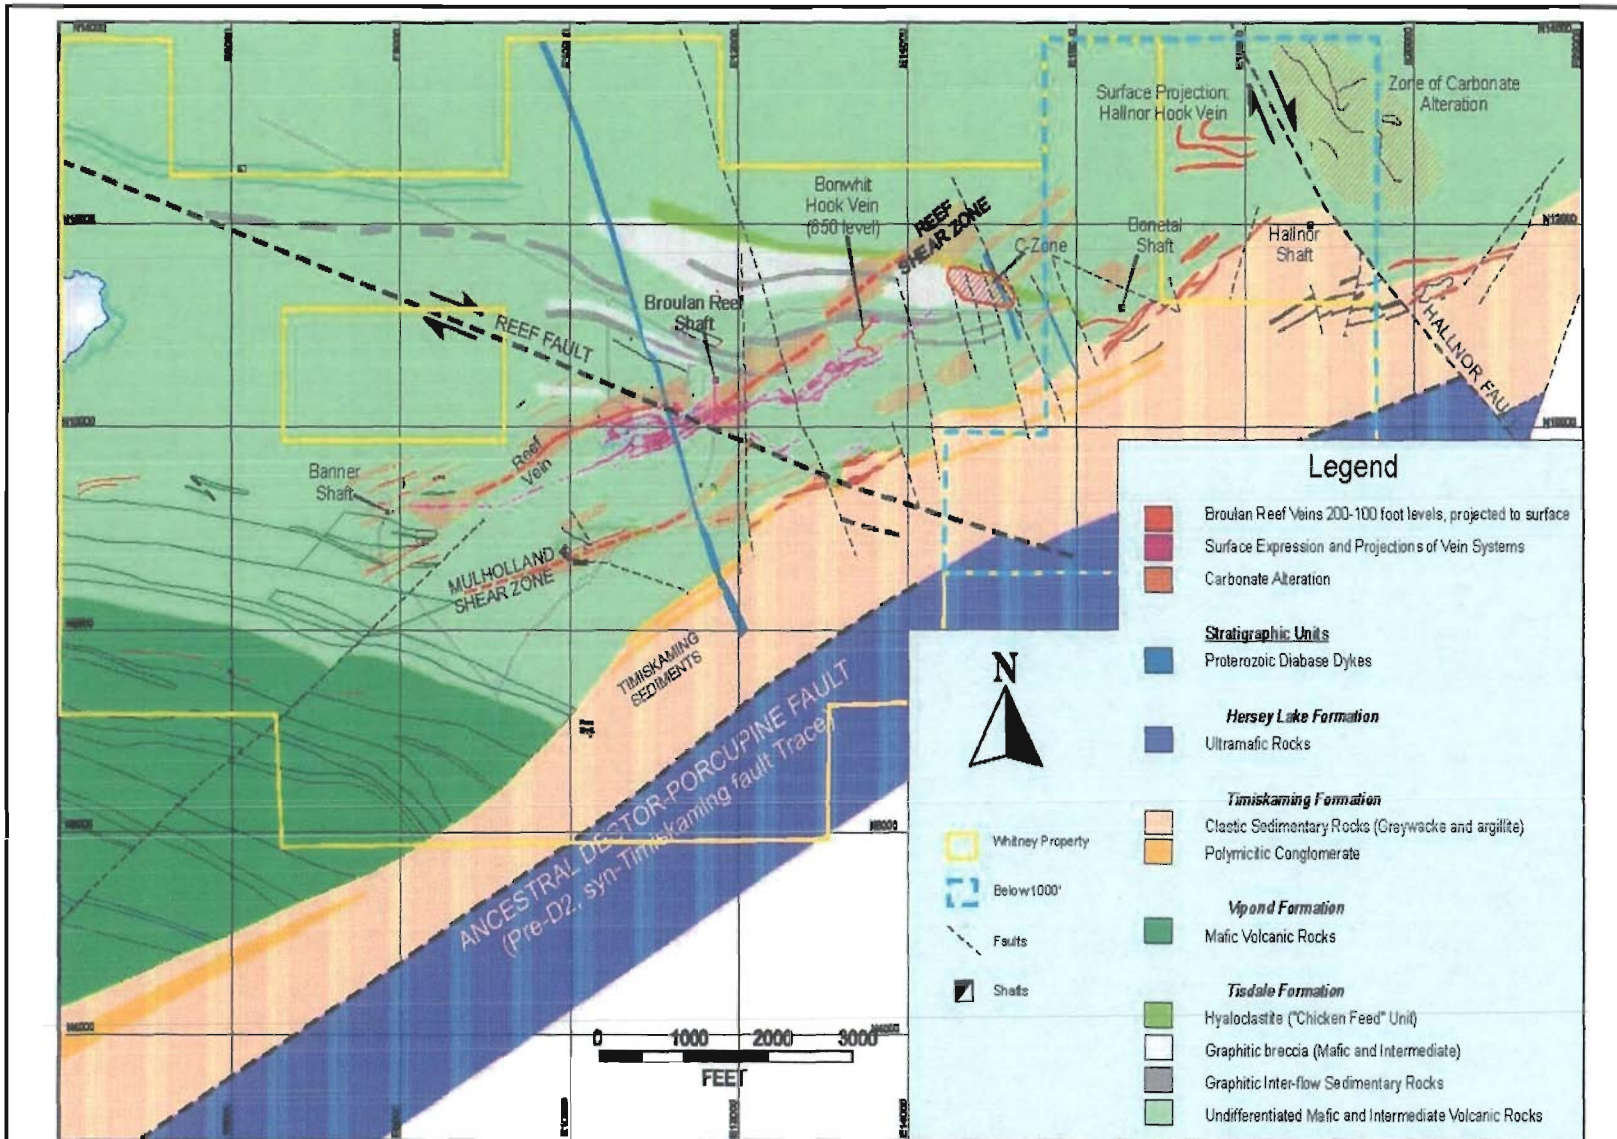


Figure 3 : Whitney Property geology (after Rhys, 2003)

## 6.0 2007 DRILLING PROGRAM


During July and August, 2007, a 2 hole, 237.5 m diamond drill hole program was carried out on the Pam property, currently under option. The program was initiated to follow up on known gold mineralization associated with quartz veining in iron carbonate zones and to locate additional mineralized zones. The drill hole collars were spotted using a GPS instrument and upon completion of the program, were surveyed more accurately by surveyor Larry Labelle of Timmins, Ontario. The diamond drill program was supervised by Henry Hutteri P.Geo., the author of this report, and by Karen Kettles P.Geo. The drill logs and sections for this program are located within the Appendix.

**Table 2: 2007 Drill Program Statistics (NAD 27)**

Hole No.	Zone	Easting	Northing	Elevation	Dip	Azimuth	Length (m)
TW07-40	Pam Property	486,165.110	5,373,321.520	295.36	-45	155	125
TW07-52	Pam Property	486,490.890	5,373,052.180	292.69	-47	340	112.5

TW07-40 was drilled approximately 75m west of the Hollander Mines hole HM-1 which had three low grade sample intervals which assayed 0.14 oz/ton over 3', 0.12 oz/ton over 2.5' and 0.11 oz/ton over 2' within a carbonate zone containing minor quartz veins and stringers. TW07-40 intersected massive to pillowed mafic volcanic rocks and a relatively massive carbonate alteration zone with weak quartz-carbonate stringers having core angles that indicated a south dip to the zone. The best assay obtained from this hole was 0.04 g/t over 1.01m.

TW07-52 was collared in the extreme southeast corner of the Pam property to test the stratigraphy for parallel carbonate alteration zones in an area which had no previous drilling, at the closet point to the main Broulan Reef shear, located further to the southeast. The hole intersected two narrow calcite alteration zones containing minor quartz-carbonate stringers within pillowed mafic volcanics. The hole ended prematurely at 112.5m when the drill rods broke. The best assay obtained from this hole was 0.23 g/t over 0.5m.

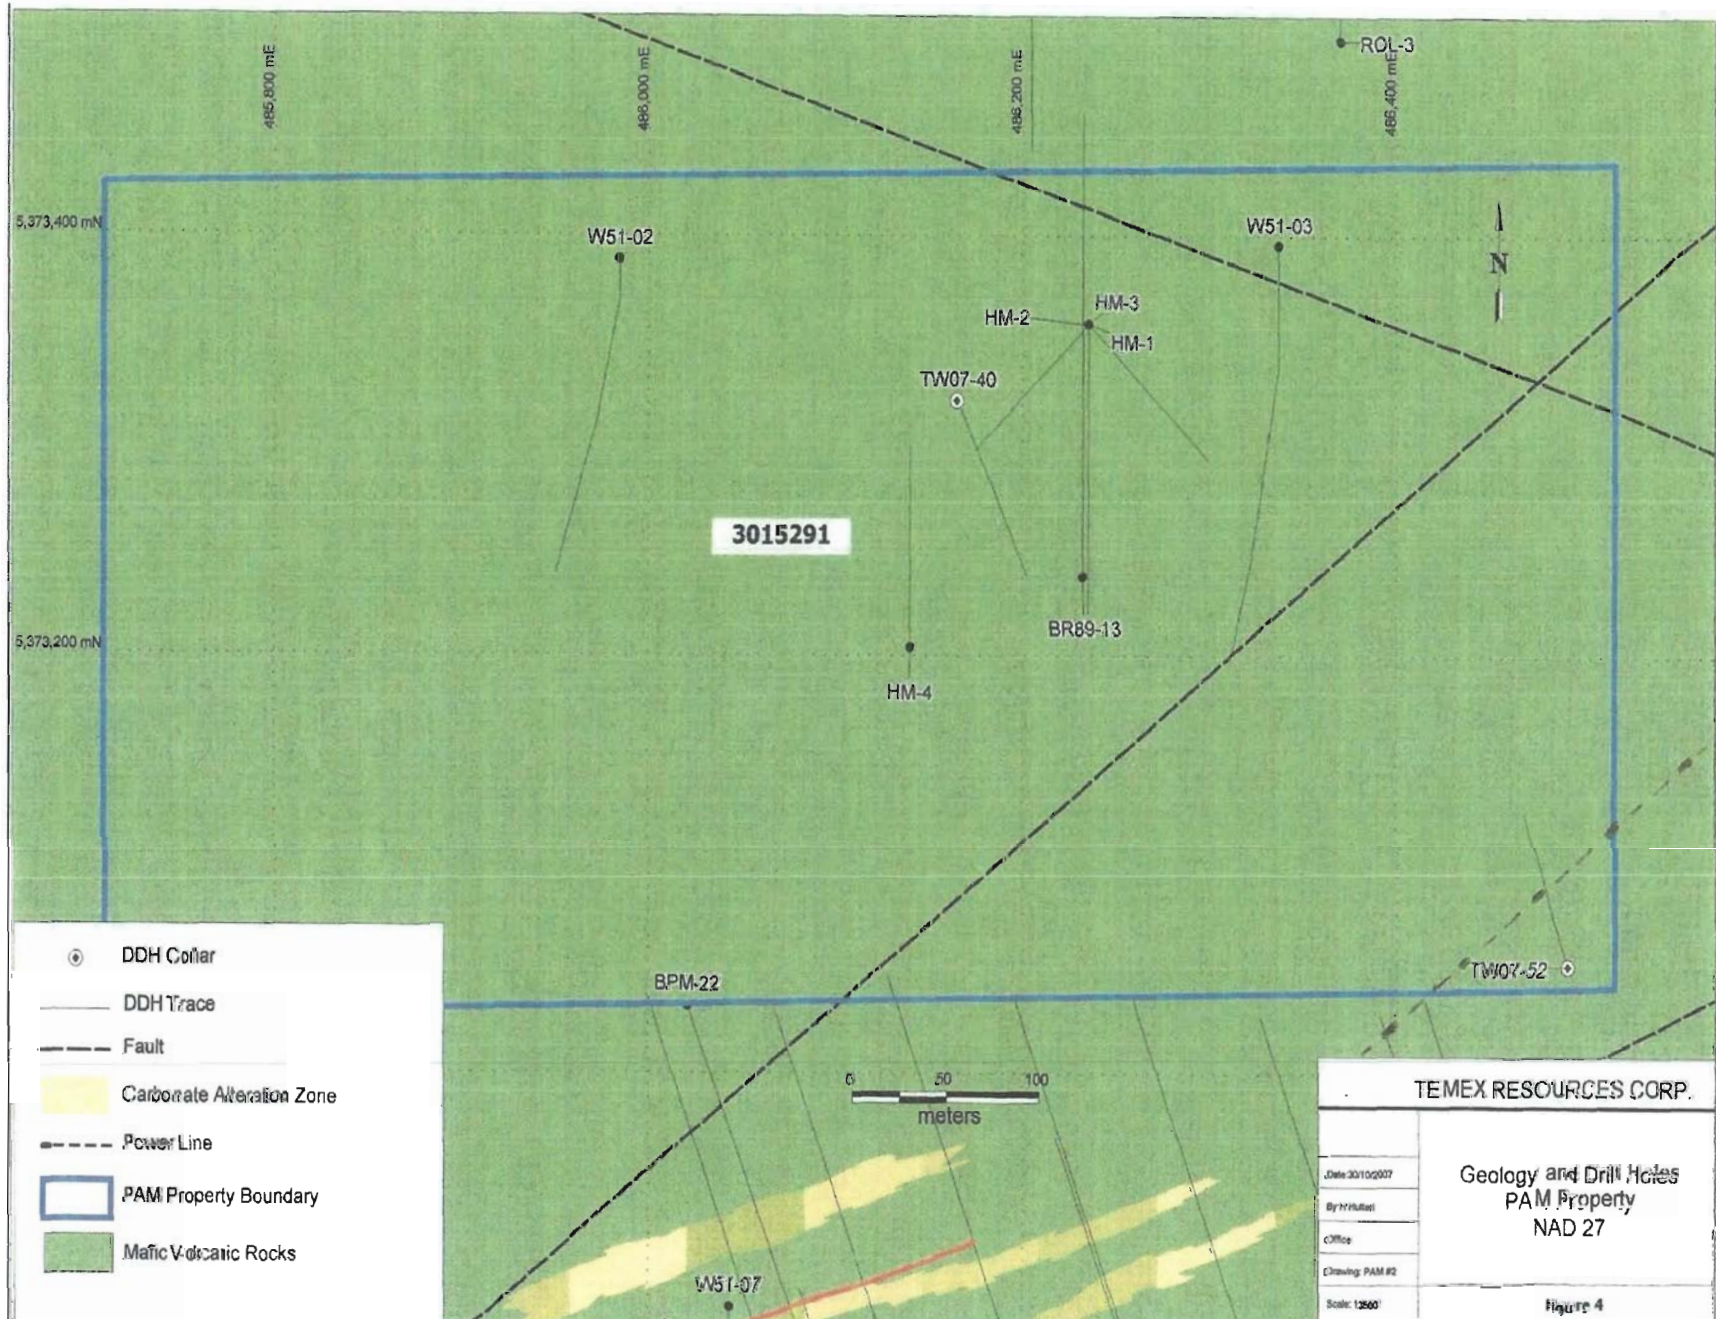

## **7.0 SAMPLING METHOD, ANALYSIS AND SECURITY**

Selective sampling was carried out where quartz or sulphides occurred intermittently, and where the mineralization was more widespread, the entire alteration zone was sampled throughout. All quartz stringers within the alteration zones were sampled, as they were potentially gold-bearing. Samples that were possibly auriferous were sampled in 1.0 m core lengths or less, and bracket or infill samples that appeared to have little potential had a maximum sample length of 1.5 m.

The drill core was regularly picked up at the drill site at the end of each shift by Temex employees and delivered directly to the company core shack in Porcupine. The core was then logged and samples were marked up by the project geologist. The marked core was then sawn in half with a diamond saw by a core technician. Half of the core for each sample was then placed in sample bags with the accompanying sample tags. The remaining half of the sample tag was then stapled into the core box at the start of the sample interval. The core samples were then placed into rice bags, sealed, and either driven directly or shipped by Manitoulin Transport to Swastika Laboratories for assaying by conventional fire assay techniques. The remaining core boxes were then tagged and cross piled. Any stored samples were kept within locked trailers within a fenced compound that was also locked.


During the logging and sampling process, both standards and blanks were inserted in the sample sequence in every batch of 20 samples as part of a QA/QC program. Two different standards were used representing higher and lower gold grades.

## **9.0 CONCLUSIONS AND RECOMMENDATIONS**

During July and August, 2007, Temex Resources Corp. completed a 2 hole surface diamond drilling program totalling 237.5m in search for additional, relatively shallow gold mineralization on the PAM property. The main target was the iron carbonate zone in the northern part of the property which yielded previous diamond drill intersections of 0.14 oz/ton over 3', 0.12 oz/ton over 2.5' and 0.11 oz/ton over 2' from Hollander Mines hole HM-1. TW07-40 was drilled approximately 75m to the west of these intersections with no significant values obtained. A second hole, TW07-52 was drilled into the southeast corner of the property to explore for other parallel carbonate alteration zones

closer to the main Broulan Reef Shear only intersected weaker calcitic alteration zones with no significant values.

No further exploration drilling on the Pam property is warranted unless further geophysical surveying identifies new targets.

A handwritten signature in cursive script, reading "Henry P. Hutteri", is written over a horizontal line.

Henry P. Hutteri P.Geol.

Temex Resources Corporation



## 12.0 REFERENCES

---

Bateman, R., Ayer, J.A. and Dube, B. 2003. Discover Abitibi. Gold Subproject 1. Structures and gold mineralization in the Pamour-Hole Pond portion of the eastern Timmins gold camp; in Summary of Field Work and other Activities 2003, Ontario Geological Survey, Open File Report 6120, p.34-1 to 34-6.

Bateman, R., Ayer, J.A., Dube, B. and Hamilton, M.A., 2005 The Timmins-Porcupine Gold Camp, Northern Ontario: The Anatomy of an Archaean Greenstone Belt and its Gold Mineralization: Discover Abitibi Initiative; Ontario Geological Survey, Open File Report 6158, 90p.

Brisbin, D.I., 1992. Geological Setting of Gold Deposits in the Porcupine Gold Camp, Timmins, Ontario; PHD Thesis for Queen's University, 523p.

Gliddon, D.J., Harvey, P., Nakie-Lajoie, P., Perrault, A., Rhys, D., and Saunders, D., 2004: Summary Report on the 2003 Broulan Reef/Hallnor Exploration Programs, Timmins, Ontario; porcupine Joint Venture Company Report, 23 p.

Hees, E.H.P. van, 2000. Gold Deposition In The Western Abitibi Greenstone Belt And Its Relation To Regional Metamorphism, PHD Thesis for the University of Michigan, 314p.

Jarvi, U., 1984. Report on the Evaluation of Ore Potential and Recommendation for Exploration Program, Hallnor Mine, Timmins, Ontario. Internal company report for Noranda Exploration co. Ltd.

Labine, R.J., 1994. Hallnor Mine 1994 Technical Report for Royal Oak Mines Inc.

MNDM assessment files, Porcupine Mining Division, Ontario.

Piroschco, D.W. and Kettles, K. 1991. Structural Study of Tisdale and Whitney townships, Abitibi greenstone belt, District of Cochrane, north-eastern Ontario; Ontario Geological Survey, Open File Report 5768, 115p.

Pyke, D.R. 1982      Geology of the Timmins Area, District of Cochrane; Ontario Geological Survey Report 219, 141p.

Rhys, D., 2003      Evaluation of the Structural Setting of vein systems in the Broulan Reef-Hallnor area, with exploration implications, Panterra Geoservices Inc., Placer Dome-Porcupine Joint Venture, Internal Company Report.

**Appendix 1**  
Lab Assay Certificates



Established 1928

# Swastika Laboratories Ltd

Assaying - Consulting - Representation

Page 1 of 2

## Assay Certificate

7W-2662-RA1

Company: **TEMEX RESOURCES CORPORATION**  
Project: **Whitney**  
Attn: **K. Rees**

Date: AUG-13-07

We hereby certify the following Assay of 32 Core samples submitted AUG-03-07 by .

Sample Number	Au g/tonne	Au Check g/tonne
29851	0.02	Nil
29852	Nil	-
29853	Nil	-
29854	Nil	-
29855	Nil	-
29856	Nil	-
29857	Nil	0.01
29858	Nil	-
29859	Nil	-
29860	1.31	-
29861	Nil	-
29862	0.01	-
29863	Nil	-
29864	Nil	-
29865	0.01	-
29866	Nil	-
29867	0.01	Nil
29868	Nil	-
29869	Nil	-
29870	Nil	-
29871	Nil	-
29872	Nil	-
29873	0.01	0.01
29874	Nil	-
29875	Nil	-
29876	0.04	-
29877	Nil	-
29878	Nil	-
29879	Nil	-
29880	4.81	-

Certified by



Established 1928

# Swastika Laboratories Ltd

Assaying - Consulting - Representation

Page 2 of 2

## Assay Certificate

7W-2662-RA1

Company: **TEMEX RESOURCES CORPORATION**  
Project: **Whitney**  
Attn: **K. Rees**

Date: AUG-13-07

We hereby certify the following Assay of 32 Core samples  
submitted AUG-03-07 by .

Sample Number	Au g/tonne	Au Check g/tonne
29881	Nil	-
29882	Nil	-
Blank	Nil	-
STD OxK48	3.56	-

Certified by \_\_\_\_\_



Established 1928

# Swastika Laboratories Ltd

Assaying - Consulting - Representation

Page 1 of 3

## Assay Certificate

7W-2607-RA1

Company: **TEMEX RESOURCES CORPORATION**  
Project:  
Attn: **K. Rees**

Date: AUG-10-07

We hereby certify the following Assay of 75 Core samples submitted JUL-31-07 by .

Sample Number	Au g/tonne	Au Check g/tonne
29883	Nil	-
29884	0.01	-
29885	0.01	-
29886	Nil	-
29887	Nil	-
29888	Nil	Nil
29889	Nil	-
29890	Nil	-
29891	Nil	-
29892	Nil	-
29893	0.03	-
29894	Nil	-
29895	Nil	-
29896	Nil	-
29897	Nil	-
29898	0.01	Nil
29899	Nil	-
29900	1.32	-
29901	Nil	-
29902	Nil	-
29903	Nil	-
29904	Nil	-
29905	Nil	-
29906	Nil	-
29907	Nil	-
29908	Nil	-
29909	Nil	-
29910	Nil	-
29911	0.02	0.01
29912	Nil	-

Certified by *Dani Chantz*



Established 1928

# Swastika Laboratories Ltd

Assaying - Consulting - Representation

Page 2 of 3

## Assay Certificate

7W-2607-RA1

Company: **TEMEX RESOURCES CORPORATION**

Date: AUG-10-07

Project:

Attn: **K. Rees**

We hereby certify the following Assay of 75 Core samples submitted JUL-31-07 by .

Sample Number	Au g/tonne	Au Check g/tonne
29913	Nil	-
29914	Nil	-
29915	Nil	-
29916	Nil	-
29917	Nil	-
29918	0.02	-
29919	0.01	-
29920	Nil	-
29921	5.14	-
29922	0.01	Nil
29923	0.02	-
29924	0.01	-
29925	0.01	-
29926	Nil	-
29927	Nil	-
29928	Nil	-
29929	Nil	-
29930	Nil	-
29931	1.24	-
29932	Nil	-
29933	Nil	-
29934	Nil	-
29935	Nil	-
29936	Nil	-
29937	Nil	0.01
29938	0.05	-
29939	0.01	-
29940	Nil	-
29941	Nil	-
29942	Nil	-

Certified by *Dennis Chantre*



Established 1928

# Swastika Laboratories Ltd

Assaying - Consulting - Representation

Page 1 of 3

## Assay Certificate

7W-2927-RA1

Company: **TEMEX RESOURCES CORPORATION**


Date: SEP-12-07

Project:

Attn: **K. Rees**


We hereby certify the following Assay of 72 Core samples submitted SEP-05-07 by .

Sample Number	Au g/tonne	Au Check g/tonne
56025	0.23	-
56026	1.33	-
56027	Nil	-
56028	Nil	-
56029	Nil	-
56030	Nil	-
56031	Nil	-
56032	0.23	-
56033	0.06	-
56034	Nil	-
56035	Nil	-
56036	Nil	-
56037	Nil	-
56038	Nil	Nil
56039	Nil	-
56040	Nil	-
56041	Nil	-
56042	Nil	-
56043	Nil	-
56044	0.01	-
56045	5.07	-
56046	0.01	-
56047	0.01	-
56048	Nil	-
56049	Nil	-
56050	Nil	-
56051	Nil	-
56052	Nil	-
56053	0.15	-
56054	0.02	-


Certified by 



**Appendix 2**  
Vertical Cross-sections of Drill Holes

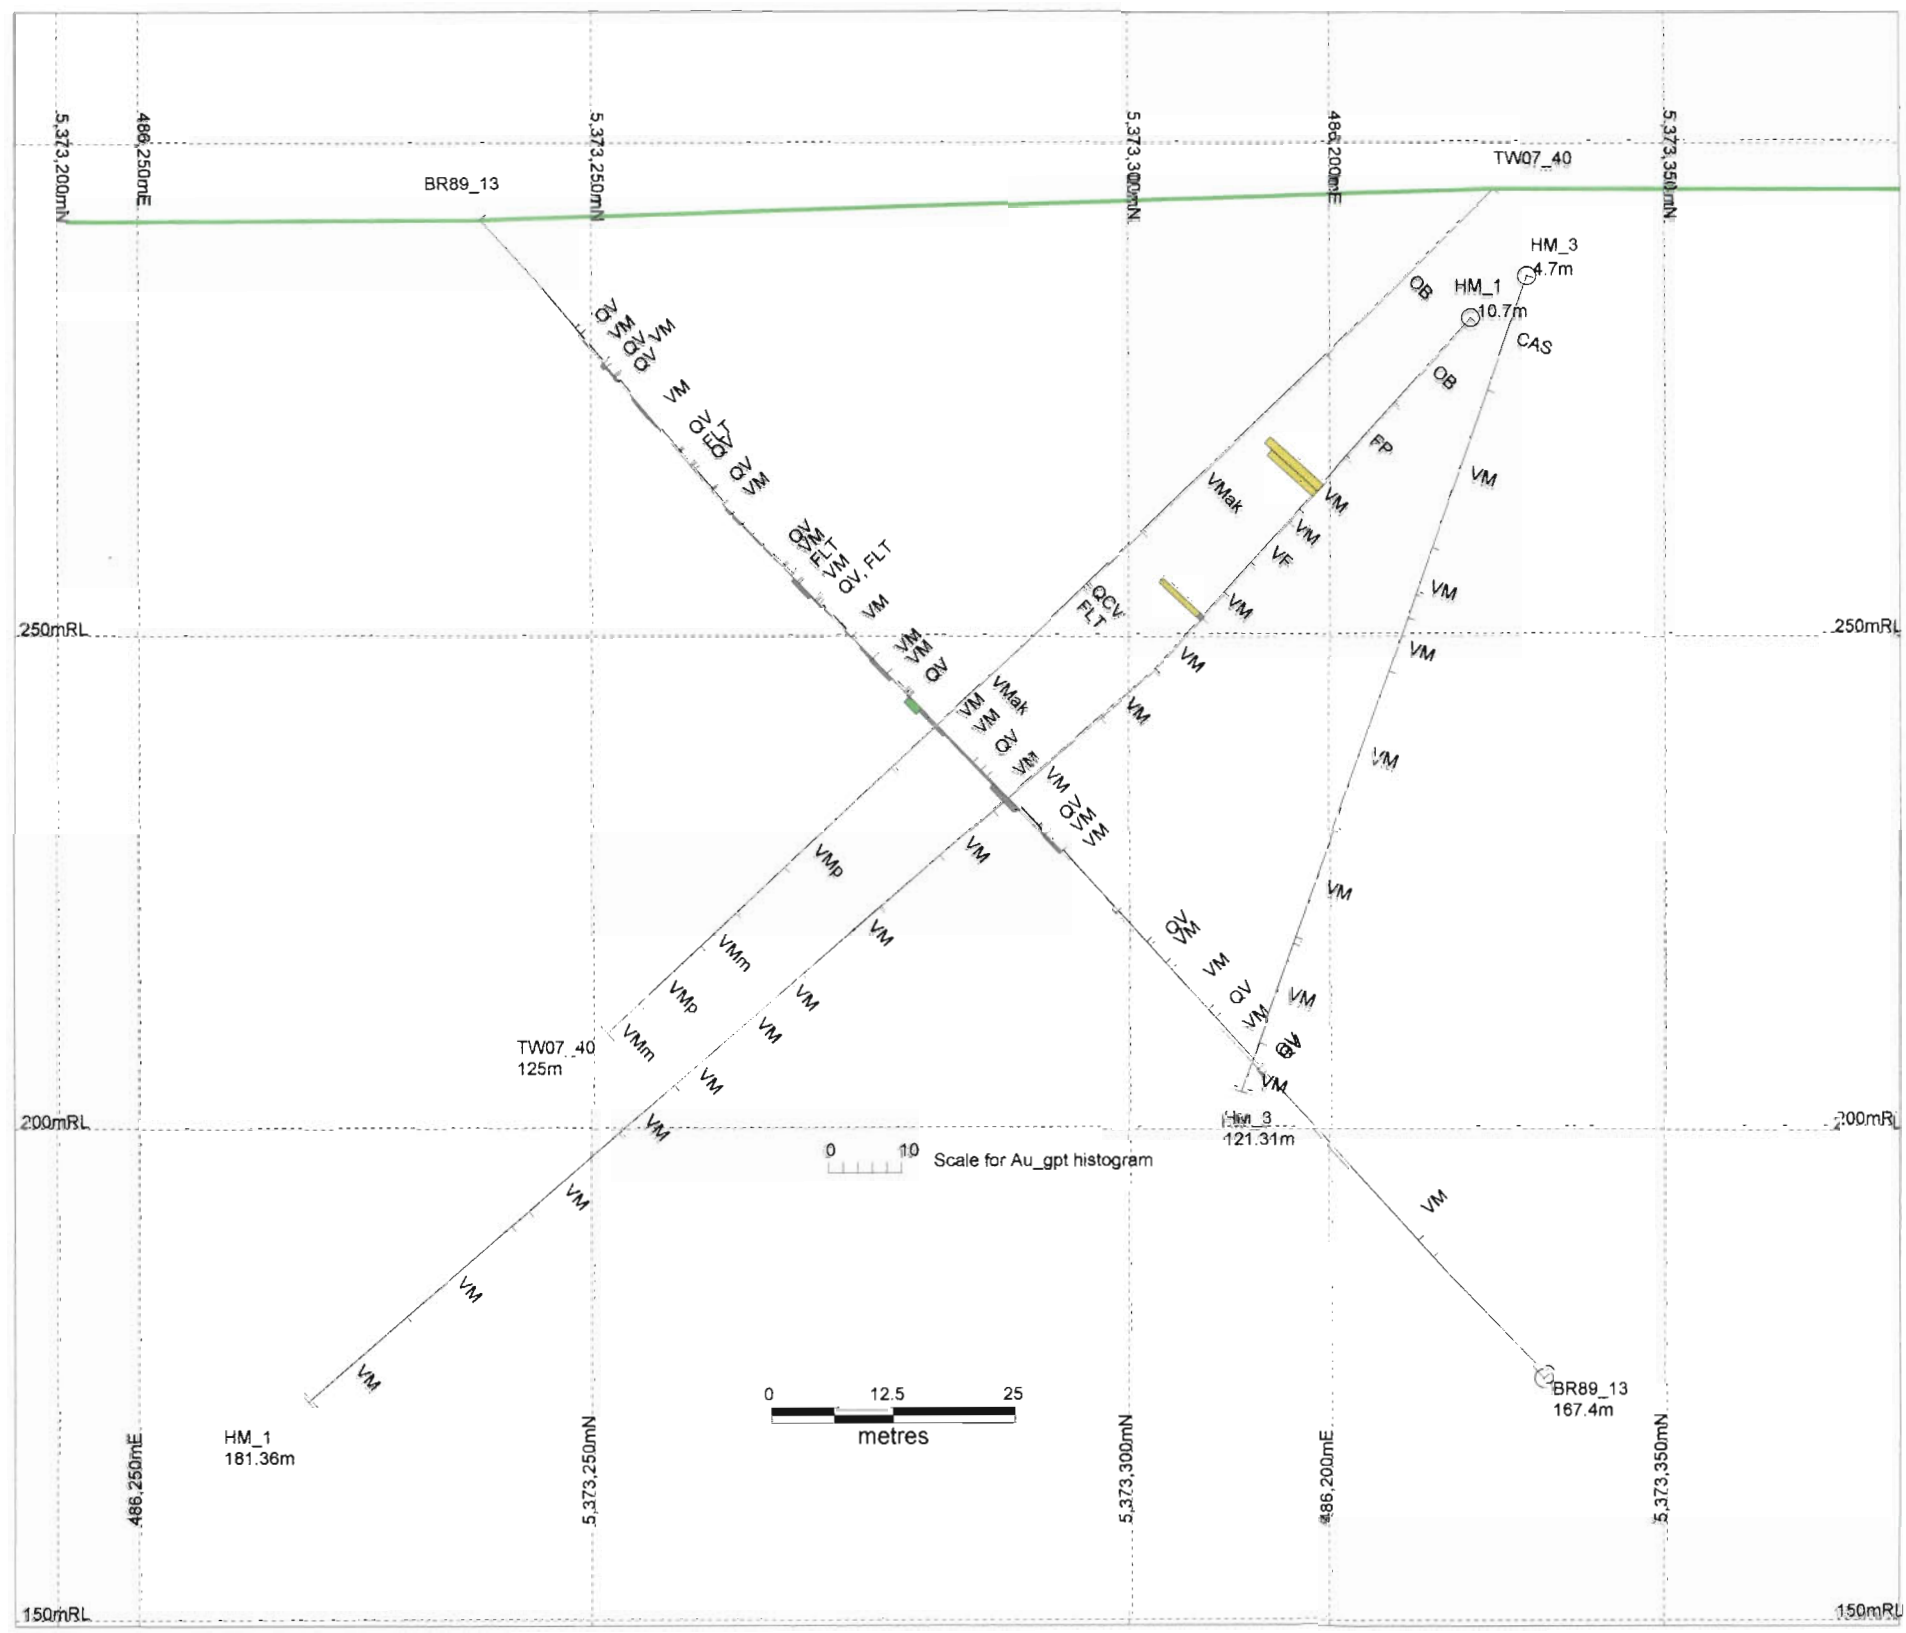

- GAS - Gasine
- OVB - Overburden
- LC - Lost Core
- SS8 - Siltstone, Argillite
- SS7 - Arenite, Greywacke
- SS6 - Greywacke, Argillite
- SS2CP - Polyminitic Conglomerate
- FLT - Fault
- QV - Quartz Vein
- QAKV - Quartz Ankerite Vein
- CAV - Carbonate Vein
- VMP - Mafic Volcanic, pillowed
- VMM - Mafic Volcanic, massive
- VMAk - Mafic Volcanic, ankerite alteration
- VMsp - Mafic Volcanic, spherulitic, hyaloclastite
- VMVAR - Mafic Volcanic, variolitic
- VMC - Mafic Volcanic, carbonaceous breccia
- VM - Mafic Volcanic
- UM - Ultramafic Volcanic
- FP - Felsic intrusive
- MP7 - Diabase Dike

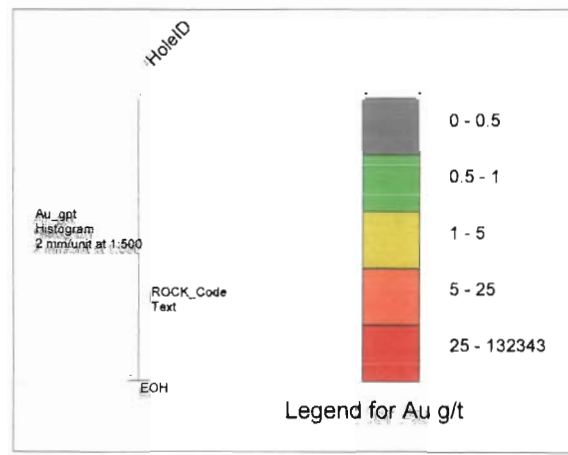


**TEMEX RESOURCES CORP.**


REV: 27/11/2007  
 Date: 27/11/2007  
 Author: KK  
 Office: Sudbury  
 Drawing: Fig. 1  
 Scale: 1:750

Temex 2007 Drilling Program  
 PAM PROPERTY  
 Drillhole TW07-40  
 Section looking WSW  
 Section width 80 m

Projection: UTM Nad 27, Zone 17

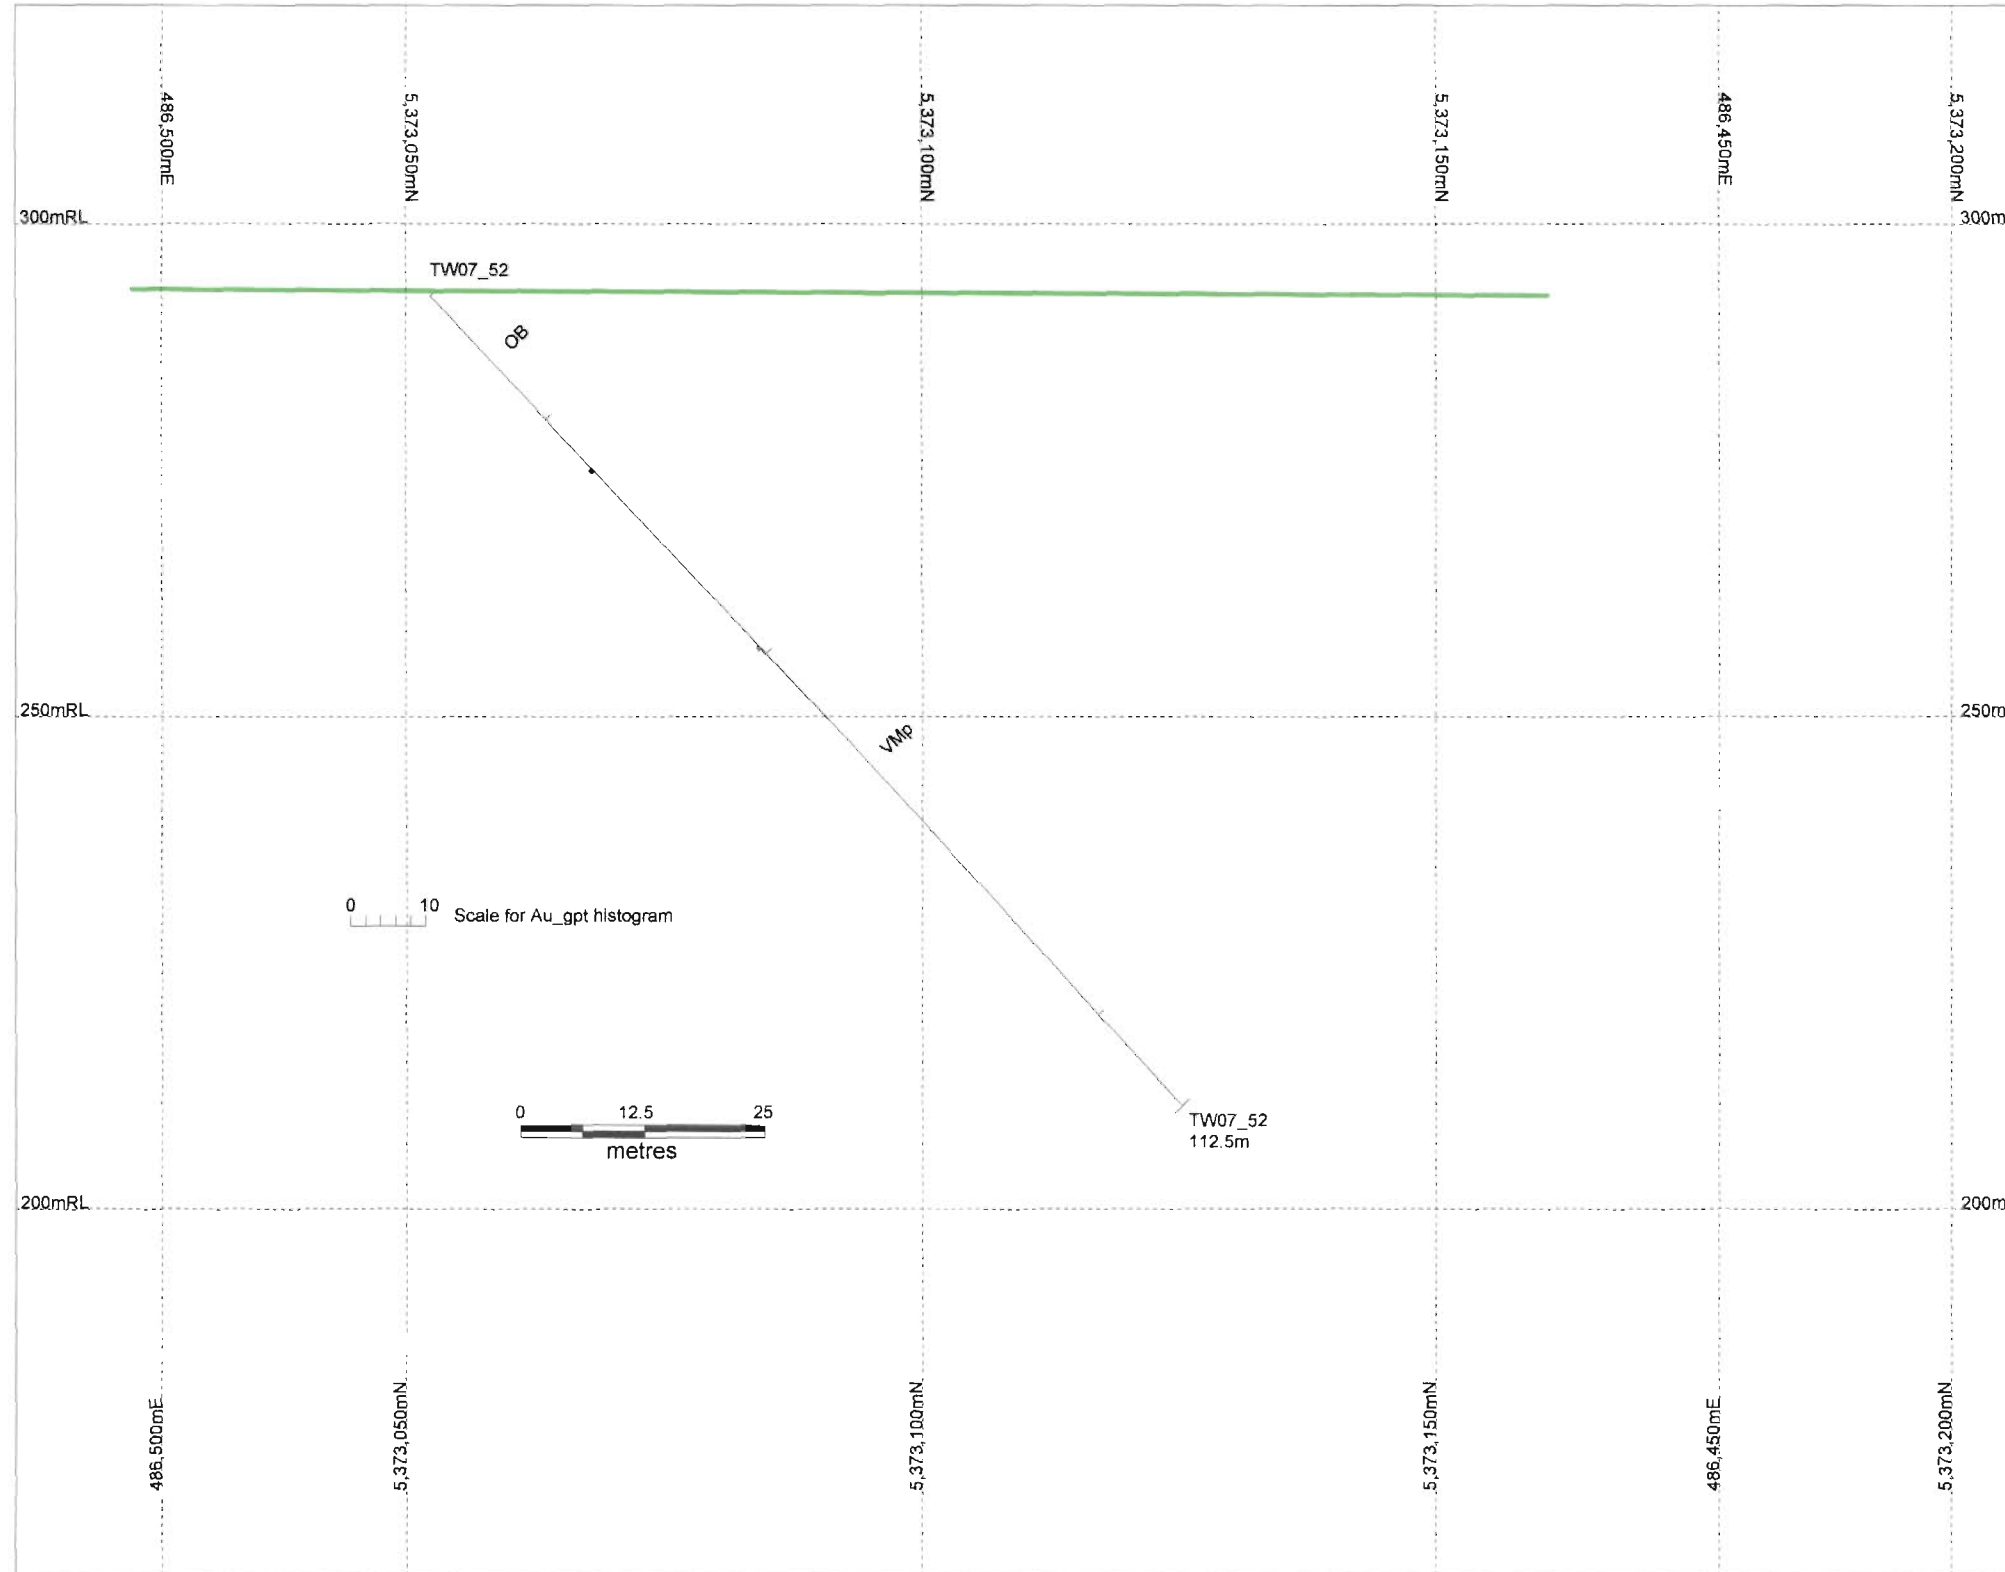

- CAS - Casing
- OVB - Overburden
- LC - Lost Core
- SS8 - Siltstone, Argillite
- SS7 - Arenite, Greywacke
- SS6 - Greywacke, Argillite
- SS2CP - Polymictic Conglomerate
- FLT - Fault
- QV - Quartz Vein
- QAKV - Quartz Ankerite Vein
- CAV - Carbonate Vein
- Vmp - Mafic Volcanic, pillowed
- VMm - Mafic Volcanic, massive
- VMak - Mafic Volcanic, ankerite alteration
- VMsp - Mafic Volcanic, spherulitic, hyaloclastite
- VMVAR - Mafic Volcanic, variolitic
- VMC - Mafic Volcanic, carbonaceous breccia
- VM - Mafic Volcanic
- UM - Ultramafic Volcanic
- FP - Felsic Intrusive
- MP7 - Diabase Dike

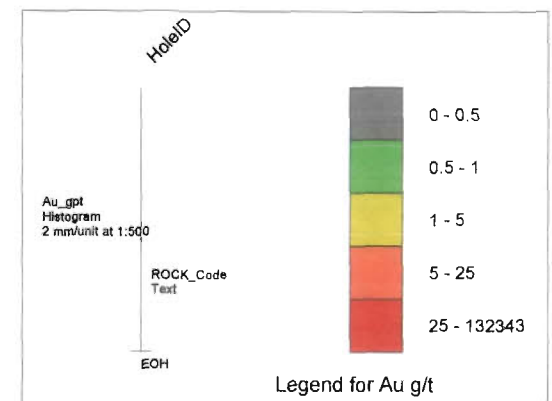

**TEMEX RESOURCES CORP.**

Rev: 27/11/2007  
 Date: 27/11/2007  
 Author: KK  
 Office: Sudbury  
 Drawing: Fig. 13  
 Scale: 1:750

Temex 2007 Drilling Program  
 PAM Property  
 Drillhole TW07-52  
 Section looking WSW  
 Section width 20 m

Projection: UTM Nad 27, Zone 17 *K. Hatten*

**Appendix 3**  
Diamond Drill Logs

**DETAILED LOG**

Hole Number: **TW07-40**

Units: METRIC

Project Name: Whitney	Primary Coordinates Grid: LOCAL:	Destination Coordinates Grid: LOCAL:	Collar Dip: -45.00
Project Number: TME06-WT	North: 5373321.52	North: 5373321.52	Collar Az: 155.00
Location: Surface	East: 486165.11	East: 486165.11	Length: 125.00
	Elev: 295.36	Elev: 295.36	Start Depth: 0.00
Date Started: Jul 09, 2007	Collar Survey: Y	Plugged: N	Final Depth: 125.00
Date Completed: Jul 11, 2007	Multishot Survey: N	Hole Size: NQ	
	Pulse EM Survey: N	Casing: Pulled	
		Contractor: Norex Drilling	
		Core Storage: Exploration Office	

Comments: Drilled to intersect a carbonate altered zone containing quartz veins, stringers and sulfides previously intersected by holes HM-1 and HM-2 on the PAM claims. Hole intersected a broad iron carbonate alteration zone from 24.0 to 85.0m containing a few 5-30cm thick quartz-carb-tour veins at 30 deg TCA (dipping south) with very minor associated sulfide mineralization.

**Sample Averages**

**Survey Data**

Depth	Azimuth Decimal	Dip Decimal	Test Type	Flag	Comments	Depth	Azimuth Decimal	Dip Decimal	Test Type	Flag	Comments
<b>0.00</b>	155.00	-45.00	ES	OK		<b>35.00</b>	155.10	-43.50	ES	OK	
<b>86.00</b>	156.70	-42.80	ES	OK		<b>125.00</b>	156.70	-42.80	ES	OK	

Detailed Lithology		Assay Data							
From	To	Lithology		Sample Number	From	To	Length	Au gpt	Au R gpt
0	24.00	<b>CAS, Casing</b> Casing, overburden.							



**DETAILED LOG**

Hole Number: **TW07-40**

Units: METRIC

Detailed Lithology		Assay Data						
From	To	Lithology	Sample Number	From	To	Length	Au gpt	Au R gpt
24.00	85.00	<b>VMak, Mafic Volcanic - Ankerite Altered</b>	29851	24.00	25.10	1.10	0.0200	
		Medium grey-buff, mainly fine grained, mod to strongly iron carbonate altered mafic volcanic flows with a few amygdules and a fair length of pillow breccia from 34.0-38.0m. Remainder of unit is fairly massive and well altered with minor irregular carb and qtz-carb stringers at 30 deg TCA and a few narrow qtz-carb-tour veins and veinlets at 30 deg TCA with very minor associated py. Weak local pervasive sericite alteration and trace mg cubes of pyrite. Local narrow rusty oxidized carbonate seams. Alteration intensity weakening gradually below approximately 74m with weak to moderate iron carbonate alteration, no sericite, quartz stringers or sulfides and frequent recognizable amygdules. Alteration weaker in bottom few metres with a grey-green colour and a mixed iron carbonate and calcite alteration. Gradational lower contact.	29852	25.10	25.70	0.60	0.0050	
			29853	25.70	28.30	2.60	0.0050	
			29854	28.30	29.00	0.70	0.0050	
			29855	29.00	30.20	1.20	0.0050	
			29856	30.20	31.40	1.20	0.0050	
		<b>Veining</b>	29857	31.40	32.00	0.60	0.0050	0.0100
		58.40 - 58.90 : 20%, Quartz Anke, stringers irregular stringers	29858	32.00	33.50	1.50	0.0050	
		60.85 - 61.35 : 7%, Quartz Anke, veinlets	29859	33.50	35.00	1.50	0.0050	
		5cm qtz-carb-tour veinlet at 30 deg TCA at 60.9-61m	29861	35.00	35.50	0.50	0.0050	
		66.10 - 68.00 : 10%, Quartz Anke, veinlets	29862	35.50	36.50	1.00	0.0100	
		5 and 10cm qtz-carb veinlets at 30 deg TCA, <1% cg py, wk ser altn in wallrock	29863	36.50	37.55	1.05	0.0050	
		<b>MINOR INTERVALS:</b>	29864	37.55	38.65	1.10	0.0050	
		<b>Minor Interval:</b>	29865	41.00	42.00	1.00	0.0100	
		57.7 - 58 Quartz Ankerite Vein	29866	42.00	42.95	0.95	0.0050	
		White quartz with minor patches and fracture-fillings of black tourmaline and minor iron carbonate. A few mg py cubes in wallrock only. Upper contact at 30 deg and lower contact irregular. Lower wallrock contact is oxidized rusty brown.	29867	42.95	44.00	1.05	0.0100	
		<b>Minor Interval:</b>	29868	44.00	45.47	1.47	0.0050	
		58 - 58.4 Fault	29869	45.47	46.75	1.28	0.0050	
		Rubby core with minor qs and oxidation.	29871	46.75	47.75	1.00	0.0050	
			29872	47.75	48.85	1.10	0.0050	
			29873	48.85	50.00	1.15	0.0100	0.0100
			29874	51.15	52.00	0.85	0.0050	
			29875	52.75	53.43	0.68	0.0050	
			29876	54.14	55.15	1.01	0.0400	
			29877	56.41	57.18	0.77	0.0050	
			29878	57.18	58.02	0.84	0.0050	
			29879	58.02	58.43	0.41	0.0050	
			29881	58.43	59.00	0.57	0.0050	
			29882	59.00	60.18	1.18	0.0050	
			29883	60.18	60.85	0.67	0.0050	
			29884	60.85	61.35	0.50	0.0100	
			29885	61.35	62.25	0.90	0.0100	
			29886	62.25	63.45	1.20	0.0050	
			29887	63.45	64.40	0.95	0.0050	

## DETAILED LOG

Hole Number: **TW07-40**

Units: METRIC

Detailed Lithology		Assay Data						
From	To	Lithology	Sample Number	From	To	Length	Au gpt	Au R gpt
			29888	64.40	65.30	0.90	0.0050	
			29889	65.30	66.10	0.80	0.0050	
			29891	66.10	66.60	0.50	0.0050	
			29892	66.60	67.55	0.95	0.0050	
			29893	67.55	68.00	0.45	0.0300	
			29894	68.00	69.00	1.00	0.0050	
			29895	71.00	72.00	1.00	0.0050	
			29896	72.35	73.25	0.90	0.0050	
			29897	76.00	77.00	1.00	0.0050	
			29898	79.10	80.00	0.90	0.0100	
			29899	80.40	81.35	0.95	0.0050	
			29901	81.35	82.35	1.00	0.0050	
			29902	82.35	83.35	1.00	0.0050	
			29903	83.35	84.30	0.95	0.0050	
85.00	106.80	<b>VMp, Pillowed Mafic Volcanic</b> Medium to dark green, very fine to fine grained, amygdaloidal pillowed flows, relatively undeformed and weakly altered with weak calcite and trace iron carb altn. trace quartz stringers. Becoming gradually more very fine grained and less altered towards end of unit. 2-3% calcite patches and stringers.	29904	86.88	87.88	1.00	0.0050	
			29905	87.88	88.68	0.80	0.0050	
			29906	89.50	90.00	0.50	0.0050	
			29907	91.10	91.60	0.50	0.0050	
			29908	94.00	95.00	1.00	0.0050	
			29909	96.14	97.14	1.00	0.0050	
			29910	98.00	99.00	1.00	0.0050	
			29911	101.00	102.00	1.00	0.0200	0.0100
			29912	103.00	104.00	1.00	0.0050	
			29913	105.80	107.00	1.20	0.0050	
106.80	112.30	<b>VMm, Massive Mafic Volcanic</b> Medium to darker green, medium to fine grained, very massive homogenous mafic volcanic flow. Tr qtz fracture-fillings.	29915	109.30	110.00	0.70	0.0050	
			29916	111.75	112.30	0.55	0.0050	
112.30	120.60	<b>VMp, Pillowed Mafic Volcanic</b> Dark green, very fine grained, unaltered mafic volcanic with numerous amygdules and qtz-carb-chl filled selvages.	29917	115.00	116.00	1.00	0.0050	
			29918	117.00	118.00	1.00	0.0200	
			29919	119.50	120.00	0.50	0.0100	
120.60	125.00	<b>VMm, Massive Mafic Volcanic</b> Dark green, fine grained, massive mafic volcanic flow with <1% qtz-carb fracture-fillings. 125.0m EOH.	29920	123.48	124.41	0.93	0.0050	

## DETAILED LOG

Hole Number: TW07-40

Units: METRIC

## Samples

Sample Number	From	To	Au gpt	Au R gpt
Sample Type	<b>ASSAY</b>			
29851	24.00	25.10	0.0200	
29852	25.10	25.70	0.0050	
29853	25.70	28.30	0.0050	
29854	28.30	29.00	0.0050	
29855	29.00	30.20	0.0050	
29856	30.20	31.40	0.0050	
29857	31.40	32.00	0.0050	0.0100
29858	32.00	33.50	0.0050	
29859	33.50	35.00	0.0050	
29861	35.00	35.50	0.0050	
29862	35.50	36.50	0.0100	
29863	36.50	37.55	0.0050	
29864	37.55	38.65	0.0050	
29865	41.00	42.00	0.0100	
29866	42.00	42.95	0.0050	
29867	42.95	44.00	0.0100	
29868	44.00	45.47	0.0050	
29869	45.47	46.75	0.0050	
29871	46.75	47.75	0.0050	
29872	47.75	48.85	0.0050	
29873	48.85	50.00	0.0100	0.0100
29874	51.15	52.00	0.0050	
29875	52.75	53.43	0.0050	
29876	54.14	55.15	0.0400	
29877	56.41	57.18	0.0050	
29878	57.18	58.02	0.0050	
29879	58.02	58.43	0.0050	
29881	58.43	59.00	0.0050	
29882	59.00	60.18	0.0050	
29883	60.18	60.85	0.0050	
29884	60.85	61.35	0.0100	
29885	61.35	62.25	0.0100	
29886	62.25	63.45	0.0050	
29887	63.45	64.40	0.0050	
29888	64.40	65.30	0.0050	
29889	65.30	66.10	0.0050	
29891	66.10	66.60	0.0050	



## DETAILED LOG

Hole Number: **TW07-40**

Units: METRIC

**Samples**

Sample Number	From	To	Au gpt	Au R gpt
Sample Type <b>ASSAY</b>				
29892	66.60	67.55	0.0050	
29893	67.55	68.00	0.0300	
29894	68.00	69.00	0.0050	
29895	71.00	72.00	0.0050	
29896	72.35	73.25	0.0050	
29897	76.00	77.00	0.0050	
29898	79.10	80.00	0.0100	
29899	80.40	81.35	0.0050	
29901	81.35	82.35	0.0050	
29902	82.35	83.35	0.0050	
29903	83.35	84.30	0.0050	
29904	86.88	87.88	0.0050	
29905	87.88	88.68	0.0050	
29906	89.50	90.00	0.0050	
29907	91.10	91.60	0.0050	
29908	94.00	95.00	0.0050	
29909	96.14	97.14	0.0050	
29910	98.00	99.00	0.0050	
29911	101.00	102.00	0.0200	0.0100
29912	103.00	104.00	0.0050	
29913	105.80	107.00	0.0050	
29915	109.30	110.00	0.0050	
29916	111.75	112.30	0.0050	
29917	115.00	116.00	0.0050	
29918	117.00	118.00	0.0200	
29919	119.50	120.00	0.0100	
29920	123.48	124.41	0.0050	

**Recovery**

From	To	Length	Recovered Length	Length > 10cm	Recovery %	RQD%
24.00	26.50	2.50	2.50		100.0	0
26.50	27.90	1.40	1.18		84.3	0
27.90	31.88	3.98	3.80		95.5	0
31.88	35.89	4.01	3.92		97.8	0
35.89	39.80	3.91	3.85		98.5	0
39.80	44.00	4.20	4.10		97.6	0
44.00	48.21	4.21	4.17		99.0	0

May 29, 2008

### DETAILED LOG

Page 6 of 6

Hole Number: **TW07-40**

Units: METRIC

#### Recovery

From	To	Length	Recovered Length	Length > 10cm	Recovery %	RQD%
48.21	52.35	4.14	3.98		96.1	0
52.35	60.18	7.83	7.83		100.0	0
60.18	63.73	3.55	3.24		91.3	0
63.73	67.93	4.20	4.14		98.6	0
67.93	72.11	4.18	4.06		97.1	0
72.11	76.29	4.18	4.07		97.4	0
76.29	80.40	4.11	3.99		97.1	0
80.40	84.66	4.26	4.12		96.7	0
84.66	125.00	40.34	40.30		99.9	0

**DETAILED LOG**

Hole Number: **TW07-52**

Units: METRIC

Project Name: Whitney	Primary Coordinates Grid: LOCAL:	Destination Coordinates Grid: LOCAL:	Collar Dip: -47.00
Project Number: TME06-WT	North: 5373052.18	North: 5373052.18	Collar Az: 340.00
Location: Surface	East: 486490.89	East: 486490.89	Length: 112.50
	Elev: 292.69	Elev: 292.69	Start Depth: 0.00
Date Started: Aug 21, 2007	Collar Survey: Y	Plugged: N	Contractor: Norex Drilling
Date Completed: Aug 23, 2007	Multishot Survey: N	Hole Size: NQ	Core Storage: Exploration Office
	Pulse EM Survey: N	Casing: Pulled	Final Depth: 112.50

Comments: Intersected two weak grey zones with pervasive calcite alteration and 2-5% quartz stringers with rare sulfide mineralization and associated very local sericite alteration. Casing broke at 112.5m and the hole was abandoned.

**Sample Averages**

**Survey Data**

Depth	Azimuth Decimal	Dip Decimal	Test Type	Flag	Comments	Depth	Azimuth Decimal	Dip Decimal	Test Type	Flag	Comments
0.00	340.00	-47.00	ES	OK		32.00	343.10	-46.40	ES	OK	
89.00	343.10	-47.40	ES	OK							

Detailed Lithology		Assay Data							
From	To	Lithology		Sample Number	From	To	Length	Au gpt	Au R gpt
0	17.20	CAS, Casing							

## DETAILED LOG

Hole Number: **TW07-52**

Units: METRIC

Detailed Lithology		Assay Data						
From	To	Lithology	Sample Number	From	To	Length	Au gpt	Au R gpt
17.20	112.50	<p><b>Vmp, Pillowed Mafic Volcanic</b></p> <p>Medium to locally slightly darker green, very fine grained, amygdaloidal pillowed mafic volcanics with moderately well preserved volcanic textures. 1-2% qtz-calcite material as fine fracture-fillings, rare &lt;1-2cm stringers at 50-70 deg TCA and as irregular infilling along pillow selvages with chlorite and tr po,py. Fairly fresh appearance to unit with tr po, py. Blocky core from 24.8 to 26.0m with 0-15 deg fractures. Medium grey-green interval from 47.0 to 58.0m with moderate to locally strong pervasive calcite alteration zone with possibly some weak Fe-carb alteration also and 3-5% qtz and qtz-carb stringers mainly at 70-80 deg TCA containing minor po, py and rarely cpy. Within this calcitic alteration zone there is only one pale green interval at 49-49.15m with moderate sericite alteration around a few 80 deg qs containing 1% po, py and cpy within the qs and in the sericitized wall rock. Minor &lt;5cm clay-rubble fit seam at 50.95-51.0m. Some blocky core sections with tr clay within interval from 52.2-54.4m. Occasional carb+/-qtz filled irregular pillow selvages often at shallow angles to the CA. 90.4 - 93.1m -narrow undulating bands of hyaloclastite along the CA with 30% cream coloured hard, vfg patchy to stringery siliceous alteration and breccia infilling within. Second medium grey-green calcite alteration zone from 107.0 to 110.0m with moderate pervasive calcite alteration around a weak 2-3% quartz and qtz-calcite stringer set at 50-80 deg TCA with no associated sulfides. Hole abandoned at 112.5m in medium green amygdaloidal pillowed flows due to a broken casing.</p> <p><b>Mineralization</b></p> <p>48.90 - 49.30 : Pyrrhotite, Disseminated, 0.5%</p> <p>Minor po,py, tr cpy in stringers and ser WR</p> <p><b>Veining</b></p> <p>47.00 - 54.30 : 4%, Quartz, stringers</p> <p>qtz-ca+/-ank stringers at 70-80 deg TCA</p> <p>107.00 - 110.00 : 3%, Quartz Calc, stringers</p> <p>qtz-ca stringers with weak associated grey zone and mod ca altn at 50-80 deg TCA</p> <p><b>MINOR INTERVALS:</b></p> <p><b>Minor Interval:</b></p> <p>50.95 - 51 Fault</p> <p>&lt;5cm of clay mixed with fine rubble.</p>	56025	24.00	24.50	0.50	0.2300	
			56027	37.10	37.60	0.50	0.0050	
			56028	46.00	47.00	1.00	0.0050	
			56029	47.00	47.50	0.50	0.0050	
			56030	47.50	48.30	0.80	0.0050	
			56031	48.30	48.90	0.60	0.0050	
			56032	48.90	49.30	0.40	0.2300	
			56033	49.30	50.00	0.70	0.0600	
			56034	50.00	50.60	0.60	0.0050	
			56036	50.60	51.60	1.00	0.0050	
			56037	51.60	52.60	1.00	0.0050	
			56038	52.60	53.60	1.00	0.0050	
			56039	53.60	54.30	0.70	0.0050	
			56040	54.30	55.30	1.00	0.0050	
			56041	55.30	56.30	1.00	0.0050	
			56042	56.30	57.30	1.00	0.0050	
			56043	57.30	58.30	1.00	0.0050	
			56044	58.30	59.30	1.00	0.0100	
			56046	74.70	75.50	0.80	0.0100	
			56047	79.00	80.00	1.00	0.0100	
			56048	107.00	108.00	1.00	0.0050	
			56049	108.00	109.00	1.00	0.0050	
			56050	109.00	110.00	1.00	0.0050	
			56051	110.00	111.00	1.00	0.0050	

## Samples

Sample Number	From	To	Au gpt	Au R gpt
Sample Type <b>ASSAY</b>				
56025	24.00	24.50	0.2300	
56027	37.10	37.60	0.0050	
56028	46.00	47.00	0.0050	
56029	47.00	47.50	0.0050	
56030	47.50	48.30	0.0050	
56031	48.30	48.90	0.0050	
56032	48.90	49.30	0.2300	

**DETAILED LOG**Hole Number: **TW07-52**

Units: METRIC

**Samples**

Sample Number	From	To	Au gpt	Au R gpt
Sample Type	<b>ASSAY</b>			
56033	49.30	50.00	0.0600	
56034	50.00	50.60	0.0050	
56036	50.60	51.60	0.0050	
56037	51.60	52.60	0.0050	
56038	52.60	53.60	0.0050	
56039	53.60	54.30	0.0050	
56040	54.30	55.30	0.0050	
56041	55.30	56.30	0.0050	
56042	56.30	57.30	0.0050	
56043	57.30	58.30	0.0050	
56044	58.30	59.30	0.0100	
56046	74.70	75.50	0.0100	
56047	79.00	80.00	0.0100	
56048	107.00	108.00	0.0050	
56049	108.00	109.00	0.0050	
56050	109.00	110.00	0.0050	
56051	110.00	111.00	0.0050	

**Recovery**

From	To	Length	Recovered Length	Length > 10cm	Recovery %	RQD%
17.20	24.80	7.60	7.60	7.05	100.0	92.76
24.80	26.00	1.20	1.10	0.30	91.7	25.00
26.00	47.00	21.00	21.00	17.75	100.0	84.52
47.00	58.00	11.00	10.90	6.50	99.1	59.09
58.00	77.00	19.00	19.00	17.50	100.0	92.11
77.00	81.00	4.00	4.00	3.60	100.0	90.00
81.00	84.50	3.50	3.50	2.00	100.0	57.14
84.50	99.50	15.00	15.00	14.40	100.0	96.00
99.50	107.00	7.50	7.50	5.40	100.0	72.00
107.00	112.50	5.50	5.50	4.70	100.0	85.45