

2.39074

**DIAMOND DRILLING ASSESSMENT
REPORT on TEXMONT PROPERTY -
2008 CAMPAIGN Section 9950**

Bartlett and Geike Townships, Porcupine Mining Division,
Ontario, Canada

Prepared for

FLETCHER NICKEL INC.

Suite 1000-141 University Avenue, Toronto, Ontario, M5H 3M5
Tel: 1(416) 642-3575; Fax: 1(416) 363-7875

Andre Jean, Project Manager
Brian Wright Geological Technologist

Sept 05 2008




Table of Contents

Table of Contents	2
Property description and accessibility	3
Previous exploration and development work.....	3
Previous Drilling Fletcher Nickel	6
2006 Drilling Program	6
2008 Drilling Section 9950.....	8
References	9

Figures

Figure 1: Texmont location map.....	12
Figure 2: Texmont Drill plan.....	13

Appendix A:	Diamond Drill sections
Appendix B:	Diamond Drill Logs
Appendix C:	Assay certificates

Property description and accessibility

The Texmont Property sits on the boundary of Bartlett and Geikie Townships in the Porcupine Mining Division of the Province of Ontario, Canada. The township boundary line runs through the center of the Property (Figure 1). The approximate center of the Property is at latitude ~ 48° 09' 55" N and longitude ~ 81° 12' 15" W (NAD 83, UTM Zone 17, ~ 484820m E, ~5334690m N, and NTS 42A/03). The Property comprises fourteen (14) contiguous mining leases (Table 1). The Texmont Property is approximately 35 km SSE of Timmins, the nearest permanent community, along well-maintained gravel-covered roads (extending south down Pine St., Timmins) including new logging roads, using properly equipped trucks. A snow plough could keep the current mine road open throughout the winter. Timber resources are actively being forested to the immediate west of the mine site and good gravel logging roads are currently in active use. Abundant gravel resources occur in moraines and eskers along these roads, and sand resources are also available nearby.

Table 1 – Texmont Property Mining Leases

Lease (L) and Claim No. (C)	Township	Area (hectares or claim units)	Expiry date	Rights Mining (M), Surface (S)
P36052 (L)	Geikie	16.750 ha	February 28, 2007	M & S
P36097 (L)	Bartlett	12.497 ha	February 28, 2007	M & S
P36098 (L)	Bartlett	14.383 ha	February 28, 2007	M & S
P36099 (L)	Bartlett	12.642 ha	February 28, 2007	M & S
P36100 (L)	Bartlett	11.489 ha	February 28, 2007	M & S
P36101 (L)	Bartlett	9.697 ha	February 28, 2007	M & S
P36102 (L)	Bartlett	14.128 ha	February 28, 2007	M & S
P36106 (L)	Geikie	12.946 ha	February 28, 2007	M & S
P36107 (L)	Geikie	17.563 ha	February 28, 2007	M & S
P36108 (L)	Geikie	16.471 ha	February 28, 2007	M & S
P36109 (L)	Geikie	14.763 ha	February 28, 2007	M & S
P36110 (L)	Geikie	13.452 ha	February 28, 2007	M & S
P36475 (L)	Bartlett	10.069 ha	February 28, 2007	M & S
P36883 (L)	Bartlett	11.242 ha	February 28, 2007	M & S

Previous exploration and development work

The Dominion Gulf Company staked the Texmont Property in 1950 while exploring for asbestos – chrysotile asbestos occurs in serpentinized ultramafics. In 1951, property prospecting found disseminated and veinlet pentlandite in outcrop. Dominion Gulf then conducted an exploration program including further prospecting, geological mapping, ground geophysics, and diamond drilling around the sulphide discovery.

Jarvis P. Kellogg of Boston, Mass. acquired the Texmont Property and subsequently, in 1957, the Property was optioned and then purchased by Fatima Mining Company Limited (“Fatima”).

Fatima initially drilled 23 surface diamond drill holes for a total of 6,231 ft, and followed with a further 27,044 ft in 1959 (Leigh, 1971). In 1959-1960, Fatima commenced the sinking of a 3-compartment shaft to a depth of 790 ft with stations at ~150 ft, ~300 ft, ~450 ft, ~600 ft, and ~742 ft. In 1960, underground work comprised 1,550 ft of drifting and crosscutting on the 450 level, and 1,450 ft of lateral work; as well as 250 ft of raising on the 742 ft level. A total of 165 diamond drill holes for 19,690 ft were drilled underground. In 1964, Fatima changed its name to Texmont Mines Limited. In 1965-1966, Texmont drilled 42 holes in a surface till-sampling program to determine whether geochemical halos occurred above nickel sulphide on the property, in a partnership with the Canadian Nickel Company ("Canadian Nickel," a wholly-owned subsidiary of INCO Ltd., then called the International Nickel Company). On June 30, 1966, Canadian Nickel earned a 15% interest in the Texmont Property.

In 1970, Sheridan Geophysics negotiated a 20-year lease on the Texmont Property with a further 20 year (renewal) from Texmont Mines Limited. Sheridan Geophysics then undertook to bring the mine into production. Mill production commenced on July 1, 1971 at a rated capacity of 500 tons per day and a hydrometallurgical smelter was put at the mine site to create a capacity of 200,000 lbs of refined nickel products per month. Sulphide concentrates were stockpiled and concentrate grade averaged 17% nickel.

During the production phase, diesel generators supplied power at the mine. The high cost of diesel caused by the "Energy Crisis" in 1971 as well as a newly imposed and onerous fuel-oil tax helped in the decision to suspend production operations in December 1972. In 1975, the fuel-oil tax was rescinded (too late to reopen the mine); most of the remaining concentrate stockpiles and refined nickel products were shipped to Europe. A quarter century-long lag in metal prices prevented renewed mining operations.

Several "lenses" of mineralization were outlined by surface exploration prior to commencement of underground development. According to available mine plan and section data sets, 6 "lenses" of mineralization were identified and marked as Zones "A," "B," "C," "D," "South," and "North." The "A" zone had the bulk of "identified resources." Zones "B," "C," and "D" have been partly explored underground. "South" and "North" zones have been identified by surface drilling.

Table 2 - Summary of Former Exploration Work at Texmont

Year(s)	Program/Work	Comments
1949-1950	Geophysics and prospecting	Airborne magnetic survey
1951	Discovery of nickel sulphide in outcrop	Small trench remains can be seen in outcrop south of the headframe
1951-1955	Surface Drilling	23 surface drill hole program totalling 6,231 feet
1957-1959	Surface Drilling	37 surface drill hole program totalling 27,044 feet
1959	A three compartment shaft	To a vertical depth of 790 feet with levels established at 150 feet

		(level 1), 300 feet (level 2), 450 feet (level 3), 600 feet (level 4) and 742 feet (level 5).
1959-1960	Underground Development	Completed 1,550 feet of drifting on level 3, 1,450 feet on level 2 and 250 feet of raising on level 5.
1961	Underground Drilling	19,690 feet of underground drilling in 165 holes and an additional 6,387 of surface drilling
1965-1966	Surface Drilling	Completed 42 surface auger drill holes for till geochemistry.
1971	Evaluation and "Resource Calculations"	e.g., Leigh, 3.19 million tons @ 0.92% nickel
1971	Start of Production	Milling at a rated capacity of 500 tons per day
1972	Ceased Operations	"Oil Crisis" and imposition of an onerous fuel oil surtax

The current work program consists of the recovery of former mine data, modelling of the known mineralization, preliminary drilling, and budget calculations. Site cleanup and environmental studies were also conducted.

Three programs of surface geophysics have been performed by Exsics Exploration Ltd. ("Exsics") of Timmins;¹ a ground magnetic survey and two induced polarization ("IP") surveys (a test survey, and a more extensive survey).

Since the target mineralization is disseminated in its peridotite host, two IP test lines were conducted across known zones of mineralization immediately south and north of the former mine buildings (where E-W access was possible).

Canadian Nickel conducted a till sampling survey across the Texmont Property in an effort to find sulphide nickel within soil fines (E.H. Cornford to G.W. Thrall, INCO Ltd. memorandum dated March 27, 1967). Chemical method of extraction was sample boiling in 1% HCl solution which does not readily strip nickel from silicates. Sulphide mineralization is shown to the north of the mine workings and nickel-anomalous till samples are apparent.

¹ Exsics Exploration Ltd., Hollinger Building, 637 Algonquin Boulevard East, Unit 13, P.O. Box 1880, Timmins, Ontario, P4N 7X1.

Previous Drilling Fletcher Nickel 2006 Drilling Program

2006 drilling activity focused on three objectives:

- a) The exploration of the open pit potential of the “Main” and “South” zones as historically identified on the Texmont Property.
- b) Upgrading of a “mineral resource” to be NI43-101 compliant – Quality Assurance Quality Control (“QA/QC”) requirements are being conducted for items identified by Wayne Valliant P.Geo, a mining geological consultant.²
- c) Data corroboration – confirmation of former mine data widths and grades.

The drilling program was conducted under the supervision of David Beilhartz P.Geo. Eleven (11) NQ-sized holes have been drilled in the vicinity of the former Texmont headframe, distributed on 5 transversal sections with a typical distance of 50 meters between two holes (figure 2). Drill holes are inclined 45 to 50 degrees and range from 67.5m to 230m in depth (average 158m), for a total length of 1736 meters of drilling.

Hole	Northing	Easting	Easting	Northing	Claims #	Dip	Depth
			UTM	UTM			
TEX06-01	10000	0+25E	484863	5334537	P36052 (34,85%); P36102 (65,15%)	-45	194
TEX06-02	10000	0+60E	484898	5334540	P36052 (100%)	-45	67.5
TEX06-03	10000	0+95E	484933	5334544	P36052 (100%)	-45	101.1
TEX06-04	10000	0+72E	484913	533454	P36052 (100%)	-45	84.4
TEX06-05	100 50	0+55E	484896	5334587	P36110 (70,7%); P36102 (29,3%)	-45	158
TEX06-06	100 50	0+90E	484936	5334590	P36110 (75,9%); P36102 (24,1%)	-45	212
TEX06-07	99 50	0+40E	484885	5334485	P36052 (49,6%); P36102 (50,43%)	-45	203
TEX06-08	99 50	0+83E	484930	5334485	P36052 (98,7%); P36102 (1,3%)	-50	176
TEX06-09	99 00	0+13E	484845	5334435	P36052 (28,4%); P36102 (71,6%)	-45	188
TEX06-10	99 00	0+50E	484891	5334435	P36052 (45%); P36102 (55%)	-45	230
TEX06-11	98 50	0+15W	484817	5334385	P36052 (11,5%); P36102 (85,5%)	-45	122
					Total drilling	1736	m

² Wayne Valliant B.Sc, P.Geo, P.O. Box 297, 40 Golfview Cr., Sutton West, Ontario, L0E 1R0.

Holes TEX06-01 to TEX06-08 have been drilled in the upper part of the “Main Zone” and have intersected historical grade nickel mineralization within an envelope of disseminated mineralization. Holes TEX06-02 to TEX06-04 failed to test the full extent of the mineralization due to underground workings, but they intersected potential open-pit grade mineralization (and widths) on the sides of the former. Holes TEX06-09 and TEX06-10 intersected weaker mineralization between the Main and South zones. These holes intersected slightly deeper levels because a pond is located in the favoured drilling setup location - no historical data was available. Hole TEX06-11 was the first of several holes planned to test the shallow levels of the “South Zone.” Drilling intersected a zone of stringer sulphides and a wider zone of disseminated sulphides.

Table 3 – Test drilling Texmont Mine (0.7% Ni cut off)

TEXMONT DRILLING SUMMARY				metric	Intersection		metric	% Ni
Hole TEX06-	Northing (metric)	Easting (metric)	Dip	Length of hole	From	To	Length	Grade
01	1000	0+25E	-45	194.0	23.00	42.00	19.00	0.95
02*	1000	0+60E	-45	67.5				
03*	1000	0+95E	-45	101.1	90.00	92.00	2.00	1.18
04*	1000	0+72E	-45	84.4	78.00	80.00	2.00	0.97
05	1050	0+55E	-45	158.0	47.00	55.20	8.20	1.15
06	1050	0+90E	-45	212.0	91.00	104.00	13.00	0.62
07	950	0+40E	-45	203.0	67.00	81.00	14.00	0.95
08	950	0+83E	-50	176.0	117.50	142.00	24.50	0.42
09	900	0+13E	-45	188.0	75.00	169.00	85.00	0.33
10	900	0+50E	-45	230.0	92.00	93.30	1.30	***0.94
					113.00	114.00	1.00	0.87
					139.00	140.00	1.00	0.83
11	850	0+15W	-45	122.0	59.00	70.00	11.00	0.45

Note: * Breakthrough into former mine workings.. *** Dykes cross-cutting mineralization located between 93.0 m and 113.0 m.

2008 Drilling Section 9950

The 2007-2008 Drilling program is focus on extending nickel mineralization to the north and down dip of prior drill campaigns. This section will deal with results of holes drilled on section 9950. The drilling program was conducted under the supervision of David Beilhartz P.Geol.

Hole	Northing	Easting	Easting	Northing	Claims #	Dip	Depth
	Grid	Grid	UTM	UTM			m
TEX08-029	9950	3+25E	485171	5334500	P36052	-53	548.6
TEX08-30	9950	2+75E	485121	5334498	P36052	-57	569.0
TEX08-31	9950	3+25E	485171	5334500	P36052	-58	579.0
TEX08-32	9950	2+75E	485121	5334498	P36052	-50	468.7
Total						2165.3	m

All 4 (four) completed on section 9950 intersected significant Mineralization and were successful in extending the known mineralization beneath the previous workings. Drill hole 08-29 had intersections that included 0.51 Ni over 38 meters and 0.47 Ni over 28 meters. Drill hole 08-30 had intersections that includes 0.47 Ni over 35 meters and 0.47 Ni over 19 meters. Drill hole 08-31 had intersections that included 0.57 Ni over 8.6 meters, 0.59 Ni over 6.24 meters, 0.46 Ni over 2.8 meters and 0.45 Ni over 9.5 meters. Drill hole 08-32 had an intersection of 0.59 Ni over 96.8 meters. The results of the drilling have greatly expanded the tonnage potential of the Texmont deposit.

References

Butler Hadyn R. (2007), Technical (Geological) Report on the Texmont and Bartlett-English Properties, NI43-101, 75 pp.

Coad, P.R. (1979): Nickel Sulphide Deposits Associated with Ultramafic Rocks of the Abitibi Belt and Economic Potential of Mafic-Ultramafic Intrusions; *Ontario Geological Survey*, Study 20.

Leigh, O.E. (1971): Texmont Mines Limited, Bartlett and Geikie Township Property, filed with Ontario Securities Commission February 29, 1972.

Pyke, D.R. and assistants (1971): Bartlett and Geikie Townships, *Ontario Geological Survey*, Map 2364.


Pyke, D.R. (1975): Geology of the Redstone River Area, District of Timiskaming, *Ontario Division of Mines*, Open File Report 5153.

Pyke, D.R., A.J. Naldrett and A.P. Eckstrand (1973): Archean ultramafic flows in Munro Township, Ontario; *Geological Society of America Bulletin*, 84, p.955-978.

Statement of Qualifications

I Brian James Wright hereby certify that;

1. I live at 503 Northern and Central Road Hagar Ontario P0M 1X0
2. That I I am a consultian for Fletcher Nickel Inc.
3. That I Completed my Education at the Haileybury School of Mines in 1983
4. That I have been actively involved in Mining and Mineral Exploration for 23 years

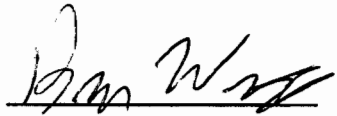

Brian James Wright
2008-09-05

Certificate of Qualifications

I André Jean of 178 Vallières, Val d'Or, QC do hereby certify that:

- 1) I am a graduate of Université du Québec à Chicoutimi, QC. (Geology engineer, 1980)
- 2) I am a member of the Ordre des Ingénieurs du Québec.
- 3) I have practiced my profession as an exploration geologist since 1980.
- 4) I am a consulting geologist for Gestion Aline Leclerc Inc., located in Val d'Or, QC.
- 5) I am the author of this report which was based on field work conducted under my supervision in 2008.

.....
André Jean
May 21 2008


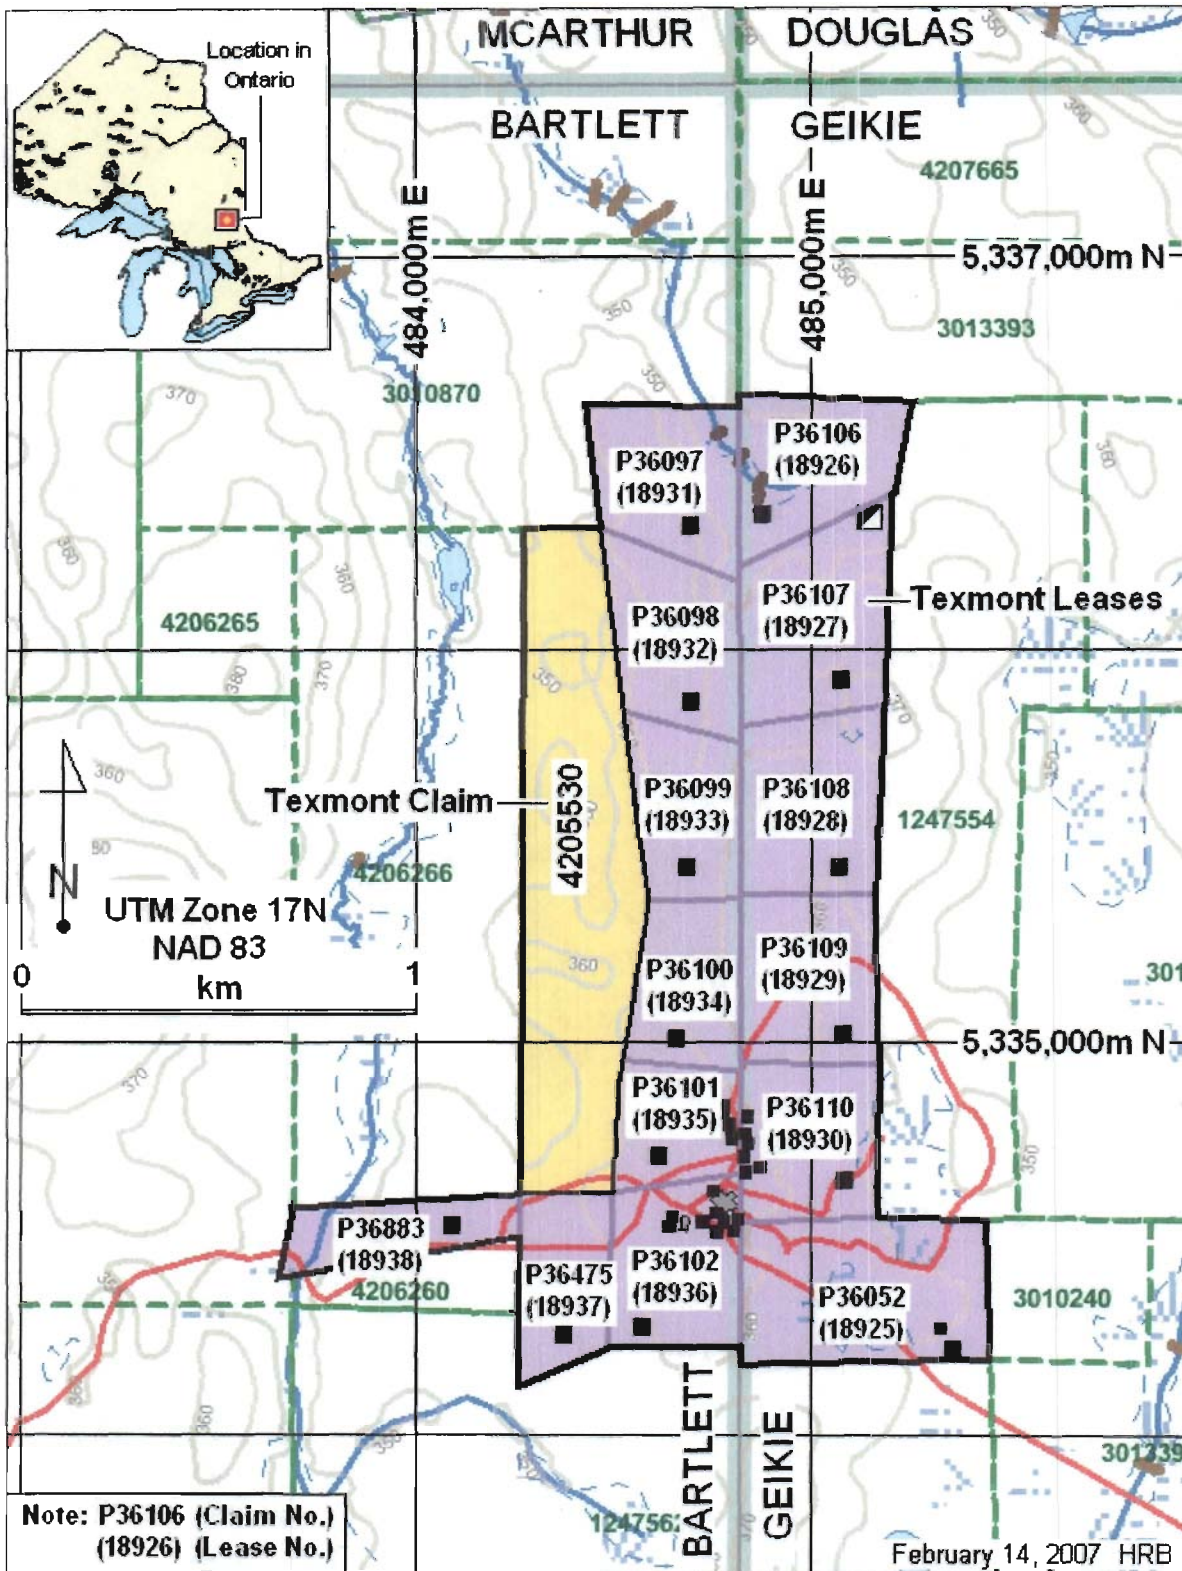


Figure 1 location Map

Appendix A

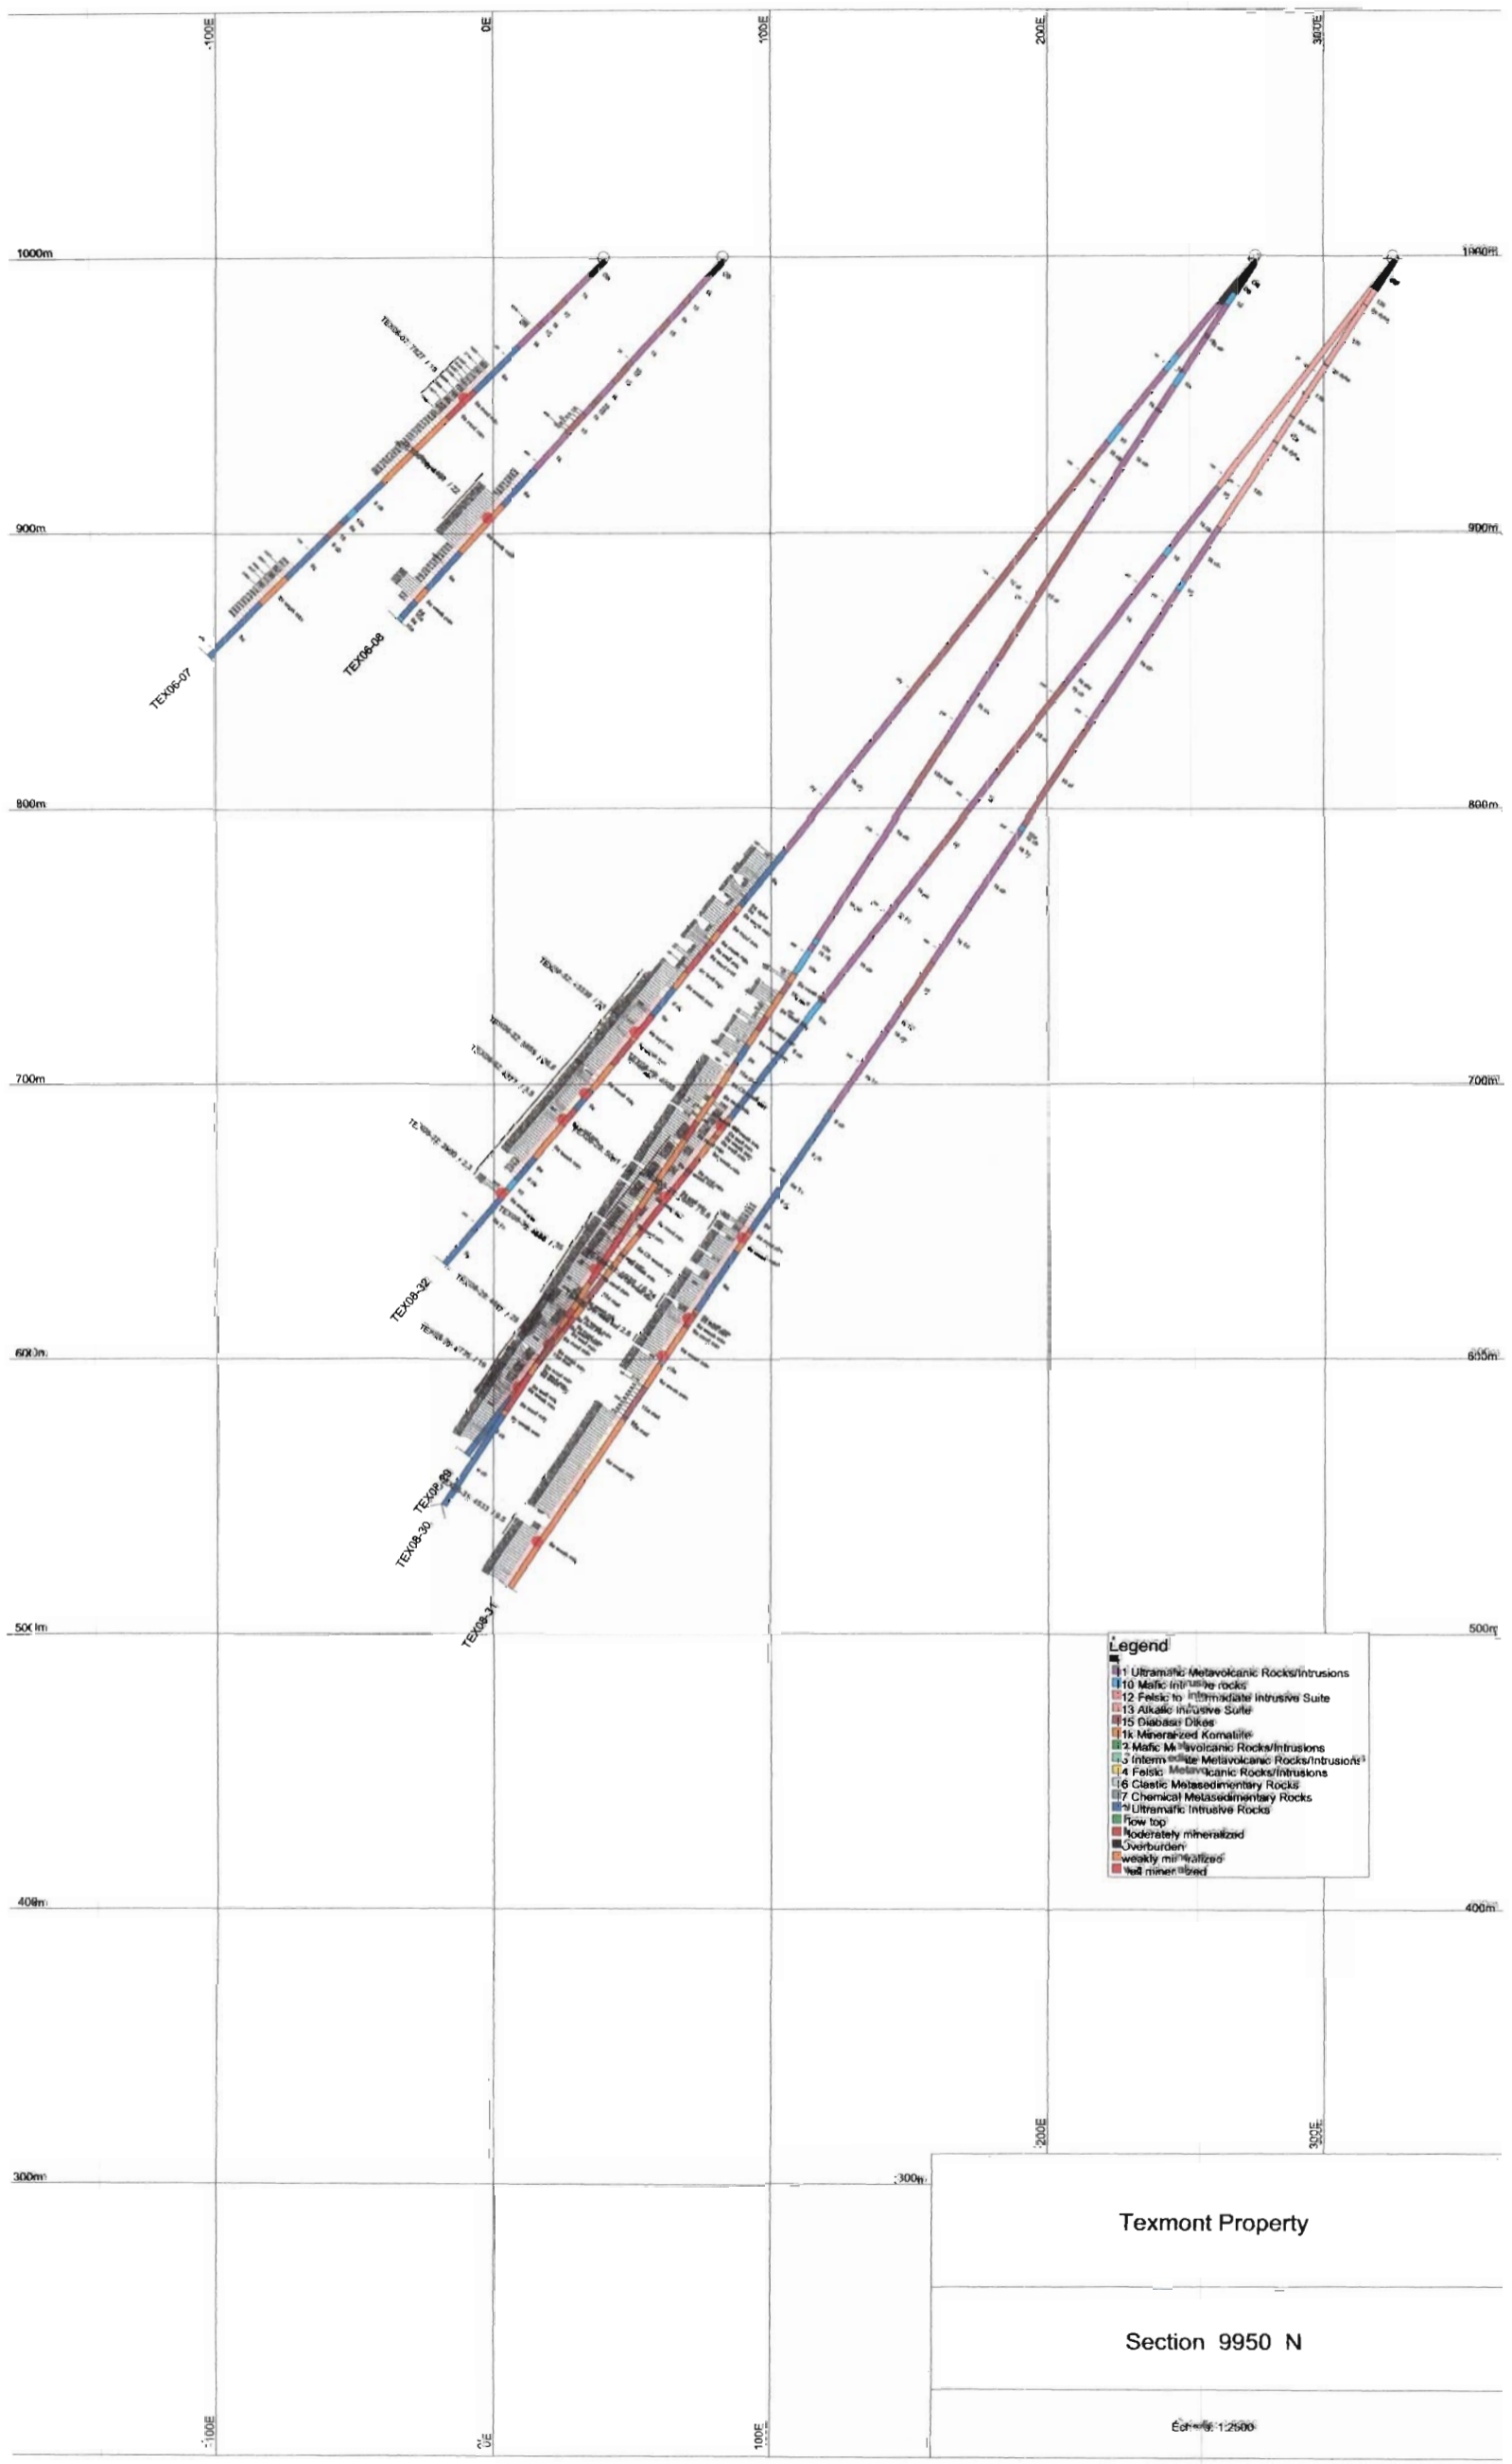


- Legend**
- 1 Ultramafic Metavolcanic Rocks/Intrusions
 - 10 Mafic Intrusive Rocks
 - 12 Felsic to Intermediate Intrusive Suite
 - 13 Alkalic Intrusive Suite
 - 15 Diabase Dikes
 - 1k Mineralized Komatiite
 - 2 Mafic Metavolcanic Rocks/Intrusions
 - 3 Intermediate Metavolcanic Rocks/Intrusions
 - 4 Felsic Metavolcanic Rocks/Intrusions
 - 16 Clastic Metasedimentary Rocks
 - 7 Chemical Metasedimentary Rocks
 - 9 Ultramafic Intrusive Rocks
 - Flow top
 - Moderately mineralized
 - Overburden
 - Weakly mineralized
 - Well mineralized

Texmont Property

Section 9950 N

Scale: 1:2500

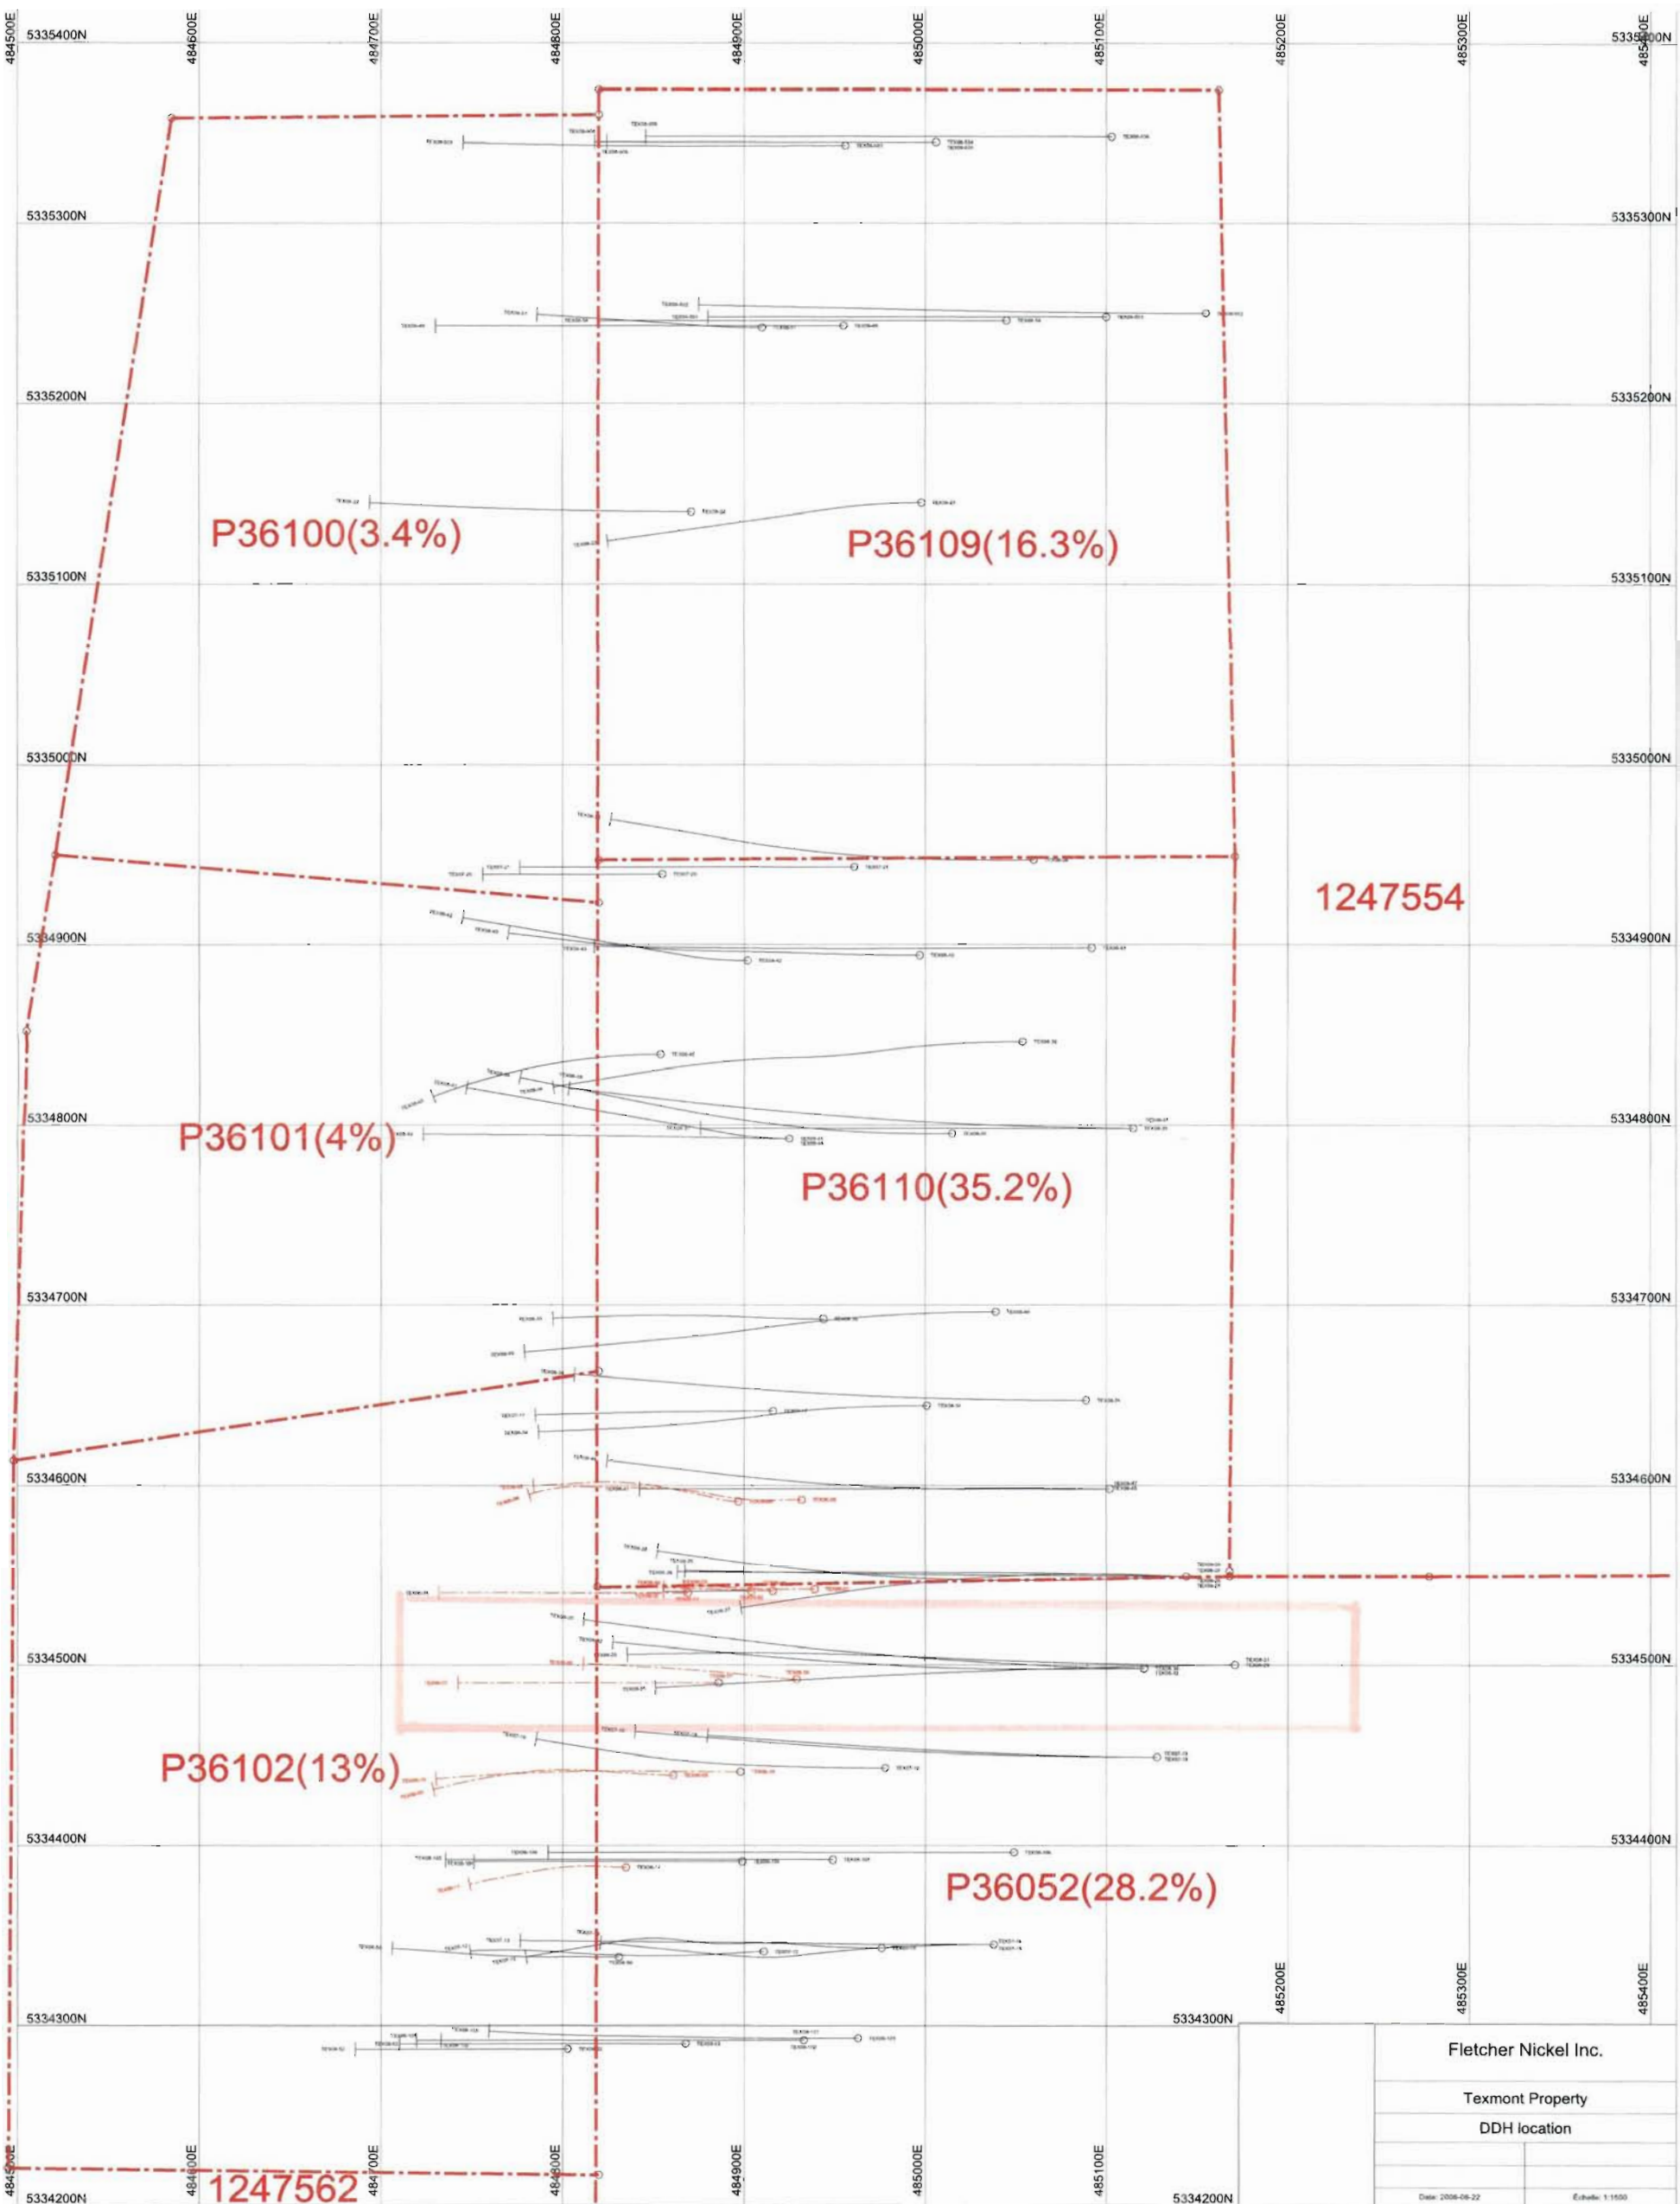

Fletcher Nickel Inc.	
Texmont Property	
DDH location	
Date: 2008-08-22	Scale: 1:1500

Appendix B

Fletcher

DDH : TEX08-32

Claims title : P36052
 Township : Geikie
 Range :
 Lot :

Section :
 Level :
 Work place : 170 Jaguar Road, Timmins Ont

Drilled by : RonKor
 Described by : Fleury

From : 2008-04-11
 Description date : 2002-05-24

To : 2008-04-17

Collar

Azimuth : 270.00°
 Plunge : -50.00°
 Length : 468.70 m

Longitude (East)
 Latitude (North)
 Elevation

Grid	UTM
275.0	485121
9950.0	5334498
1000.0	1000

Down hole survey

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	0.00 m	270.00°	-50.71°	No	
Maxibor	3.00 m	270.02°	-50.41°	No	
Maxibor	6.00 m	269.82°	-50.34°	No	
Maxibor	9.00 m	269.57°	-50.26°	No	
Maxibor	12.00 m	269.46°	-50.56°	No	
Maxibor	15.00 m	269.47°	-50.69°	No	
Maxibor	18.00 m	269.42°	-50.73°	No	
Maxibor	21.00 m	269.47°	-50.75°	No	
Maxibor	24.00 m	269.42°	-50.83°	No	
Maxibor	27.00 m	269.41°	-50.85°	No	
Maxibor	30.00 m	269.41°	-50.85°	No	
Maxibor	33.00 m	269.45°	-50.94°	No	
Maxibor	36.00 m	269.48°	-50.93°	No	

Remarks

Bm West

Core size : Carotte NQ

Cemented : No

Stored : No

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	39.00 m	269.49°	-50.96°	No	
Maxibor	42.00 m	269.48°	-51.03°	No	
Maxibor	45.00 m	269.53°	-51.09°	No	
Maxibor	48.00 m	269.48°	-51.14°	No	
Maxibor	51.00 m	269.52°	-51.18°	No	
Maxibor	54.00 m	269.56°	-51.25°	No	
Maxibor	57.00 m	269.58°	-51.31°	No	
Maxibor	60.00 m	269.56°	-51.34°	No	
Maxibor	63.00 m	269.56°	-51.38°	No	
Maxibor	66.00 m	269.57°	-51.43°	No	
Maxibor	69.00 m	269.59°	-51.42°	No	
Maxibor	72.00 m	269.66°	-51.48°	No	
Maxibor	75.00 m	269.59°	-51.53°	No	
Maxibor	78.00 m	269.72°	-51.64°	No	
Maxibor	81.00 m	269.67°	-51.71°	No	
Maxibor	84.00 m	269.81°	-51.67°	No	
Maxibor	87.00 m	269.83°	-51.70°	No	
Maxibor	90.00 m	269.87°	-51.77°	No	
Maxibor	93.00 m	269.94°	-51.74°	No	
Maxibor	96.00 m	269.98°	-51.79°	No	
Maxibor	99.00 m	270.04°	-51.81°	No	
Maxibor	102.00 m	270.07°	-51.80°	No	
Maxibor	105.00 m	270.10°	-51.87°	No	
Maxibor	108.00 m	270.16°	-51.89°	No	
Maxibor	111.00 m	270.22°	-51.95°	No	
Maxibor	114.00 m	270.31°	-51.97°	No	
Maxibor	117.00 m	270.39°	-51.98°	No	
Maxibor	120.00 m	270.48°	-52.03°	No	
Maxibor	123.00 m	270.58°	-52.05°	No	
Maxibor	126.00 m	270.63°	-52.09°	No	
Maxibor	129.00 m	270.70°	-52.01°	No	
Maxibor	132.00 m	270.79°	-51.99°	No	
Maxibor	135.00 m	270.85°	-52.02°	No	
Maxibor	138.00 m	270.91°	-52.02°	No	
Maxibor	141.00 m	270.99°	-51.99°	No	
Maxibor	144.00 m	271.05°	-51.94°	No	
Maxibor	147.00 m	271.10°	-51.97°	No	
Maxibor	150.00 m	271.19°	-51.97°	No	
Maxibor	153.00 m	271.26°	-51.94°	No	
Maxibor	156.00 m	271.32°	-51.95°	No	
Maxibor	159.00 m	271.41°	-51.95°	No	
Maxibor	162.00 m	271.46°	-51.93°	No	
Maxibor	165.00 m	271.54°	-51.94°	No	
Maxibor	168.00 m	271.61°	-51.87°	No	
Maxibor	171.00 m	271.67°	-51.83°	No	
Maxibor	174.00 m	271.75°	-51.77°	No	
Maxibor	177.00 m	271.84°	-51.65°	No	
Maxibor	180.00 m	271.98°	-51.74°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	183.00 m	272.15°	-51.65°	No	
Maxibor	186.00 m	272.30°	-51.72°	No	
Maxibor	189.00 m	272.46°	-51.62°	No	
Maxibor	192.00 m	272.61°	-51.60°	No	
Maxibor	195.00 m	272.72°	-51.57°	No	
Maxibor	198.00 m	272.82°	-51.54°	No	
Maxibor	201.00 m	272.88°	-51.52°	No	
Maxibor	204.00 m	272.95°	-51.55°	No	
Maxibor	207.00 m	273.02°	-51.57°	No	
Maxibor	210.00 m	273.07°	-51.54°	No	
Maxibor	213.00 m	273.11°	-51.65°	No	
Maxibor	216.00 m	273.19°	-51.62°	No	
Maxibor	219.00 m	273.26°	-51.63°	No	
Maxibor	222.00 m	273.31°	-51.69°	No	
Maxibor	225.00 m	273.34°	-51.77°	No	
Maxibor	228.00 m	273.36°	-51.79°	No	
Maxibor	231.00 m	273.43°	-51.74°	No	
Maxibor	234.00 m	273.57°	-51.40°	No	
Maxibor	237.00 m	273.59°	-50.96°	No	
Maxibor	240.00 m	273.54°	-51.31°	No	
Maxibor	243.00 m	273.58°	-51.31°	No	
Maxibor	246.00 m	273.65°	-51.28°	No	
Maxibor	249.00 m	273.70°	-51.07°	No	
Maxibor	252.00 m	273.73°	-51.25°	No	
Maxibor	255.00 m	273.73°	-51.17°	No	
Maxibor	258.00 m	273.79°	-50.85°	No	
Maxibor	261.00 m	273.79°	-51.26°	No	
Maxibor	264.00 m	273.84°	-50.95°	No	
Maxibor	267.00 m	273.80°	-50.82°	No	
Maxibor	270.00 m	273.84°	-51.08°	No	
Maxibor	273.00 m	273.87°	-51.26°	No	
Maxibor	276.00 m	273.97°	-51.15°	No	
Maxibor	279.00 m	274.04°	-51.09°	No	
Maxibor	282.00 m	274.08°	-51.15°	No	
Maxibor	285.00 m	274.12°	-51.16°	No	
Maxibor	288.00 m	274.20°	-51.03°	No	
Maxibor	291.00 m	274.18°	-50.79°	No	
Maxibor	294.00 m	274.18°	-51.14°	No	
Maxibor	297.00 m	274.25°	-51.11°	No	
Maxibor	300.00 m	274.29°	-50.77°	No	
Maxibor	303.00 m	274.32°	-51.12°	No	
Maxibor	306.00 m	274.38°	-51.09°	No	
Maxibor	309.00 m	274.47°	-51.09°	No	
Maxibor	312.00 m	274.52°	-51.10°	No	
Maxibor	315.00 m	274.53°	-51.31°	No	
Maxibor	318.00 m	274.58°	-50.89°	No	
Maxibor	321.00 m	274.56°	-50.89°	No	
Maxibor	324.00 m	274.57°	-51.44°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	327.00 m	274.62°	-50.93°	No	
Maxibor	333.00 m	274.68°	-51.36°	No	
Maxibor	336.00 m	274.73°	-51.30°	No	
Maxibor	339.00 m	274.78°	-51.33°	No	
Maxibor	342.00 m	274.85°	-51.30°	No	
Maxibor	345.00 m	274.95°	-51.33°	No	
Maxibor	348.00 m	275.01°	-51.30°	No	
Maxibor	351.00 m	275.15°	-51.21°	No	
Maxibor	354.00 m	275.20°	-51.28°	No	
Maxibor	357.00 m	275.15°	-51.25°	No	
Maxibor	360.00 m	275.10°	-51.36°	No	
Maxibor	363.00 m	275.16°	-51.35°	No	
Maxibor	366.00 m	275.24°	-51.29°	No	
Maxibor	369.00 m	275.34°	-51.30°	No	
Maxibor	372.00 m	275.44°	-51.24°	No	
Maxibor	375.00 m	275.53°	-50.99°	No	
Maxibor	378.00 m	275.55°	-50.42°	No	
Maxibor	381.00 m	275.46°	-50.30°	No	
Maxibor	387.00 m	275.44°	-50.17°	No	

Fletcher

DESCRIPTION			ASSAYS					
			From	To	Number	Length	Ni (ppm)	
0.00	21.20	OB Overburden Casing, sand and gravel. One 10 cm diorite boulder						
21.20	45.00	1k cb Carbonate Altered Komatiite Light to medium grey colored ultramafic volcanics. Fine grained. Moderately to non magnetic. Some very infrequent calcite veinlets. Frequent spinifex textures, variably developed (crystal length) and long (interval length).						
45.00	52.35	10 Lamprophyre Medium grey-brown colored medium-grained lamprophyre dyke. Sheared contact with the komatiite, 40° to CA.						
52.35	77.77	1k cb Carbonate Altered Komatiite Same as above. Occasional carbonate breccia or close veining.						
77.77	85.60	10 Lamprophyre Same as above. Contacts are sharp at 40° to CA						
85.60	89.65	1k cb Carbonate Altered Komatiite Same as above.						
89.65	204.10	15 ol Olivine Diabase Homogeneously coarse grain mafic massive intrusion, olivine-rich. Finer grained towards borders. Weakly magnetic. Sharp lower contact at 15° to CA.						
204.10	274.00	1k cb Carbonate Altered Komatiite Same as above. Upper 5m show little carbonate alteration, then gets more densely veined and lighter colored afterwards.						
274.00	296.40	9a Peridotite Light grey peridotite, consistently fractured, calcite veinlets. Sulfides are present as disseminated fine to medium grains + 1 to 2 mm-large patches. Some pyrite. Mostly non to weakly magnetic with small metric sections of moderately magnetic.	278.00	279.00	155869	1.00	160	
			279.00	280.00	155870	1.00	180	
			280.00	281.00	155871	1.00	120	
			281.00	282.00	155872	1.00	360	
			282.00	283.00	155873	1.00	100	
			283.00	284.00	155874	1.00	110	
			284.00	285.00	155877	1.00	120	
			285.00	286.00	155878	1.00	60	
			286.00	287.00	155879	1.00	80	
			287.00	287.80	155880	0.80	80	
			287.80	288.30	155881	0.50	600	
			288.30	289.00	155882	0.70	270	
			289.00	290.00	155883	1.00	500	
			290.00	291.00	155884	1.00	150	
			291.00	292.00	155885	1.00	400	
			292.00	293.00	155886	1.00	60	
			293.00	294.00	155887	1.00	50	
			294.00	295.00	155888	1.00	40	
			295.00	296.00	155889	1.00	40	
			296.00	296.40	155890	0.40	50	
			296.40	297.00	155891	0.60	40	
296.40	298.00	9a dyke						

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
338.25	347.00	9 cb Carbonate Altered Peridotite Same as above except light gray to varying degrees and more desently veined in carbonates. Extreme carbonatisation occurs over the first 3m.	339.00	340.00	155941	1.00	830
			340.00	341.00	155942	1.00	1140
			341.00	342.00	155943	1.00	3550
			342.00	343.00	155944	1.00	1760
			343.00	344.00	155945	1.00	1910
			344.00	345.00	155946	1.00	2550
			345.00	346.00	155947	1.00	5540
			346.00	347.00	155948	1.00	3920
			347.00	348.00	155949	1.00	9320
			348.00	349.00	155953	1.00	9370
			349.00	350.00	155954	1.00	3090
347.00	351.00	9a Peridotite	350.00	350.50	155955	0.50	6040
			350.50	351.00	155956	0.50	9820
			351.00	351.50	155957	0.50	12600
			351.50	352.00	155958	0.50	34000
			352.00	353.00	155959	1.00	23600
			353.00	354.00	155960	1.00	28500
			354.00	355.00	155961	1.00	26600
			355.00	356.00	155962	1.00	23100
			356.00	357.00	155963	1.00	12600
			357.00	358.00	155964	1.00	14600
			358.00	359.00	155965	1.00	20100
351.00	361.00	9a well min Well Mineralized Peridotite	359.00	360.00	155966	1.00	24600
			360.00	361.00	155967	1.00	26100
			361.00	362.00	155968	1.00	5110
			362.00	362.50	155969	0.50	6080
			362.50	363.00	155970	0.50	12800
			363.00	364.00	155971	1.00	9140
			364.00	365.00	155972	1.00	33400
			365.00	366.00	155973	1.00	11700
			366.00	367.00	155974	1.00	7350
			367.00	368.00	155977	1.00	10300
			368.00	369.00	155978	1.00	5010
361.00	362.50	9a weak min Weakly Mineralized Peridotite	369.00	370.00	155979	1.00	5620
			370.00	371.00	155980	1.00	4970
			371.00	372.00	155981	1.00	11200
			372.00	373.00	155982	1.00	5510
			373.00	374.00	155983	1.00	5810
			374.00	375.00	155984	1.00	2850
			375.00	376.00	155985	1.00	3220
			376.00	377.00	155986	1.00	3140
			377.00	378.00	155987	1.00	2630
			378.00	379.00	155988	1.00	2650
			379.00	380.00	155989	1.00	1790
374.00	386.00	9a weak min Weakly Mineralized Peridotite	380.00	380.65	155990	0.65	2800
			380.65	382.50	155991	1.85	4170
			380.65	382.50	FA		

Fletcher

DESCRIPTION			ASSAYS							
			From	To	Number	Length	Ni (ppm)			
386.00	395.00	9a Peridotite	382.50	383.00	155992	0.50	2190			
			383.00	384.00	155993	1.00	3280			
			384.00	384.50	155994	0.50	4710			
			384.50	385.00	155995	0.50	2650			
			385.00	386.00	155996	1.00	2160			
			386.00	387.00	155997	1.00	2230			
			387.00	388.00	155998	1.00	1990			
			388.00	389.00	155999	1.00	2000			
			389.00	390.00	156002	1.00	2080			
			390.00	391.00	156003	1.00	2220			
			391.00	392.00	156004	1.00	1270			
			392.00	393.00	156005	1.00	1390			
			393.00	394.00	156006	1.00	1510			
			394.00	395.00	156007	1.00	1060			
			395.00	402.50	9a mod min Moderately Mineralized Peridotite	395.00	396.00	156008	1.00	1120
			397.60	398.45	FA Fault Wavy fault face with striated serpentine	396.00	397.00	156009	1.00	1430
						397.00	397.60	156010	0.60	4180
397.60	398.00	156011				0.40	1400			
398.00	399.00	156012				1.00	1590			
399.00	400.00	156013				1.00	3310			
400.00	401.00	156014				1.00	4360			
401.00	402.00	156015				1.00	5580			
402.00	402.50	156016				0.50	4140			
402.50	403.00	156017				0.50	2170			
403.00	404.00	156018				1.00	2310			
402.50	418.00	9a weak min Weakly Mineralized Peridotite	404.00	405.00	156019	1.00	3170			
			405.00	406.00	156020	1.00	3520			
			406.00	407.00	156021	1.00	4430			
			407.00	408.00	156022	1.00	3550			
			408.00	409.00	156023	1.00	3080			
			409.00	410.00	156024	1.00	2760			
			410.00	411.00	156027	1.00	3210			
			411.00	412.00	156028	1.00	4610			
			412.00	413.00	156029	1.00	2580			
			413.00	414.00	156030	1.00	3650			
			414.00	415.00	156031	1.00	3470			
			415.00	416.00	156032	1.00	4570			
			416.00	417.00	156033	1.00	4780			
			417.00	418.00	156034	1.00	2930			
			418.00	419.00	156035	1.00	2700			
			419.00	420.00	156036	1.00	3890			
			420.00	421.00	156037	1.00	3570			
421.00	422.00	156038	1.00	3200						
422.00	428.55	9 cb Carbonate Altered Peridotite Same as aboe except light grey. Carbonate-serpentine eins more common (1%)	422.00	423.50	156039	1.50	2780			
			423.50	425.00	156040	1.50	2760			
			425.00	426.50	156041	1.50	2220			
			426.50	428.00	156042	1.50	2110			

Fletcher

DESCRIPTION			ASSAYS					
			From	To	Number	Length	Ni (ppm)	
427.20	427.32	FA Fault Highly fractured rubble, moderately serpentinized, white fault gouge						
428.55	433.20	10 Lamprophyre Light gray-brown with black veinlets. Both contacts are sharp but highly irregular with angular pieces of lamprophyre reaching up into the black peridotite.						
430.35	433.50	FA Fault Highly fractured zone with fractures generally at 15° to CA						
433.20	436.80	9a weak min Weakly Mineralized Peridotite Same as above expect dark green thanks to strong serpentinisation	433.50	434.50	156043	1.00	3650	
			434.50	435.50	156044	1.00	4440	
			435.50	436.50	156045	1.00	3490	
			436.50	436.80	156046	0.30	4160	
436.80	452.55	9a Tc Talc Altered Peridotite Same as above except whitish gray thanks to intense talc alteration. Occassional scattered sulphides.						
452.55	468.70	9a Peridotite Same as above with more prealent serpentine veining (still less than 1%). Occassional trees of sulphides, max <1% over 20 cm.						
468.70	DDH end Number of samples : 163 Number of samples QAQC : 14 Total sampled length : 153.30							

Fletcher

DDH : TEX08-31

Claims title : P36052
 Township : Geikie
 Range :
 Lot :

Section :
 Level :
 Work place : 170 Jaguar Road, Timmins Ont

Drilled by : MG Drilling
 Described by : Fleury/Giguère

From : 2008-04-11
 Description date : 2002-05-24

To : 2008-04-23

Collar

Azimuth : 270.00°
 Plunge : -58.00°
 Length : 579.00 m

Longitude (East)
 Latitude (North)
 Elevation

Grid	UTM
325.0	485171
9950.0	5334500
1000.0	1000

Down hole survey

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	0.00 m	270.00°	-57.94°	No	
Maxibor	3.00 m	269.73°	-57.85°	No	
Maxibor	6.00 m	269.50°	-57.37°	No	
Maxibor	9.00 m	269.35°	-57.05°	No	
Maxibor	12.00 m	269.34°	-56.92°	No	
Maxibor	15.00 m	269.37°	-56.96°	No	
Maxibor	18.00 m	269.36°	-56.93°	No	
Maxibor	21.00 m	269.37°	-56.97°	No	
Maxibor	24.00 m	269.34°	-57.01°	No	
Maxibor	27.00 m	269.30°	-56.94°	No	
Maxibor	30.00 m	269.25°	-57.03°	No	
Maxibor	33.00 m	269.23°	-56.94°	No	
Maxibor	36.00 m	269.20°	-56.90°	No	

Remarks

Bon West

Core size : Carotte NQ

Cemented : No

Stored : No

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	39.00 m	269.16°	-56.94°	No	
Maxibor	42.00 m	269.13°	-56.93°	No	
Maxibor	45.00 m	269.07°	-56.93°	No	
Maxibor	48.00 m	269.07°	-56.92°	No	
Maxibor	51.00 m	269.04°	-56.89°	No	
Maxibor	54.00 m	269.05°	-56.81°	No	
Maxibor	57.00 m	269.00°	-56.90°	No	
Maxibor	60.00 m	268.98°	-56.85°	No	
Maxibor	63.00 m	268.93°	-56.87°	No	
Maxibor	66.00 m	268.91°	-56.85°	No	
Maxibor	69.00 m	268.88°	-57.01°	No	
Maxibor	72.00 m	268.90°	-56.85°	No	
Maxibor	75.00 m	268.91°	-56.95°	No	
Maxibor	78.00 m	268.91°	-56.86°	No	
Maxibor	81.00 m	268.92°	-56.80°	No	
Maxibor	84.00 m	268.86°	-56.75°	No	
Maxibor	87.00 m	268.84°	-56.77°	No	
Maxibor	90.00 m	268.81°	-56.71°	No	
Maxibor	93.00 m	268.80°	-56.68°	No	
Maxibor	96.00 m	268.77°	-56.67°	No	
Maxibor	99.00 m	268.75°	-56.55°	No	
Maxibor	102.00 m	268.75°	-56.59°	No	
Maxibor	105.00 m	268.70°	-56.62°	No	
Maxibor	108.00 m	268.68°	-56.60°	No	
Maxibor	111.00 m	268.67°	-56.60°	No	
Maxibor	114.00 m	268.62°	-56.70°	No	
Maxibor	117.00 m	268.56°	-56.70°	No	
Maxibor	120.00 m	268.53°	-56.65°	No	
Maxibor	123.00 m	268.52°	-56.70°	No	
Maxibor	126.00 m	268.52°	-56.67°	No	
Maxibor	129.00 m	268.49°	-56.68°	No	
Maxibor	132.00 m	268.53°	-56.65°	No	
Maxibor	135.00 m	268.50°	-56.66°	No	
Maxibor	138.00 m	268.43°	-56.63°	No	
Maxibor	141.00 m	268.35°	-56.61°	No	
Maxibor	144.00 m	268.30°	-56.61°	No	
Maxibor	147.00 m	268.27°	-56.65°	No	
Maxibor	150.00 m	268.22°	-56.68°	No	
Maxibor	153.00 m	268.15°	-56.60°	No	
Maxibor	156.00 m	268.17°	-56.73°	No	
Maxibor	159.00 m	268.18°	-56.70°	No	
Maxibor	162.00 m	268.20°	-56.65°	No	
Maxibor	165.00 m	268.21°	-56.69°	No	
Maxibor	168.00 m	268.22°	-56.67°	No	
Maxibor	171.00 m	268.18°	-56.64°	No	
Maxibor	174.00 m	268.18°	-56.65°	No	
Maxibor	177.00 m	268.18°	-56.60°	No	
Maxibor	180.00 m	268.14°	-56.58°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	183.00 m	268.15°	-56.64°	No	
Maxibor	186.00 m	268.16°	-56.59°	No	
Maxibor	189.00 m	268.12°	-56.58°	No	
Maxibor	192.00 m	268.12°	-56.58°	No	
Maxibor	195.00 m	268.09°	-56.56°	No	
Maxibor	198.00 m	268.16°	-56.55°	No	
Maxibor	201.00 m	268.18°	-56.57°	No	
Maxibor	204.00 m	268.18°	-56.51°	No	
Maxibor	207.00 m	268.15°	-56.53°	No	
Maxibor	210.00 m	268.13°	-56.48°	No	
Maxibor	213.00 m	268.11°	-56.48°	No	
Maxibor	216.00 m	268.06°	-56.47°	No	
Maxibor	219.00 m	268.04°	-56.47°	No	
Maxibor	222.00 m	268.06°	-56.46°	No	
Maxibor	225.00 m	267.98°	-56.44°	No	
Maxibor	228.00 m	267.92°	-56.48°	No	
Maxibor	231.00 m	267.88°	-56.45°	No	
Maxibor	234.00 m	267.84°	-56.46°	No	
Maxibor	237.00 m	267.81°	-56.44°	No	
Maxibor	240.00 m	267.78°	-56.49°	No	
Maxibor	243.00 m	267.79°	-56.43°	No	
Maxibor	246.00 m	267.73°	-56.41°	No	
Maxibor	249.00 m	267.71°	-56.44°	No	
Maxibor	252.00 m	267.73°	-56.45°	No	
Maxibor	255.00 m	267.75°	-56.39°	No	
Maxibor	258.00 m	267.70°	-56.38°	No	
Maxibor	261.00 m	267.72°	-56.40°	No	
Maxibor	264.00 m	267.83°	-56.38°	No	
Maxibor	267.00 m	267.82°	-56.39°	No	
Maxibor	270.00 m	267.81°	-56.30°	No	
Maxibor	273.00 m	267.87°	-56.25°	No	
Maxibor	276.00 m	267.89°	-56.26°	No	
Maxibor	279.00 m	267.84°	-56.23°	No	
Maxibor	282.00 m	267.80°	-56.22°	No	
Maxibor	285.00 m	267.79°	-56.21°	No	
Maxibor	288.00 m	267.73°	-56.27°	No	
Maxibor	291.00 m	267.75°	-56.25°	No	
Maxibor	294.00 m	267.64°	-56.23°	No	
Maxibor	297.00 m	267.60°	-56.24°	No	
Maxibor	300.00 m	267.53°	-56.20°	No	
Maxibor	303.00 m	267.47°	-56.25°	No	
Maxibor	306.00 m	267.46°	-56.24°	No	
Maxibor	309.00 m	267.40°	-56.17°	No	
Maxibor	312.00 m	267.40°	-56.15°	No	
Maxibor	315.00 m	267.31°	-56.22°	No	
Maxibor	318.00 m	267.33°	-56.22°	No	
Maxibor	321.00 m	267.30°	-56.20°	No	
Maxibor	324.00 m	267.19°	-56.11°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	327.00 m	267.21°	-56.19°	No	
Maxibor	330.00 m	267.20°	-56.21°	No	
Maxibor	333.00 m	267.26°	-56.17°	No	
Maxibor	336.00 m	267.30°	-56.16°	No	
Maxibor	339.00 m	267.28°	-56.17°	No	
Maxibor	342.00 m	267.24°	-56.15°	No	
Maxibor	345.00 m	267.28°	-56.14°	No	
Maxibor	348.00 m	267.28°	-56.13°	No	
Maxibor	351.00 m	267.20°	-56.11°	No	
Maxibor	354.00 m	267.12°	-56.10°	No	
Maxibor	357.00 m	267.06°	-56.13°	No	
Maxibor	360.00 m	267.07°	-56.13°	No	
Maxibor	363.00 m	267.07°	-56.11°	No	
Maxibor	366.00 m	267.01°	-56.12°	No	
Maxibor	369.00 m	267.05°	-56.16°	No	
Maxibor	372.00 m	267.05°	-56.10°	No	
Maxibor	375.00 m	267.00°	-56.16°	No	
Maxibor	378.00 m	266.95°	-56.08°	No	
Maxibor	381.00 m	266.96°	-56.13°	No	
Maxibor	384.00 m	266.96°	-56.18°	No	
Maxibor	387.00 m	266.91°	-56.15°	No	
Maxibor	390.00 m	266.89°	-56.15°	No	
Maxibor	393.00 m	266.86°	-56.13°	No	
Maxibor	396.00 m	266.86°	-56.08°	No	
Maxibor	399.00 m	266.84°	-56.09°	No	
Maxibor	402.00 m	266.81°	-56.15°	No	
Maxibor	405.00 m	266.81°	-56.11°	No	
Maxibor	408.00 m	266.80°	-56.12°	No	
Maxibor	411.00 m	266.78°	-56.07°	No	
Maxibor	414.00 m	266.77°	-56.13°	No	
Maxibor	417.00 m	266.79°	-56.11°	No	
Maxibor	420.00 m	266.79°	-56.13°	No	
Maxibor	423.00 m	266.80°	-56.12°	No	
Maxibor	426.00 m	266.84°	-56.12°	No	
Maxibor	429.00 m	266.84°	-56.12°	No	
Maxibor	432.00 m	266.80°	-56.15°	No	
Maxibor	435.00 m	266.80°	-56.15°	No	
Maxibor	438.00 m	266.78°	-56.15°	No	
Maxibor	441.00 m	266.76°	-56.18°	No	
Maxibor	444.00 m	266.72°	-55.63°	No	
Maxibor	447.00 m	266.72°	-56.21°	No	
Maxibor	450.00 m	266.71°	-56.21°	No	
Maxibor	453.00 m	266.71°	-56.23°	No	
Maxibor	456.00 m	266.71°	-56.25°	No	
Maxibor	459.00 m	266.78°	-56.27°	No	
Maxibor	462.00 m	266.77°	-56.27°	No	
Maxibor	465.00 m	266.74°	-56.26°	No	
Maxibor	468.00 m	266.83°	-56.29°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	477.00 m	266.92°	-56.33°	No	
Maxibor	480.00 m	266.94°	-56.27°	No	
Maxibor	483.00 m	266.95°	-56.33°	No	
Maxibor	486.00 m	266.94°	-56.34°	No	
Maxibor	489.00 m	266.94°	-56.35°	No	
Maxibor	492.00 m	266.94°	-56.34°	No	
Maxibor	495.00 m	266.96°	-56.32°	No	

Fletcher

DESCRIPTION			ASSAYS					
			From	To	Number	Length	Ni (ppm)	
0.00	13.00	OB Overburden Casing, sand and gravel.						
13.00	20.10	13b Diorite Coarse grain massive dioritic intrusion. Slightly monzodioritic (reddish orthoclase) in the first 5 m. Non-magnetic.						
20.10	20.20	9a dyke Peridotitic Dyke						
20.20	45.88	Uniform light gray. Sharp contacts at 40° to CA. Non-magnetic. 13b Diorite						
45.88	46.24	Same as above 9a dyke Peridotitic Dyke						
46.24	68.30	Same as above. Sharp contacts at 45° to CA. 13b Diorite						
68.30	68.68	Same as above 9a dyke Peridotitic Dyke						
68.68	79.20	Same as above. Lighter, more greenish center. Sharp contacts at 20° to CA. 13b Diorite						
79.20	79.74	Same as above 9a dyke Peridotitic Dyke						
79.74	116.30	Same as above. Sharp lower, vague upper contacts at 40° to CA. 13b Diorite						
116.30	139.85	Same as above. Last 15m of a darker shade, finer grained and with far distributed feldspar crystals. Nds with a two meter chill margin with komatiite. Contact is vague. 1k cb Carbonate Altered Komatiite						
139.85	143.60	Light to medium grey colored ultramafic volcanics. Fine grained. Moderately to non magnetic. Some very infrequent calcite veinlets. Frequent spinifex textures, variably developed (crystal length) over long intervals. 10 Lamprophyre						
143.60	201.90	Medium grey-brown colored medium-grained lamprophyre dyke. Vague upper contact, sheared lower contact, 60° to CA. 1k cb Carbonate Altered Komatiite						
201.90	245.85	Same as above. 15 ol Olivine Diabase						
245.85	247.80	Medium grain massive olivine-rich diabase. No foliation, chilled margins. Weakly to moderately magnetic. Hard. Sharp upper contact at 30° to CA 10a Mafic Dyke						

Fletcher

		DESCRIPTION	ASSAYS				
			From	To	Number	Length	Ni (ppm)
247.80	249.20	Black with beige spots medium-grained dyke. 65% mafic, probably pyroxène, 35% white plagioclase. Prevalence of hair-thin carbonate fractures giving sections a stringy look. 1k cb Carbonate Altered Komatiite Same as above					
249.20	257.40	1k Tc Talc Altered Komatiite Softer and of a much lighter color than the komatiite described above (whitish grey with a greenish tinge). Possible spinifex texture in one spot. Progressive transition.					
257.40	281.55	1k cb Carbonate Altered Komatiite Same as above					
	272.40	273.65 FA Fault Small fault, average fracturation, no visible alteration associated.					
281.55	305.00	1k Tc Talc Altered Komatiite Same as above, progressive transition. Softer and of a much lighter color (whitish grey with a greenish tinge). Spinifex textures. Progressive transition.					
	285.00	286.70 FA Fault Small fault, average fracturation, no visible alteration associated.					
	293.40	297.00 FA Fault Large fault, major fragmentation, no visible alteration associated.					
305.00	324.55	15 Diabase Dark grey massive mafic dyke with ophitic texture, medium to fine grain size, no foliated, weakly magnetic. Sheared upper contact with chill margin, chill margin and sharp lower contact at 20° to CA. Angular bloc of komatiite protruding into diabase at contact.					
324.55	332.80	1k Tc Talc Altered Komatiite Same as above, progressive transition.					
332.80	335.00	1k cb Carbonate Altered Komatiite Same as above					
335.00	370.75	1k Tc Talc Altered Komatiite Same as above					
370.75	374.70	9 cb Carbonate Altered Peridotite Same as above, few pyrite crystals at 372.5. Between 373.9m and 374.5m, several quartz, albite and carbonate veins cut peridotite generally parallel to schistosity (37°ca).					
	374.68	374.70 FA Fault Small fault with fault gouge					
374.70	400.03	9 cb					

Fletcher

DESCRIPTION		ASSAYS				
		From	To	Number	Length	Ni (ppm)
400.03	401.88	Carbonate Altered Peridotite Same as above. Some peridotite intersections are not altered. 9a Tc				
401.88	414.00	Talc Altered Peridotite Medium grey-green, soft, weakly foliated (40°ca), fine grains and non magnetic. 9 cb				
414.00	422.48	Carbonate Altered Peridotite Same as above 9a				
		414.00	415.50	156047	1.50	1690
		415.50	417.00	156048	1.50	1880
		417.00	418.50	156049	1.50	1810
		418.50	420.00	156052	1.50	2180
		420.00	421.40	156053	1.40	2470
		421.40	422.40	156054	1.00	2430
		422.40	423.00	156055	0.60	5650
422.48	423.90	423.00	423.90	156056	0.90	17000
		Peridotite Progressive transition from carbonate altered peridotite to not carbonate altered. Dark green, weakly foliated (37°ca), moderately hard and strongly magnetic. Peridotite has pentlandite-pyrrhotite cluster as trace.				
		9a mod min				
		Moderately Mineralized Peridotite Same peridotite as above, but mineralized with 3% of pentlandite-pyrrhotite semi-massive or disseminated clusters, until 10% sulphides over short intersection (15cm).				
423.90	432.00	9a weak min				
		Weakly Mineralized Peridotite Same peridotite as above, but weakly mineralized with 1% or <1% pentlandite-pyrrhotite blebs and disseminated clusters. Some pentlandite-pyrrhotite veinlets. Peridotite is cut by a few serpentine veins and veinlets and by carbonate veins. Peridotite is foliated (37°ac)				
		423.90	425.00	156057	1.10	2330
		425.00	426.00	156058	1.00	2570
		426.00	427.00	156059	1.00	4810
		427.00	428.00	156060	1.00	5480
		428.00	429.00	156061	1.00	4780
		429.00	430.00	156062	1.00	6350
		430.00	431.00	156063	1.00	3650
		431.00	432.00	156064	1.00	2200
		432.00	433.00	156065	1.00	2370
		433.00	434.00	156066	1.00	2320
		434.00	435.00	156067	1.00	2100
		435.00	436.00	156068	1.00	2400
		436.00	437.00	156069	1.00	2390
		437.00	438.00	156070	1.00	2490
		438.00	439.00	156071	1.00	2410
		439.00	440.00	156072	1.00	3750
		440.00	441.00	156073	1.00	2250
		441.00	442.00	156074	1.00	2330
		442.00	443.00	156077	1.00	2260
		443.00	444.00	156078	1.00	2390
		444.00	445.00	156079	1.00	2350
		445.00	446.00	156080	1.00	2340
		446.00	447.00	156081	1.00	2280
		447.00	448.00	156082	1.00	2270
		448.00	449.00	156083	1.00	2220
		449.00	450.00	156084	1.00	2410
		450.00	451.00	156085	1.00	2240
		451.00	452.00	156086	1.00	2220
447.69	448.21	FA Fault Highly fractured core and fault gouge.				

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
			452.00	453.00	156087	1.00	2140
			453.00	454.00	156088	1.00	2310
			454.00	455.00	156089	1.00	2400
			455.00	456.00	156090	1.00	2430
			456.00	457.00	156091	1.00	2790
			457.00	458.00	156092	1.00	3150
457.75	458.86	9a weak min Weakly Mineralized Peridotite Peridotite is weakly mineralized with less than 1% pentlandite blebs or disseminated cluster to non mineralized.	458.00	458.86	156093	0.86	2700
458.86	459.92	9a mod min Moderately Mineralized Peridotite Same peridotite as above with 2% disseminated pentlandite-pyrrhotite cluster or disseminated pentlandite.	458.86	459.92	156094	1.06	10200
459.92	464.00	9a weak min Weakly Mineralized Peridotite Less than 1% pentlandite as semi-massive veinlets with net texture or disseminated pentlandite.	459.92	461.00	156095	1.08	6630
			461.00	462.00	156096	1.00	3700
			462.00	463.00	156097	1.00	3510
			463.00	464.00	156098	1.00	3400
464.00	465.10	9a mod min Moderately Mineralized Peridotite Until 5% sulphides as pentlandite-pyrrhotite as semi-massive veins or disseminated pentlandite	464.00	464.70	156102	0.70	5600
			464.70	465.10	156103	0.40	11400
465.10	479.88	9a weak min Weakly Mineralized Peridotite Less than 1% disseminated pentlandite-pyrrhotite cluster	465.10	466.00	156104	0.90	2830
			466.00	467.00	156105	1.00	2770
			467.00	468.00	156106	1.00	2010
			468.00	469.00	156107	1.00	1880
			469.00	470.00	156108	1.00	2960
			470.00	471.00	156109	1.00	2970
			471.00	472.00	156110	1.00	2480
			472.00	473.00	156111	1.00	2790
			473.00	474.00	156112	1.00	2760
			474.00	475.00	156113	1.00	2390
			475.00	476.00	156114	1.00	3170
			476.00	477.00	156115	1.00	1790
			477.00	478.00	156116	1.00	3430
			478.00	479.00	156117	1.00	5370
			479.00	479.80	156118	0.80	5070
			479.80	481.20	156119	1.40	380
479.88	481.21	10a Mafic Dyke Dark green, fine grains, hard, non magnetic and massive. Sharp contact with komatiite (45°ca). Injected by few carbonate veins and veinlets.	481.20	482.00	156120	0.80	1700
481.21	491.30	9a weak min Weakly Mineralized Peridotite Same peridotite as above. Weakly mineralized to non mineralized. Between 490m and 491.14m, peridotite is strongly serpentinized and takes a medium dark greenish color. Peridotite is cut by serpentine veins and by chrysotile veinlets.	482.00	483.00	156121	1.00	2540
			483.00	484.00	156122	1.00	2430
			484.00	485.00	156123	1.00	2670
			485.00	486.00	156124	1.00	8770
			486.00	487.00	156127	1.00	3430
			487.00	488.00	156128	1.00	2200
			488.00	489.00	156129	1.00	1380
			489.00	490.00	156130	1.00	6830

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
491.30	504.15	15a mat Matachewan Dyke Medium grey, glomeroporphyric (5% green feldspar), fine grains to medium grains, hard, non magnetic and massive. Contact with peridotite is sharp (55°ca) and we have chilled margin 5cm thick.	490.00	491.30	156131	1.30	2170
			491.30	492.00	156132	0.70	50
			492.00	493.50	156133	1.50	40
			493.50	495.00	156134	1.50	40
			495.00	496.50	156135	1.50	40
			496.50	498.00	156136	1.50	70
			498.00	499.50	156137	1.50	40
			499.50	501.00	156138	1.50	40
			501.00	502.50	156139	1.50	40
			502.50	504.00	156140	1.50	50
			504.00	505.50	156141	1.50	610
504.15	504.65	9a Peridotite Same as above					
504.65	505.50	15a mat Matachewan Dyke Same as above					
505.50	536.50	9a weak min Weakly Mineralized Peridotite Same as above. Peridotite is strongly serpentinized between 505.5m and 510m. A fragments on Matachewan dyke is shown between 513m and 513.2m. Small dyke probably «boudiné».	505.50	506.00	156142	0.50	5800
			506.00	507.00	156143	1.00	2490
			507.00	508.00	156144	1.00	3650
			508.00	509.00	156145	1.00	1970
			509.00	510.00	156146	1.00	2420
			510.00	511.00	156147	1.00	2590
			511.00	512.00	156148	1.00	1180
			512.00	513.00	156149	1.00	1310
			513.00	514.00	156152	1.00	2320
			514.00	515.00	156153	1.00	1490
			515.00	516.00	156154	1.00	1940
			516.00	517.00	156155	1.00	1710
			517.00	518.00	156156	1.00	1410
			518.00	519.00	156157	1.00	1530
			519.00	520.00	156158	1.00	2400
			520.00	521.00	156159	1.00	1680
			521.00	522.00	156160	1.00	2190
			522.00	523.00	156161	1.00	1590
			523.00	524.00	156162	1.00	2470
			524.00	525.00	156163	1.00	2020
			525.00	526.00	156164	1.00	1430
			526.00	527.00	156165	1.00	2490
			527.00	528.00	156166	1.00	1890
			528.00	529.00	156167	1.00	2230
			529.00	530.00	156168	1.00	2550
			530.00	531.00	156169	1.00	3620
			531.00	532.00	156170	1.00	4460
			532.00	533.00	156171	1.00	3950
			533.00	534.00	156172	1.00	3980
			534.00	535.00	156173	1.00	3810
523.25	523.35	SHR Shear Zone Talc shear (25°ca) composed by talc and serpentine.					

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
			535.00	536.00	156174	1.00	3650
			536.00	537.00	156177	1.00	2110
536.20	536.50	SHR Shear Zone Talc shear (35°ca) composed by talc and serpentine.					
536.50	579.00	9a weak min Weakly Mineralized Peridotite Same as above. Weakly to non mineralized peridotite. Some interval with finely disseminated pentlandite. Upper contact with tacl shear is altered by talc on 10m. Peridotite is cut by serpentine veins, chrysotile veinlets and carbonate veins.	537.00	538.00	156178	1.00	2220
			538.00	539.00	156179	1.00	2170
			539.00	540.00	156180	1.00	2940
			540.00	541.00	156181	1.00	2990
			541.00	542.00	156182	1.00	1970
			542.00	543.00	156183	1.00	2190
			543.00	544.00	156184	1.00	2040
			544.00	545.00	156185	1.00	2890
			545.00	546.00	156186	1.00	2090
			546.00	547.00	156187	1.00	1300
			547.00	548.00	156188	1.00	3050
			548.00	549.00	156189	1.00	2640
			549.00	549.90	156190	0.90	2970
			554.16	555.00	156191	0.84	3280
			555.00	556.50	156192	1.50	3880
			556.50	557.50	156193	1.00	5140
			557.50	558.50	156194	1.00	5180
			558.50	559.50	156195	1.00	7310
			559.50	560.50	156196	1.00	2020
			560.50	561.50	156197	1.00	2460
			561.50	562.50	156198	1.00	2730
			562.50	563.50	156199	1.00	5640
			563.50	564.50	156202	1.00	6760
			564.50	565.50	156203	1.00	3910
			565.50	566.50	156204	1.00	3000
			566.50	567.50	156205	1.00	2920
			567.50	568.50	156206	1.00	2750
			568.50	569.50	156207	1.00	2860
			569.50	570.50	156208	1.00	2540
			570.50	571.50	156209	1.00	2500
			571.50	572.50	156210	1.00	2520
			572.50	573.50	156211	1.00	2650
			573.50	574.50	156212	1.00	2780
			574.50	575.00	156213	0.50	2510
			575.00	576.00	156214	1.00	4200
			576.00	577.00	156215	1.00	2540
			577.00	578.00	156216	1.00	3420
			578.00	579.00	156217	1.00	2860

Fletcher

DESCRIPTION	ASSAYS				
	From	To	Number	Length	Ni (ppm)
579.00 DDH end Number of samples : 156 Number of samples QAQC : 14 Total sampled length : 160.74					

Fletcher

DDH : TEX08-30

Claims title : P36052
 Township : Geikie
 Range :
 Lot :

Section :
 Level :
 Work place : 170 Jaguar Road, Timmins Ont

Drilled by : RonKor
 Described by : Rafini/Fleury

From : 2008-04-02
 Description date : 2002-05-24

To : 2008-04-11

Collar

Azimuth : 270.00°
 Plunge : -57.00°
 Length : 569.00 m

Longitude (East)
 Latitude (North)
 Elevation

Grid	UTM
275.0	485121
9950.0	5334498
1000.0	1000

Down hole survey

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	0.00 m	270.00°	-56.72°	No	
Maxibor	3.00 m	270.27°	-57.15°	No	
Maxibor	6.00 m	270.33°	-57.30°	No	
Maxibor	9.00 m	270.44°	-57.34°	No	
Maxibor	12.00 m	270.65°	-56.97°	No	
Maxibor	15.00 m	270.89°	-56.87°	No	
Maxibor	18.00 m	270.93°	-57.00°	No	
Maxibor	21.00 m	271.01°	-56.96°	No	
Maxibor	24.00 m	271.06°	-56.99°	No	
Maxibor	27.00 m	271.01°	-57.01°	No	
Maxibor	30.00 m	271.13°	-57.03°	No	
Maxibor	33.00 m	271.14°	-57.02°	No	
Maxibor	36.00 m	271.23°	-57.04°	No	

Remarks



Core size : Carotte NQ

Cemented : No

Stored : No

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	39.00 m	271.31°	-57.07°	No	
Maxibor	42.00 m	271.37°	-57.12°	No	
Maxibor	45.00 m	271.44°	-57.28°	No	
Maxibor	48.00 m	271.54°	-57.08°	No	
Maxibor	51.00 m	271.62°	-57.05°	No	
Maxibor	54.00 m	271.69°	-57.01°	No	
Maxibor	57.00 m	271.81°	-57.02°	No	
Maxibor	60.00 m	271.92°	-56.94°	No	
Maxibor	63.00 m	271.99°	-56.98°	No	
Maxibor	66.00 m	272.13°	-57.02°	No	
Maxibor	69.00 m	272.24°	-57.04°	No	
Maxibor	72.00 m	272.33°	-57.03°	No	
Maxibor	75.00 m	272.40°	-57.03°	No	
Maxibor	78.00 m	272.46°	-57.06°	No	
Maxibor	81.00 m	272.51°	-56.98°	No	
Maxibor	84.00 m	272.56°	-57.02°	No	
Maxibor	87.00 m	272.59°	-57.02°	No	
Maxibor	90.00 m	272.61°	-57.05°	No	
Maxibor	93.00 m	272.61°	-57.03°	No	
Maxibor	96.00 m	272.63°	-57.04°	No	
Maxibor	99.00 m	272.67°	-57.05°	No	
Maxibor	102.00 m	272.74°	-57.04°	No	
Maxibor	105.00 m	272.80°	-57.18°	No	
Maxibor	108.00 m	272.85°	-57.09°	No	
Maxibor	111.00 m	272.97°	-57.13°	No	
Maxibor	114.00 m	273.08°	-57.09°	No	
Maxibor	117.00 m	273.14°	-57.07°	No	
Maxibor	120.00 m	273.18°	-57.11°	No	
Maxibor	123.00 m	273.24°	-57.16°	No	
Maxibor	126.00 m	273.27°	-57.25°	No	
Maxibor	129.00 m	273.24°	-57.25°	No	
Maxibor	132.00 m	273.27°	-57.31°	No	
Maxibor	135.00 m	273.31°	-57.30°	No	
Maxibor	138.00 m	273.34°	-57.33°	No	
Maxibor	141.00 m	273.36°	-57.31°	No	
Maxibor	144.00 m	273.47°	-57.33°	No	
Maxibor	147.00 m	273.49°	-57.33°	No	
Maxibor	150.00 m	273.53°	-57.31°	No	
Maxibor	153.00 m	273.55°	-57.33°	No	
Maxibor	156.00 m	273.51°	-57.30°	No	
Maxibor	159.00 m	273.49°	-57.27°	No	
Maxibor	162.00 m	273.53°	-57.28°	No	
Maxibor	165.00 m	273.57°	-57.29°	No	
Maxibor	168.00 m	273.59°	-57.27°	No	
Maxibor	171.00 m	273.64°	-57.23°	No	
Maxibor	174.00 m	273.74°	-57.24°	No	
Maxibor	177.00 m	273.81°	-57.20°	No	
Maxibor	180.00 m	273.87°	-57.21°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	183.00 m	273.91°	-57.23°	No	
Maxibor	186.00 m	273.94°	-57.21°	No	
Maxibor	189.00 m	273.98°	-57.20°	No	
Maxibor	192.00 m	273.95°	-57.26°	No	
Maxibor	195.00 m	274.00°	-57.22°	No	
Maxibor	198.00 m	274.02°	-57.20°	No	
Maxibor	201.00 m	274.02°	-57.22°	No	
Maxibor	204.00 m	274.04°	-57.22°	No	
Maxibor	207.00 m	274.05°	-57.15°	No	
Maxibor	210.00 m	274.08°	-57.19°	No	
Maxibor	213.00 m	274.16°	-57.18°	No	
Maxibor	216.00 m	274.22°	-57.13°	No	
Maxibor	219.00 m	274.26°	-57.10°	No	
Maxibor	222.00 m	274.28°	-57.09°	No	
Maxibor	225.00 m	274.29°	-57.05°	No	
Maxibor	228.00 m	274.34°	-56.99°	No	
Maxibor	231.00 m	274.37°	-57.03°	No	
Maxibor	234.00 m	274.35°	-57.01°	No	
Maxibor	237.00 m	274.35°	-56.96°	No	
Maxibor	240.00 m	274.40°	-56.98°	No	
Maxibor	243.00 m	274.43°	-56.84°	No	
Maxibor	246.00 m	274.46°	-56.88°	No	
Maxibor	249.00 m	274.53°	-56.85°	No	
Maxibor	252.00 m	274.58°	-56.88°	No	
Maxibor	255.00 m	274.67°	-56.83°	No	
Maxibor	258.00 m	274.79°	-56.88°	No	
Maxibor	261.00 m	274.90°	-57.00°	No	
Maxibor	264.00 m	274.93°	-56.85°	No	
Maxibor	267.00 m	274.94°	-57.00°	No	
Maxibor	270.00 m	274.96°	-56.87°	No	
Maxibor	273.00 m	274.95°	-56.95°	No	
Maxibor	276.00 m	275.00°	-57.03°	No	
Maxibor	279.00 m	275.08°	-56.99°	No	
Maxibor	282.00 m	275.11°	-56.94°	No	
Maxibor	285.00 m	275.13°	-56.91°	No	
Maxibor	288.00 m	275.14°	-57.03°	No	
Maxibor	291.00 m	275.19°	-56.96°	No	
Maxibor	294.00 m	275.19°	-57.06°	No	
Maxibor	297.00 m	275.19°	-56.95°	No	
Maxibor	300.00 m	275.18°	-56.98°	No	
Maxibor	303.00 m	275.25°	-56.97°	No	
Maxibor	306.00 m	275.32°	-56.87°	No	
Maxibor	309.00 m	275.36°	-56.91°	No	
Maxibor	312.00 m	275.36°	-56.80°	No	
Maxibor	315.00 m	275.27°	-56.85°	No	
Maxibor	318.00 m	275.17°	-56.96°	No	
Maxibor	321.00 m	275.01°	-56.79°	No	
Maxibor	324.00 m	274.96°	-56.72°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	327.00 m	275.01°	-56.79°	No	
Maxibor	330.00 m	275.19°	-56.77°	No	
Maxibor	333.00 m	275.41°	-56.70°	No	
Maxibor	336.00 m	275.63°	-56.71°	No	
Maxibor	339.00 m	275.83°	-56.62°	No	
Maxibor	342.00 m	275.94°	-56.58°	No	
Maxibor	345.00 m	275.95°	-56.53°	No	
Maxibor	348.00 m	275.98°	-56.52°	No	
Maxibor	351.00 m	276.02°	-56.58°	No	
Maxibor	354.00 m	276.10°	-56.58°	No	
Maxibor	357.00 m	276.19°	-56.57°	No	
Maxibor	360.00 m	276.24°	-56.59°	No	
Maxibor	363.00 m	276.36°	-56.57°	No	
Maxibor	366.00 m	276.48°	-56.54°	No	
Maxibor	369.00 m	276.63°	-56.52°	No	
Maxibor	372.00 m	276.79°	-56.52°	No	
Maxibor	375.00 m	276.92°	-56.51°	No	
Maxibor	378.00 m	276.94°	-56.40°	No	
Maxibor	381.00 m	276.92°	-56.42°	No	
Maxibor	384.00 m	276.93°	-56.43°	No	
Maxibor	387.00 m	276.92°	-56.46°	No	
Maxibor	390.00 m	276.89°	-56.38°	No	
Maxibor	393.00 m	276.87°	-56.44°	No	
Maxibor	396.00 m	276.88°	-56.52°	No	
Maxibor	399.00 m	276.90°	-56.48°	No	
Maxibor	405.00 m	276.98°	-56.46°	No	
Maxibor	408.00 m	276.99°	-56.54°	No	
Maxibor	411.00 m	277.06°	-56.53°	No	
Maxibor	414.00 m	277.09°	-56.59°	No	
Maxibor	417.00 m	277.17°	-56.55°	No	
Maxibor	420.00 m	277.14°	-56.59°	No	
Maxibor	423.00 m	277.18°	-56.64°	No	
Maxibor	426.00 m	277.16°	-56.60°	No	
Maxibor	429.00 m	277.23°	-56.64°	No	
Maxibor	432.00 m	277.28°	-56.57°	No	
Maxibor	435.00 m	277.25°	-56.59°	No	
Maxibor	438.00 m	277.39°	-56.54°	No	
Maxibor	441.00 m	277.46°	-56.65°	No	
Maxibor	444.00 m	277.49°	-56.77°	No	
Maxibor	447.00 m	277.59°	-56.78°	No	
Maxibor	450.00 m	277.62°	-56.77°	No	

Fletcher

DESCRIPTION			ASSAYS					
			From	To	Number	Length	Ni (ppm)	
0.00	15.00	OB Overburden Casing, sand and gravel.						
15.00	20.00	10						
		Lamprophyre Medium grey-brown colored coarse grain lamprophyre dyke. Sheared contact with the komatiite, 20 to CA.						
20.00	49.10	1k cb						
		Carbonate Altered Komatiite Light to medium grey colored ultramafic volcanics. Globally fine grain size, locally foliated (40 deg to CA). Weakly to non magnetic. Some magnetite-rich veinlets + early calcite veinlets. Frequent spinifex textures, variably developed (crystal length) and long (interval length).						
49.10	55.00	10						
		Lamprophyre Same as above. Sheared contacts at 20 to 30 deg to CA.						
55.00	114.00	1k cb						
		Carbonate Altered Komatiite Same as above. Some local strong variations of grain size to coarse. Early breccia (syn-volcanic), no significant late veining. Still fine grain with well developed spinifex texture in places ((locally foliation-resembling). Fairly less altered and darker in the lower part (below 101m).						
114.00	173.10	15 ol						
		Olivine Diabase Homogeneously coarse grain mafic massive intrusion, olivine-rich. Finer grain towards borders. Weakly to moderately magnetic.						
173.10	208.50	1k cb						
		Carbonate Altered Komatiite Same as above. Quite heterogeneous grain size, globally medium. Foliated in place (30 to 50 deg to CA). Spinifex textures are globally rare, totally absent below 183m. Frequent early (syn-volcanic ?) ductile breccia. Moderately to well magnetic.						
208.50	231.30	15a mat						
		Matachewan Dyke Massive dark colored mafic dyke with neat interbanded fine to medium grain textures, frequently ophitic, contains feldspar rectangular shaped automorphic phenocrystals (1 cm-large). Chilled borders with progressively modified texture (finer grain). Weakly magnetic.						
231.30	259.00	1k cb						
		Carbonate Altered Komatiite Spinifex textures, frequent calcite veining and veinletting to protobreccia stage locally, several very minor shear zones (< 2 cm large, 45 deg to CA) without brittle reactivation. Foliated at several places (40 to 70 deg to CA).						
	256.00	259.00 FA						
		Fault Large shear zone with good brittle reactivation. Several fault gouges (1 to 4 cm-thick), main fault plane at 357.6m. Fault dip seems to be shallow (65 deg to CA), uncertain.						
259.00	293.60	1k cb						
		Carbonate Altered Komatiite Same as above. Spinifex textures and early ductile breccia. Medium developed calcite veining and veinletting. Non to weakly magnetic. Several minor shear zones (< 3cm-thick) associated to calcite sheared veining: 274.6m, 291.3m.						
293.60	296.00	10a						
		Mafic Dyke Dark grey massive fine to medium grain mafic intrusive. Hard and non-magnetic.						
296.00	298.60	1k cb						

Fletcher

		DESCRIPTION	ASSAYS					
			From	To	Number	Length	Ni (ppm)	
298.60	308.90	Carbonate Altered Komatiite Same as above. 10a						
	306.20	Mafic Dyke Same as above. Some 1 to 10 mm large phenocrystals (feldspar ?), non automorphous. 308.90 SHR						
		Shear zone Strongly talc-altered shear zone. Shearing is not very strong and there is no brittle reactivation. Pyrite-rich, locally massive. Shearing dip is 50 to 55 deg to CA.						
308.90	312.80	9a weak min	308.90	310.00	155655	1.10	110	
		Weakly Mineralized Peridotite	310.00	311.00	155656	1.00	15	
		Light grey pridotite, consistently fractured, calcite veinlets, thick calcite vein at 30 deg to CA. Sulfides are present as disseminated fine to medium grains + 1 to 2 mm-large patches. May be mostly pyrite with few pentlandite. Non magnetic.	311.00	312.00	155657	1.00	180	
312.80	317.40	15a mat	312.00	312.80	155658	0.80	120	
		Matachewan Dyke Same as above.						
317.40	327.50	9a weak min	317.40	318.40	155659	1.00	15	
		Weakly Mineralized Peridotite	318.40	319.40	155660	1.00	50	
		Light to medium grey peridotite, medium grain size (homogeneous), Only early veinlets. Sulfides are present in a significant density of disseminated fine grains (possibly pentlandite) + on veinlets smearing (pyrite/chalcopyrite). Locally well carbonate altered. Non Magnetic.	319.40	320.00	155661	0.60	15	
			320.00	321.00	155662	1.00	15	
			321.00	322.00	155663	1.00	15	
			322.00	323.00	155664	1.00	510	
			323.00	324.00	155665	1.00	1080	
			324.00	325.00	155666	1.00	420	
			325.00	326.00	155667	1.00	15	
			326.00	327.50	155668	1.50	300	
327.50	333.10	9a mod min	327.50	329.00	155669	1.50	15	
		Moderately Mineralized Peridotite	329.00	330.00	155670	1.00	15	
		Dark grey, homogeneous medium grain size, massive. Non magnetic. Uncertain recognition as a peridotite (could be a mafic dyke), interstitial pyroxenes appear as sticks looking on places. Sulfide ar well represented: dense disseminated fine grains (pentlandite?) and pyrite along veinlets.	330.00	331.00	155671	1.00	15	
			331.00	332.00	155672	1.00	15	
333.10	339.70	9a weak min	332.00	333.10	155673	1.10	15	
		Weakly Mineralized Peridotite	333.10	334.00	155674	0.90	50	
		Dark grey peridotite, homogeneously fine grain, non magnetic, weakly veinleted (mostly early veinlets). Disseminated sulfides (mostly pyrite, possibly pentlandite).	334.00	335.00	155677	1.00	15	
			335.00	336.00	155678	1.00	15	
			336.00	337.00	155679	1.00	15	
			337.00	338.00	155680	1.00	15	
			338.00	339.00	155681	1.00	15	
			339.00	339.70	155682	0.70	15	
339.70	347.50	9a	339.70	341.00	155683	1.30	15	
		Peridotite	341.00	342.00	155684	1.00	15	
		Same as above, no mineralized to traces. Strong carbonate alteration and late calcite subvertical veining between 345m and 347m. Could be a parallel to CA shear zone.	342.00	343.00	155685	1.00	15	
			343.00	344.00	155686	1.00	15	
			344.00	345.00	155687	1.00	180	
			345.00	346.00	155688	1.00	1090	
			346.00	347.50	155689	1.50	1000	
347.50	351.20	15a mat Matachewan Dyke						

Fletcher

DESCRIPTION		ASSAYS					
		From	To	Number	Length	Ni (ppm)	
351.20	358.00	Same as above. 9a Cb weak min Weakly Mineralized Carbonate Altered Peridotite Light grey-green peridotite, quite heterogeneous fine to medium grain size, intensive late calcite veining and veining. Weakly to moderately magnetic. Sulfides are present as disseminated fine grains. 1m-long mafic dyke at the bottom.	351.20	352.20	155690	1.00	1400
			352.20	353.00	155691	0.80	2100
			353.00	354.00	155692	1.00	1960
			354.00	355.00	155693	1.00	2240
			355.00	356.00	155694	1.00	3360
			356.00	357.00	155695	1.00	3160
			357.00	358.00	155696	1.00	1470
			358.00	359.00	155697	1.00	2960
			359.00	360.00	155698	1.00	3960
			360.00	361.00	155699	1.00	2490
358.00	362.00	9a mod min Moderately Mineralized Peridotite Same as above. Heterogeneous medium to coarse grain, serpentine pervasive alteration, verty large calcite veining at 359m (0.3m-large). Frequent calcite veins. Sulfides heterogeneously appear as foliation-parallel disseminated coarse grains (or blebs) + locally along early veins. Non to weaky magnetic.	361.00	362.00	155702	1.00	2760
			362.00	363.00	155703	1.00	1510
			363.00	364.00	155704	1.00	1360
			364.00	365.00	155705	1.00	1930
			365.00	366.00	155706	1.00	1980
			366.00	367.00	155707	1.00	1910
			367.00	368.00	155708	1.00	1870
			368.00	369.00	155709	1.00	2200
			369.00	370.00	155710	1.00	1690
			370.00	371.00	155711	1.00	1110
362.00	373.20	9a weak min Weakly Mineralized Peridotite Same as above. Strongly heterogeneous grain size and textures. Disseminated background fine grain is strongly decreased to absent. Local patches and blebs concentrations.	371.00	372.00	155712	1.00	2090
			372.00	373.20	155713	1.20	1910
			373.20	374.00	155714	0.80	2380
			374.00	375.00	155715	1.00	5430
			375.00	376.00	155716	1.00	2370
			376.00	377.00	155717	1.00	2810
			377.00	378.00	155718	1.00	3240
			378.00	379.00	155719	1.00	4940
			379.00	380.00	155720	1.00	5400
			380.00	381.00	155721	1.00	3520
373.20	381.00	9a mod min Moderately Mineralized Peridotite Same host rock as above. Well magnetic. Intensive calcite veining in the upper part (no magnetism there). Sulfides are present in patches + foliation-parallel bleb concntrations.	381.00	382.00	155722	1.00	2170
			382.00	383.00	155723	1.00	2090
			383.00	384.00	155724	1.00	1570
			384.00	385.00	155727	1.00	990
			385.00	386.00	155728	1.00	1350
			386.00	387.00	155729	1.00	1330
			387.00	388.00	155730	1.00	3130
			388.00	389.00	155731	1.00	2640
			389.00	390.00	155732	1.00	2740
			390.00	391.00	155733	1.00	1680
381.00	398.30	9a Cb weak min Weakly Mineralized Carbonate Altered Peridotite Light grey-green peridotite, strongly heterogeneous texture, fine to coarse grain size with locally prophyritic textures (383.3m). Chloritized and strongly carbonate altered. Intensive calcite veining. Sulfide appears as disseminated fine grains, with locally concentrations on early veinlets smearing or along foliation-parallel thin bands.	391.00	392.00	155734	1.00	1150
			392.00	393.00	155735	1.00	2620
			393.00	394.00	155736	1.00	2100
			394.00	395.00	155737	1.00	2590
			395.00	396.00	155738	1.00	2330

Fletcher

DESCRIPTION			ASSAYS							
			From	To	Number	Length	Ni (ppm)			
398.30	411.00	9a weak min Weakly Mineralized Peridotite Same as above, no altered. Dark grey ultramafics, veining is quite less frequent (only veinlets. Sulfides is present as disseminated fine grains, locally coarser grain or concentrated on blebs clusters (404.7-406m).	396.00	397.00	155739	1.00	3200			
			397.00	398.20	155740	1.20	2150			
			398.20	399.00	155741	0.80	3060			
			399.00	400.00	155742	1.00	2390			
			400.00	401.00	155743	1.00	2120			
			401.00	402.00	155744	1.00	2260			
			402.00	403.00	155745	1.00	2380			
			403.00	404.00	155746	1.00	2300			
			404.00	404.70	155747	0.70	2040			
			404.70	406.00	155748	1.30	2920			
			406.00	407.00	155749	1.00	1740			
			407.00	408.00	155752	1.00	1370			
			408.00	409.00	155753	1.00	1130			
			409.00	410.00	155754	1.00	1350			
			411.00	422.30	9a mod min Moderately Mineralized Peridotite Dark black ultramafics, globally coarse grain and consistently foliated (45 deg to CA). Grain size seems to vary slightly from medium to very coarse, but foliation is very regular and ubiquitous. Several foliation-parallel discontinuous very thin calcite-serpentine veinlets. Sulfides are quite homogeneously disseminated in fine to medium grains that locally increases in density and size + some local higher concentrations on foliation-parallel bands.	410.00	411.00	155755	1.00	1200
411.00	412.00	155756				1.00	5150			
412.00	413.00	155757				1.00	1790			
413.00	414.00	155758				1.00	1900			
414.00	415.00	155759				1.00	2160			
415.00	416.00	155760				1.00	2780			
416.00	417.00	155761				1.00	1400			
417.00	418.00	155762				1.00	1870			
418.00	419.00	155763				1.00	4990			
419.00	420.00	155764				1.00	1820			
420.00	421.00	155765				1.00	1690			
421.00	422.25	155766				1.25	3490			
422.25	423.00	155767				0.75	4010			
423.00	424.00	155768				1.00	4080			
422.30	435.00	9a well min Well Mineralized Peridotite Same as above, higher concentration in size (until 2 mm-large) of disseminated sulfide grains, which remain pretty homogeneous.				424.00	425.00	155769	1.00	5760
			425.00	426.00	155770	1.00	7860			
			426.00	427.00	155772	1.00	13000			
			427.00	428.00	155773	1.00	10800			
			428.00	429.00	155774	1.00	8470			
			429.00	430.00	155777	1.00	5160			
			430.00	431.00	155778	1.00	3320			
			431.00	432.00	155779	1.00	4010			
			432.00	433.00	155780	1.00	5980			
			433.00	434.00	155781	1.00	3950			
			434.00	435.00	155782	1.00	3050			
			435.00	444.00	9a mod min Moderately Mineralized Peridotite Same as above.	435.00	436.00	155783	1.00	2650
						436.00	437.00	155784	1.00	5140
						437.00	438.00	155785	1.00	5000
						438.00	439.00	155786	1.00	3420
439.00	440.00	155787				1.00	3280			
440.00	441.00	155788				1.00	3080			
441.00	442.00	155789				1.00	4400			
442.00	443.00	155790				1.00	3510			

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
444.00	455.00	9a weak min Weakly Mineralized Peridotite Same as above.	443.00	444.00	155791	1.00	4470
			444.00	445.00	155792	1.00	4260
			445.00	446.00	155793	1.00	2900
			446.00	447.00	155794	1.00	3470
			447.00	448.00	155795	1.00	3620
			448.00	449.00	155796	1.00	2620
			449.00	450.00	155797	1.00	6460
			450.00	451.00	155798	1.00	3930
			451.00	452.00	155799	1.00	3950
			452.00	453.00	155802	1.00	3310
			453.00	454.00	155803	1.00	2970
			454.00	455.00	155804	1.00	2750
			455.00	456.00	155805	1.00	6090
			456.00	457.00	155806	1.00	2580
			455.00	458.50	9a mod min Moderately Mineralized Peridotite Same as above.	457.00	458.00
458.00	458.50	155808				0.50	4210
458.50	459.00	155809				0.50	2370
459.00	460.00	155810				1.00	2590
460.00	461.00	155811				1.00	3660
458.50	463.00	9a weak min Weakly Mineralized Peridotite Same as above.	461.00	462.00	155812	1.00	2690
			462.00	463.00	155813	1.00	2350
			463.00	464.00	155814	1.00	2130
			464.00	464.40	155815	0.40	2590
			464.40	465.00	155816	0.60	2640
			465.00	465.50	155817	0.50	3540
			465.50	466.00	155818	0.50	2770
			466.00	467.00	155819	1.00	4250
			467.00	468.00	155820	1.00	2180
			468.00	469.00	155821	1.00	300
468.00	476.85	15a mat Matachewan Dyke Light grey mafic to ultramafic dyke. Hard and fine grained, no foliation. Cloudish and greenish large feldspar phenocrystals. Non-magnetic. Sharp but undulating upper contact dipping 40° to CA. Lower contact is regular and also at 40° to CA.	469.00	470.00	155822	1.00	50
			476.00	477.00	155823	1.00	330
			477.00	478.00	155824	1.00	3920
			478.00	478.30	155827	0.30	3830
476.85	478.30	9a mod min Moderately Mineralized Peridotite Same as above.	478.30	479.00	155828	0.70	2400
			479.00	480.00	155829	1.00	2470
478.30	483.50	9a weak min Weakly Mineralized Peridotite Same as above.	480.00	481.00	155830	1.00	4120
			481.00	482.00	155831	1.00	4620
			482.00	483.00	155832	1.00	2800
			483.00	483.50	155833	0.50	3550
			483.50	484.00	155834	0.50	5550
			484.00	485.00	155835	1.00	5490
			485.00	486.00	155836	1.00	5600
			486.00	487.20	155837	1.20	10100
			487.20	488.00	155838	0.80	2580
			488.00	489.00	155839	1.00	4580
483.50	489.00	9a well min Well Mineralized Peridotite Same as above.	488.00	489.00	155839	1.00	4580

Fletcher

DESCRIPTION			ASSAYS							
			From	To	Number	Length	Ni (ppm)			
489.00	499.00	9a mod min Moderately Mineralized Peridotite Same as above.	489.00	490.00	155840	1.00	3910			
			490.00	491.00	155841	1.00	2830			
			491.00	492.00	155842	1.00	3970			
			492.00	493.00	155843	1.00	3980			
			493.00	494.00	155844	1.00	5410			
			494.00	495.00	155845	1.00	4660			
			495.00	496.00	155846	1.00	7010			
			496.00	497.00	155847	1.00	3940			
			497.00	498.00	155848	1.00	3240			
			498.00	499.00	155849	1.00	5080			
			499.00	500.00	155852	1.00	2360			
			500.00	501.00	155853	1.00	2870			
			501.00	544.15	9 cb Carbonate Altered Peridotite Same as above except light gray to varying degrees. Extreme carbonatisation occurs over the last 5m before the contact with the talc shear. Peridotite is very weakly mineralised, showing decimetric groupings of locally 1-3% sulphides every three meters or so. One 60cm length of 1% disseminated mineralization around 529 m. Not sampled.	501.00	502.00	155854	1.00	2570
502.00	503.00	155855				1.00	2630			
503.00	504.00	155856				1.00	2570			
504.00	505.00	155857				1.00	2470			
505.00	506.00	155858				1.00	1590			
506.00	507.00	155859				1.00	1620			
507.00	508.00	155860				1.00	1870			
508.00	509.00	155861				1.00	2020			
509.00	509.50	155862				0.50	3190			
509.50	510.00	155863				0.50	3140			
510.00	511.00	155864				1.00	3590			
511.00	512.00	155865				1.00	1970			
512.00	513.00	155866				1.00	2310			
513.00	514.00	155867				1.00	2490			
514.00	515.00	155868				1.00	2290			
543.08	544.15	SHR Shear zone greenish-white.								
544.15	569.00	9 cb Carbonate Altered Peridotite Same as above including 5m of strong alteration around upper contact with talc shear and occasional mineralized patches. Varying serpentinisation going from light to moderate in places.								
569.00	DDH end Number of samples : 197 Number of samples QAQC : 16 Total sampled length : 191.80									

Fletcher

DDH : TEX08-29

Claims title : P36052
 Township : Geikie
 Range :
 Lot :

Section :
 Level :
 Work place : 170 Jaguar Road, Timmins Ont

Drilled by : MG Drilling
 Described by : Rafini/Fleury

From : 2008-03-30
 Description date : 2002-05-24

To : 2008-04-11

Collar

Azimuth : 270.00°
 Plunge : -53.00°
 Length : 548.60 m

Longitude (East)
 Latitude (North)
 Elevation

Grid	UTM
325.0	485171
9950.0	5334500
1000.0	1000

Down hole survey

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	0.00 m	270.00°	-51.98°	No	
Maxibor	3.00 m	269.94°	-51.94°	No	
Maxibor	6.00 m	269.86°	-52.38°	No	
Maxibor	9.00 m	269.72°	-52.18°	No	
Maxibor	12.00 m	269.57°	-52.12°	No	
Maxibor	15.00 m	269.45°	-52.31°	No	
Maxibor	18.00 m	269.41°	-52.36°	No	
Maxibor	21.00 m	269.50°	-52.44°	No	
Maxibor	24.00 m	269.58°	-52.44°	No	
Maxibor	27.00 m	269.69°	-52.44°	No	
Maxibor	30.00 m	269.81°	-52.50°	No	
Maxibor	33.00 m	269.89°	-52.31°	No	
Maxibor	36.00 m	270.01°	-52.39°	No	

Remarks

Bm Wm

Core size : Carotte NQ

Cemented : No

Stored : No

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	39.00 m	270.12°	-52.21°	No	
Maxibor	42.00 m	270.15°	-52.45°	No	
Maxibor	45.00 m	270.24°	-52.30°	No	
Maxibor	48.00 m	270.32°	-52.24°	No	
Maxibor	51.00 m	270.34°	-52.32°	No	
Maxibor	54.00 m	270.43°	-52.31°	No	
Maxibor	57.00 m	270.44°	-52.33°	No	
Maxibor	60.00 m	270.54°	-52.23°	No	
Maxibor	63.00 m	270.54°	-52.36°	No	
Maxibor	66.00 m	270.61°	-52.30°	No	
Maxibor	69.00 m	270.72°	-52.27°	No	
Maxibor	72.00 m	270.80°	-52.08°	No	
Maxibor	75.00 m	270.80°	-52.35°	No	
Maxibor	78.00 m	270.83°	-52.32°	No	
Maxibor	81.00 m	270.85°	-52.33°	No	
Maxibor	84.00 m	270.90°	-52.31°	No	
Maxibor	87.00 m	270.95°	-52.23°	No	
Maxibor	90.00 m	271.02°	-52.30°	No	
Maxibor	93.00 m	271.12°	-52.32°	No	
Maxibor	96.00 m	271.20°	-52.08°	No	
Maxibor	99.00 m	271.34°	-52.11°	No	
Maxibor	102.00 m	271.41°	-52.05°	No	
Maxibor	105.00 m	271.48°	-52.17°	No	
Maxibor	108.00 m	271.51°	-52.14°	No	
Maxibor	111.00 m	271.53°	-52.11°	No	
Maxibor	114.00 m	271.54°	-52.18°	No	
Maxibor	117.00 m	271.53°	-52.00°	No	
Maxibor	120.00 m	271.50°	-52.06°	No	
Maxibor	123.00 m	271.52°	-52.25°	No	
Maxibor	126.00 m	271.58°	-52.12°	No	
Maxibor	129.00 m	271.63°	-52.02°	No	
Maxibor	132.00 m	271.68°	-52.18°	No	
Maxibor	135.00 m	271.64°	-52.05°	No	
Maxibor	138.00 m	271.67°	-52.03°	No	
Maxibor	141.00 m	271.71°	-52.21°	No	
Maxibor	144.00 m	271.69°	-52.32°	No	
Maxibor	147.00 m	271.71°	-52.30°	No	
Maxibor	150.00 m	271.72°	-52.03°	No	
Maxibor	153.00 m	271.69°	-52.25°	No	
Maxibor	156.00 m	271.68°	-52.17°	No	
Maxibor	159.00 m	271.68°	-52.27°	No	
Maxibor	162.00 m	271.72°	-52.35°	No	
Maxibor	165.00 m	271.71°	-52.32°	No	
Maxibor	168.00 m	271.69°	-52.27°	No	
Maxibor	171.00 m	271.76°	-52.34°	No	
Maxibor	174.00 m	271.87°	-52.15°	No	
Maxibor	177.00 m	271.92°	-52.27°	No	
Maxibor	180.00 m	271.93°	-52.40°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	183.00 m	271.96°	-52.30°	No	
Maxibor	186.00 m	271.95°	-52.40°	No	
Maxibor	189.00 m	272.01°	-52.43°	No	
Maxibor	192.00 m	272.03°	-52.42°	No	
Maxibor	195.00 m	272.06°	-52.42°	No	
Maxibor	198.00 m	272.06°	-52.30°	No	
Maxibor	201.00 m	272.01°	-52.39°	No	
Maxibor	204.00 m	272.13°	-52.37°	No	
Maxibor	207.00 m	272.11°	-52.31°	No	
Maxibor	210.00 m	272.11°	-52.37°	No	
Maxibor	213.00 m	272.21°	-52.39°	No	
Maxibor	216.00 m	272.19°	-52.30°	No	
Maxibor	219.00 m	272.18°	-52.49°	No	
Maxibor	222.00 m	272.23°	-52.35°	No	
Maxibor	225.00 m	272.23°	-52.30°	No	
Maxibor	228.00 m	272.30°	-52.36°	No	
Maxibor	231.00 m	272.28°	-52.21°	No	
Maxibor	234.00 m	272.25°	-52.46°	No	
Maxibor	237.00 m	272.29°	-52.47°	No	
Maxibor	240.00 m	272.31°	-52.44°	No	
Maxibor	243.00 m	272.43°	-52.40°	No	
Maxibor	246.00 m	272.46°	-52.19°	No	
Maxibor	249.00 m	272.50°	-52.42°	No	
Maxibor	252.00 m	272.49°	-52.40°	No	
Maxibor	255.00 m	272.46°	-52.31°	No	
Maxibor	258.00 m	272.49°	-52.24°	No	
Maxibor	261.00 m	272.44°	-52.25°	No	
Maxibor	264.00 m	272.40°	-52.33°	No	
Maxibor	267.00 m	272.43°	-52.27°	No	
Maxibor	270.00 m	272.39°	-52.30°	No	
Maxibor	273.00 m	272.41°	-52.50°	No	
Maxibor	276.00 m	272.45°	-52.52°	No	
Maxibor	279.00 m	272.49°	-52.35°	No	
Maxibor	282.00 m	272.60°	-52.42°	No	
Maxibor	285.00 m	272.71°	-52.46°	No	
Maxibor	288.00 m	272.79°	-52.34°	No	
Maxibor	291.00 m	272.74°	-52.28°	No	
Maxibor	294.00 m	272.67°	-52.32°	No	
Maxibor	297.00 m	272.56°	-52.38°	No	
Maxibor	300.00 m	272.53°	-52.31°	No	
Maxibor	303.00 m	272.50°	-52.23°	No	
Maxibor	306.00 m	272.42°	-52.29°	No	
Maxibor	309.00 m	272.35°	-52.21°	No	
Maxibor	312.00 m	272.27°	-52.35°	No	
Maxibor	315.00 m	272.28°	-52.29°	No	
Maxibor	318.00 m	272.24°	-52.30°	No	
Maxibor	321.00 m	272.22°	-52.27°	No	
Maxibor	324.00 m	272.20°	-52.34°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	327.00 m	272.16°	-52.39°	No	
Maxibor	330.00 m	272.12°	-52.36°	No	
Maxibor	333.00 m	272.05°	-52.32°	No	
Maxibor	336.00 m	272.00°	-52.34°	No	
Maxibor	339.00 m	271.98°	-52.33°	No	
Maxibor	342.00 m	271.92°	-52.37°	No	
Maxibor	345.00 m	271.92°	-52.37°	No	
Maxibor	348.00 m	271.90°	-52.34°	No	
Maxibor	351.00 m	271.82°	-52.31°	No	
Maxibor	354.00 m	271.76°	-52.36°	No	
Maxibor	357.00 m	271.71°	-52.36°	No	
Maxibor	360.00 m	271.66°	-52.31°	No	
Maxibor	363.00 m	271.59°	-52.35°	No	
Maxibor	366.00 m	271.57°	-52.40°	No	
Maxibor	369.00 m	271.47°	-52.40°	No	
Maxibor	372.00 m	271.30°	-52.38°	No	
Maxibor	375.00 m	271.20°	-52.30°	No	
Maxibor	378.00 m	271.09°	-52.27°	No	
Maxibor	381.00 m	271.03°	-52.29°	No	
Maxibor	384.00 m	271.01°	-52.31°	No	
Maxibor	387.00 m	270.99°	-52.24°	No	
Maxibor	390.00 m	270.95°	-52.28°	No	
Maxibor	393.00 m	270.86°	-52.23°	No	
Maxibor	396.00 m	270.86°	-52.18°	No	
Maxibor	399.00 m	270.83°	-52.23°	No	
Maxibor	402.00 m	270.78°	-52.14°	No	
Maxibor	405.00 m	270.74°	-52.34°	No	
Maxibor	408.00 m	270.68°	-52.18°	No	
Maxibor	411.00 m	270.61°	-52.14°	No	
Maxibor	414.00 m	270.56°	-52.20°	No	
Maxibor	417.00 m	270.46°	-52.19°	No	
Maxibor	420.00 m	270.32°	-52.15°	No	
Maxibor	423.00 m	270.22°	-52.22°	No	
Maxibor	426.00 m	270.18°	-52.19°	No	
Maxibor	429.00 m	270.13°	-52.18°	No	
Maxibor	432.00 m	270.06°	-52.26°	No	
Maxibor	435.00 m	270.03°	-52.25°	No	
Maxibor	438.00 m	269.98°	-52.24°	No	
Maxibor	441.00 m	269.92°	-52.30°	No	
Maxibor	444.00 m	269.87°	-52.30°	No	
Maxibor	447.00 m	269.82°	-52.27°	No	
Maxibor	450.00 m	269.76°	-52.25°	No	
Maxibor	453.00 m	269.71°	-52.25°	No	
Maxibor	456.00 m	269.69°	-52.27°	No	
Maxibor	459.00 m	269.70°	-52.25°	No	
Maxibor	462.00 m	269.61°	-52.25°	No	
Maxibor	465.00 m	269.61°	-52.21°	No	
Maxibor	468.00 m	269.59°	-52.24°	No	

Fletcher

Type	Depth	Azimuth	Plunge	Invalid	Remarks
Maxibor	471.00 m	269.54°	-52.23°	No	
Maxibor	474.00 m	269.53°	-52.31°	No	
Maxibor	477.00 m	269.53°	-52.22°	No	
Maxibor	480.00 m	269.42°	-52.30°	No	
Maxibor	483.00 m	269.38°	-52.20°	No	
Maxibor	486.00 m	269.39°	-52.20°	No	
Maxibor	489.00 m	269.34°	-52.32°	No	
Maxibor	492.00 m	269.22°	-52.34°	No	
Maxibor	495.00 m	269.21°	-52.33°	No	
Maxibor	498.00 m	269.19°	-52.24°	No	
Maxibor	501.00 m	269.09°	-52.23°	No	
Maxibor	504.00 m	269.06°	-52.22°	No	
Maxibor	507.00 m	269.05°	-52.26°	No	
Maxibor	510.00 m	269.02°	-52.26°	No	
Maxibor	513.00 m	268.99°	-52.28°	No	
Maxibor	516.00 m	268.93°	-52.27°	No	
Maxibor	519.00 m	268.87°	-52.28°	No	

Fletcher

DESCRIPTION			ASSAYS					
			From	To	Number	Length	Ni (ppm)	
0.00	13.00	OB Overburden Casing, sand and gravel.						
13.00	104.70	13b Diorite Coarse grain massive dioritic intrusion. Composition is closer to monzodiorite in the upper part (above 30m), and then progressively more mafic with interbanded variations. Hard and non magnetic.						
104.70	105.30	10 Lamprophyre Very progressive upper contact over 3 meters long. Short lamprophyre (?) interval. See description below.						
105.30	132.30	1k cb Carbonate Altered Komatiite Light grey massive ultramafic volcanics. Globally fine grain and non-foliated, with frequent spinifex interval of very variable length (0.2 to 3 m-long). Spinifex development is very irregular in cristal size (0.1 to 20 cm-long cristals). Non to weakly magnetic. Minor shear zones at 108m and 128.7m. No significant veining.						
132.30	136.20	10 Lamprophyre Light brownish colored mafic dyke, biotite-rich, few amphibole sticks. Medium grain size, weakly foliated at 50 deg to CA. Non magnetic. Sharp contacts at 20 to 25 deg to CA.						
136.20	188.00	1k Komatiite Same as above. Foliated (45 deg to CA) and less altered in the lower part (below 163m). Some magnetite-very rick thin veins.						
188.00	193.20	1k shr Sheared Komatiite Strongly sheared fine to medium grain ultramafics, associated to weak calcite-veinleting. No significant brittle reactivation. Shearing is dipping 50 deg to CA, and the vertical compmnet of displacement is inverse according to a simple-shear criterion visible at 189.6m.						
193.20	195.20	1k cb Carbonate Altered Komatiite Same as above. Definition as a komatiite or a peridotite is uncertain since 159m where was last observed spinifex characteristic textures.						
195.20	235.50	15 ol Oilvine Diabase Medium grain massive olivinie-rich diabase. No foliation, chilled margins. Weakly to moderately magnetic. Hard.						
235.50	252.60	1k Komatiite Same as above, fresher.						
252.60	277.70	15 Diabase Dark grey massive mafic dyke with ophitic texture, medium grain size, no foliated, weakly magnetic. Chillerd upper contact (progressively finer grain towards contact), sheared lower contact at 60 deg to CA.						
277.70	295.00	1k cb Carbonate Altered Komatiite Light grey-green ultramafics, heterogeneous fine to coarse grain size, frequently foliated (variable dip: 30 to 60 deg to CA), non magnetic. Frequent calcite-veinlets (rare sulfide smearing), local protobreccia. Frequently broken core.						
295.00	300.00	1k Tc Talc Altered Komatiite						

Fletcher

DESCRIPTION		ASSAYS				
		From	To	Number	Length	Ni (ppm)
298.20	300.00	Same as above, progressive transition. Dense calcite-filled veinlet network. Softer. Spinifex textures.				
		SHR				
		Shear zone				
		Weakly developed, shearing is not intensive, several minor shear zones (2cm-large). Very weak brittle reactivation (tectonic brecciation) with intensive calcite veining. Dip is 40 deg to CA. No real fault gouge but two 3 to 5cm-large proto-gouges.				
300.00	340.40	1k cb				
		Carbonate Altered Komatiite				
		Same as above, frequent calcite veining and veinletting. Heterogeneous grain size. Non magnetic. Spinifex observed at several place, variably developed, as well as early ductile breccia. Minor shear zones are encountered, dipping 50 deg to CA, associated with calcite sheared veins (312,3m). Locally pyrite-rich. Mafic dykes (< 1 m-large).				
340.40	349.90	10a				
		Mafic Dyke				
		Dark grey fine grain massive mafic dyke. Hard, and non magnetic. Both contacts are minor shear zones dipping 65 deg to CA with very weak brittle reactivation.				
349.90	370.70	9 cb				
		Carbonate Altered Peridotite				
		Medium to dark grey ultramafics, heterogeneous grain size from fine to coarse. Frequent calcite veining and veinletting (random orientation). Mafic dykes (< 1 m-large).				
366.00	370.70	SHR				
		Shear zone				
		Talc altered peridotite significantly sheared at 35 deg to CA. Could be described as a talc-altered peridotite. Extremely talcy over 1 m.				
370.70	393.80	391.00	392.00	154806	1.00	2390
		392.00	393.00	154807	1.00	1490
		393.00	393.80	154808	0.80	1540
		Light grey-green coarse grain peridotite. Heterogeneous texture. Local foliation at 40 deg to CA. Locally porphyritic elongated minerals (carbonatized olivine ?), randomly oriented. Frequent late calcite veinlets (dominantly dipping 50 deg to CA), and veins. Non to weakly magnetic.				
393.80	397.80	393.80	395.00	154809	1.20	1820
		395.00	396.00	154810	1.00	3660
		396.00	397.00	154811	1.00	2330
		397.00	397.80	154812	0.80	4170
		Sulfides appear very heterogeneously in interstices, with good concentrations on cm-size zones. Probably chalcopyrite, pentlandite and pyrrhotite. Weakly to well magnetic.				
397.80	398.70	397.80	398.70	154813	0.90	4860
		Well Mineralized Peridotite				
		Dark grey ultramafics. Same host rock as above. Sulfides occurs very heterogeneously in very high grade, along foliation-parallel blebs concentrations. Blebs are in average 3 mm-large. Strongly magnetic. Pentlandite and pyrrhotite.				
398.70	401.80	398.70	400.00	154814	1.30	2230
		400.00	401.00	154815	1.00	2170
		401.00	401.80	154816	0.80	2710
		Same as above. Increasing proportion of serpentine in veinlets and veins filling. Locally well mineralized (few cm-long interval), very heterogeneous and globally low grade. Mineralization is similar as above: interstitial to concentrated in blebs oriented along the foliation. Also appears as disseminated fine grains.				
401.80	403.00	401.80	403.00	154817	1.20	7740
		Well Mineralized Peridotite				
		Same as above, locally massive.				
403.00	412.00	403.00	404.00	154818	1.00	2200
		404.00	405.00	154819	1.00	2470
		Weakly Mineralized Peridotite				

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
Same as above.			405.00	406.00	154820	1.00	2950
			406.00	407.00	154821	1.00	3250
			407.00	408.00	154822	1.00	2620
			408.00	409.00	154823	1.00	2450
			409.00	410.00	154824	1.00	2840
			410.00	411.00	154827	1.00	2350
			411.00	412.00	154828	1.00	2040
412.00	420.00	9a mod min Moderately Mineralized Peridotite	412.00	413.00	154829	1.00	3320
			413.00	414.00	154830	1.00	3530
			414.00	415.00	154831	1.00	4480
			415.00	416.00	154832	1.00	5090
			416.00	417.00	154833	1.00	2470
			417.00	418.00	154834	1.00	2540
			418.00	419.00	154835	1.00	3140
			419.00	420.00	154836	1.00	6860
420.00	431.00	9a well min Well Mineralized Peridotite 2 mm semi-masive vein, 10 cm 10% bebbly section	420.00	421.00	154837	1.00	11800
			421.00	422.00	154838	1.00	6380
			422.00	423.00	154839	1.00	5770
			423.00	424.00	154840	1.00	9890
			424.00	425.00	154841	1.00	9710
			425.00	426.00	154842	1.00	9700
			426.00	427.00	154843	1.00	3320
			427.00	428.00	154844	1.00	6520
			428.00	429.00	154845	1.00	4760
			429.00	430.00	154846	1.00	9430
			430.00	431.00	154847	1.00	7000
431.00	448.00	9a mod min Moderately Mineralized Peridotite	431.00	432.00	154848	1.00	9560
			432.00	433.00	154849	1.00	3670
			433.00	434.00	154852	1.00	2190
			434.00	435.00	154853	1.00	1860
			435.00	436.00	154854	1.00	3650
			436.00	437.00	154855	1.00	2360
			437.00	438.00	154856	1.00	2810
			438.00	439.00	154857	1.00	2310
			439.00	440.00	154858	1.00	10300
			440.00	441.00	154859	1.00	3000
			441.00	442.00	154860	1.00	2560
			442.00	443.00	154861	1.00	5100
			443.00	444.20	154862	1.20	12100
			444.20	445.00	154863	0.80	2580
			445.00	446.00	154864	1.00	3360
			446.00	447.00	154865	1.00	1940
			447.00	448.00	154866	1.00	1300
448.00	455.15	9a Cb weak min Weakly Mineralized Carbonate Altered Peridotite Light grey, carbonate splotches and 5% carbonate and serpentine veins (mm in width)	448.00	449.00	154867	1.00	1560
			449.00	450.00	154868	1.00	3620
			450.00	451.00	154869	1.00	2280
			451.00	452.00	154870	1.00	2220

Fletcher

DESCRIPTION			ASSAYS							
			From	To	Number	Length	Ni (ppm)			
455.15	459.50	9a weak min Weakly Mineralized Peridotite	452.00	453.00	154871	1.00	2350			
			453.00	454.00	154872	1.00	2180			
			454.00	455.00	154873	1.00	1940			
			455.00	455.50	154874	0.50	1750			
			455.50	456.00	154877	0.50	2450			
			456.00	457.00	154878	1.00	2010			
			457.00	458.00	154879	1.00	1910			
			458.00	459.00	154880	1.00	2330			
			459.00	460.00	154881	1.00	1650			
			459.50	467.40	9a Cb weak min Weakly Mineralized Carbonate Altered Peridotite Light grey, carbonate splotches and 5% carbonate and serpentine veins (mm in width except for the one at 461.5m which is 35 cm in width)	460.00	461.00	154882	1.00	1280
461.00	461.50	154883				0.50	1210			
461.50	462.00	154884				0.50	560			
462.00	463.00	154885				1.00	2390			
463.00	464.00	154886				1.00	1780			
464.00	465.00	154887				1.00	1080			
465.00	466.00	154888				1.00	760			
466.00	467.00	154889				1.00	1750			
467.00	467.40	154890				0.40	1380			
467.40	477.00	15a mat Matachewan Dyke Light green dyke with white to greenish large feldspar phenocrysts. Slightly intruded by quartz veins (1%). Core of dyke is medium-grained while 2m off each border is fine grained. Those borders are lined with and intruded by flat black veins of what could be melted peridotite hostrock. Both contacts are sharp at 40-45° to CA.				467.40	468.00	154891	0.60	50
			468.00	469.00	154892	1.00	150			
			475.00	476.00	154893	1.00	60			
			476.00	477.00	154894	1.00	950			
			477.00	480.75	9a weak min Weakly Mineralized Peridotite Same as above.	477.00	478.00	154895	1.00	3620
						478.00	479.00	154896	1.00	2250
479.00	480.75	FA Fault Serpentinised, slickenlines	479.00	481.00	154897	2.00	2080			
480.75	485.70	9a weak min Weakly Mineralized Peridotite Same as above.	481.00	482.00	154898	1.00	1850			
			482.00	483.00	154899	1.00	2080			
			483.00	484.00	154902	1.00	2280			
			484.00	485.00	154903	1.00	2050			
			485.00	485.70	154904	0.70	3550			
485.70	489.00	9a mod min Moderately Mineralized Peridotite Same as above.	485.70	486.00	154905	0.30	10200			
			486.00	487.00	154906	1.00	4690			
			487.00	488.00	154907	1.00	2450			
			488.00	489.00	154908	1.00	4090			
			489.00	490.00	154909	1.00	5520			
			490.00	491.00	154910	1.00	8080			
489.00	492.00	9a well min Well Mineralized Peridotite Same as above.	491.00	492.00	154911	1.00	4420			
			492.00	493.00	154912	1.00	2500			
			493.00	494.00	154913	1.00	1780			
			494.00	495.00	154914	1.00	1530			
			495.00	496.00	154915	1.00	1510			
			496.00	497.00	154916	1.00	2090			
			497.00	498.00	154917	1.00	3500			
492.00	505.00	9a weak min Weakly Mineralized Peridotite Same as above.	492.00	493.00	154912	1.00	2500			
			493.00	494.00	154913	1.00	1780			
			494.00	495.00	154914	1.00	1530			
			495.00	496.00	154915	1.00	1510			
			496.00	497.00	154916	1.00	2090			
			497.00	498.00	154917	1.00	3500			

Fletcher

DESCRIPTION			ASSAYS				
			From	To	Number	Length	Ni (ppm)
			498.00	499.00	154918	1.00	6490
			499.00	500.00	154919	1.00	8930
			500.00	501.00	154920	1.00	6620
			501.00	502.00	154921	1.00	6890
			502.00	503.00	154922	1.00	3660
			503.00	504.00	154923	1.00	2790
			504.00	505.00	154924	1.00	3910
505.00	510.00	9a well min Well Mineralized Peridotite Same as above.	505.00	506.00	154927	1.00	6240
			506.00	507.00	154928	1.00	6040
			507.00	508.00	154929	1.00	7650
			508.00	509.00	154930	1.00	6450
510.00	522.00	9a weak min Weakly Mineralized Peridotite Same as above.	509.00	510.00	154931	1.00	5010
			510.00	511.00	154932	1.00	4220
			511.00	512.00	154933	1.00	3090
			512.00	513.00	154934	1.00	4140
			513.00	514.00	154935	1.00	3550
			514.00	515.00	154936	1.00	3100
			515.00	516.00	154937	1.00	3610
			516.00	517.00	154938	1.00	3110
			517.00	518.00	154939	1.00	3220
			518.00	519.00	154940	1.00	3010
			519.00	520.00	154941	1.00	2910
			520.00	520.60	154942	0.60	3230
			520.60	521.00	154943	0.40	490
522.00	548.60	9 cb Carbonate Altered Peridotite Varying shades of light gray with dotted carbonate alteration prevalent. One 3m section heavily carbonate-altered (from 529 to 532m). Hole ended due to shattered bit wedging the corebarrel inside the rods.	521.00	522.00	154944	1.00	370
			522.00	522.50	154945	0.50	3580
			522.50	523.00	154946	0.50	3330
			523.00	524.00	154947	1.00	3740
			524.00	525.00	154948	1.00	3550
			525.00	526.00	154949	1.00	2760
			526.00	527.00	154952	1.00	2930
			527.00	528.00	154953	1.00	2810
			528.00	529.00	154954	1.00	1510
548.60		DDH end Number of samples : 137 Number of samples QAQC : 12 Total sampled length : 132.00					

Appendix C

Quality Analysis ...



Innovative Technologies

Invoice No.: **A08-1952**
 Purchase Order:
 Invoice Date: **30-May-08**
 Date submitted: **22-Apr-08**
 Your Reference: **Texmont**
 GST #: **R121979355**

Fletcher Nickel
141 Adelaide St. West
Toronto Ontario M5H 3M7
Canada

ATTN Samir Biswas-Invoices

INVOICE

No. samples	Description	Unit Price	Total
50	RX1-T(TIMMINS)	\$ 10.00	\$ 500.00
50	8-Ni	\$ 11.00	\$ 550.00
Subtotal: :			\$ 1,050.00
GST 5% :			\$ 52.50
AMOUNT DUE: (CAD) :			\$ 1,102.50

Net 30 days. 1 1/2 % per month charged on overdue accounts.

Bank Transfers can be made to:
 ACTIVATION LABORATORIES LTD at
 ROYAL BANK OF CANADA
 59 WILSON STREET WEST
 ANCASTER, ONTARIO CANADA L9G 1N1
 TRANSIT #: 00102 003 ACCOUNT #: 100 154 4
 SWIFT CODE#: ROYCCAT2

Please reference the invoice number when
 making a payment by Bank/Wire transfer.
 Thank you!

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
 +1.888.228.5227 FAX +1.905.648.9613

E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Report: A08-1952 (i)
Report Date: 5/29/2008

Final Report Activation Laboratories

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
154806	0.239
154807	0.149
154808	0.154
154809	0.182
154810	0.366
154811	0.233
154812	0.417
154813	0.486
154814	0.223
154815	0.217
154816	0.271
154817	0.774
154818	0.22
154819	0.247
154820	0.295
154821	0.325
154822	0.262
154823	0.245
154824	0.284
154825	0.008
154826	0.731
154827	0.235
154828	0.204
154829	0.332
154830	0.353
154831	0.448
154832	0.509
154833	0.247
154834	0.254
154835	0.314
154836	0.686
154837	1.18
154838	0.638
154839	0.577
154840	0.989
154841	0.971
154842	0.97
154843	0.332
154844	0.652
154845	0.476
154846	0.943
154847	0.7
154848	0.956
154849	0.367
154850	0.009
154851	1.38
154852	0.219
154853	0.186

Report: A08-1952 (i)
Report Date: 5/29/2008

Final Report
Activation Laboratories

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
<hr/>	
154806	0.239
154854	0.365
154855	0.236

Quality Analysis ...



Innovative Technologies

Date Submitted: 22-Apr-08
Invoice No.: A08-1952 (i)
Invoice Date: 29-May-08
Your Reference: Texmont

Fletcher Nickel
181 University Ave Suite 2200
Toronto Ontario M5H 3M7

ATTN: Samir Blewas-Invoices

CERTIFICATE OF ANALYSIS

50 Core samples and 1 Crushed Rock sample were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-1952 (I)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman", written over a horizontal line.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
154806	0.238
154807	0.148
154808	0.154
154809	0.182
154810	0.388
154811	0.233
154812	0.417
154813	0.486
154814	0.223
154815	0.217
154816	0.271
154817	0.774
154818	0.220
154819	0.247
154820	0.285
154821	0.325
154822	0.282
154823	0.245
154824	0.284
154825	0.008
154826	0.731
154827	0.235
154828	0.204
154829	0.332
154830	0.353
154831	0.448
154832	0.509
154833	0.247
154834	0.254
154835	0.314
154836	0.588
154837	1.18
154838	0.638
154839	0.577
154840	0.069
154841	0.971
154842	0.970
154843	0.332
154844	0.652
154845	0.476
154846	0.943
154847	0.700
154848	0.956
154849	0.367
154850	0.009
154851	1.38
154852	0.219
154853	0.188
154854	0.385
154855	0.236

Quality Control	
Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

154806 Orig	0.239
154806 Split	0.237
154807 Orig	0.146
154807 Dup	0.162
154828 Orig	0.201
154828 Dup	0.206
154835 Orig	0.314
154835 Split	0.318
154835 Split	0.316
154842 Orig	0.987
154842 Dup	0.973
154855 Orig	0.236
154855 Split	0.232
Method Blank Method	< 0.003
Blank	
Method Blank Method	< 0.003
Blank	
Method Blank Method	< 0.003
Blank	
Method Blank Method	< 0.003
Blank	

Quality Analysis ...



Innovative Technologies

Date Submitted: 23-Apr-08
Invoice No.: A08-1967 (i)
Invoice Date: 29-May-08
Your Reference: Texmont

Fletcher Nickel
181 University Ave Suite 2200
Toronto Ontario M5H 3M7

ATTN: Samir Biswas-Invoices

CERTIFICATE OF ANALYSIS

50 Core samples and 1 Crushed Rock sample were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-1967 (i)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman", written over a horizontal line.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.000
Analysis Method	ICP-OES
154856	0.281
154857	0.231
154858	1.03
154859	0.300
154860	0.256
154861	0.510
154862	1.21
154863	0.256
154864	0.336
154865	0.194
154866	0.130
154867	0.156
154868	0.362
154869	0.228
154870	0.222
154871	0.235
154872	0.218
154873	0.184
154874	0.175
154875	0.014
154876	0.733
154877	0.245
154878	0.201
154879	0.191
154880	0.233
154881	0.185
154882	0.129
154883	0.121
154884	0.066
154885	0.239
154886	0.178
154887	0.108
154888	0.076
154889	0.175
154890	0.138
154891	0.005
154892	0.015
154893	0.006
154894	0.095
154895	0.362
154896	0.225
154897	0.206
154898	0.185
154899	0.206
154900	0.003
154901	1.41
154902	0.226
154903	0.206
154904	0.355
154905	1.02

Quality Control

Analyte Symbol	N
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

154856 Orig	0.281
154856 Spilt	0.299
154866 Orig	0.356
154866 Dup	0.367
154885 Orig	0.239
154885 Spilt	0.245
154889 Orig	0.171
154889 Dup	0.179
154903 Orig	0.210
154903 Dup	0.201
154905 Orig	1.02
154905 Spilt	1.02
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003

Quality Analysis ...



Innovative Technologies

Date Submitted: 24-Apr-08
Invoice No.: A08-1970
Invoice Date: 30-May-08
Your Reference: Texmont

Fletcher Nickel
181 University Ave Suite 2200
Toronto Ontario M5H 3M7

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

50 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-1970

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman".

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsintl.com ACTLABS GROUP WEBSITE <http://www.actlabsintl.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
154906	0.469
154907	0.245
154908	0.409
154909	0.552
154910	0.808
154911	0.442
154912	0.250
154913	0.178
154914	0.153
154915	0.151
154916	0.209
154917	0.380
154918	0.649
154919	0.893
154920	0.852
154921	0.588
154922	0.386
154923	0.279
154924	0.391
154925	< 0.003
154926	0.886
154927	0.624
154928	0.504
154929	0.765
154930	0.645
154931	0.501
154932	0.422
154933	0.309
154934	0.414
154935	0.355
154936	0.310
154937	0.361
154938	0.311
154939	0.322
154940	0.301
154941	0.291
154942	0.323
154943	0.049
154944	0.037
154945	0.358
154946	0.333
154947	0.374
154948	0.355
154949	0.276
154950	0.009
154951	1.38
154952	0.293
154953	0.281
154954	0.151

Quality Control

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

PTC-1a Meas	9.85
PTC-1a Cert	10.1
OREAS 13P Meas	0.233
OREAS 13P Cert	0.226
OREAS 14P Meas	2.06
OREAS 14P Cert	2.10
154918 Orig	0.852
154918 Dup	0.845
154932 Orig	0.427
154932 Dup	0.417
154935 Orig	0.368
154935 Split	0.339
154947 Orig	0.367
154947 Dup	0.361
154954 Orig	0.151
154954 Split	0.154
Method Blank Method	< 0.003
Blank	
Method Blank Method	< 0.003
Blank	

Quality Analysis ...



Innovative Technologies

Date Submitted: 21-Apr-08
Invoice No.: A08-1900 (i)
Invoice Date: 23-May-08
Your Reference: Texmont -30

Fletcher Nickel
181 University Ave
Suite 2200
Toronto Ontario M5H 3M7
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Core samples were submitted for analysis.

The following analytical packages were requested:

REPORT A08-1900 (I)

Code Specific Gravity Pulp
Code 4F-S Infrared
Code 8 Code 8-Assays
Code 8-4 Acid Total Digestion Code 8-4 Acid Total Digestion Assays

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "C. Douglas Read". The signature is written in a cursive, flowing style.

C. Douglas Read, B.Sc.
Laboratory Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	Total S	NI	NI	Fe Spec Grav	
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	ICP-OES	GRAV
155655	0.08	0.011	0.019	9.44	2.90
155656	0.31	< 0.003	0.006	10.8	2.65
155657	0.14	0.018	0.020	10.6	2.89
155658	0.62	0.012	0.015	12.3	2.92
155659	0.68	< 0.003	0.005	11.8	2.98
155660	0.16	0.006	0.009	11.8	2.93
155661	0.32	< 0.003	0.005	11.0	3.02
155662	0.35	< 0.003	0.005	11.3	2.93
155663	0.72	< 0.003	0.005	11.7	2.93
155664	0.10	0.051	0.068	9.78	3.09
155665	0.39	0.108	0.128	7.02	2.96
155666	0.09	0.042	0.058	11.5	2.94
155667	0.36	< 0.003	0.008	11.7	2.99
155668	0.10	0.030	0.043	10.7	3.06
155669	0.65	< 0.003	0.005	12.2	2.97
155670	0.36	< 0.003	0.006	12.3	3.00
155671	0.86	< 0.003	0.003	11.9	2.96
155672	0.30	< 0.003	0.005	12.2	3.01
155673	0.42	< 0.003	0.005	12.3	2.98
155674	0.37	0.005	0.010	12.0	2.98
155675	< 0.01	< 0.003	0.010	4.88	
155676	1.73	0.728	0.700	9.38	
155677	0.28	< 0.003	0.007	12.2	3.01
155678	0.16	< 0.003	0.006	11.8	2.99
155679	0.13	< 0.003	0.005	11.8	2.98
155680	0.10	< 0.003	0.008	12.0	2.99
155681	0.13	< 0.003	0.005	11.9	3.10
155682	0.07	< 0.003	0.003	11.8	2.91
155683	0.05	< 0.003	0.003	11.4	2.88
155684	< 0.01	< 0.003	0.004	11.5	2.83
155685	< 0.01	< 0.003	0.006	12.0	3.00
155686	< 0.01	< 0.003	0.006	12.0	2.99
155687	< 0.01	0.018	0.032	11.8	3.50
155688	0.08	0.109	0.158	5.03	2.65
155689	0.11	0.100	0.120	5.88	2.65
155690	0.09	0.140	0.184	4.59	2.87
155691	0.11	0.210	0.215	4.84	2.67
155692	0.09	0.186	0.209	5.24	2.65
155693	0.11	0.224	0.234	5.47	2.98
155694	0.22	0.338	0.341	5.78	2.71
155695	0.19	0.318	0.308	8.09	2.75
155696	0.28	0.147	0.138	10.1	2.93
155697	0.23	0.298	0.290	5.48	2.70
155698	0.33	0.396	0.371	4.81	2.71
155699	0.14	0.249	0.284	5.51	2.63
155700	0.02	< 0.003	0.009	4.86	
155701	3.30	1.52	1.44	9.20	
155702	0.12	0.276	0.303	5.31	2.71
155703	0.09	0.151	0.203	5.17	2.77
155704	0.05	0.136	0.179	4.48	2.78

Quality Control

Analyte Symbol	Total S	NI	NI	Fe	Spec Grav
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	ICP-OES	GRAV
KC-1A Meas				10.8	
KC-1A Cert				10.9	
SGR-1 Meas	1.44				
SGR-1 Cert	1.53				
OREAS 13P Meas		0.234	0.230	7.65	
OREAS 13P Cert		0.226	0.226	7.58	
OREAS 14P Meas		2.17	2.12	34.1	
OREAS 14P Cert		2.10	2.10	37.2	
155855 Orig	0.08	0.011	0.019	9.44	2.80
155855 Split	0.05	0.014	0.025	9.17	2.73
155884 Orig	0.10				3.13
155884 Dup	0.10				3.05
155867 Orig		< 0.003	0.006	11.8	
155867 Dup		< 0.003	0.006	11.8	
155874 Orig	0.36				2.87
155874 Dup	0.36				2.85
155881 Orig		< 0.003	0.003	12.0	
155881 Dup		< 0.003	0.005	11.8	
155884 Orig	< 0.01	< 0.003	0.004	11.5	2.93
155884 Split	< 0.01	< 0.003	0.004	11.8	2.88
155884 Orig	0.03				
155884 Dup	< 0.01				
155888 Orig					3.01
155888 Dup					2.98
155894 Orig	0.22				
155894 Dup	0.23				
155898 Orig					2.90
155898 Dup					2.97
155702 Orig		0.270	0.301	5.22	
155702 Dup		0.282	0.304	5.41	
155704 Orig	0.05	0.136	0.179	4.48	2.76
155704 Split	0.05	0.139	0.178	4.47	2.76
155704 Orig	0.06				
155704 Dup	0.05				
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank			< 0.003	< 0.003	
Method Blank Method Blank			< 0.003	< 0.003	
Method Blank Method Blank			< 0.003	0.051	
Method Blank Method Blank	< 0.01				
Method Blank Method Blank					< 0.01
Method Blank Method Blank					< 0.01

Quality Analysis ...



Innovative Technologies

Date Submitted: 21-Apr-08
Invoice No.: A08-1901 (i)
Invoice Date: 11-Jun-08
Your Reference: Texmont 1000000000

Fletcher Nickel
141 Adelaide St, West, Suite #1000
Toronto Ontario M5H 3L5

ATTN: Samir Biswas-Invoices

CERTIFICATE OF ANALYSIS

50 Core samples and 1 Crushed Rock sample were submitted for analysis.

The following analytical packages were requested:

REPORT	A08-1901 (i)	Code Specific Gravity Pulp
		Code 8 Code 8-Assays
		Code 8-4 Acid Total Digestion Code 8-4 Acid Total Digestion
		Assays
		Code 4F-S Infrared

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman".

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabs.nt.com ACTLABS GROUP WEBSITE <http://www.actlabs.nt.com>

Analyte Symbol	Total S	Ni	Fe	Spec Grav
Unit Symbol	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	GRAV
155705	0.04	0.183	4.75	2.88
155706	0.06	0.188	4.88	2.73
155707	0.09	0.191	4.71	2.85
155708	0.11	0.187	4.78	2.84
155709	0.13	0.220	5.47	2.87
155710	0.22	0.189	7.93	2.78
155711	0.18	0.111	7.80	2.84
155712	0.13	0.209	4.82	2.84
155713	0.10	0.191	4.85	2.84
155714	0.18	0.238	4.88	2.78
155715	0.45	0.543	4.99	2.88
155718	0.18	0.207	4.77	2.76
155717	0.27	0.281	4.03	2.82
155718	0.30	0.324	5.45	2.82
155719	0.53	0.494	5.84	2.85
155720	0.57	0.540	4.90	2.83
155721	0.32	0.352	3.80	2.73
155722	0.17	0.217	3.87	2.83
155723	0.21	0.209	5.75	2.88
155724	0.28	0.157	4.13	2.88
155725	0.03	0.005	4.82	
155726	1.74	0.888	8.91	
155727	0.08	0.099	4.50	2.83
155728	0.13	0.135	4.82	2.96
155729	0.15	0.133	4.88	2.99
155730	0.42	0.313	5.50	2.93
155731	0.37	0.264	4.97	2.92
155732	0.35	0.274	4.79	3.00
155733	0.12	0.168	4.77	2.90
155734	0.18	0.113	5.88	2.79
155735	0.29	0.282	4.94	2.84
155738	0.21	0.210	3.58	2.70
155737	0.19	0.259	4.14	2.85
155738	0.19	0.233	4.18	2.88
155739	0.42	0.320	4.22	2.78
155740	0.25	0.215	3.23	2.78
155741	0.28	0.308	3.91	2.72
155742	0.19	0.239	3.91	2.88
155743	0.19	0.212	4.34	2.89
155744	0.20	0.228	4.82	2.87
155745	0.22	0.238	5.03	2.84
155746	0.20	0.230	5.13	2.78
155747	0.23	0.204	5.18	2.71
155748	0.43	0.292	6.38	2.88
155749	0.18	0.174	6.52	2.74
155750	0.03	0.006	4.70	2.80
155751	3.32	1.31	9.17	
155752	0.15	0.137	6.77	2.89
155753	0.13	0.113	6.73	2.88
155754	0.17	0.135	6.78	2.74

Quality Control				
Analyte Symbol	Total S	Ni	Fe	Spec Grav
Unit Symbol	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	GRAV
KC-1A Meas			10.7	
KC-1A Cert			10.8	
SGR-1 Meas	1.50			
SGR-1 Cert	1.33			
PTC-1a Meas		9.83	33.3	
PTC-1a Cert		10.1	34.8	
PTC-1a Meas		9.87		
PTC-1a Cert		10.1		
PTC-1a Meas		10.0		
PTC-1a Cert		10.1		
OREAS 13P Meas		0.217	7.43	
OREAS 13P Cert		0.226	7.58	
OREAS 13P Meas		0.225		
OREAS 13P Cert		0.228		
OREAS 13P Meas		0.228		
OREAS 13P Cert		0.228		
OREAS 14P Meas		2.16	35.7	
OREAS 14P Cert		2.10	37.2	
OREAS 14P Meas		2.08		
OREAS 14P Cert		2.10		
OREAS 14P Meas		2.18		
OREAS 14P Cert		2.10		
155705 Orig	0.04	0.193	4.75	2.88
155705 Split	0.07	0.189	4.94	2.72
155708 Orig		0.205		
155708 Split		0.230		
155714 Orig	0.15			2.77
155714 Dup	0.18			2.76
155717 Orig		0.315	4.15	
155717 Dup		0.297	3.91	
155717 Orig		0.279		
155717 Dup		0.283		
155724 Orig	0.25			2.84
155724 Dup	0.26			2.87
155731 Orig		0.380	4.91	
155731 Dup		0.370	5.00	
155731 Orig		0.268		
155731 Dup		0.259		
155734 Orig	0.18	0.174	5.88	2.78
155734 Split	0.16	0.182	6.05	2.82
155734 Orig	0.19			2.81
155734 Dup	0.17			2.77
155734 Orig		0.115		
155734 Split		0.115		
155744 Orig	0.19			2.85
155744 Dup	0.20			2.70
155746 Orig		0.226	5.11	
155746 Dup		0.225	5.15	
155746 Orig		0.230		
155746 Dup		0.230		
155754 Orig	0.17	0.139	8.78	2.74
155754 Split	0.17	0.138	8.78	2.70
155754 Orig	0.17			2.72
155754 Dup	0.18			2.76
155754 Orig		0.135		
155754 Split		0.130		

Quality Control				
Analyte Symbol	Total S	NI	Fe	Spec Grav
Unit Symbol	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	GRAV
Method Blank Method Blank	< 0.01			
Method Blank Method Blank	< 0.003			
Method Blank Method Blank	< 0.003			
Method Blank Method Blank	< 0.003	< 0.003		
Method Blank Method Blank	< 0.003	< 0.003		
Method Blank Method Blank	< 0.003	< 0.003		
Method Blank Method Blank	< 0.003			
Method Blank Method Blank			< 0.01	
Method Blank Method Blank	< 0.003			

Sample ID	Specific gravity
155705-1	2.669
155705-2	2.672
155706-1	2.659
155706-2	2.671
155707-1	2.674
155707-2	2.669
155708-1	2.673
155708-2	2.678
155709-1	2.669
155709-2	2.679
155710-1	2.691
155710-2	2.679
155711-1	2.640
155711-2	2.629
155712-1	2.669
155712-2	2.658
155713-1	2.669
155713-2	2.670
155714-1	2.685
155714-2	2.675
155715-1	2.694
155715-1	2.689
155715-2	2.758
155715-2	2.755
155716-1	2.690
155716-2	2.689
155717-1	2.730
155717-2	2.742
155718-1	2.711
155718-2	2.697
155719-1	2.720
155719-2	2.700
155720-1	2.698
155720-2	2.705
155721-1	2.792
155721-1	2.783
155721-2	2.742
155721-2	2.740
155722-1	2.747
155722-2	2.760
155723-1	2.843
155723-1	2.843
155723-2	2.773

Sample ID	Specific gravity
155723-2	2.771
155724-1	2.865
155724-2	2.873
155725-1	0.000
155725-2	0.000
155726-1	0.000
155726-2	0.000
155727-1	2.859
155727-2	2.883
155728-1	2.900
155728-2	2.906
155729-1	2.912
155729-1	2.907
155729-2	2.918
155729-2	2.915
155730-1	2.934
155730-2	2.902
155731-1	2.907
155731-1	2.912
155731-2	2.932
155731-2	2.896
155732-1	3.577
155732-1	2.914
155732-2	2.920
155732-2	2.910
155733-1	3.020
155733-1	2.864
155733-2	3.066
155733-2	2.891
155734-1	2.835
155734-2	2.816
155735-1	2.737
155735-2	2.741
155736-1	2.709
155736-1	2.705
155736-2	2.732
155736-2	2.734
155737-1	2.814
155737-1	2.686
155737-2	2.932
155737-2	2.680
155738-1	2.778
155738-1	2.730

Sample ID	Specific gravity
155738-2	2.991
155738-2	2.719
155739-1	2.798
155739-1	2.787
155739-2	4.095
155739-2	2.954
155740-1	2.719
155740-1	2.714
155740-2	2.668
155740-2	2.793
155741-1	2.610
155741-2	2.671
155742-1	2.678
155742-1	2.679
155742-2	2.670
155742-2	2.670
155743-1	2.656
155743-1	2.658
155743-2	2.664
155743-2	2.664
155744-1	2.719
155744-2	2.671
155745-1	2.664
155745-1	2.665
155745-2	2.664
155745-2	2.668
155746-1	2.668
155746-1	2.667
155746-2	2.667
155746-2	2.665
155747-1	2.644
155747-2	2.659
155748-1	2.638
155748-2	2.657
155749-1	2.725
155749-1	2.717
155749-2	2.735
155749-2	2.739
155750-1	0.000
155750-2	0.000
155751-1	0.000
155751-2	0.000
155752-1	2.719

Sample ID	Specific gravity
155752-2	2.697
155753-1	2.746
155753-1	2.743
155753-2	2.685
155753-2	2.719
155754-1	2.721
155754-2	2.767

Quality Analysis ...



Innovative Technologies

Date Submitted: 21-Apr-08
Invoice No.: A08-1902
Invoice Date: 23-Jun-08
Your Reference: TEX08-30

Fletcher Nickel
141 Adelaide St, West,
Suite #1000
Toronto Ontario M5H 3L5
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

49 Core samples and 1 Crushed Rock sample were submitted for analysis.

The following analytical packages were requested:

REPORT A08-1902

Code 4F-S Infrared
Code 8 Code 8-Assays
Code 8-4 Acid Total Digestion Code 8-4 Acid Total Digestion
Assays
Code Specific Gravity Pulp
Code Specific Gravity Core - Core

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Elitsa Hrischeva". The signature is written in a cursive style and is positioned above a horizontal line.

Elitsa Hrischeva, Ph.D.
Quality Control

ACTIVATION LABORATORIES LTD.

1335 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsintl.com ACTLABS GROUP WEBSITE <http://www.actlabsintl.com>

Activation Laboratories Ltd. Report: A08-1902

Analyte Symbol Package Code	Total S 4P-S	Ni 6	Ni 8-4 Acid Total Digestion	Fe 8-4 Acid Total Digestion	Spec Grav Specific Gravity
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
155755	0.17	0.120	0.115	6.56	2.72
155756	0.89	0.515	0.490	8.92	2.68
155757	0.33	0.179	0.183	6.27	2.67
155758	0.31	0.190	0.190	6.23	2.63
155759	0.30	0.215	0.218	6.75	2.65
155760	0.40	0.278	0.282	7.13	2.68
155761	0.21	0.140	0.148	6.92	2.65
155762	0.31	0.187	0.190	7.78	2.70
155763	0.86	0.499	0.488	7.48	2.70
155764	0.29	0.182	0.185	5.67	2.67
155765	0.30	0.189	0.190	5.33	2.66
155766	0.40	0.349	0.348	5.73	2.69
155767	0.64	0.401	0.395	5.85	2.72
155768	0.47	0.408	0.388	6.32	2.68
155769	0.68	0.576	0.561	7.63	2.77
155770	1.33	0.786	0.769	8.51	2.76
155772	1.85	1.30	1.31	8.68	2.79
155773	1.41	1.06	1.06	7.68	2.71
155774	1.28	0.847	0.814	7.30	2.68
155775	0.01	0.004	0.013	5.22	
155776	1.87	0.746	0.709	9.39	
155777	0.76	0.516	0.504	6.44	2.71
155778	0.42	0.332	0.329	4.99	2.62
155779	0.49	0.401	0.406	6.42	2.69
155780	0.83	0.598	0.546	4.01	2.74
155781	0.53	0.395	0.399	7.18	2.67
155782	0.43	0.305	0.299	5.23	2.69
155783	0.44	0.285	0.276	3.21	2.68
155784	0.52	0.514	0.506	6.48	2.68
155785	0.52	0.500	0.494	6.13	2.68
155786	0.39	0.342	0.344	6.48	2.67
155787	0.34	0.328	0.330	6.12	2.67
155788	0.32	0.306	0.312	5.24	2.67
155789	0.34	0.440	0.437	5.67	2.68
155790	0.43	0.351	0.370	5.63	2.68
155791	0.46	0.447	0.449	4.91	2.72
155792	0.44	0.426	0.426	4.31	2.67
155793	0.26	0.290	0.297	4.57	2.62
155794	0.33	0.347	0.349	5.06	2.72
155795	0.36	0.362	0.366	4.96	2.73
155796	0.28	0.262	0.260	5.33	2.72
155797	0.67	0.646	0.653	5.89	2.72
155798	0.34	0.393	0.405	5.28	2.67
155799	0.37	0.395	0.384	5.27	2.67
155800	< 0.01	< 0.003	0.010	4.96	
155801	3.28	1.40	1.42	9.23	
155802	0.32	0.331	0.321	5.48	2.69
155803	0.27	0.297	0.304	5.06	2.63
155804	0.24	0.275	0.262	4.04	2.63

Quality Control					
Analyte Symbol	Total S	Ni	Ni	Fe	Spec Grav
Package Code	4F-S	8	8-4 Acid Total Digestion	8-4 Acid Total Digestion	Specific Gravity
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
KC-1A Meas				10.8	
KC-1A Cert				10.9	
SGR-1 Meas	1.49				
SGR-1 Cert	1.53				
PTC-1a Meas		9.90	9.73		
PTC-1a Cert		10.13	10.13		
OREAS 13P Meas		0.226	0.234	7.78	
OREAS 13P Cert		0.226	0.228	7.88	
OREAS 14P Meas		2.17	2.07	38.1	
OREAS 14P Cert		2.10	2.10	37.2	
155755 Orig	0.17	0.120	0.115	6.56	2.72
155755 Split	0.15	0.103	0.111	6.32	2.86
155755 Split	0.15				
155784 Orig	0.29				2.65
155784 Dup	0.29				2.70
155787 Orig		0.396	0.398	5.83	
155787 Dup		0.405	0.394	5.68	
155774 Orig	1.28				
155774 Dup	1.27				
155777 Orig					2.72
155777 Dup					2.70
155782 Orig		0.305	0.297	3.54	
155782 Dup		0.305	0.300	8.82	
155784 Orig	0.52	0.514	0.508	8.45	2.68
155784 Split	0.53	0.499	0.513	8.57	2.65
155784 Orig	0.53				
155784 Dup	0.52				
155787 Orig					2.67
155787 Dup					2.66
155794 Orig	0.33				
155794 Dup	0.33				
155797 Orig		0.841	0.855	5.94	2.73
155797 Dup		0.852	0.852	5.85	2.71
155804 Orig	0.24	0.275	0.282	4.04	2.63
155804 Split	0.24	0.275	0.283	4.08	2.60
Method Blank Method Blank	< 0.003				
Method Blank Method Blank	< 0.003				
Method Blank Method Blank	< 0.003				
Method Blank Method Blank	< 0.003				
Method Blank Method Blank		< 0.003	0.275		
Method Blank Method Blank		< 0.003	0.277		
Method Blank Method Blank					< 0.01
Method Blank Method Blank	< 0.01				

Sample ID	Specific gravity
155755-1	2.75
155755-1	2.75
155755-2	2.67
155755-2	2.69
155756-1	2.74
155756-2	2.69
155757-1	2.62
155757-1	2.69
155757-2	2.69
155757-2	2.69
155758-1	2.68
155758-1	2.68
155758-2	2.67
155758-2	2.68
155759-1	2.68
155759-2	2.69
155760-1	2.65
155760-2	2.69
155761-1	2.67
155761-1	2.67
155761-2	2.68
155761-2	2.68
155762-1	2.73
155762-2	2.68
155763-1	2.72
155763-1	2.72
155763-2	2.73
155763-2	2.73
155764-1	2.66
155764-2	2.67
155765-1	2.69
155765-1	2.69
155765-2	2.66
155765-2	2.67
155766-1	2.67
155766-2	2.67
155767-1	2.67
155767-1	2.67
155767-2	2.71
155767-2	2.72
155768-1	2.67

Sample ID	Specific gravity
155768-2	2.68
155769-1	2.70
155769-2	2.71
155770-1	2.72
155770-2	2.74
155772-1	2.78
155772-2	2.76
155773-1	2.70
155773-2	2.72
155774-1	2.76
155774-1	2.77
155774-2	2.71
155774-2	2.71
155777-1	2.68
155777-2	2.68
155778-1	2.70
155778-2	2.67
155779-1	2.70
155779-2	2.69
155780-1	2.72
155780-2	2.70
155781-1	2.69
155781-2	2.69
155782-1	2.69
155782-2	2.70
155783-1	2.67
155783-2	2.69
155784-1	2.70
155784-2	2.70
155785-1	2.70
155785-2	2.69
155786-1	2.71
155786-2	2.69
155787-1	2.68
155787-2	2.68
155788-1	2.65
155788-2	2.66
155789-1	2.68
155789-2	2.68
155790-1	2.66
155790-2	2.66

Sample ID	Specific gravity
155791-1	2.67
155791-2	2.66
155792-1	2.62
155792-2	2.65
155793-1	2.66
155793-2	2.67
155794-1	2.68
155794-2	2.68
155795-1	2.70
155795-2	2.69
155796-1	2.68
155796-2	2.66
155797-1	2.67
155797-2	2.67
155798-1	2.73
155798-1	2.73
155798-2	2.67
155798-2	2.67
155799-1	2.67
155799-2	2.67
155802-1	2.69
155802-2	2.66
155803-1	2.67
155803-2	2.65
155804-1	2.64
155804-2	2.65

Quality Analysis ...



Innovative Technologies

Date Submitted: 21-Apr-08
Invoice No.: A08-1921 (i)
Invoice Date: 12-Jun-08
Your Reference: 1100000000

Fletcher Nickel
141 Adelaide St, West,
Suite #1000
Toronto Ontario M5H 3L5
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

50 Core samples and 1 Crushed Rock sample were submitted for analysis.

The following analytical packages were requested:

REPORT	A08-1921 (i)	Code 8 Code 8-Assays
		Code 8-4 Acid Total Digestion Code 8-4 Acid Total Digestion Assays
		Code 4F-S Infrared
		Code Specific Gravity Pulp
		Code Specific Gravity Core - Core

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is fluid and cursive, written over a horizontal line.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabs-nt.com ACTLABS GROUP WEBSITE <http://www.actlabs-nt.com>

Analyte Symbol Package Code	Total S 4F-S	Ni B	Ni 8-4 Acid Total Digestion	Fe 8-4 Acid Total Digestion	Spec Grav Specific Gravity
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
155805	0.81	0.808	0.845	5.18	2.82
155806	0.23	0.258	0.273	4.87	2.87
155807	0.28	0.310	0.314	4.17	2.74
155808	0.37	0.421	0.428	4.58	2.86
155809	0.21	0.237	0.250	4.39	2.78
155810	0.22	0.259	0.288	4.28	2.86
155811	0.34	0.366	0.384	4.11	2.85
155812	0.26	0.289	0.285	3.59	2.83
155813	0.41	0.235	0.248	2.57	2.53
155814	0.70	0.213	0.222	4.08	2.85
155815	0.54	0.289	0.093	1.08	2.88
155816	0.23	0.284	0.317	3.14	2.59
155817	0.30	0.354	0.383	2.81	2.82
155818	0.24	0.277	0.284	2.81	2.80
155819	0.43	0.425	0.434	3.14	2.84
155820	0.44	0.218	0.214	3.50	2.86
155821	0.05	0.030	0.030	8.87	2.89
155822	0.08	0.006	0.012	10.1	3.01
155823	0.03	0.033	0.033	8.48	2.81
155824	0.32	0.382	0.388	2.97	2.88
155825	< 0.01	0.007	0.013	5.17	
155826	1.87	0.720	0.728	10.1	
155827	0.33	0.383	0.378	4.58	2.88
155828	0.22	0.240	0.244	5.07	2.87
155829	0.22	0.247	0.249	5.32	2.84
155830	0.40	0.412	0.433	6.20	2.84
155831	0.42	0.482	0.478	5.82	2.88
155832	0.25	0.280	0.276	5.47	2.82
155833	0.32	0.355	0.382	5.15	2.82
155834	0.52	0.555	0.608	8.98	2.87
155835	0.52	0.548	0.583	8.21	2.87
155836	0.52	0.580	0.588	6.12	2.88
155837	0.93	1.01	1.04	8.27	2.88
155838	0.24	0.256	0.280	6.33	2.85
155839	0.45	0.458	0.488	6.39	2.88
155840	0.37	0.391	0.413	6.18	2.70
155841	0.29	0.283	0.284	3.08	2.84
155842	0.37	0.397	0.413	5.98	2.87
155843	0.38	0.398	0.417	5.86	2.85
155844	0.52	0.541	0.580	8.47	2.88
155845	0.45	0.488	0.483	6.43	2.71
155846	0.67	0.701	0.738	5.90	2.88
155847	0.39	0.384	0.418	5.38	2.82
155848	0.30	0.324	0.345	5.83	2.86
155849	0.46	0.508	0.566	6.25	2.70
155850	< 0.01	0.011	0.019	5.80	
155851	3.29	1.35	1.48	8.53	
155852	0.21	0.238	0.280	5.18	2.83
155853	0.24	0.287	0.312	5.88	2.84
155854	0.21	0.257	0.279	5.45	2.81

Quality Control					
Analyte Symbol	Total S	NI	NI	Fo	Spec Grav
Package Code	4F-S	S	8-4 Acid Total Digestion	8-4 Acid Total Digestion	Specific Gravity
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
KC-1A Meas				11.0	
KC-1A Cert				10.9	
PTM-1a Meas			45.8		
PTM-1a Cert			47.44		
SGR-1 Meas	1.51				
SGR-1 Cert	1.53				
PTC-1a Meas		9.88	9.85	34.2	
PTC-1a Cert		10.1	10.1	34.6	
OREAS 13P Meas		0.230	0.236	7.84	
OREAS 13P Cert		0.226	0.226	7.56	
OREAS 14P Meas		2.11	2.06	35.6	
OREAS 14P Cert		2.10	2.10	37.2	
155805 Orig	0.81	0.809	0.845	5.16	2.82
155805 Split	0.58	0.570	0.602	5.03	2.88
155814 Orig	0.71				2.87
155814 Dup	0.70				2.84
155817 Orig		0.357	0.361	2.79	
155817 Dup		0.351	0.384	2.82	
155824 Orig	0.32				2.69
155824 Dup	0.32				2.57
155831 Orig		0.483	0.472	5.79	
155831 Dup		0.481	0.480	5.84	
155834 Orig	0.52	0.555	0.606	5.98	2.67
155834 Split	0.53	0.532	0.616	6.11	2.64
155834 Orig	0.52				
155834 Dup	0.51				
155836 Orig					2.67
155836 Dup					2.69
155844 Orig	0.51				
155844 Dup	0.53				
155846 Orig		0.698	0.752	5.88	2.71
155846 Dup		0.705	0.724	5.82	2.84
155854 Orig	0.21	0.237	0.279	5.45	2.81
155854 Split	0.21	0.260	0.287	5.54	2.84
155854 Orig	0.22				
155854 Dup	0.21				
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003	0.008		
Method Blank Method Blank		< 0.003	0.009		
Method Blank Method Blank		< 0.003	< 0.003		
Method Blank Method Blank	< 0.01				

Activation Laboratories Ltd. Specific Gravity-Core A08-1921

Sample ID	Specific gravity
155805-1	2.66
155805-2	2.65
155806-1	2.66
155806-2	2.65
155807-1	2.64
155807-2	2.64
155808-1	2.67
155808-2	2.65
155809-1	2.66
155809-2	2.66
155810-1	2.66
155810-2	2.66
155811-1	2.64
155811-2	2.66
155812-1	2.63
155812-2	2.62
155813-1	2.56
155813-2	2.55
155814-1	2.60
155814-1	2.60
155814-2	2.57
155814-2	2.57
155815-1	2.58
155815-2	2.56
155816-1	2.57
155816-2	2.57
155817-1	2.56
155817-2	2.57
155818-1	2.59
155818-2	2.58
155819-1	2.58
155819-2	2.59
155820-1	2.96
155820-1	2.96
155820-2	2.52
155820-2	2.52
155821-1	2.97
155821-2	3.00
155822-1	3.01
155822-2	3.02
155823-1	2.93
155823-2	2.92

Activation Laboratories Ltd. Specific Gravity-Core A08-1921

Sample ID	Specific gravity
155824-1	2.64
155824-1	2.64
155824-2	2.59
155824-2	2.59
155827-1	2.61
155827-2	2.60
155828-1	2.64
155828-2	2.63
155829-1	2.62
155829-1	2.61
155829-2	2.65
155829-2	2.65
155830-1	2.62
155830-2	2.64
155831-1	2.66
155831-2	2.67
155832-1	2.65
155832-2	2.65
155833-1	2.67
155833-2	2.67
155834-1	2.67
155834-1	2.67
155834-2	2.59
155834-2	2.58
155835-1	2.68
155835-2	2.68
155836-1	2.66
155836-2	2.67
155837-1	2.67
155837-2	2.68
155838-1	2.67
155838-2	2.67
155839-1	2.68
155839-2	2.67
155840-1	2.67
155840-2	2.68
155841-1	2.60
155841-2	2.60
155842-1	2.66
155842-2	2.68
155843-1	2.68
15 3-2	2.65

Sample ID	Specific gravity
155844-1	2.68
155844-1	2.69
155844-2	2.71
155844-2	2.72
155845-1	2.68
155845-2	2.67
155846-1	2.66
155846-1	2.67
155846-2	2.73
155846-2	2.73
155847-1	2.66
155847-2	2.66
155848-1	2.67
155848-2	2.67
155849-1	2.68
155849-2	2.67
155852-1	2.63
155852-1	2.63
155852-2	2.66
155852-2	2.66
155853-1	2.67
155853-2	2.68
155854-1	2.68
155854-2	2.67



Date Submitted: 21-Apr-08
Invoice No.: A08-1923 (i)
Invoice Date: 11-Jun-08
Your Reference: (U.V. 100)

Fletcher Nickel
141 Adelaide St, West, Suite #1000
Toronto Ontario M5H 3L5

ATTN: Samir Biswas-Invoices

CERTIFICATE OF ANALYSIS

14 Core samples were submitted for analysis.

The following analytical packages were requested:

REPORT A08-1923 (i)

Code Specific Gravity Pulp
Code 8-4 Acid Total Digestion Code 8-4 Acid Total Digestion Assays
Code 4F-S Infrared
Code 8 Code 8-Assays

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.



Date Submitted: 21-Apr-08
Invoice No.: A08-1923 (i)
Invoice Date: 11-Jun-08
Your Reference: 11719-15

Fletcher Nickel
141 Adelaide St, West, Suite #1000
Toronto Ontario M5H 3L5

ATTN: Samir Biswas-Invoices

CERTIFICATE OF ANALYSIS

14 Core samples were submitted for analysis.

The following analytical packages were requested:

REPORT	A08-1923 (i)	Code Specific Gravity Pulp
		Code 8-4 Acid Total Digestion Code 8-4 Acid Total Digestion Assays
		Code 4F-S Infrared
		Code 8 Code 8-Assays

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

Analyte Symbol	Total S	Ni	Ni	Fe	Spec Grav
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	ICP-OES	GRAV
155855	0.22	0.283	0.282	5.37	2.67
155856	0.21	0.257	0.286	5.47	2.65
155857	0.19	0.247	0.289	5.13	2.64
155858	0.13	0.159	0.186	4.73	2.64
155859	0.12	0.162	0.178	5.90	2.68
155860	0.15	0.187	0.185	6.59	2.73
155861	0.16	0.202	0.205	7.57	2.70
155862	0.28	0.319	0.318	8.22	2.71
155863	0.29	0.314	0.325	7.29	2.71
155864	0.32	0.358	0.387	7.36	2.75
155865	0.18	0.197	0.206	7.44	2.70
155866	0.18	0.231	0.233	6.03	2.80
155867	0.24	0.248	0.275	6.36	2.75
155868	0.20	0.229	0.236	6.87	2.74

Quality Control					
Analyte Symbol	Total S	Ni	Ni	Fe	Spec Grav
Unit Symbol	%	%	%	%	-
Detection Limit	0.01	0.003	0.003	0.003	0.01
Analysis Method	IR	ICP-OES	ICP-OES	ICP-OES	GRAV
KC-1A Meas				10.8	
KC-1A Cert				10.9	
SGR-1 Meas	1.48				
SGR-1 Cert	1.53				
PTC-1a Meas		9.90	9.73		
PTC-1a Cert		10.1	10.1		
OREAS 13P Meas		0.226	0.234	7.76	
OREAS 13P Cert		0.226	0.226	7.58	
OREAS 14P Meas		2.17	2.07	36.1	
OREAS 14P Cert		2.10	2.10	37.2	
155856 Orig		0.158	0.165	4.72	
155856 Dup		0.160	0.167	4.74	
155864 Orig	0.32				2.78
155864 Dup	0.32				2.73
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank		< 0.003			
Method Blank Method Blank			< 0.003	0.275	
Method Blank Method Blank			< 0.003	0.277	
Method Blank Method Blank					< 0.01
Method Blank Method Blank	< 0.01				

Activation Laboratories Ltd. Specific Gravity-Core A08-1923

Sample ID	Specific gravity
155855-1	2.726
155855-1	2.725
155855-2	2.687
155855-2	2.687
155856-1	2.682
155856-2	2.665
155857-1	2.672
155857-2	2.698
155858-1	2.636
155858-2	2.650
155859-1	2.733
155859-2	2.726
155860-1	2.713
155860-2	2.716
155861-1	2.744
155861-2	2.723
155862-1	2.752
155862-1	2.751
155862-2	2.712
155862-2	2.709
155863-1	2.742
155863-2	2.743
155864-1	2.726
155864-2	2.709
155865-1	2.721
155865-2	2.735
155866-1	2.754
155866-2	2.745
155867-1	2.725
155867-2	2.735
155868-1	2.725
155868-2	2.747

Quality Analysis ...



Innovative Technologies

Date Submitted: 16-May-08
Invoice No.: A08-2452 (i)
Invoice Date: 11-Jun-08
Your Reference: 11-000-11

Fletcher Nickel
141 Adelaide St, West, Suite #1000
Toronto Ontario M5H 3L5

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2452 (i)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is fluid and cursive, written over a horizontal line.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive Ancaster Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
155055	0.237
155056	0.233
155057	0.288
155058	0.207
155059	0.355
155060	0.385
155061	0.297
155062	0.295
155063	0.202
155064	0.283
155065	0.224
155066	0.214
155067	0.243
155068	0.323
155069	0.297
155070	0.489
155071	0.252
155072	0.254
155073	0.233
155074	0.283
155075	0.005
155076	0.007
155077	0.245
155078	0.222
155079	0.142
155080	0.149
155081	0.112
155082	0.070
155083	0.132
155084	0.137
155085	0.098
155086	0.018
155087	0.020
155088	0.450
155089	0.231
155090	0.182
155091	0.470
155092	0.706
155093	0.147
155094	0.049
155095	0.048
155096	0.135
155097	0.102
155098	0.151
155099	0.210
155100	0.004
155101	0.005
155102	0.183
155103	0.341
155104	0.282

Quality Control	
Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
PTC-1a Meas	10.0
PTC-1a Cert	10.1
OREAS 13P Meas	0.225
OREAS 13P Cert	0.226
OREAS 14P Meas	2.12
OREAS 14P Cert	2.10
155055 Orig	0.237
155055 Split	0.230
155087 Orig	0.241
155087 Dup	0.245
155081 Orig	0.112
155081 Dup	0.112
155084 Orig	0.137
155084 Split	0.146
155102 Orig	0.181
155102 Dup	0.185
155104 Orig	0.282
155104 Split	0.281
Method Blank Method	< 0.003
Blank	
Method Blank Method	< 0.003
Blank	

Quality Analysis ...



Innovative Technologies

Date Submitted: 12-May-08
Invoice No.: A08-2332 (i)
Invoice Date: 29-May-08
Your Reference: Texmont

Fletcher Nickel
181 University Ave
Suite 2200
Toronto Ontario M5H 3M7
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2332 (i)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is fluid and cursive, written over a horizontal line.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
150047	0.189
150048	0.186
150049	0.181
150050	0.009
150051	0.745
150052	0.218
150053	0.247
150054	0.243
150055	0.585
150056	1.70
150057	0.233
150058	0.257
150059	0.481
150060	0.548
150061	0.478
150062	0.635
150063	0.385
150064	0.220
150065	0.237
150066	0.232
150067	0.210
150068	0.240
150069	0.239
150070	0.249
150071	0.241
150072	0.375
150073	0.225
150074	0.233
150075	0.004
150076	1.30
150077	0.228
150078	0.239
150079	0.235
150080	0.234
150081	0.228
150082	0.227
150083	0.222
150084	0.241
150085	0.224
150086	0.222
150087	0.214
150088	0.231
150089	0.240
150090	0.245
150091	0.279
150092	0.315
150093	0.270
150094	1.02
150095	0.683
150096	0.370

Quality Control

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

PTC-1a Meas	9.48
PTC-1a Cert	10.1
OREAS 13P Meas	0.232
OREAS 13P Cert	0.228
OREAS 14P Meas	2.08
OREAS 14P Cert	2.10
158047 Orig	0.188
158047 Split	0.195
158058 Orig	0.481
158058 Dup	0.471
158073 Orig	0.224
158073 Dup	0.225
158077 Orig	0.226
158077 Split	0.233
158086 Orig	0.227
158086 Dup	0.235
158086 Orig	0.370
158086 Split	0.358
Method Blank Method	< 0.000
Blank	
Method Blank Method	< 0.003
Blank	

Quality Analysis ...



Innovative Technologies

Date Submitted: 14-May-08
Invoice No.: A08-2384 (i)
Invoice Date: 16-Jun-08
Your Reference: 10701001

Fletcher Nickel
141 Adelaide St, West,
Suite #1000
Toronto Ontario M5H 3L5
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2384 (i)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Elitsa Hrischeva". The signature is written in a cursive style and is positioned above a horizontal line.

Elitsa Hrischeva, Ph.D.
Administration

ACTIVATION LABORATORIES LTD.

1335 Sandhill Drive Ancaster Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
156097	0.351
156098	0.340
156099	0.004
156101	0.553
156102	0.560
156103	1.14
156104	0.283
156105	0.277
156106	0.201
156107	0.188
156108	0.236
156109	0.297
156110	0.248
156111	0.279
156112	0.276
156113	0.239
156114	0.317
156115	0.179
156116	0.343
156117	0.537
156118	0.507
156119	0.036
156120	0.170
156121	0.254
156122	0.243
156123	0.287
156124	0.877
156125	0.006
156126	1.39
156127	0.343
156128	0.220
156129	0.138
156130	0.683
156131	0.217
156132	0.005
156133	0.004
156134	0.004
156135	0.004
156136	0.007
156137	0.004
156138	0.004
156139	0.004
156140	0.005
156141	0.081
156142	0.580
156143	0.249
156144	0.385
156145	0.197
156146	0.242
156147	0.259

Quality Control

Analyte Symbol	N
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
PTC-1a Meas	9.89
PTC-1a Cert	10.13
PTC-1a Meas	10.0
PTC-1a Cert	10.1
OREAS 13P Meas	0.229
OREAS 13P Cert	0.226
OREAS 13P Meas	0.230
OREAS 13P Cert	0.226
OREAS 14P Meas	2.12
OREAS 14P Cert	2.10
OREAS 14P Meas	2.14
OREAS 14P Cert	2.10
156087 Orig	0.351
156087 Split	0.337
156088 Orig	0.355
156088 Dup	0.325
156120 Orig	0.167
156120 Dup	0.173
156127 Orig	0.343
156127 Split	0.346
156134 Orig	0.004
156134 Dup	0.004
156147 Orig	0.259
156147 Split	0.245
Method Blank Method	< 0.003
Blank	

Quality Analysis ...



Innovative Technologies

Date Submitted: 14-May-08
Invoice No.: A08-2385
Invoice Date: 09-Jun-08
Your Reference: Texmont 1175 01

Fletcher Nickel
141 Adelaide St, West, Suite #1000
Toronto Ontario M5H 3L5

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2385

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is written in a cursive, flowing style with a long horizontal stroke extending to the right.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
156148	0.118
156149	0.131
156150	0.004
156151	0.762
156152	0.232
156153	0.149
156154	0.194
156155	0.171
156156	0.141
156157	0.153
156158	0.240
156159	0.188
156160	0.219
156161	0.159
156162	0.247
156163	0.202
156164	0.143
156165	0.248
156166	0.189
156167	0.223
156168	0.235
156169	0.362
156170	0.448
156171	0.395
156172	0.388
156173	0.381
156174	0.385
156175	0.067
156176	1.37
156177	0.211
156178	0.222
156179	0.217
156180	0.294
156181	0.286
156182	0.197
156183	0.219
156184	0.204
156185	0.289
156186	0.209
156187	0.130
156188	0.305
156189	0.284
156190	0.297
156191	0.328
156192	0.388
156193	0.514
156194	0.518
156195	0.731
156196	0.202
156197	0.246

Quality Control

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

PTC-1a Meas	10.0
PTC-1a Cert	10.1
OREAS 13P Meas	0.230
OREAS 13P Cert	0.228
OREAS 14P Meas	2.14
OREAS 14P Cert	2.10
156148 Orig	0.118
156148 Split	0.110
156168 Orig	0.168
156168 Dup	0.169
156173 Orig	0.377
156173 Dup	0.385
156177 Orig	0.211
156177 Split	0.215
156188 Orig	0.307
156188 Dup	0.303
156197 Orig	0.246
156197 Split	0.241

Quality Analysis ...



Innovative Technologies

Date Submitted: 14-May-08
Invoice No.: A08-2386
Invoice Date: 05-Jun-08
Your Reference: Texmont 11766151

Fletcher Nickel
181 University Ave Suite 2200
Toronto Ontario M5H 3M7

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

20 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2386

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is written in a cursive style with a long horizontal stroke extending to the right.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1 905.648.9611 or
+1 888 228 5227 FAX +1 905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
156198	0.273
156199	0.564
156200	0.004
156201	0.706
156202	0.676
156203	0.381
156204	0.300
156205	0.282
156206	0.273
156207	0.286
156208	0.254
156209	0.250
156210	0.252
156211	0.263
156212	0.278
156213	0.251
156214	0.420
156215	0.254
156216	0.342
156217	0.266

Quality Control

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

PTC-1a Meas	9.82
PTC-1a Cert	10.1
OREAS 13P Meas	0.225
OREAS 13P Cert	0.226
OREAS 14P Meas	2.10
OREAS 14P Cert	2.10
156210 Orig	0.250
156210 Dup	0.255
156217 Orig	0.286
156217 Split	0.288
Method Blank Method	< 0.003
Blank	

Quality Analysis ...



Innovative Technologies

Date Submitted: 02-May-08
Invoice No.: A08-2155 (i)
Invoice Date: 24-Jun-08
Your Reference: TEX08-32

Fletcher Nickel
141 Adelaide St, West,
Suite #1000
Toronto Ontario M5H 3L5
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

50 Core samples and 1 Crushed Rock sample were submitted for analysis.

The following analytical packages were requested: Code 1C-Exp Fire Assay-ICP/MS
Code 8 Code 8-Assays

REPORT A08-2155 (i)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

We recommend reanalysis by fire assay Au, Pt, Pd Code 8 if values exceed upper limit.

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is written in a cursive style with a long horizontal stroke at the end.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1338 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	Pd	Pt	Au	Cu	Ni
Unit Symbol	ppb	ppb	ppb	%	%
Detection Limit	1	1	2	0.001	0.003
Analysis Method	FA-MB	FA-MS	FA-MS	ICP-OES	ICP-OES
155869					0.018
155870					0.018
155871					0.012
155872					0.038
155873					0.010
155874					0.011
155875					0.004
155876					0.879
155877					0.012
155878					0.008
155879					0.008
155880					0.008
155881					0.080
155882					0.027
155883					0.080
155884					0.015
155885					0.040
155886	< 1	< 1	< 2	0.008	0.008
155887	< 1	< 1	75	0.054	0.005
155888	< 1	< 1	29	0.042	0.004
155889	< 1	< 1	38	0.081	0.004
155890	< 1	< 1	11	0.028	0.005
155891	< 1	8	< 2	0.001	0.004
155892	< 1	< 1	8	< 0.001	0.005
155893	< 1	< 1	< 2	0.003	0.005
155894	< 1	< 1	8	0.011	0.004
155895	< 1	< 1	8	0.025	0.003
155896	< 1	8	23	0.056	< 0.003
155897	< 1	< 1	42	0.087	0.005
155898	< 1	8	55	0.079	0.005
155899	< 1	< 1	24	0.041	0.003
155900	< 1	1	< 2	0.004	0.007
155901	87	58	11	0.088	1.35
155902	< 1	< 1	49	0.108	0.009
155903	< 1	< 1	12	0.019	0.005
155904	< 1	< 1	14	0.033	0.004
155905	< 1	< 1	33	0.087	0.003
155906	< 1	7	4	0.007	< 0.003
155907	< 1	< 1	80	0.117	0.004
155908	< 1	< 1	24	0.042	< 0.003
155909	< 1	< 1	17	0.072	0.005
155910	< 1	< 1	17	0.038	0.004
155911	< 1	< 1	15	0.027	0.004
155912	< 1	< 1	12	0.020	0.004
155913	< 1	< 1	5	0.014	0.003
155914	< 1	< 1	194	0.256	0.004
155915	< 1	< 1	194	0.284	0.004
155916	< 1	< 1	166	0.199	0.003
155917	< 1	< 1	32	0.076	0.004
155918	< 1	< 1	90	0.187	0.004

Quality Control

Analyte Symbol	Pd	Pt	Au	Cu	Ni
Unit Symbol	ppb	ppb	ppb	%	%
Detection Limit	1	1	2	0.001	0.003
Analysis Method	FA-MS	FA-MS	FA-MS	ICP-OES	ICP-OES
KC-1A Meas				0.616	
KC-1A Cert				0.629	
CZ-3 Meas				0.672	
CZ-3 Cert				0.865	
PTM-1a Meas				23.2	43.4
PTM-1a Cert				25.0	47.4
CCU-1C Meas				23.8	
CCU-1C Cert				23.8	
PTC-1a Meas				13.5	9.92
PTC-1a Cert				13.5	10.13
CDN-PGMS-9 Meas	2800	867	1050		
CDN-PGMS-9 Cert	2800	710	1040		
OREAS 13P Meas				0.268	0.223
OREAS 13P Cert				0.250	0.228
OREAS 14P Meas				1.01	2.10
OREAS 14P Cert				1.00	2.10
CDN-PGMS-8 Meas	1400	378	867		
CDN-PGMS-8 Cert	1500	440	820		
155809 Orig				0.004	0.016
155809 Split	1	1	< 2	0.007	0.016
155881 Orig				0.028	0.058
155881 Dup				0.029	0.052
155885 Orig	< 1	< 1	8	0.025	0.004
155885 Dup	< 1	8	7	0.025	0.003
155888 Orig	< 1	8	56	0.079	0.005
155888 Split	< 1	< 1	54	0.078	0.005
155905 Orig	< 1	< 1	31		
155905 Dup	< 1	< 1	36		
155910 Orig				0.038	0.005
155910 Dup				0.037	0.004
155915 Orig	< 1	< 1	184		
155915 Dup	< 1	< 1	204		
155918 Orig	< 1	< 1	90	0.187	0.004
155918 Split	< 1	4	90	0.180	0.004
Method Blank Method Blank				< 0.001	< 0.003
Method Blank Method Blank				< 0.001	< 0.003
Method Blank Method Blank	< 1	< 1	< 2		

Quality Analysis ...



Innovative Technologies

Date Submitted: 09-May-08
Invoice No.: A08-2279 (i)
Invoice Date: 05-Jun-08
Your Reference: Texmont 1170132

Fletcher Nickel
181 University Ave Suite 2200
Toronto Ontario M5H 3M7

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2279 (i)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman".

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabsintl.com ACTLABS GROUP WEBSITE <http://www.actlabsintl.com>

Analyte Symbol	Ni
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES
155970	1.28
155971	0.914
155972	3.34
155973	1.17
155974	0.735
155975	0.007
155976	0.737
155977	1.03
155978	0.501
155979	0.982
155980	0.497
155981	1.12
155982	0.531
155983	0.581
155984	0.385
155985	0.322
155986	0.314
155987	0.283
155988	0.285
155989	0.179
155990	0.280
155991	0.417
155992	0.219
155993	0.328
155994	0.471
155995	0.285
155996	0.218
155997	0.223
155998	0.199
155999	0.200
156000	0.006
156001	1.40
156002	0.208
156003	0.222
156004	0.127
156005	0.139
156006	0.151
156007	0.108
156008	0.112
156009	0.143
156010	0.418
156011	0.140
156012	0.159
156013	0.331
156014	0.436
156015	0.558
156016	0.414
156017	0.217
156018	0.231
156019	0.317

Quality Control

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

PTC-1a Meas	9.81
PTC-1a Cert	10.1
OREAS 13P Meas	0.232
OREAS 13P Cert	0.226
OREAS 14P Meas	2.10
OREAS 14P Cert	2.10
155970 Orig	1.26
155970 Split	1.30
155982 Orig	0.548
155982 Dup	0.583
155998 Orig	0.220
155998 Dup	0.212
155999 Orig	0.200
155999 Split	0.202
156011 Orig	0.125
156011 Dup	0.154
156019 Orig	0.317
156019 Split	0.348
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003

Quality Analysis ...



Innovative Technologies

Date Submitted: 09-May-08

Invoice No.: A08-2280

Invoice Date: 05-Jun-08

Your Reference: Texmont 1003-17

Fletcher Nickel
181 University Ave Suite 2200
Toronto Ontario M5H 3M7

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

27 Core samples were submitted for analysis.

The following analytical package was requested: Code 8 Code 8-Assays

REPORT A08-2280

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "Eric Hoffman". The signature is written in a cursive, flowing style.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1 905 648 9611 or
+1 888 228 5227 FAX +1 905 648 9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.005
Analysis Method	ICP-OES
158020	0.352
158021	0.443
158022	0.355
158023	0.308
158024	0.276
158025	0.008
158028	0.712
158027	0.321
158028	0.481
158029	0.258
158030	0.385
158031	0.347
158032	0.457
158033	0.478
158034	0.293
158035	0.270
158036	0.389
158037	0.357
158038	0.320
158039	0.278
158040	0.278
158041	0.222
158042	0.211
158043	0.385
158044	0.444
158045	0.349
158048	0.416

Quality Control

Analyte Symbol	NI
Unit Symbol	%
Detection Limit	0.003
Analysis Method	ICP-OES

PTC-1a Meas	9.91
PTC-1a Cert	10.1
OREAS 13P Meas	0.232
OREAS 13P Cert	0.228
OREAS 14P Meas	2.10
OREAS 14P Cert	2.10
156021 Orig	0.439
156021 Dup	0.447
156042 Orig	0.218
156042 Dup	0.205
156046 Orig	0.416
156046 Split	0.399
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003
Method Blank Method Blank	< 0.003

Quality Analysis ...



Innovative Technologies

Date Submitted: 09-May-08
Invoice No.: A08-2278 (I)
Invoice Date: 15-Jul-08
Your Reference: Texmont TEX08-32

Fletcher Nickel
141 Adelaide St, West,
Suite #1000
Toronto Ontario M5H 3L5
Canada

ATTN: Hayden Butler

CERTIFICATE OF ANALYSIS

51 Crushed Rock samples were submitted for analysis.

The following analytical packages were requested: Code 1C-Exp Fire Assay-ICP/MS
Code 8 Code 8-Assays

REPORT A08-2278 (I)

This report may be reproduced without our consent. If only selected portions of the report are reproduced, permission must be obtained. If no instructions were given at time of sample submittal regarding excess material, it will be discarded within 90 days of this report. Our liability is limited solely to the analytical cost of these analyses. Test results are representative only of material submitted for analysis.

Notes:

We recommend reanalysis by fire assay Au, Pt, Pd Code 8 if values exceed upper limit.

CERTIFIED BY :

A handwritten signature in black ink, appearing to read "E. Hoffman", written over a horizontal line.

Eric Hoffman, Ph.D.
President/General Manager

ACTIVATION LABORATORIES LTD.

1336 Sandhill Drive, Ancaster, Ontario Canada L9G 4V5 TELEPHONE +1.905.648.9611 or
+1.888.228.5227 FAX +1.905.648.9613
E-MAIL ancaster@actlabsint.com ACTLABS GROUP WEBSITE <http://www.actlabsint.com>

Analyte Symbol	Pd	Pt	Au	Cu	Ni
Unit Symbol	ppb	ppb	ppb	%	%
Detection Limit	1	1	2	0.001	0.003
Analysis Method	FA-MS	FA-MS	FA-MS	ICP-OES	ICP-OES
155919	<1	<1	52	0.042	0.004
155920	<1	<1	78	0.094	0.004
155921	<1	<1	35	0.050	0.003
155922	<1	<1	230	0.380	0.004
155923	<1	<1	259	0.484	0.005
155924	<1	<1	390	0.808	0.004
155925	<1	<1	18	<0.001	0.007
155926	38	31	30	0.021	0.731
155927	<1	<1	408	0.812	0.003
155928	<1	<1	510	0.592	0.004
155929	<1	<1	355	0.314	0.003
155930	<1	<1	507	0.255	0.005
155931	<1	<1	26	0.012	0.005
155932	<1	<1	358	0.698	0.004
155933	<1	<1	8	0.011	0.005
155934	<1	<1	13	0.004	0.004
155935	<1	<1	10	<0.001	0.005
155936	<1	<1	9	<0.001	0.004
155937					0.004
155938					0.006
155939					0.005
155940					0.006
155941					0.083
155942					0.114
155943					0.355
155944					0.178
155945					0.191
155946					0.255
155947					0.554
155948					0.392
155949					0.932
155950					0.007
155951					1.34
155953					0.637
155954					0.309
155955					0.604
155956					0.982
155957					1.28
155958					3.40
155959					2.30
155960					2.85
155961					2.80
155962					2.31
155963					1.28
155964					1.40
155965					2.01
155966					2.40
155967					2.81
155968					0.511
155969					0.608

Quality Control

Analyte Symbol	Pd	Pt	Au	Cu	Ni
Unit Symbol	ppb	ppb	ppb	%	%
Detection Limit	1	1	2	0.001	0.003
Analysis Method	FA-MS	FA-MS	FA-MS	ICP-OES	ICP-OES
KC-1A Meas				0.823	
KC-1A Cert				0.829	
CZ-3 Meas				0.885	
CZ-3 Cert				0.885	
PTM-1a Meas				24.7	
PTM-1a Cert				24.98	
PTM-1a Meas					472
PTM-1a Cert					47.44
CCU-1C Meas				25.8	
CCU-1C Cert				25.8	
PTC-1a Meas				13.5	
PTC-1a Cert				13.5	
PTC-1a Meas					9.81
PTC-1a Cert					10.1
CDN-PGMS-8 Meas	2480	702	934		
CDN-PGMS-8 Cert	2800	710	1040		
OREAS 13P Meas				0.251	
OREAS 13P Cert				0.250	
OREAS 13P Meas					0.224
OREAS 13P Cert					0.228
OREAS 14P Meas				0.889	
OREAS 14P Cert				0.897	
OREAS 14P Meas					2.10
OREAS 14P Cert					2.10
CDN-PGMS-8 Meas	1540	432	714		
CDN-PGMS-8 Cert	1500	440	820		
155919 Orig	< 1	< 1	52	0.042	0.004
155919 Spill	< 1	< 1	51	0.058	0.003
155931 Orig				0.012	0.005
155931 Dup				0.012	0.005
155944 Orig					0.175
155944 Dup					0.177
155948 Orig					0.382
155948 Spill					0.384
155980 Orig					2.82
155980 Dup					2.77
155989 Orig					0.808
155989 Spill					0.593
Method Blank Method Blank				< 0.001	
Method Blank Method Blank					< 0.003
Method Blank Method Blank				< 0.001	
Method Blank Method Blank					< 0.003
Method Blank Method Blank	< 1	< 1	< 2		