



Report of Work
(Geophysical, Geological,
Geochemical and Expenditures)

DOC
W90



52L08SW0004 2.12780 PATTERSON

2.12780 The

900

Number of Survey(s) **Airborne EM, VLF-EM and magnetometer** Township or Area **Treelined Lake G2651**
 Claim Holder(s) **Champion Bear Resources Ltd.** **2.12780** Prospector's Licence No. **T 5146**
 Address **3805 - 7A Street S.W.; Calgary, Alberta; T2T 2Y8**
 Survey Company **Digheem Surveys & Processing Inc.** Date of Survey (from & to) **13 05 89** to **15 05 89** Total Miles of line Cut **1612**
 Name and Address of Author (of Geo-Technical report) **Ruth Prichard, Mississauga, Ontario, 228 Matheson Blvd. E. L4Z 1X1**

Credits Requested per Each Claim in Columns at right

Special Provisions	Geophysical	Days per Claim
For first survey: Enter 40 days. (This includes line cutting)	- Electromagnetic	
	- Magnetometer	
For each additional survey: using the same grid: Enter 20 days (for each)	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Man Days	Geophysical	Days per Claim
Complete reverse side and enter total(s) here	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Airborne Credits	Geophysical	Days per Claim
Note: Special provisions credits do not apply to Airborne Surveys.	Electromagnetic	20
	Magnetometer	40
	Radiometric	20
	VLF-EM	40

Mining Claims Traversed (List in numerical sequence)

Prefix	Mining Claim Number	Expend. Days Cr.	Prefix	Mining Claim Number	Expend. Days Cr.
K	1085257	80			
	1085258	80			
	1085259	80			
	1085260	80			
	1085261	80			
	1085262	80			
	1085263	80			
	1085264	80			
	1085265	80			
	1085266	80			
	1085267	80			
	1085268	80			
	1085269	80			
	1085270	80			
	1085271	80			
	1085272	80			
	1085273	80			
	1085274	80			
	1085275	80			

RECEIVED
MAY 25 1990
MINING LANDS SECTION
*SEE W8901-200
these claims were missed*

Expenditures (excludes power stripping)

Type of Work Performed

Performed on Claim(s)

Calculation of Expenditure Days Credits

Total Expenditures \$ ÷ 15 = Total Days Credits

Instructions
Total Days Credits may be apportioned at the claim holder's choice. Enter number of days credits per claim selected in columns at right.

Date **April 24th/90** Recorded Holder or Agent (Signature) *[Signature]*

Total number of mining claims covered by this report of work **19**

For Office Use Only

Total Days Cr. Recorded **1520** Date Recorded **May 15/90**

KENORA MINING DIV

See Revised Work Statement

78010112123450

Certification Verifying Report of Work

I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Postal Address of Person Certifying **L.C. Chastko; 791 Elmhurst Rd.; Winnipeg, Manitoba; R3R 0V3**

Date Certified **April 24/90** Certified by (Signature) *[Signature]*



Ontario

Ministry of
Northern Development
and Mines

Ministère du
Développement du Nord
et des Mines

June 20, 1990

Mining Recorder
Ministry of Northern Development & Mines
808 Robertson Street
P. O. Box 5200
KENORA, ONTARIO
P9N 3X9

Dear Madam/Sir:

Re: Airborne Geophysical (Electromagnetic and Magnetometer) Survey
submitted on Mining Claims: K 1085257 et al in Treelined Lake Area.

Please disregard the Notice of Intent dated June 07, 1990. The credits
have been approved as recorded on Report of Work W9001.204, because of
additional information submitted by Mr. Chastko on June 14, 1990.

Please inform the recorded holder of these mining claims and so indicate
on your records.

Yours sincerely,

W. R. Cowan
Provincial Manager, Mining Lands Section
Mines & Minerals Division

IJS:zm
Enclosure

RIS
cc: Resident Geologist
KENORA, ONTARIO

Mr. W. D. Tieman
Mining & Lands Commissioner
Toronto, Ontario

Independent Exploration Services Ltd
Attention: L. C. Chastko
WINNIPEG, MANITOBA

Dighem Surveys & Processing Inc.
MISSISSAUGA, ONTARIO

Champion Bear Resources Ltd
CALGARY, ALBERTA

✓ Mining Lands Section
880 Bay Street, 3rd Floor
Toronto, Ontario
M5S 1Z8

Telephone: (416) 965-4888

Our File: 2.12780
Report of Work: W9001.204



INDEPENDENT EXPLORATION SERVICES LTD.

P.O. Box 7, Postal Station A; Winnipeg, Manitoba R3K 1Z9
Phone (204) 837-7641 889-0751 or 889-1563

RECEIVED

JUN 20 1990

MINING LANDS SECTION

June 14, 1990

Ministry of Northern Development & Mines
Mining Lands Section
3rd Floor, 880 Bay Street
Toronto, Ontario
M5S 1Z8

Attention: Mr. Larry J. Stoliker

Re: Airborne Assessment Work
Your File 2.12780

Dear Mr. Stoliker,

I have calculated the line kms flown over claims 1085257 to 1085275 incl. to be 15.9 km which is more than the 15 km that you have expanded.

Would you be so kind as to reconsider the assessment days credit per claim on the above mentioned claims.

Yours truly,


L.C. Chastko, P.Eng.
President

LCC/sc



Ontario

AMENDED

Ministry of
Northern Development
and Mines

Ministère du
Développement du Nord
et des Mines

Mining Lands Section
880 Bay Street, 3rd Floor
Toronto, Ontario
M5S 1Z8

Telephone: (416) 965-4888

April 19, 1990

Your File: W8901-200
Our File: 2.12780

Mining Recorder
Ministry of Northern Development and Mines
808 Robertson Street
P.O. Box 5200
Kenora, Ontario
P8N 3X9

Dear Sir:

Re: Notice of Intent dated February 15, 1990 for Geophysical,
(Electromagnetic & Magnetometer) Survey submitted on Mining
Claims: K 1023503 et al in Treelined Lake, Paterson Lake and
Stop Lake.

The assessment work credits, as listed with the above-mentioned Notice
of Intent have been approved as of the above date. Please note that on
the original approval, mining claims K 1085236 to 240 inclusive were not
included.

Please inform the recorded holder of these mining claims and so indicate
on your records.

Yours sincerely,

W.R. Cowan
Provincial Manager, Mining Lands
Mines & Minerals Division

AS
LS:pt
Enclosure

cc: Mr. G.H. Ferguson
Mining and Lands Commissioner
Toronto, Ontario

Resident Geologist
Kenora, Ontario

Champion Bear Resources Ltd.
Calgary, Alberta

L.C. Chastko
Winnipeg, Manitoba



File
2,12780

Date
Feb 2, 1990

Mining Recorder's Report of
Work No.
W8901.200

Recorded Holder
Champion Bear Resources Ltd.

Township or Area
Treelined Lake, Paterson Lake and Stop Lake

Type of survey and number of Assessment days credit per claim	Mining Claims Assessed
Geophysical	See attached list
Electromagnetic _____ 20 _____ days	
Magnetometer _____ 20 _____ days	
Radiometric _____ days	
Induced polarization _____ days	
Other _____ VLF 20 _____ days	
Section 77 (19) See "Mining Claims Assessed" column	
Geological _____ days	
Geochemical _____ days	
Man days <input type="checkbox"/> Airborne <input checked="" type="checkbox"/> Special provision <input type="checkbox"/> Ground <input type="checkbox"/> <input checked="" type="checkbox"/> Credits have been reduced because of partial coverage of claims. <input type="checkbox"/> Credits have been reduced because of corrections to work dates and figures of applicant.	

Special credits under section 77 (16) for the following mining claims

No credits have been allowed for the following mining claims

not sufficiently covered by the survey insufficient technical data filed

K
1085250 to 252 incl.

No work credits allowed for resistivity since data is derived from a sensor for which credit is already being requested.

The Mining Recorder may reduce the above credits if necessary in order that the total number of approved assessment days recorded on each claim does not exceed the maximum allowed as follows: Geophysical - 80; Geological - 40; Geochemical - 40; Section 77(19) - 60.

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 1
Aug 10/89

1023503 80 days
1023504 80 days
1023505 80 days
1023506 80 days
1023507 80 days
1023508 80 days
1023509 80 days
1023510 80 days
1023511 80 days
1023512 80 days
1023513 80 days
1023514 80 days
1023515 80 days
1023516 80 days
1023517 80 days
1058425 80 days
1058426 80 days
1058427 80 days
1058428 80 days
1058429 80 days
1058430 80 days
1058431 80 days
1058432 80 days
1058433 80 days
1058434 80 days
1058435 80 days
1058436 80 days
1058437 80 days
1058438 80 days
1058439 80 days
1058440 80 days
1058441 80 days
1058442 80 days
1058443 80 days
1058444 80 days
1058445 80 days
1058446 80 days
1058447 80 days
1058448 80 days
1058449 80 days
1058450 80 days
1058451 80 days
1058452 80 days
1058453 80 days
1058454 80 days
1058455 80 days
1058456 80 days
1058457 80 days
1058458 80 days
1058459 80 days

1058460 80 days
1058461 80 days
1058462 80 days
1058463 80 days
1058464 80 days
1058465 80 days
1058466 80 days
1058467 80 days
1058468 80 days
1058469 80 days
1058470 80 days
1058471 80 days
1058472 80 days
1058473 80 days
1058474 80 days
1058475 80 days
1058476 80 days
1058477 80 days
1058478 80 days
1058479 80 days
1058480 80 days
1058481 80 days
1058482 80 days
1058483 80 days
1058484 80 days
1058485 80 days
1058486 80 days
1058487 80 days
1058488 80 days
1058489 80 days
1058490 80 days
1058491 80 days
1058492 80 days
1058493 80 days
1058494 80 days
1058495 80 days
1058496 80 days
1058497 80 days
1058498 80 days
1058518 80 days
1058519 80 days
1058520 80 days
1058521 80 days
1058522 80 days
1058523 80 days
1058524 80 days
1058525 80 days
1058578 80 days
1058579 80 days
1058580 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM 7891011 12123456 PM

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 2
Aug 10/89

1058581 80 days
1058582 80 days
1058583 80 days
1058584 80 days
1058585 80 days
1058586 80 days
1058587 80 days
1058588 80 days
1058589 80 days
1058590 80 days
1058591 80 days
1058592 80 days
1058593 80 days
1058594 80 days
1058595 80 days
1058596 80 days
1058597 80 days
1058598 80 days
1058599 80 days
1058600 80 days
1058601 80 days
1058602 80 days
1058603 80 days
1058604 80 days
1058605 80 days
1058606 80 days
1058607 80 days
1058608 80 days
1058609 80 days
1058610 80 days
1058611 80 days
1058612 80 days
1058613 80 days
1058614 80 days
1058615 80 days
1058616 80 days
1058617 80 days
1058618 80 days
1058619 80 days
1058620 80 days
1058621 80 days
1058622 80 days
1058623 80 days
1058624 80 days
1058625 80 days
1058626 80 days
1058627 80 days
1058628 80 days
1058629 80 days
1058630 80 days

1058631 80 days
1058632 80 days
1058633 80 days
1058634 80 days
1058635 80 days
1058636 80 days
1058637 80 days
1058638 80 days
1058639 80 days
1058640 80 days
1084930 80 days
1084931 80 days
1084932 80 days
1084933 80 days
1084934 80 days
1084935 80 days
1084936 80 days
1084937 80 days
1084938 80 days
1084939 80 days
1084940 80 days
1084941 80 days
1084942 80 days
1084943 80 days
1084944 80 days
1084945 80 days
1084946 80 days
1084947 80 days
1084948 80 days
1084949 80 days
1084950 80 days
1084978 80 days
1084979 80 days
1085073 80 days
1085074 80 days
1085086 80 days
1085087 80 days
1085089 80 days
1085090 80 days
1085091 80 days
1085117 80 days
1085118 80 days
1085119 80 days
1085120 80 days
1085121 80 days
1085122 80 days
1085123 80 days
1085124 80 days
1085125 80 days
1085126 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM PM
789101112123456

DOCUMENT No.
W8901-100

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 3
Aug 10/89

1085127 80 days
1085128 80 days
1085129 80 days
1085130 80 days
1085131 80 days
1085132 80 days
1085133 80 days
1085134 80 days
1085135 80 days
1085136 80 days
1085236 80 days
1085237 80 days
1085238 80 days
1085239 80 days
1085240 80 days
1085241 80 days
1085242 80 days
1085243 80 days
1085244 80 days
1085245 80 days
1085246 80 days
1085247 80 days
1085248 80 days
1085249 80 days
~~1085250 80 days~~
~~1085251 80 days~~
~~1085252 80 days~~
1085276 80 days
1085277 80 days
1085278 80 days
1085279 80 days
1085280 80 days
1085281 80 days
1085282 80 days
1085283 80 days
1085284 80 days
1085285 80 days
1085286 80 days
1085287 80 days
1085288 80 days
1085289 80 days
1085290 80 days
1085291 80 days
1085292 80 days
1085293 80 days
1085294 80 days
1085295 80 days
1085331 80 days
1085332 80 days
1085333 80 days

~~1085334~~ 80 days
~~1085335~~ 80 days
~~1085336~~ 80 days
~~1085337~~ 80 days
~~1085338~~ 80 days
~~1085339~~ 80 days
~~1085340~~ 80 days
~~1085341~~ 80 days
~~1085342~~ 80 days
~~1085343~~ 80 days
~~1085344~~ 80 days
~~1085345~~ 80 days
~~1085346~~ 80 days
~~1085347~~ 80 days
~~1085348~~ 80 days
~~1085349~~ 80 days
1085350 80 days
1085351 80 days
1085352 80 days
1085353 80 days
1085358 80 days
1085359 80 days
1085360 80 days
1085361 80 days
1085362 80 days
1085363 80 days
1085364 80 days
1085365 80 days
1085366 80 days
1085367 80 days
1085368 80 days
1085369 80 days
1085370 80 days
1085371 80 days
1085372 80 days
1085373 80 days
1085374 80 days
1085375 80 days
1085376 80 days
1085377 80 days
1085378 80 days
1085379 80 days
1085380 80 days
1085381 80 days
1085382 80 days
1085383 80 days
1085384 80 days
1085385 80 days
1085386 80 days
1085387 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM 7 8 9 10 11 12 1 2 3 4 5 6 PM

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 4
Aug 10/89

1085388 80 days
1085389 80 days
1085390 80 days
1085391 80 days
1085392 80 days
1085394 80 days
1085395 80 days
1085396 80 days
1085397 80 days
1085398 80 days
1085399 80 days
1085400 80 days
1085401 80 days
1085402 80 days
1085403 80 days
1085404 80 days
1085405 80 days
1085406 80 days
1085407 80 days
1085408 80 days
1085409 80 days
1085410 80 days
1085411 80 days
1085412 80 days
1085413 80 days
1085414 80 days
1085415 80 days
1085416 80 days
1085417 80 days
1085418 80 days
1085419 80 days
1085420 80 days
1085421 80 days
1085422 80 days
1085423 80 days
~~1086088~~ 80 days
~~1086089~~ 80 days
~~1086090~~ 80 days
1086091 80 days
~~1086092~~ 80 days
~~1086093~~ 80 days
1086094 80 days
~~1086095~~ 80 days
1086096 80 days
1086097 80 days
~~1086098~~ 80 days
1086099 80 days
~~1086100~~ 80 days
1086101 80 days
~~1086102~~ 80 days

~~1086103~~ 80 days
~~1086104~~ 80 days
~~1086105~~ 80 days
~~1086106~~ 80 days
~~1086107~~ 80 days
~~1086108~~ 80 days
~~1086109~~ 80 days
~~1086110~~ 80 days
~~1086111~~ 80 days
~~1086112~~ 80 days
~~1086113~~ 80 days
~~1086114~~ 80 days
~~1086115~~ 80 days
~~1086116~~ 80 days
~~1086117~~ 80 days
~~1086118~~ 80 days
~~1086119~~ 80 days
~~1086120~~ 80 days
~~1086121~~ 80 days
~~1086122~~ 80 days
~~1086123~~ 80 days
~~1086124~~ 80 days
~~1086125~~ 80 days
~~1086126~~ 80 days
~~1086127~~ 80 days
~~1086128~~ 80 days
~~1086129~~ 80 days
~~1086130~~ 80 days
~~1086131~~ 80 days
~~1086132~~ 80 days
~~1086133~~ 80 days
~~1086134~~ 80 days
~~1086135~~ 80 days
~~1086136~~ 80 days
~~1086137~~ 80 days
~~1086138~~ 80 days
~~1086139~~ 80 days
~~1086140~~ 80 days
~~1086141~~ 80 days
~~1086142~~ 80 days
~~1086143~~ 80 days
~~1086144~~ 80 days
~~1086145~~ 80 days
~~1086146~~ 80 days
~~1086147~~ 80 days
~~1086148~~ 80 days
~~1086149~~ 80 days
~~1086150~~ 80 days
~~1086151~~ 80 days
~~1086152~~ 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM PM
7891011 12123456

DOCUMENT No.
W8901• 200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 5
Aug 10/89

1086153	80 days
1086154	80 days
1086155	80 days
1086156	80 days
1086157	80 days
1105578	80 days
1105579	80 days
1105580	80 days
1105581	80 days
1105582	80 days
1105583	80 days
1105584	80 days
1105585	80 days
1105586	80 days
1105587	80 days
1105588	80 days
1105589	80 days
1105590	80 days
1105591	80 days
1105592	80 days
1105593	80 days
1105594	80 days
1105595	80 days
1105596	80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM PM
789101112123456



Ministry of
Natural
Resources

Report of Work
(Geophysical, Geological,
Geochemical and Expenditures)

DOCUMENT No.
W8901-200

Instructions: - Please type or print.
- If number of mining claims traversed exceeds space on this form, attach a list.
Note: - Only days credits calculated in the "Expenditures" section may be entered in the "Expend Days Cr." columns.
- Do not use shaded areas below.

Mining Act *MJ*

Type of Survey(s): **Airborne EM, VLF-EM & Magnetometer & Resistivity**

Claim Holder(s): **Champion Bear Resources Ltd.**

Address: **3805 - 7 A Street S.W.; Calgary, Alberta; T2T 2Y8**

Survey Company: **Dighem Surveys & Processing Inc.**

Name and Address of Author (of Geo-Technical report): **Ruth Pritchard, Mississauga, Ontario**

Township or Area: **62634 Treelined Lake, 62631 Paterson Lake & Stop Lake 62623**

Prospector's Licence No.: **T 5146**

2.12780

Date of Survey (from & to): **13 05 89 | 15 05 89**

Total Miles Flown: **1612 km.**

Credits Requested per Each Claim in Columns at right

Special Provisions	Geophysical	Days per Claim
For first survey: Enter 40 days. (This includes line cutting)	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
For each additional survey: using the same grid: Enter 20 days (for each)	- Other	
	Geological	
	Geochemical	
Man Days	Geophysical	Days per Claim
Complete reverse side and enter total(s) here	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Airborne Credits		Days per Claim
Note: Special provisions credits do not apply to Airborne Surveys	Electromagnetic	20
	Resistivity	20
	Magnetometer	20
	XXXXXXXX VLF_EM	20

Mining Claims Traversed (List in numerical sequence)

Prefix	Mining Claim Number	Expend. Days Cr.	Prefix	Mining Claim Number	Expend. Days Cr.
See attached list					
K.		80			

RECEIVED
AUG 23 1989
MINING LANDS SECTION

KENORA MINING DIV.
RECEIVED
AUG 11 1989
AM 7891011 12123456 PM

Expenditures (excludes power stripping)

Type of Work Performed

Performed on Claim(s)

Calculation of Expenditure Days Credits

Total Expenditures ÷ 15 = Total Days Credits

Instructions: Total Days Credits may be apportioned at the claim holder's choice. Enter number of days credits per claim selected in columns at right.

Total number of mining claims covered by this report of work: **424**

312

1023503

For Office Use Only

Total Days Cr. Recorded: **24960**

Date Recorded: **AUG 11 1989**

Date Approved as Recorded: **See revised work statement**

Branch Director: *Scott Rivett*

Date: **August 10/89**

Recorded Holder of Agent (Signature): *h.o.*

Certification Verifying Report of Work

I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Postal Address of Person Certifying: **I.C. Chastko; 791 Elmhurst Road; Winnipeg, Man; R3R 0V3**

Date Certified: **August 10/89**

Certified by (Signature): *I.C. Chastko*



Ontario

Ministry of
Northern Development
and Mines

Ministère du
Développement du Nord
et des Mines

Mining Lands Section
880 Bay Street, 3rd Floor
Toronto, Ontario
M5S 1Z8

Telephone: (416) 965-488

March 21, 1990

Your File: W8901-200
Our File: 2.12780

Mining Recorder
Ministry of Northern Development and Mines
808 Robertson Street
P.O. Box 5200
Kenora, Ontario
P8N 3X9


Dear Sir:

Re: Notice of Intent dated February 15, 1990 for Geophysical
(Electromagnetic & Magnetometer) submitted on Mining Claims
K 1023503 et al in Treelined Lake, Paterson Lake & Stop Lake
Areas.


The assessment work credits, as listed with the above-mentioned Notice
Intent have been approved as of the above date.

Please inform the recorded holder of these mining claims and so indicate
on your records.

Yours sincerely,

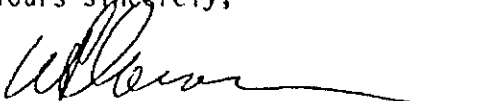
W.R. Cowan
Provincial Manager, Mining Lands
Mines & Minerals Division

AS
LS:pt
Enclosure

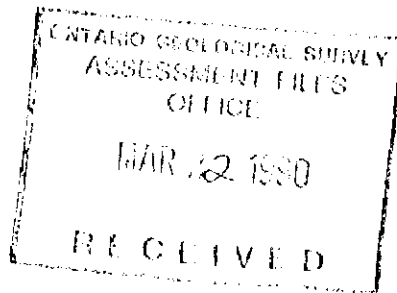

cc: Mr. G.H. Ferguson
Mining and Lands Commissioner
Toronto, Ontario

Resident Geologist
Kenora, Ontario

Champion Bear Resources Ltd.
Calgary, Alberta

L.C. Chastko
Winnipeg, Manitoba



File
2.12780

Date
Feb 2, 1990

Mining Recorder's Report of
Work No.
W8901.200

Recorded Holder
Champion Bear Resources Ltd.

Township or Area
Treelined Lake, Paterson Lake and Stop Lake

Type of survey and number of Assessment days credit per claim	Mining Claims Assessed
Geophysical	See attached list
Electromagnetic _____ 20 _____ days	
Magnetometer _____ 20 _____ days	
Radiometric _____ days	
Induced polarization _____ days	
Other _____ VLF 20 _____ days	
Section 77 (19) See "Mining Claims Assessed" column	
Geological _____ days	
Geochemical _____ days	
Man days <input type="checkbox"/> Airborne <input checked="" type="checkbox"/>	
Special provision <input type="checkbox"/> Ground <input type="checkbox"/>	
<input checked="" type="checkbox"/> Credits have been reduced because of partial coverage of claims.	
<input type="checkbox"/> Credits have been reduced because of corrections to work dates and figures of applicant.	

Special credits under section 77 (16) for the following mining claims

[Empty box for special credits]

No credits have been allowed for the following mining claims

not sufficiently covered by the survey insufficient technical data filed

K 1085236 to 240 incl.
1085250 to 252 incl.

No work credits allowed for resistivity since data is derived from a sensor for which credit is already being requested.

The Mining Recorder may reduce the above credits if necessary in order that the total number of approved assessment days recorded on each claim does not exceed the maximum allowed as follows: Geophysical - 80; Geological - 40; Geochemical - 40; Section 77(19) - 60.

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 1
Aug 10/89

K1023503 80 days
1023504 80 days
1023505 80 days
1023506 80 days
1023507 80 days
1023508 80 days
1023509 80 days
1023510 80 days
1023511 80 days
1023512 80 days
1023513 80 days
1023514 80 days
1023515 80 days
1023516 80 days
1023517 80 days
1058425 80 days
1058426 80 days
1058427 80 days
1058428 80 days
1058429 80 days
1058430 80 days
1058431 80 days
1058432 80 days
1058433 80 days
1058434 80 days
1058435 80 days
1058436 80 days
1058437 80 days
1058438 80 days
1058439 80 days
1058440 80 days
1058441 80 days
1058442 80 days
1058443 80 days
1058444 80 days
1058445 80 days
1058446 80 days
1058447 80 days
1058448 80 days
1058449 80 days
1058450 80 days
1058451 80 days
1058452 80 days
1058453 80 days
1058454 80 days
1058455 80 days
1058456 80 days
1058457 80 days
1058458 80 days
1058459 80 days

K1058460 80 days
1058461 80 days
1058462 80 days
1058463 80 days
1058464 80 days
1058465 80 days
1058466 80 days
1058467 80 days
1058468 80 days
1058469 80 days
1058470 80 days
1058471 80 days
1058472 80 days
1058473 80 days
1058474 80 days
1058475 80 days
1058476 80 days
1058477 80 days
1058478 80 days
1058479 80 days
1058480 80 days
1058481 80 days
1058482 80 days
1058483 80 days
1058484 80 days
1058485 80 days
1058486 80 days
1058487 80 days
1058488 80 days
1058489 80 days
1058490 80 days
1058491 80 days
1058492 80 days
1058493 80 days
1058494 80 days
1058495 80 days
1058496 80 days
1058497 80 days
1058498 80 days
1058518 80 days
1058519 80 days
1058520 80 days
1058521 80 days
1058522 80 days
1058523 80 days
1058524 80 days
1058525 80 days
1058578 80 days
1058579 80 days
1058580 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM PM
789101112123456

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 2
Aug 10/89

K1058581 80 days
1058582 80 days
1058583 80 days
1058584 80 days
1058585 80 days
1058586 80 days
1058587 80 days
1058588 80 days
1058589 80 days
1058590 80 days
1058591 80 days
1058592 80 days
1058593 80 days
1058594 80 days
1058595 80 days
1058596 80 days
1058597 80 days
1058598 80 days
1058599 80 days
1058600 80 days
1058601 80 days
1058602 80 days
1058603 80 days
1058604 80 days
1058605 80 days
1058606 80 days
1058607 80 days
1058608 80 days
1058609 80 days
1058610 80 days
1058611 80 days
1058612 80 days
1058613 80 days
1058614 80 days
1058615 80 days
1058616 80 days
1058617 80 days
1058618 80 days
1058619 80 days
1058620 80 days
1058621 80 days
1058622 80 days
1058623 80 days
1058624 80 days
1058625 80 days
1058626 80 days
1058627 80 days
1058628 80 days
1058629 80 days
1058630 80 days

K1058631 80 days
1058632 80 days
1058633 80 days
1058634 80 days
1058635 80 days
1058636 80 days
1058637 80 days
1058638 80 days
1058639 80 days
1058640 80 days
1084930 80 days
1084931 80 days
1084932 80 days
1084933 80 days
1084934 80 days
1084935 80 days
1084936 80 days
1084937 80 days
1084938 80 days
1084939 80 days
1084940 80 days
1084941 80 days
1084942 80 days
1084943 80 days
1084944 80 days
1084945 80 days
1084946 80 days
1084947 80 days
1084948 80 days
1084949 80 days
1084950 80 days
1084978 80 days
1084979 80 days
1085073 80 days
1085074 80 days
1085086 80 days
1085087 80 days
1085089 80 days
1085090 80 days
1085091 80 days
1085117 80 days
1085118 80 days
1085119 80 days
1085120 80 days
1085121 80 days
1085122 80 days
1085123 80 days
1085124 80 days
1085125 80 days
1085126 80 days

KENORA
MINING DIV
RECEIVED
AUG 11 1989
AM PM
7891011 12123456

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY

Page 3
Aug 10/89

CLAIM NO EXPEND.DAYS CR.

CLAIM NO EXPEND.DAYS CR.

K 1085127 80 days
 1085128 80 days
 1085129 80 days
 1085130 80 days
 1085131 80 days
 1085132 80 days
 1085133 80 days
 1085134 80 days
 1085135 80 days
 1085136 80 days
~~1085236 80 days~~
~~1085237 80 days~~
~~1085238 80 days~~
~~1085239 80 days~~
~~1085240 80 days~~
 1085241 80 days
 1085242 80 days
 1085243 80 days
 1085244 80 days
 1085245 80 days
 1085246 80 days
 1085247 80 days
 1085248 80 days
 1085249 80 days
~~1085250 80 days~~
~~1085251 80 days~~
~~1085252 80 days~~
 1085276 80 days
 1085277 80 days
 1085278 80 days
 1085279 80 days
 1085280 80 days
 1085281 80 days
 1085282 80 days
 1085283 80 days
 1085284 80 days
 1085285 80 days
 1085286 80 days
 1085287 80 days
 1085288 80 days
 1085289 80 days
 1085290 80 days
 1085291 80 days
 1085292 80 days
 1085293 80 days
 1085294 80 days
 1085295 80 days
~~1085331 80 days~~
~~1085332 80 days~~
 1085333 80 days

~~1085334 80 days~~
~~1085335 80 days~~
~~1085336 80 days~~
~~1085337 80 days~~
~~1085338 80 days~~
~~1085339 80 days~~
~~1085340 80 days~~
~~1085341 80 days~~
~~1085342 80 days~~
~~1085343 80 days~~
 1085344 80 days
~~1085345 80 days~~
~~1085346 80 days~~
~~1085347 80 days~~
 1085348 80 days
~~1085349 80 days~~
 1085350 80 days
~~1085351 80 days~~
~~1085352 80 days~~
~~1085353 80 days~~
K 1085358 80 days
 1085359 80 days
 1085360 80 days
 1085361 80 days
 1085362 80 days
 1085363 80 days
 1085364 80 days
 1085365 80 days
 1085366 80 days
 1085367 80 days
 1085368 80 days
 1085369 80 days
 1085370 80 days
 1085371 80 days
 1085372 80 days
 1085373 80 days
 1085374 80 days
 1085375 80 days
 1085376 80 days
 1085377 80 days
 1085378 80 days
 1085379 80 days
 1085380 80 days
 1085381 80 days
 1085382 80 days
 1085383 80 days
 1085384 80 days
 1085385 80 days
 1085386 80 days
 1085387 80 days

KENORA
MINING DIV.
R E C E I V E D
AUG 11 1989
AM 789101112123456 PM

DOCUMENT No.
W8901 • 200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 4
Aug 10/89

K1085388	80 days	1086103	80 days
1085389	80 days	1086104	80 days
1085390	80 days	1086105	80 days
1085391	80 days	1086106	80 days
1085392	80 days	1086107	80 days
1085394	80 days	1086108	80 days
1085395	80 days	1086109	80 days
1085396	80 days	1086110	80 days
1085397	80 days	1086111	80 days
1085398	80 days	1086112	80 days
1085399	80 days	1086113	80 days
1085400	80 days	1086114	80 days
1085401	80 days	1086115	80 days
1085402	80 days	1086116	80 days
1085403	80 days	1086117	80 days
1085404	80 days	1086118	80 days
1085405	80 days	1086119	80 days
1085406	80 days	1086120	80 days
1085407	80 days	1086121	80 days
1085408	80 days	1086122	80 days
1085409	80 days	1086123	80 days
1085410	80 days	1086124	80 days
1085411	80 days	1086125	80 days
1085412	80 days	1086126	80 days
1085413	80 days	1086127	80 days
1085414	80 days	1086128	80 days
1085415	80 days	1086129	80 days
1085416	80 days	1086130	80 days
1085417	80 days	1086131	80 days
1085418	80 days	1086132	80 days
1085419	80 days	1086133	80 days
1085420	80 days	1086134	80 days
1085421	80 days	1086135	80 days
1085422	80 days	1086136	80 days
1085423	80 days	1086137	80 days
1086088	80 days	1086138	80 days
1086089	80 days	1086139	80 days
1086090	80 days	1086140	80 days
1086091	80 days	1086141	80 days
1086092	80 days	1086142	80 days
1086093	80 days	1086143	80 days
1086094	80 days	1086144	80 days
1086095	80 days	1086145	80 days
1086096	80 days	1086146	80 days
1086097	80 days	1086147	80 days
1086098	80 days	1086148	80 days
1086099	80 days	1086149	80 days
1086100	80 days	1086150	80 days
1086101	80 days	1086151	80 days
1086102	80 days	1086152	80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM PM
7891011 12123456

DOCUMENT No.
W8901• 200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 5
Aug 10/89

1086153	80 days
1086154	80 days
1086155	80 days
1086156	80 days
1086157	80 days
1105578	80 days
1105579	80 days
1105580	80 days
1105581	80 days
1105582	80 days
1105583	80 days
1105584	80 days
1105585	80 days
1105586	80 days
1105587	80 days
1105588	80 days
1105589	80 days
1105590	80 days
1105591	80 days
1105592	80 days
1105593	80 days
1105594	80 days
1105595	80 days
1105596	80 days

KENORA
MILITARY DIV
RECEIVED
AUG 11 1989
AM PM
789 1011 121 23 456



Ministry of
Natural
Resources

Report of Work
(Geophysical, Geological,
Geochemical and Expenditures)

DOCUMENT No.
W8901-200

Instructions: - Please type or print
- If number of mining claims traversed exceeds space on this form, attach a list
Note: - Only days credits calculated in the "Expenditures" section may be entered in the "Expend Days Cr." columns
- Do not use shaded areas below.

Mining Act **MJ**

Sept 30

Type of Survey(s): Airborne EM, VLF-EM & Magnetometer & Resistivity

Claim Holder(s): Champion Bear Resources Ltd. **2.12780**

Address: 3805 - 7 A Street S.W.; Calgary, Alberta; T2T 2Y8

Township or Area: **62634** Treelined Lake, **62631**
Paterson Lake & Stop Lake **62633**
Prospector's Licence No. T 5146

Survey Company: Dighem Surveys & Processing Inc.

Date of Survey (from & to): 13 05 89 15 05 89
Day | Mo | Yr. | Day | Mo | Yr.

Total Miles Traversed: 1612 km.

Name and Address of Author (of Geo Technical report): Ruth Pritchard, Mississauga, Ontario

Credits Requested per Claim in Columns at right

Special Provisions	Geophysical	Days per Claim
For first survey. Enter 40 days. (This includes line cutting)	- Electromagnetic	
	- Magnetometer	
For each additional survey, using the same grid: Enter 20 days (for each)	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Man. Days Complete reverse side and enter total(s) here	Geophysical	Days per Claim
	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Airborne Credits Note: Special provisions credits do not apply to Airborne Surveys.	Electromagnetic	20
	Resistivity	20
	Magnetometer	20
	Electromagnetic VLF_EM	20

Mining Claims Traversed (List in numerical sequence)

Mining Claim Prefix	Mining Claim Number	Expend. Days Cr.	Mining Claim Prefix	Mining Claim Number	Expend. Days Cr.
See attached list					
K.		80			

RECEIVED
AUG 23 1989
MINING LANDS SECTION

KENORA MINING DIV.
RECEIVED
AUG 11 1989
AM 789 10 11 12 1 23 4 5 6 PM

Expenditures (excludes power stripping)

Type of Work Performed:

Performed on Claim(s):

Calculation of Expenditure Days Credits

Total Expenditures: \$ ÷ 15 = Total Days Credits:

Instructions:
Total Days Credits may be apportioned at the claim holder's choice. Enter number of days credits per claim selected in columns at right

Total number of mining claims covered by this report of work. **424**
312

1023503

For Office Use Only

Total Days Cr. Recorded: 24 960

Date Recorded: **AUG 11 1989**

Mining Recorder: *Scott Rivett*

Date Approved as Recorder: *See revised work statement*

Branch Director:

Date: August 10/89

Recorder: Holder or Agent (Signature): *h.o.*

Certification Verifying Report of Work

I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Postal Address of Person Certifying: L.C. Chastko; 791 Elmhurst Road; Winnipeg, Man; R3R 0V3

Date Certified: August 10/89

Certified by (Signature): *L.C. Chastko*

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 1
Aug 10/89

1023503 80 days
1023504 80 days
1023505 80 days
1023506 80 days
1023507 80 days
1023508 80 days
1023509 80 days
1023510 80 days
1023511 80 days
1023512 80 days
1023513 80 days
1023514 80 days
1023515 80 days
1023516 80 days
1023517 80 days
1058425 80 days
1058426 80 days
1058427 80 days
1058428 80 days
1058429 80 days
1058430 80 days
1058431 80 days
1058432 80 days
1058433 80 days
1058434 80 days
1058435 80 days
1058436 80 days
1058437 80 days
1058438 80 days
1058439 80 days
1058440 80 days
1058441 80 days
1058442 80 days
1058443 80 days
1058444 80 days
1058445 80 days
1058446 80 days
1058447 80 days
1058448 80 days
1058449 80 days
1058450 80 days
1058451 80 days
1058452 80 days
1058453 80 days
1058454 80 days
1058455 80 days
1058456 80 days
1058457 80 days
1058458 80 days
1058459 80 days

1058460 80 days
1058461 80 days
1058462 80 days
1058463 80 days
1058464 80 days
1058465 80 days
1058466 80 days
1058467 80 days
1058468 80 days
1058469 80 days
1058470 80 days
1058471 80 days
1058472 80 days
1058473 80 days
1058474 80 days
1058475 80 days
1058476 80 days
1058477 80 days
1058478 80 days
1058479 80 days
1058480 80 days
1058481 80 days
1058482 80 days
1058483 80 days
1058484 80 days
1058485 80 days
1058486 80 days
1058487 80 days
1058488 80 days
1058489 80 days
1058490 80 days
1058491 80 days
1058492 80 days
1058493 80 days
1058494 80 days
1058495 80 days
1058496 80 days
1058497 80 days
1058498 80 days
1058518 80 days
1058519 80 days
1058520 80 days
1058521 80 days
1058522 80 days
1058523 80 days
1058524 80 days
1058525 80 days
1058578 80 days
1058579 80 days
1058580 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM 7891011 12123456 PM

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 2
Aug 10/89

1058581 80 days
1058582 80 days
1058583 80 days
1058584 80 days
1058585 80 days
1058586 80 days
1058587 80 days
1058588 80 days
1058589 80 days
1058590 80 days
1058591 80 days
1058592 80 days
1058593 80 days
1058594 80 days
1058595 80 days
1058596 80 days
1058597 80 days
1058598 80 days
1058599 80 days
1058600 80 days
1058601 80 days
1058602 80 days
1058603 80 days
1058604 80 days
1058605 80 days
1058606 80 days
1058607 80 days
1058608 80 days
1058609 80 days
1058610 80 days
1058611 80 days
1058612 80 days
1058613 80 days
1058614 80 days
1058615 80 days
1058616 80 days
1058617 80 days
1058618 80 days
1058619 80 days
1058620 80 days
1058621 80 days
1058622 80 days
1058623 80 days
1058624 80 days
1058625 80 days
1058626 80 days
1058627 80 days
1058628 80 days
1058629 80 days
1058630 80 days

1058631 80 days
1058632 80 days
1058633 80 days
1058634 80 days
1058635 80 days
1058636 80 days
1058637 80 days
1058638 80 days
1058639 80 days
1058640 80 days
1084930 80 days
1084931 80 days
1084932 80 days
1084933 80 days
1084934 80 days
1084935 80 days
1084936 80 days
1084937 80 days
1084938 80 days
1084939 80 days
1084940 80 days
1084941 80 days
1084942 80 days
1084943 80 days
1084944 80 days
1084945 80 days
1084946 80 days
1084947 80 days
1084948 80 days
1084949 80 days
1084950 80 days
1084978 80 days
1084979 80 days
1085073 80 days
1085074 80 days
1085086 80 days
1085087 80 days
1085089 80 days
1085090 80 days
1085091 80 days
1085117 80 days
1085118 80 days
1085119 80 days
1085120 80 days
1085121 80 days
1085122 80 days
1085123 80 days
1085124 80 days
1085125 80 days
1085126 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM 7891011 12123456 PM

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 3
Aug 10/89

1085127 80 days
1085128 80 days
1085129 80 days
1085130 80 days
1085131 80 days
1085132 80 days
1085133 80 days
1085134 80 days
1085135 80 days
1085136 80 days
1085236 80 days
1085237 80 days
1085238 80 days
1085239 80 days
1085240 80 days
1085241 80 days
1085242 80 days
1085243 80 days
1085244 80 days
1085245 80 days
1085246 80 days
1085247 80 days
1085248 80 days
1085249 80 days
1085250 80 days
1085251 80 days
1085252 80 days
1085276 80 days
1085277 80 days
1085278 80 days
1085279 80 days
1085280 80 days
1085281 80 days
1085282 80 days
1085283 80 days
1085284 80 days
1085285 80 days
1085286 80 days
1085287 80 days
1085288 80 days
1085289 80 days
1085290 80 days
1085291 80 days
1085292 80 days
1085293 80 days
1085294 80 days
1085295 80 days
1085331 80 days
1085332 80 days
1085333 80 days

~~1085334~~ 80 days
~~1085335~~ 80 days
~~1085336~~ 80 days
~~1085337~~ 80 days
~~1085338~~ 80 days
~~1085339~~ 80 days
~~1085340~~ 80 days
~~1085341~~ 80 days
~~1085342~~ 80 days
~~1085343~~ 80 days
~~1085344~~ 80 days
~~1085345~~ 80 days
~~1085346~~ 80 days
~~1085347~~ 80 days
~~1085348~~ 80 days
~~1085349~~ 80 days
1085350 80 days
1085351 80 days
~~1085352~~ 80 days
~~1085353~~ 80 days
1085358 80 days
1085359 80 days
1085360 80 days
1085361 80 days
1085362 80 days
1085363 80 days
1085364 80 days
1085365 80 days
1085366 80 days
1085367 80 days
1085368 80 days
1085369 80 days
1085370 80 days
1085371 80 days
1085372 80 days
1085373 80 days
1085374 80 days
1085375 80 days
1085376 80 days
1085377 80 days
1085378 80 days
1085379 80 days
1085380 80 days
1085381 80 days
1085382 80 days
1085383 80 days
1085384 80 days
1085385 80 days
1085386 80 days
1085387 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM PM
789101112123456

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 4
Aug 10/89

1085388 80 days
1085389 80 days
1085390 80 days
1085391 80 days
1085392 80 days
1085394 80 days
1085395 80 days
1085396 80 days
1085397 80 days
1085398 80 days
1085399 80 days
1085400 80 days
1085401 80 days
1085402 80 days
1085403 80 days
1085404 80 days
1085405 80 days
1085406 80 days
1085407 80 days
1085408 80 days
1085409 80 days
1085410 80 days
1085411 80 days
1085412 80 days
1085413 80 days
1085414 80 days
1085415 80 days
1085416 80 days
1085417 80 days
1085418 80 days
1085419 80 days
1085420 80 days
1085421 80 days
1085422 80 days
1085423 80 days
~~1086088~~ 80 days
~~1086089~~ 80 days
~~1086090~~ 80 days
1086091 80 days
~~1086092~~ 80 days
1086093 80 days
1086094 80 days
~~1086095~~ 80 days
1086096 80 days
1086097 80 days
~~1086098~~ 80 days
1086099 80 days
~~1086100~~ 80 days
1086101 80 days
1086102 80 days

~~1086103~~ 80 days
~~1086104~~ 80 days
~~1086105~~ 80 days
~~1086106~~ 80 days
~~1086107~~ 80 days
~~1086108~~ 80 days
~~1086109~~ 80 days
~~1086110~~ 80 days
~~1086111~~ 80 days
~~1086112~~ 80 days
~~1086113~~ 80 days
~~1086114~~ 80 days
~~1086115~~ 80 days
~~1086116~~ 80 days
~~1086117~~ 80 days
~~1086118~~ 80 days
~~1086119~~ 80 days
1086120 80 days
1086121 80 days
~~1086122~~ 80 days
1086123 80 days
~~1086124~~ 80 days
1086125 80 days
~~1086126~~ 80 days
~~1086127~~ 80 days
~~1086128~~ 80 days
~~1086129~~ 80 days
~~1086130~~ 80 days
~~1086131~~ 80 days
~~1086132~~ 80 days
~~1086133~~ 80 days
~~1086134~~ 80 days
~~1086135~~ 80 days
~~1086136~~ 80 days
~~1086137~~ 80 days
~~1086138~~ 80 days
~~1086139~~ 80 days
1086140 80 days
1086141 80 days
1086142 80 days
1086143 80 days
1086144 80 days
1086145 80 days
1086146 80 days
1086147 80 days
1086148 80 days
1086149 80 days
1086150 80 days
~~1086151~~ 80 days
~~1086152~~ 80 days

KENORA
MINING DIV.
RECEIVED
AUG 11 1989
AM 7891011 12123456 PM

DOCUMENT No.
W8901-200

File: ASSESS.AUG10.89
Report: AIRBORNE.SURVEY
CLAIM NO EXPEND.DAYS CR.

Page 5
Aug 10/89

1086152	80 days
1086154	80 days
1086155	80 days
1086156	80 days
1086157	80 days
1105578	80 days
1105579	80 days
1105580	80 days
1105581	80 days
1105582	80 days
1105583	80 days
1105584	80 days
1105585	80 days
1105586	80 days
1105587	80 days
1105588	80 days
1105589	80 days
1105590	80 days
1105591	80 days
1105592	80 days
1105593	80 days
1105594	80 days
1105595	80 days
1105596	80 days

KENORA
MINING DIV
RECEIVED
AUG 11 1989
AM 789101112123456 PM



52L085W0004 2.12780 PATTERSON

010

Report #1069

RECEIVED

OCT 2 1989

DIGHEM^{IV} SURVEY
FOR
MINING LANDS SECTION
CHAMPION BEAR RESOURCES LTD.
HELDER LAKE 1989, ONTARIO

NTS 52L/1, 2, 7, 8

2.12780

DIGHEM SURVEYS & PROCESSING INC.
MISSISSAUGA, ONTARIO
JULY 11, 1989

Ruth A. Pritchard
Geophysicist

A1069JUL.90R

SUMMARY

This report describes the logistics and results of a DIGHEM^{IV} airborne geophysical survey carried out for Champion Bear Resources Ltd., over a property in the Helder Lake Area, Ontario.

The purpose of the survey was to detect zones of conductive mineralization and to provide information that could be used to map the geology and structure of the survey area. This was accomplished by using a DIGHEM^{IV} multi-coil, multi-frequency electromagnetic system, supplemented by a high sensitivity Cesium magnetometer and a two-channel VLF receiver. The information from these sensors was processed to produce maps which display the magnetic and conductive properties of the survey area. An electronic navigation system, operating in the UHF band, ensured accurate positioning of the geophysical data with respect to the base maps.

The EM survey detected many discrete bedrock conductors and numerous anomalies of possible bedrock origin. Some of these correlate with magnetic anomalies. Most of the inferred bedrock conductors appear to warrant further investigation using appropriate surface exploration techniques. Areas of interest may be assigned priorities on the basis of supporting geophysical, geochemical and/or

geological information. After initial investigations have been carried out, it may be necessary to re-evaluate the remaining anomalies based on information acquired from the follow-up program.

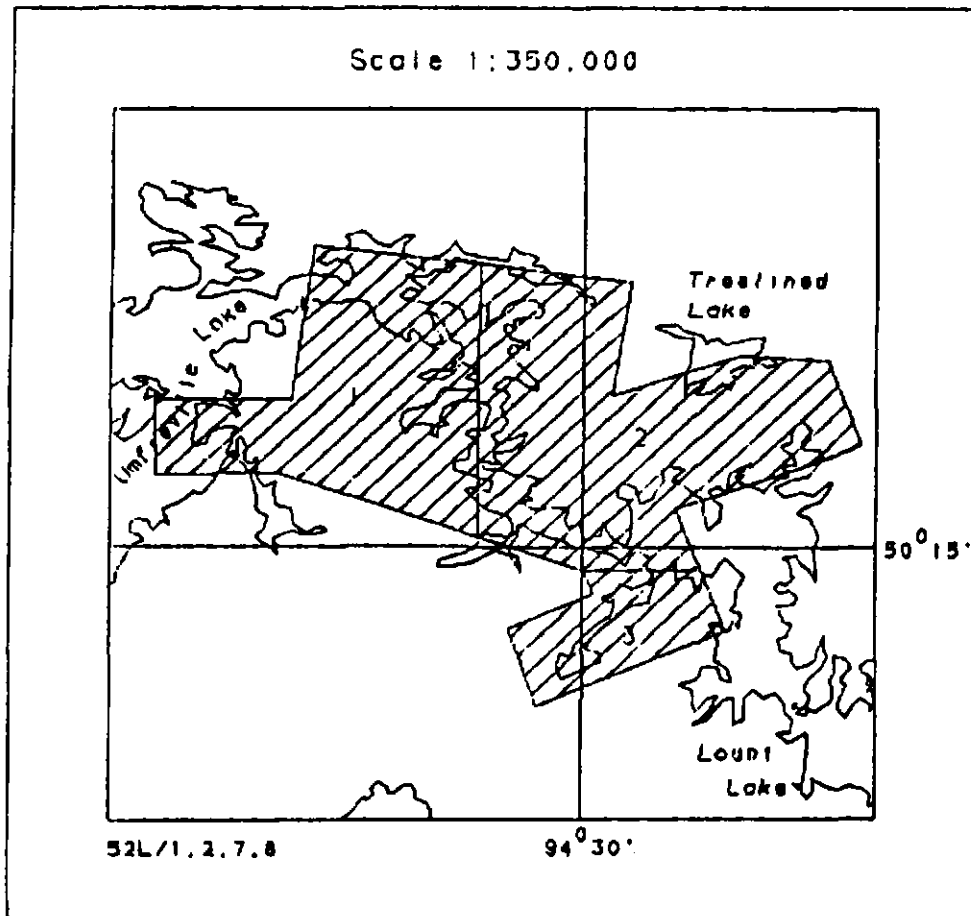


FIGURE 1
THE SURVEY AREA



52L08SW0004 2.12780 PATTERSON

010C

CONTENTS

	<u>Section</u>
INTRODUCTION	1
SURVEY EQUIPMENT	2
PRODUCTS AND PROCESSING TECHNIQUES	3
SURVEY RESULTS	4
GENERAL DISCUSSION	4- 1
CONDUCTORS IN THE SURVEY AREA	4-14
Sheet 1.....	4-16
Sheet 2.....	4-23
Sheet 3.....	4-30
BACKGROUND INFORMATION	5
ELECTROMAGNETICS	5- 1
MAGNETICS	5-23
VLF	5-26
CONCLUSIONS AND RECOMMENDATIONS	6

APPENDICES

- A. List of Personnel
- B. Statement of Cost
- C. Statement of Qualifications
- D. EM Anomaly List

INTRODUCTION

A DIGHEM^{IV} electromagnetic/resistivity/magnetic/VLF survey was flown for Champion Bear Resources Ltd., from May 13 to May 15, 1989, over one survey block in the Helder Lake Area, Ontario. The survey area consists of 3 overlapping grids. This area is located on NTS map sheets 52L/1, 2, 7, 8. (See Figure 1).

Survey coverage consisted of approximately 1612 line-km. Flight lines were flown in an azimuthal direction of 158°/338° for the 10000 series lines, 12°/192° for the 20000 series lines, and 0°/180° for the 30000 series lines. The line separation for all grids was 200 metres.

The survey employed the DIGHEM^{IV} electromagnetic system. Ancillary equipment consisted of a magnetometer, radio altimeter, video camera, analog and digital recorders, a VLF receiver and an electronic navigation system. Details on the survey equipment are given in Section 2.

The instrumentation was installed in an Aerospatiale AS350B turbine helicopter which was provided by Questral Helicopters Ltd. The helicopter flew at an average airspeed of 122 km/hr with an EM bird height of approximately 30 m.

Section 2 also provides details on the data channels, their respective sensitivities, and the navigation/flight path recovery procedure. Noise levels of less than 2 ppm are generally maintained for wind speeds up to 35 km/h. Higher winds may cause the system to be grounded because excessive bird swinging produces difficulties in flying the helicopter. The swinging results from the 5 m² of area which is presented by the bird to broadside gusts.

SURVEY EQUIPMENT

This section provides a brief description of the geophysical instruments used to acquire the survey data:

Electromagnetic System

Model: DIGHEM^{IV}

Type: Towed bird, symmetric dipole configuration operated at a nominal survey altitude of 30 metres. Coil separation is 8 metres for the 900 Hz and 7200 Hz coil pairs; 6.3 metres for the 56,000 Hz.

Coil orientations/frequencies: coaxial / 900 Hz
coplanar/ 900 Hz
coplanar/ 7,200 Hz
coplanar/56,000 Hz

Channels recorded: 4 inphase channels
4 quadrature channels
3 monitor channels

Sensitivity: 0.2 ppm at 900 Hz
0.4 ppm at 7,200 Hz
1.0 ppm at 56,000 Hz

Sample rate: 10 per second

The electromagnetic system utilizes a multi-coil coaxial/coplanar technique to energize conductors in different directions. The coaxial transmitter coil is vertical with its axis in the flight direction. The coplanar coils are horizontal. The secondary fields are sensed

simultaneously by means of receiver coils which are maximum coupled to their respective transmitter coils. The system yields an inphase and a quadrature channel from each transmitter-receiver coil-pair.

Magnetometer

Model: Picodas 3000
Type: Optically pumped Cesium vapour
Sensitivity: 0.01 nT
Sample rate: 10 per second

The magnetometer sensor is towed in a bird 15 m below the helicopter.

Magnetic Base Station

Model: Scintrex IGS-2/MP-3
Type: Digital recording proton precession
Sensitivity: 0.10 nT
Sample rate: 0.5 per second

A digital recorder is operated in conjunction with the base station magnetometer to record the diurnal variations of the earth's magnetic field. The clock of the base station is synchronized with that of the airborne system to permit subsequent removal of diurnal drift.

VLF System

Manufacturer: Herz Industries Ltd.

Type: Totem-2A

Sensitivity: 0.1%

Stations: Annapolis, Maryland; NSS, 21.4 kHz
Cutler, Maine; NAA, 24.0 kHz
Seattle, Washington; NLK, 24.8 kHz

The VLF receiver measures the total field and vertical quadrature components of the secondary VLF field. Signals from two separate transmitters can be measured simultaneously. The VLF sensor is towed in a bird 10 m below the helicopter.

Radio Altimeter

Manufacturer: Honeywell/Sperry

Type: AA 220

Sensitivity: 1 ft

The radio altimeter measures the vertical distance between the helicopter and the ground. This information is used in the processing algorithm which determines conductor depth.

Analog Recorder

Manufacturer: RMS Instruments
Type: GR33 dot-matrix graphics recorder
Resolution: 4x4 dots/mm
Speed: 1.5 mm/sec

The analog profiles were recorded on chart paper in the aircraft during the survey. Table 2-1 lists the geophysical data channels and the vertical scale of each profile.

Digital Data Acquisition System

Manufacturer: Scintrex
Type: CDI-6
Tape Deck: RMS TCR-12, 6400 bpi, tape cartridge recorder

The digital data were used to generate several computed parameters. Both measured and computed parameters were plotted as "digital profiles" during data processing. These parameters are shown in Table 2-2.

In Table 2-2, the log resistivity scale of 0.06 decade/mm means that the resistivity changes by an order of magnitude in 16.5 mm. The resistivities at 0, 33 and 67 mm up from the bottom of the digital profile are respectively 1, 100 and 10,000 ohm-m.

Table 2-1. The Analog Profiles

Channel Name	Parameter	Scale units/mm	Designation on digital profile
CX1I	coaxial inphase (900 Hz)	2.5 ppm	CXI (900 Hz)
CX1Q	coaxial quad (900 Hz)	2.5 ppm	CXQ (900 Hz)
CP2I	coplanar inphase (900 Hz)	2.5 ppm	CPI (900 Hz)
CP2Q	coplanar quad (900 Hz)	2.5 ppm	CPQ (900 Hz)
CP3I	coplanar inphase (7200 Hz)	5 ppm	CPI (7200 Hz)
CP3Q	coplanar quad (7200 Hz)	5 ppm	CPQ (7200 Hz)
CP4I	coplanar inphase(56000 Hz)	10 ppm	CPI (56 kHz)
CP4Q	coplanar quad (56000 Hz)	10 ppm	CPQ (56 kHz)
ALT	altimeter	3 m	ALT
VF1T	VLF-total: primary stn.	5%	
VF1Q	VLF-quad: primary stn.	5%	
VF2T	VLF-total: secondary stn.	5%	
VF2Q	VLF-quad: secondary stn.	5%	
CMGC	magnetics, coarse	25 nT	MAG
CMGF	magnetics, fine	2.5 nT	
CXSP	coaxial spherics monitor		CXS
CXPL	coaxial powerline monitor		CXPL
CPPL	coplanar powerline monitor		

Table 2-2. The Digital Profiles

Channel Name (Freq)	Observed parameters	Scale units/mm
MAG	magnetics	10 nT
ALT	bird height	6 m
CXI (900 Hz)	vertical coaxial coil-pair inphase	2 ppm
CXQ (900 Hz)	vertical coaxial coil-pair quadrature	2 ppm
CXS	ambient noise monitor (coaxial receiver)	
CXPL	coaxial 50/60 Hz powerline monitor	
CPI (900 Hz)	horizontal coplanar coil-pair inphase	2 ppm
CPQ (900 Hz)	horizontal coplanar coil-pair quadrature	2 ppm
CPI (7200 Hz)	horizontal coplanar coil-pair inphase	4 ppm
CPQ (7200 Hz)	horizontal coplanar coil-pair quadrature	4 ppm
CPI (56000 Hz)	horizontal coplanar coil-pair inphase	10 ppm
CPQ (56000 Hz)	horizontal coplanar coil-pair quadrature	10 ppm
	<u>Computed Parameters</u>	
DIFI (900 Hz)	difference function inphase from CXI and CPI	2 ppm
DIFQ (900 Hz)	difference function quadrature from CXQ and CPQ	2 ppm
CDT	conductance	1 grade
RES (900 Hz)	log resistivity	.06 decade
RES (7200 Hz)	log resistivity	.06 decade
RES (56000 Hz)	log resistivity	.06 decade
DP (900 Hz)	apparent depth	6 m
DP (7200 Hz)	apparent depth	6 m
DP (56000 Hz)	apparent depth	6 m

Tracking Camera

Type: Panasonic Video
Model: AG 2400/WVCD132

Fiducial numbers are recorded continuously and are displayed on the margin of each image. This procedure ensures accurate correlation of analog and digital data with respect to visible features on the ground.

Navigation System

Model: Del Norte 547
Type: UHF electronic positioning system
Sensitivity: 1 m
Sample rate: 0.5 per second

The navigation system uses ground based transponder stations which transmit distance information back to the helicopter. The ground stations are set up well away from the survey area and are positioned such that the signals cross the survey block at an angle between 30° and 150°. After site selection, a traverse line is flown at right angles to a base line drawn through the transmitter sites to establish an arbitrary coordinate system for the survey area. The onboard Central Processing Unit takes any two transponder distances and determines the helicopter position relative to these two ground stations in cartesian coordinates.

The cartesian coordinates are transformed to UTM coordinates during data processing. This is accomplished by correlating a number of prominent topographical locations with the navigational data points. The use of numerous visual tie points serves two purposes: to accurately relate the navigation data to the map sheet and to minimize location errors which might result from distortions in uncontrolled photomosaic base maps.

PRODUCTS AND PROCESSING TECHNIQUES

The following products are available from the survey data. Those which are not part of the survey contract may be acquired later. Refer to Table 3-1 for a summary of the maps which accompany this report, some of which may be sent under separate cover. Most parameters can be displayed as contours, profiles, or in colour.

Base Maps

Base maps of the survey area have been prepared from published topographic maps although photomosaics can also be used. Topographic maps provide an accurate, distortion-free base which facilitates correlation of the navigation data to the UTM grid. Photomosaics are useful for visual reference and for subsequent flight path recovery, but usually contain scale distortions. Orthophotos are ideal, but their cost and the time required to produce them, usually precludes their use as base maps.

Electromagnetic Anomalies

Anomalous electromagnetic responses are selected and analysed by computer to provide a preliminary electromagnetic anomaly map. This preliminary EM map is used, by the

Table 3-1 Products Available from the Survey

MAP	NO. OF SHEETS	ANOMALY MAP	PROFILES ON MAP	CONTOURS		SHADOW MAP
				INK	COLOR	
Electromagnetic Anomalies	3	20,000	-	N/A	N/A	N/A
Probable Bedrock Conductors	-	-	N/A	N/A	N/A	N/A
Resistivity (900 Hz)	-	N/A	-	-	-	-
Resistivity (7,200 Hz)	3	N/A	-	20,000	-	-
Resistivity (56,000 Hz)	-	N/A	-	-	-	-
EM Magnetite	-	N/A	-	-	-	-
Total Field Magnetics	3	N/A	-	20,000	20,000	*
Enhanced Magnetics	3	N/A	-	20,000	-	-
Vertical Gradient Magnetics	-	N/A	-	-	-	-
2nd Vertical Derivative Magnetics	-	N/A	-	-	-	-
Magnetic Susceptibility	-	N/A	-	-	-	-
Filtered Total Field VLF	3	N/A	-	20,000	-	-
EM Profiles (900 Hz)	-	N/A	-	N/A	N/A	N/A
EM Profiles (7200 Hz)	-	N/A	-	N/A	N/A	N/A
EM Profiles (56,000 Hz)	-	N/A	-	N/A	N/A	N/A
Overburden Thickness	-	N/A	-	-	-	N/A
Digital Profiles	Worksheet profiles					20,000
	Interpreted profiles					-

- N/A Not available
- *** Highly recommended due to its overall information content
- ** Recommended
- * Qualified recommendation, as it may be useful in local areas
- No recommendation
- 20,000 Scale of delivered map, i.e, 1:20,000

geophysicist, in conjunction with the computer-generated digital profiles, to produce the final interpreted EM anomaly map. This map includes bedrock, surficial and cultural conductors. A map containing only bedrock conductors can be generated, if desired.

Resistivity

The apparent resistivity in ohm-m may be generated from the inphase and quadrature EM components for any of the frequencies, using a pseudo-layer halfspace model. A resistivity map portrays all the EM information for that frequency over the entire survey area. This contrasts with the electromagnetic anomaly map which provides information only over interpreted conductors. The large dynamic range makes the resistivity parameter an excellent mapping tool.

EM Magnetite

The apparent percent magnetite by weight is computed wherever magnetite produces a negative inphase EM response.

Total Field Magnetics

The aeromagnetic data are corrected for diurnal variation using the magnetic base station data. The regional

IGRF gradient is removed from the data, if required under the terms of the contract.

Enhanced Magnetics

The total field magnetic data are subjected to a processing algorithm. This algorithm enhances the response of magnetic bodies in the upper 500 m and attenuates the response of deeper bodies. The resulting enhanced magnetic map provides better definition and resolution of near-surface magnetic units. It also identifies weak magnetic features which may not be evident on the total field magnetic map. However, regional magnetic variations, and magnetic lows caused by remanence, are better defined on the total field magnetic map. The technique is described in more detail in Section 5.

Magnetic Derivatives

The total field magnetic data may be subjected to a variety of filtering techniques to yield maps of the following:

vertical gradient

second vertical derivative

magnetic susceptibility with reduction to the pole

upward/downward continuations

All of these filtering techniques improve the recognition of near-surface magnetic bodies, with the exception of upward continuation. Any of these parameters can be produced on request. Dighem's proprietary enhanced magnetic technique is designed to provide a general "all-purpose" map, combining the more useful features of the above parameters.

VLF

The VLF data are digitally filtered to remove long wavelengths such as those caused by variations in the transmitted field strength.

Digital Profiles

Distance-based profiles of the digitally recorded geophysical data are generated and plotted by computer. These profiles also contain the calculated parameters which are used in the interpretation process. These are produced as worksheets prior to interpretation, and can also be presented in the final corrected form after interpretation. The profiles display electromagnetic anomalies with their respective interpretive symbols. The differences between the worksheets and the final corrected form occur only with respect to the EM anomaly identifier.

Contour, Colour and Shadow Map Displays

The geophysical data are interpolated onto a regular grid using a cubic spline technique. The resulting grid is suitable for generating contour maps of excellent quality.

Colour maps are produced by interpolating the grid down to the pixel size. The parameter is then incremented with respect to specific amplitude ranges to provide colour "contour" maps.

Monochromatic shadow maps are generated by employing an artificial sun to cast shadows on a surface defined by the geophysical grid. There are many variations in the shadowing technique which may be applied to total field or enhanced magnetic data, magnetic derivatives, VLF, resistivity, etc. Of the various magnetic products, the shadow of the enhanced magnetic parameter is particularly suited for defining geological structures with crisper images and improved resolution.

SURVEY RESULTS

GENERAL DISCUSSION

The survey results are presented on separate map sheets for each parameter at a scale of 1:20,000. Tables 4-1, 4-2 and 4-3 summarize the EM responses in the survey area, with respect to conductance grade and interpretation.

The anomalies shown on the electromagnetic anomaly maps are based on a near-vertical, half plane model. This model best reflects "discrete" bedrock conductors. Wide bedrock conductors or flat-lying conductive units, whether from surficial or bedrock sources, may give rise to very broad anomalous responses on the EM profiles. These may not appear on the electromagnetic anomaly maps if they have a regional character rather than a locally anomalous character. These broad conductors, which more closely approximate a half space model, will be maximum coupled to the horizontal (coplanar) coil-pair and should be more evident on the resistivity parameter. Resistivity maps, therefore, may be more valuable than the electromagnetic anomaly maps, in areas where broad or flat-lying conductors are considered to be of importance. Contoured resistivity maps, based on the 7200 Hz coplanar data, are included with this report.

TABLE 4-1

EM ANOMALY STATISTICS

HELDER LAKE (GRID A)

CONDUCTOR GRADE	CONDUCTANCE RANGE SEIMENS (MHOS)	NUMBER OF RESPONSES
7	> 100	44
6	50 - 100	58
5	20 - 50	112
4	10 - 20	99
3	5 - 10	87
2	1 - 5	245
1	< 1	289
*	INDETERMINATE	166
TOTAL		1100

CONDUCTOR MODEL	MOST LIKELY SOURCE	NUMBER OF RESPONSES
D	DISCRETE BEDROCK CONDUCTOR	342
B	DISCRETE BEDROCK CONDUCTOR	104
S	CONDUCTIVE COVER	599
H	ROCK UNIT OR THICK COVER	16
E	EDGE OF WIDE CONDUCTOR	39
TOTAL		1100

(SEE EM MAP LEGEND FOR EXPLANATIONS)

TABLE 4-2

EM ANOMALY STATISTICS

HELDER LAKE (GRID B)

CONDUCTOR GRADE	CONDUCTANCE RANGE SEIMENS (MHOS)	NUMBER OF RESPONSES
7	> 100	34
6	50 - 100	62
5	20 - 50	149
4	10 - 20	121
3	5 - 10	103
2	1 - 5	291
1	< 1	439
*	INDETERMINATE	211
TOTAL		1410

CONDUCTOR MODEL	MOST LIKELY SOURCE	NUMBER OF RESPONSES
D	DISCRETE BEDROCK CONDUCTOR	431
B	DISCRETE BEDROCK CONDUCTOR	198
S	CONDUCTIVE COVER	732
E	EDGE OF WIDE CONDUCTOR	49
TOTAL		1410

(SEE EM MAP LEGEND FOR EXPLANATIONS)

TABLE 4-3

EM ANOMALY STATISTICS
HELDER LAKE (GRID C)

CONDUCTOR GRADE	CONDUCTANCE RANGE SEIMENS (MHOS)	NUMBER OF RESPONSES
7	> 100	0
6	50 - 100	5
5	20 - 50	2
4	10 - 20	4
3	5 - 10	12
2	1 - 5	51
1	< 1	56
*	INDETERMINATE	34
TOTAL		164

CONDUCTOR MODEL	MOST LIKELY SOURCE	NUMBER OF RESPONSES
D	DISCRETE BEDROCK CONDUCTOR	11
B	DISCRETE BEDROCK CONDUCTOR	9
S	CONDUCTIVE COVER	139
E	EDGE OF WIDE CONDUCTOR	5
TOTAL		164

(SEE EM MAP LEGEND FOR EXPLANATIONS)

Excellent resolution and discrimination of conductors was accomplished by using a fast sampling rate of 0.1 sec and by employing a common frequency (900 Hz) on two orthogonal coil-pairs (coaxial and coplanar). The resulting "difference channel" parameters often permit differentiation of bedrock and surficial conductors, even though they may exhibit similar conductance values.

Anomalies which occur near the ends of the survey lines (i.e., outside the survey area), should be viewed with caution. Some of the weaker anomalies could be due to aerodynamic noise, i.e., bird bending, which is created by abnormal stresses to which the bird is subjected during the climb and turn of the aircraft between lines. Such aerodynamic noise is usually manifested by an anomaly on the coaxial inphase channel only, although severe stresses can affect the coplanar inphase channels as well.

Magnetics

A Scintrex IGS/MP-3 proton precession magnetometer was operated at the survey base to record diurnal variations of the earth's magnetic field. The clock of the base station was synchronized with that of the airborne system to permit subsequent removal of diurnal drift.

The background magnetic levels have been adjusted to the mean IGRF value for the survey area. However, the IGRF gradient across the survey block has not been removed.

The total field magnetic data have been presented as contours on the base maps using a contour interval of 10 nT where gradients permit. The maps show the magnetic properties of the rock units underlying the survey area.

There is ample evidence on the magnetic maps which suggests that the survey area has been subjected to deformation and/or alteration. These structural complexities are evident on the contour maps as variations in magnetic intensity, irregular patterns, and as offsets or changes in strike direction.

The geologic strike inferred from the magnetic data changes from approximately east/west to west-northwest/east-southeast in the western half of the area to approximately northeast/southwest in the east.

The magnetic values range from a background of approximately 59400 to over 67000 nT in the vicinity of fiducial 4170 on line 10180, and fiducial 300 on line 10460.

A highly magnetic feature, which is bounded by the 60000 nT contour is located on sheets 2 and 3. It contains the highest magnetic values in the survey area. The changes in strike direction within this feature, and the truncations in the contour patterns, suggest that this zone is structurally complex between lines 10460 and 20120. Many of the anomalies interpreted to be of bedrock origin are located within this complex feature or in close proximity to the contact of this zone with the surrounding, less magnetic material.

The western end of the survey area (sheet 1) also seems to be structurally complex. Several magnetic features near the north ends of lines 20330 to 20730 may have been subjected to some deformation or folding. They seem to be truncated in the east by a possible magnetic break extending from fiducial 2140 on line 20410 to the north end of line 20270.

If a specific magnetic intensity can be assigned to the rock type which is believed to host the target mineralization, it may be possible to select areas of higher priority on the basis of the total field magnetic maps. This is based on the assumption that the magnetite content of the host rocks will give rise to a limited range of contour

values which will permit differentiation of various lithological units.

The total field magnetic data have been subjected to a processing algorithm to produce enhanced magnetic maps. This procedure enhances near-surface magnetic units and suppresses regional gradients. Maps of the first or second vertical magnetic derivative can also be prepared from existing survey data upon request.

The magnetic results, in conjunction with the other geophysical parameters, should provide valuable information which can be used to effectively map the geology and structure in the survey area.

Resistivity

Resistivity maps, which display the conductive properties of the survey area, were produced from the 7200 Hz coplanar data.

In areas where several conductors or conductive trends appear to be related to a common geological unit, these have been outlined as "zones" on the EM anomaly maps. These zone outlines usually approximate the limits of conductive units

defined by the resistivity contours, but may also be related to possible contacts inferred from the magnetic data.

The zones may consist of a single conductive horizon, or may contain numerous banded or segmented conductors. They may show close correlation with magnetic units.

These zones are sometimes quite extensive and often reflect "formational" conductors which may be of minor interest as direct exploration targets. However, attention may be focused on areas where these zones appear to be faulted or folded or where anomaly characteristics differ along strike.

The resistivity patterns show a general agreement with the magnetic trends, although many of the resistivity lows outline the lakes and streams of the survey area. There are some bedrock anomalies in the survey area which are located in lakes and streams. These anomalies may not produce distinct resistivity lows on the 7200 Hz resistivity maps as they may be masked by the effects of conductive overburden.

Bedrock anomalies which occur in close proximity to magnetite-rich zones may also fail to produce distinct resistivity lows on the resistivity map.

VLF

The VLF method is quite sensitive to the angle of coupling between the conductor and the propagated EM field. Consequently, conductors which strike towards the VLF station will usually yield a stronger response than conductors which are nearly orthogonal to it.

The VLF parameter does not normally provide the same degree of resolution available from the EM data. Closely-spaced conductors, conductors of short strike length or conductors which are poorly coupled to the VLF field, may escape detection with this method. Erratic signals from the VLF transmitters can also give rise to strong, isolated anomalies which should be viewed with caution. The filtered total field VLF contours are presented on the base maps with a contour interval of one percent.

VLF results were obtained from the transmitting stations at Cutler, Maine (NAA - 24.0 kHz), Seattle, Washington (NLK- 24.8 kHz), and Annapolis, Maryland (NSS - 21.4 kHz). The VLF maps show the contoured results of the filtered total field from Annapolis for all lines.

The general magnetic strike in the survey area, inferred from the magnetic data, changes from approximately east/west

in the western half of the survey block to northeast/southwest in the east. The strike of the western half provides good coupling with the VLF signals from Cutler, while the eastern half provides moderate coupling.

In general, the VLF trends over the survey block are strong, and well defined. The general strike of the VLF data is east/west to northwest/southeast. These trends show good agreement with the trend of the lakes and streams in the area, and many of the VLF anomalies may be caused by conductive surficial material. Many VLF trends show good correlation with the bedrock conductors interpreted from the electromagnetic data.

Many of the structural features inferred from the magnetic data are evident as truncations in the contour patterns on the VLF maps.

Electromagnetics

The EM anomalies resulting from this survey appear to fall within one of three general categories. The first type consists of discrete, well-defined anomalies which yield marked inflections on the difference channels. These anomalies are usually attributed to conductive sulphides or graphite and are generally given a "B", "T" or "D"

interpretive symbol, denoting a bedrock source.

The second class consists of moderately well-defined quadrature responses which coincide with low amplitude or negative polarity inphase responses. The positive quadrature is attributed to poorly conductive material which overlies, or is associated with, a magnetite-rich host. These anomalies often yield very weak conductance values but show moderate to strong magnetic correlation. Interpretive symbols may vary from "B?" to "S?".

The third class of anomalies comprises broad responses which exhibit the characteristics of a half space and do not yield well-defined inflections on the difference channels. Anomalies in this category are usually given an "S" or "H" interpretive symbol. The lack of a difference channel response usually implies a broad or flat-lying conductive source such as overburden.

The effects of conductive overburden are evident over most of the survey area. Although the difference channels (DIFI and DIFQ) are extremely valuable in detecting bedrock conductors which are partially masked by conductive overburden, sharp undulations in the bedrock/overburden interface can yield anomalies in the difference channels

which may be interpreted as possible bedrock conductors. Such anomalies usually fall into the "S?" or "B?" classification but may also be given an "E" interpretive symbol, denoting a resistivity contrast at the edge of a conductive unit.

In areas where EM responses are evident primarily on the quadrature components, zones of poor conductivity are indicated. Where these responses are coincident with magnetic anomalies, it is possible that the inphase component amplitudes have been suppressed by the effects of magnetite. Most of these poorly-conductive magnetic features give rise to resistivity anomalies which are only slightly below background. If it is expected that poorly-conductive economic mineralization may be associated with magnetite-rich units, most of these weakly anomalous features will be of interest. In areas where magnetite causes the inphase components to become negative, the apparent conductance and depth of EM anomalies may be unreliable.

As economic mineralization within the area may be associated with massive to weakly disseminated sulphides, which may or may not be hosted by magnetite-rich rocks, it is difficult to assess the relative merits of EM anomalies on the basis of conductance. It is recommended that an attempt

be made to compile a suite of geophysical "signatures" over areas of interest. Anomaly characteristics are clearly defined on the computer-processed geophysical data profiles which are supplied as one of the survey products.

Even weak conductors may be of economic significance in the survey area. A complete assessment and evaluation of the survey data should be carried out by one or more qualified professionals who have access to, and can provide a meaningful compilation of, all available geophysical, geological and geochemical data.

CONDUCTORS IN THE SURVEY AREA

The electromagnetic anomaly maps show the anomaly locations with the interpreted conductor type, dip, conductance and depth being indicated by symbols. Direct magnetic correlation is also shown if it exists. The strike direction and length of the conductors are indicated when anomalies can be correlated from line to line. When studying the map sheets, consult the anomaly listings appended to this report.

Many of the electromagnetic anomalies in the survey area seem to have some association with magnetic zones. Some

anomalies are directly coincident with highly magnetic trends, while some are located at contacts between highly magnetic zones, and relatively non-magnetic zones. There are also some conductors attributed to bedrock sources that are located in the vicinity of apparent structural breaks.

The differences in magnetic signatures with respect to electromagnetic anomalies show that the conductors in the area are likely due to different causative sources. Strong magnetic conductors are commonly observed over pyrrhotite, while strong non-magnetic conductors often reflect graphitic zones.

Most of the stronger anomalies which have been attributed to bedrock sources, give rise to resistivity lows on the 7200 Hz resistivity map. Well-defined resistivity lows are not developed where the conductors are coincident with highly magnetic, magnetite-rich zones.

Not all anomalies can be described in this report. The following paragraphs, however, describe some of the more interesting geophysical targets in the survey area which are considered to warrant further investigation.

Sheet 1

Most of the conductive trends on sheet 1 that are of probable bedrock origin are associated with magnetic features. The magnetic data suggest that sheet 1 is structurally complex. The conductors therefore have a segmented appearance, and are mostly of limited strike length. Strike directions of the conductors are changeable, and are closely related to the changing magnetic strike direction on sheet 1.

Conductors 20210H-20340D, 20230E-20240F, 20290C-20400B, 20340A-20370B, 20340B-20360B, 20390B-20440A, 20440B-20610B, 20540B-20630A, 20570C-20590C, 20650A-20690B, 20700B-30040C and 20730A-30040B

These conductors are all related to a thin magnetic zone trending approximately west-northwest/east-southeast to east/west. This magnetic zone is complex. There are several places along strike where the magnetic contours seem to be truncated or offset. Dips have been determined for several of the conductors. There is evidence of a northerly dip for conductors 20440B-20610B, 20650A-20690B, 20700B-30440C. Southerly dips

are exhibited by conductors 20210H-20340D, 20230E-20240F and 20290C-20400B. This suggests that some of the sources of these conductors may be overturned. Correlation with the magnetic data varies along strike of most of these conductors. Conductors 20290C-20400B, 20340B-20360B, 20390B-20440A, 20540B-20630A and 20700B-30040C coincide with the peaks of this magnetic zone, while the others seem to be related to magnetic contacts. Most of the conductors reflect thin bedrock sources. The highest conductance values of these trends are located between lines 20270 and 20350, 20530 and 20620, and 20730 and 30040. There is correlation of most of these trends with several strong VLF anomalies. These anomalies do not seem to be adversely affected by conductive overburden.

Conductors 20410B-20440D, 20420D-20450B, 20490B-20570F,
20490C-20500E, 20440E-20480C and 20400C-
20490D

These conductors are also related to thin magnetic units trending west-northwest/east-southeast. Magnetic correlation varies along strike. Conductor 20490B-20570F reflects a very strong source. Dips vary along strike (north at anomalies 20510F and 20530B, and south

at anomaly 20560C), suggesting that the source of this conductor is overturned at one or more locations. Closely-spaced parallel conductors 20410B-20440D and 20420D-20450B are moderately strong. Conductor 20410B-20440D dips to the south, while 20420D-20450B dips to the north. This suggests that the source of one is overturned with respect to the other.

Conductors 20450G-20470I, 20460H-20470H, 20480G-20500J
and 20490F-20500I

These conductors are all associated with an east-northeast/west-southwest trending magnetic unit which seems to merge with a highly magnetic, semi-circular feature to the west. These conductors are moderately strong and of limited strike length. Conductor 20480G-20500J exhibits a dip to the north.

Conductors 20340M-20350K, 20340N-20350L, 20370L-20390N,
20370M-20410I and 20410H-20440L

These conductors are also associated with another east-northeast/west-southwest trending magnetic zone which merges with the same semi-circular feature to the west. These conductors are strong, and of limited

strike length. Conductor 20410H-20440L exhibits a dip to the south.

Other conductors, such as conductors 20380Q-20390Q, 20410K-20420N, 20420O-20450J, and single line response 20410L are located near these conductive trends. The magnetic data suggest that this area is structurally complex. Several structural linear features can be inferred from the magnetic data.

Conductors 20730C-30030D, 20680C-30020C, 20670D-20680D, 20630B-20640C, 20630D-20650B, 20630E-20640E, 20600F-20610D, 20560F-20570I, 20530G-20540H, 20510L-20530H, 20460L-20470K and 20460M-20470L

These conductors are associated with the highly magnetic, semi-circular feature mentioned previously.

Conductors 20730C-30030D, 20680C-30020C, 20670D-20680D, 20630B-20640C, 20630D-20650B and 20630E-20640E seem to be related to the magnetic peaks of this feature. The others are situated in high gradient magnetics, suggesting that they are contact features.

Strikes of this group of conductors vary from east/west for the most westerly conductor, gradually changing to northeast/southwest for the eastern conductors.

Conductors 20590J-20640M, 20550I-20560H, 20550J-20560I, 20550K-20580H and 20460N-20480M

These conductors are of limited strike length, trending approximately east/west. All appear to be related to magnetic contacts at the northern edge of the same semi-circular magnetic feature as the previous group of conductors. These conductors exhibit northerly dips, except for 20460N-20480M, which dips to the south.

The magnetic data suggest that the area is complex in the vicinity of conductors 20460N-20480M, 20460L-20470K and 20460M-20470L. The strike directions of the conductors in this area are variable.

Conductors 20350V-20400O, 20360T-20370T, 20390AA-20410Q, 20400N-20460T, 20460S-20550O, 20360R-20430P, 20380U-20540M, 20380T-20390X, 20400I-20410N and 20450M-20460P

These conductors are related to two thin magnetic

bands and a relatively non-magnetic zone. They are situated in an area which appears to have been subjected to some deformation or folding. Conductors 20350V-20400O, 20400N-20460T, 20460S-20550O and 20380U-20540M are coincident with the peaks of these thin magnetic bands. Most of these conductors reflect very strong, thin bedrock sources, although conductance values vary along strike. Dips vary within this area, suggesting that the sources of some conductors are overturned. Conductors 20400I-20410N and 20450M-20460P are of limited strike length. They occur within a magnetic low which is also located in this area of deformation. Conductor 20400I-20410N dips to the south.

These magnetic units are all truncated in the east by an apparent structural break which trends north-northeast/south-southwest from fiducial 2140 on line 20410 to the north end of line 20270.

Conductors 20680M-20720J, 20680N-20690L, 20690M-20700P, 20700O-20720L, 20710P-20730L and 20710R-20720M

These conductors are very strong and of limited strike length. They seem to be situated around a local

magnetic high extending from fiducial 780 on line 20680 to fiducial 2295 on line 20720. All conductors seem to be related to the contact of this local magnetic high and the surrounding less magnetic units.

Conductors 20690I-20730G and 20690J-20730H

These very strong, parallel conductors are of limited strike length. Both are coincident with a local magnetic high extending from fiducial 1340 on line 20690 to fiducial 2853 on line 20730. A strong VLF anomaly is coincident with this magnetic feature.

Conductors 30180F-30190E and 30180G-30190F

These closely spaced, moderately weak conductors are of limited strike length. They show strong correlation with a magnetic high extending from fiducial 2190 on line 30150 to fiducial 1428 on line 30200. This magnetic unit is also coincident with a moderately strong VLF response. The VLF response, however, may be adversely affected by conductive overburden due to its proximity to the lake shore.

Conductors 30150A-30160B

This weak, probable bedrock conductor is of limited strike length. It is coincident with the peak of a highly magnetic circular feature extending over lines 30140 to 30180.

There are other weak conductive trends and single line responses on this sheet that should be subjected to further investigation to determine their importance.

Sheet 2

Most of the bedrock anomalies on sheet 2 are contained in 3 to 4 sub-parallel conductors trending east-northeast/west-southwest. These conductors extend the length of sheet 2 through the central region of the map.

There is coincidence of these conductors with a complex, highly magnetic unit. Conductors 10010C-10020D, 10060A-10090C, 10110C-10290D, 10310E-10510K show the strongest magnetic correlation. These trends are coincident with a magnetite-rich zone within the magnetic unit. These trends do not give rise to well-defined resistivity lows on the 7200 Hz resistivity map.

Several conductors show correlation with other peaks within this magnetic zone, while some, such as 10050C-10110F, 10390H-10460T, 10460U-20080K and 20080J-20150G, seem to be related to the contact of this magnetic trend and the surrounding relatively non-magnetic material.

Most conductors reflect very strong, thin bedrock sources, although conductance values vary greatly along strike. Dip directions are difficult to determine when the EM responses exhibit the effects of magnetite, or when two or more conductors are closely spaced. At the eastern end of this conductive zone there is evidence of northerly dips. West of line 10630 the conductors exhibit a southerly dip. Two exceptions at the western end of this zone are north-dipping conductors 20090D-20100B and 20110C-20130B. The change in dip direction suggests some sources have been overturned. The magnetic zone is structurally complex, and several structural breaks can be inferred from the magnetic data. These structural linear features intersect the magnetic unit at steep angles. The magnetic zone is most complex between lines 10460 and 20180. Between these lines the zone appears to have been subjected to folding or deformation. Many of the structural breaks inferred from the magnetic data are situated between these lines.

West of line 10530, the magnetic trend seems to split into two magnetic units divided by a relative magnetic low. The conductive trends also seem to diverge, coinciding with the magnetic peaks of the zone.

The magnetic trends and the conductors seem to be truncated at the western end of sheet 2 by an apparent structural break trending approximately northwest from the southern end of line 20070 to fiducial 4200 on line 20200.

Zone A

Zone A contains two conductors of limited strike length and several single line responses. The approximate limit of this zone is the 1000 ohm-m contour. Most of the conductors in this zone reflect thin bedrock sources of moderate strength. There is some correlation of the conductors in this zone with local magnetic highs. Conductor 20050R-20060T exhibits a north dip.

Zone B

Zone B consists of four to five sub-parallel bedrock conductors. The conductors in this zone are

associated with a highly complex magnetic unit. The zone is approximately outlined by the 59400 nT contour on the total field magnetic map. There is direct magnetic correlation of several conductors with some of the peaks in this zone. These include 10310Q-10380V and 10350L-10460X. Most conductors reflect very strong, thin bedrock sources, although conductance varies along strike.

Dips of closely-spaced conductors, such as those in Zone B, are difficult to determine. Conductors 10290N-10320Q and 10360Q-103800 exhibit a northerly dip, while conductor 10350L-10460X exhibits a dip to the south.

Zone C

The approximate limit of Zone C is the 1000 ohm-m contour on the 7200 Hz resistivity map. The conductors in Zone C reflect thin, strong bedrock sources. There is evidence of a northerly dip. There is direct correlation of this zone with a highly magnetic trend striking northwest/southeast. This magnetic feature seems to be intersected by two possible structural breaks inferred from the magnetic data. There is direct correlation of this zone with a strong VLF trend.

This VLF response may be a combination of the effects of conductive surficial material and bedrock sources as it is situated near a lake shore.

Conductor 10520W-20040I

This conductor is located west of Zone B. It seems to be coincident with part of the same magnetic trend as Zone B. This conductor reflects a thin bedrock source. There is evidence of a south dip.

Conductors 10150I-10230I, 10250I-10260K, 10270K-10310L,
10290J-10310K, 10330K-10340K, 10330J-10390K
and 10340J-10420K

These conductors are situated in several weak magnetic features southeast of Zone B. Magnetic correlation varies along strike of all conductors. Conductor 10150I-10230I reflects a relatively weak, thin bedrock source with a probable dip to the north. No dips have been determined for the other conductors. Conductance values vary along strike of conductors 10330J-10390K and 10340J-10420K. The highest values are situated between lines 10340 and 10360.

Conductor 10130H-10140F

This conductor is a well-defined thin bedrock source of limited strike length. This conductor is associated with a local magnetic high. Anomaly 10130G is a strong single line response located in close proximity to this conductor. Both conductor 10130H-10140F and anomaly 10130G exhibit southerly dips.

Conductors 10460I-10510G, 10480G-10490E, 10490F-10510F
and 10530F-10540E

These conductors are coincident with a highly magnetic unit, which is possibly related to the highly magnetic feature extending through the central region of the sheet.

Conductor 10460I-10510G is coincident with the peak of this magnetite-rich zone. This conductor reflects a thin, moderately strong bedrock source. It has a probable dip to the north. The other conductors reflect weak, probable bedrock conductors that appear to be related to the contacts of this zone with the surrounding, less magnetic material.

Conductors 20070L-20140H, 20110M-20220K, 20140G-20220H
and 20200G-20210K

These conductors reflect thin, strong bedrock sources. Conductors 20110M-20220K and 20140G-20220H are coincident with two magnetic peaks of a magnetic zone extending over lines 20120-20220. Both conductors exhibit a probable south dip. These two conductors are coincident with very strong VLF trends.

Conductor 20070L-20140H is a moderately strong bedrock conductor which is located south of conductors 20110M-20220K and 20140G-20220H. There is no magnetic correlation with this trend.

Conductor 20010J-20070P

This conductor reflects a strong, thin bedrock source, although conductance varies along strike. There is evidence of a southerly dip. It is associated with a thin magnetic trend striking approximately east/west, although magnetic correlation also varies along strike. This conductor is coincident with a moderately strong VLF anomaly.

Conductors 20260Q-20270L and 20270M-202900

These conductors reflect strong thin bedrock sources of limited strike length. There is direct correlation of these conductors with a local magnetic high, and a strong VLF anomaly.

Sheet 3

All of the anomalies interpreted to be of bedrock origin are situated within a highly complex magnetic zone defined by the 60000 nT contour. This zone may be related to the highly magnetic trend on sheet 2.

Several apparent structural breaks can be inferred from the magnetic data which seem to intersect this magnetic feature. This magnetic unit also appears to have been subjected to some deformation or folding.

Zone D

The conductors of Zone D reflect thin bedrock sources. Conductor 10460B-10500B is coincident with a peak of the magnetic zone above. Conductance values vary along strike of the conductors in this zone.

The limit of this zone is defined by the 1000 ohm-m contour on the 7200 Hz resistivity map.

Conductors 10530E-10540D, 10570D-10580D, 10610C-10620D

These conductors reflect probable bedrock sources. They are all located within the highly magnetic zone.

Single line responses 10610F, 10630J and 10660D may also be of interest. Anomaly 10660D is a very strong single line response which gives rise to a well-defined resistivity low. There is a probable dip to the north. All of these responses are located in high gradient magnetics, and may be related to contacts.

BACKGROUND INFORMATION

This section provides background information on parameters which are available from the survey data. Those which have not been supplied as survey products may be generated later from raw data on the digital archive tape.

ELECTROMAGNETICS

DIGHEM electromagnetic responses fall into two general classes, discrete and broad. The discrete class consists of sharp, well-defined anomalies from discrete conductors such as sulfide lenses and steeply dipping sheets of graphite and sulfides. The broad class consists of wide anomalies from conductors having a large horizontal surface such as flatly dipping graphite or sulfide sheets, saline water-saturated sedimentary formations, conductive overburden and rock, and geothermal zones. A vertical conductive slab with a width of 200 m would straddle these two classes.

The vertical sheet (half plane) is the most common model used for the analysis of discrete conductors. All anomalies plotted on the electromagnetic map are analyzed according to this model. The following section entitled **Discrete Conductor Analysis** describes this model in detail, including

the effect of using it on anomalies caused by broad conductors such as conductive overburden.


The conductive earth (half space) model is suitable for broad conductors. Resistivity contour maps result from the use of this model. A later section entitled **Resistivity Mapping** describes the method further, including the effect of using it on anomalies caused by discrete conductors such as sulfide bodies.

Geometric interpretation

The geophysical interpreter attempts to determine the geometric shape and dip of the conductor. Figure 5-1 shows typical DIGHEM anomaly shapes which are used to guide the geometric interpretation.

Discrete conductor analysis

The EM anomalies appearing on the electromagnetic map are analyzed by computer to give the conductance (i.e., conductivity-thickness product) in siemens (mhos) of a vertical sheet model. This is done regardless of the interpreted geometric shape of the conductor. This is not an unreasonable procedure, because the computed conductance increases as the electrical quality of the conductor increases, regardless of its true shape. DIGHEM anomalies

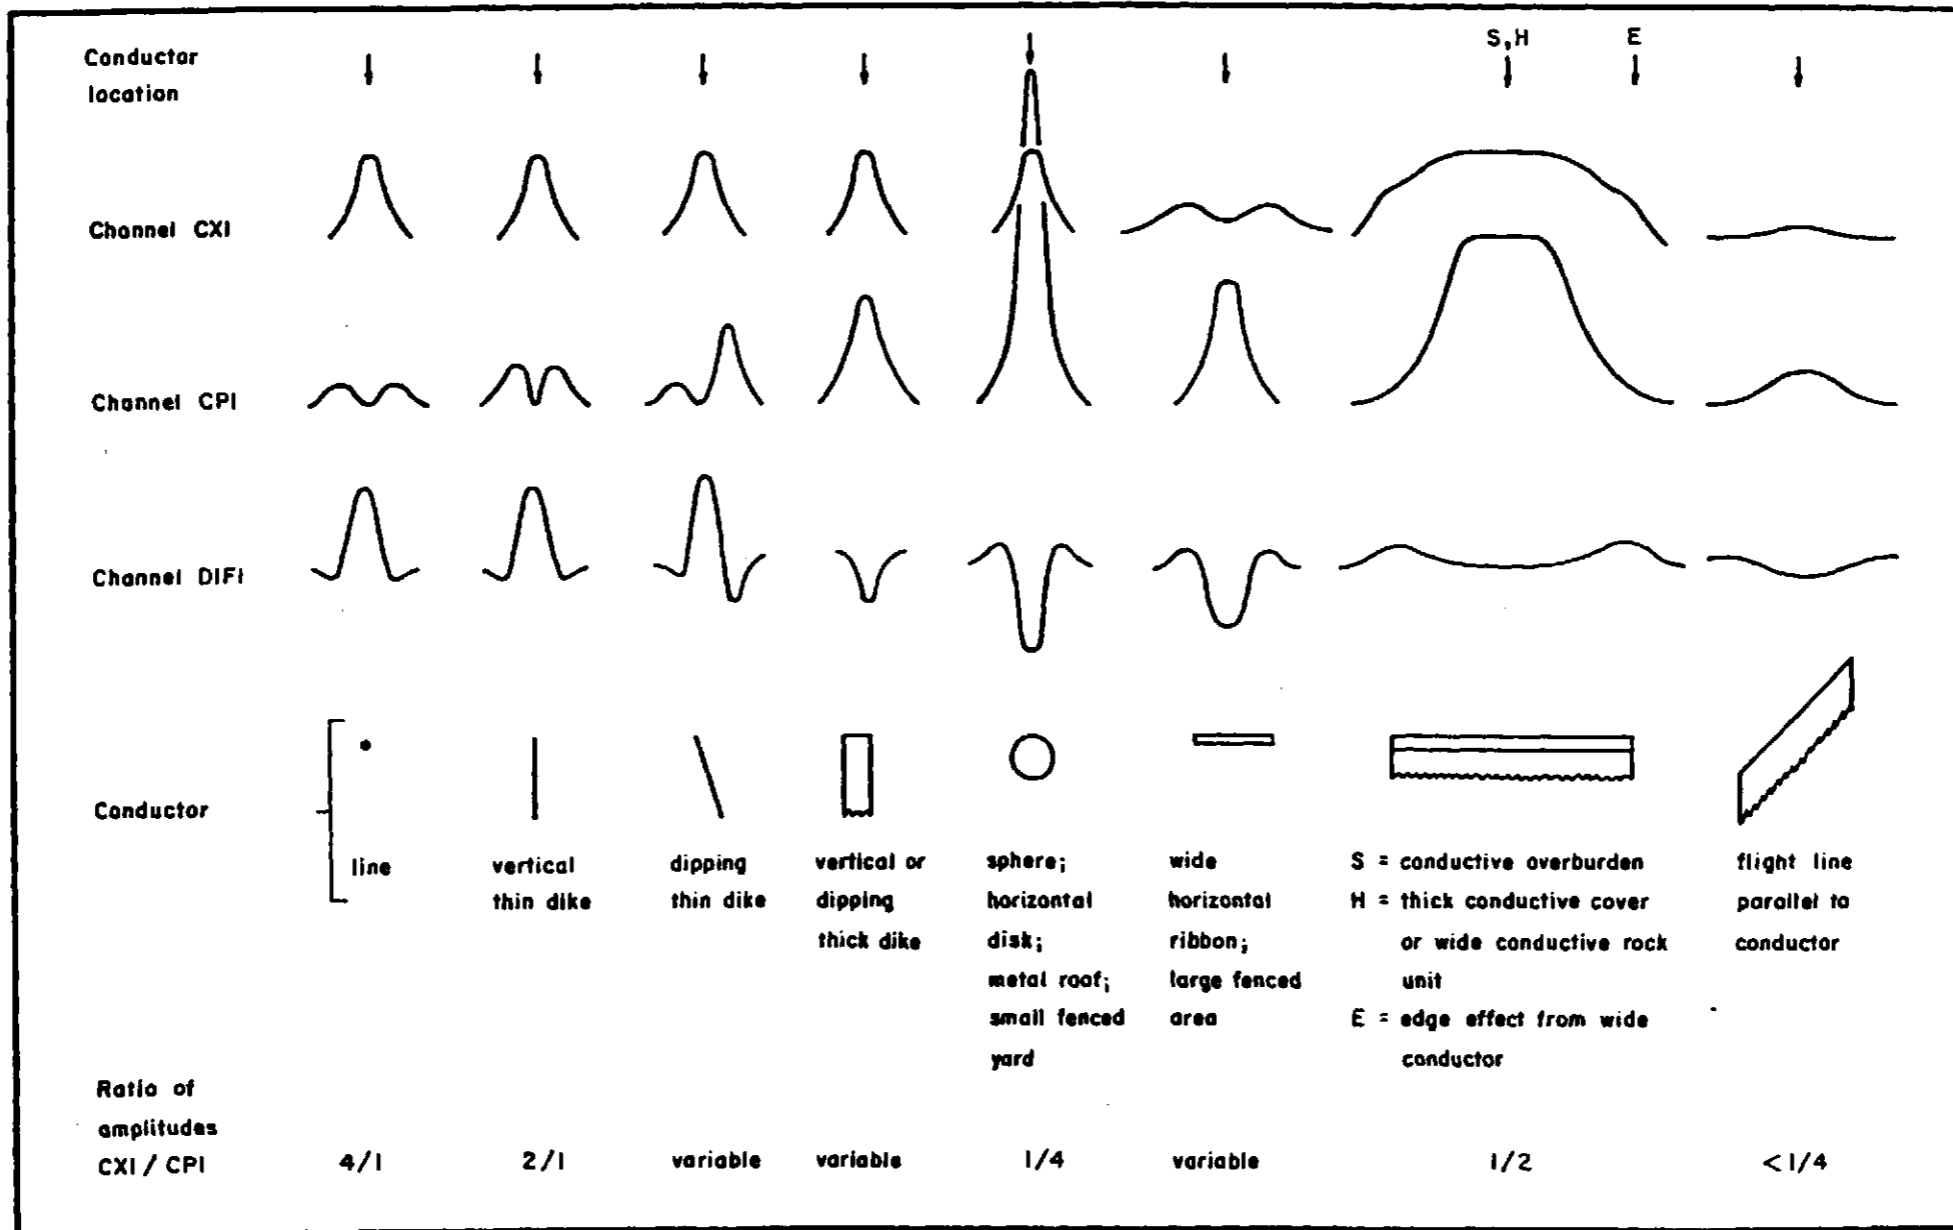

-5-3-

Fig 5-1 Typical DIGHEM anomaly shapes

are divided into seven grades of conductance, as shown in Table 5-1 below. The conductance in siemens (mhos) is the reciprocal of resistance in ohms.

Table 5-1. EM Anomaly Grades

<u>Anomaly Grade</u>	<u>siemens</u>
7	> 100
6	50 - 100
5	20 - 50
4	10 - 20
3	5 - 10
2	1 - 5
1	< 1

The conductance value is a geological parameter because it is a characteristic of the conductor alone. It generally is independent of frequency, flying height or depth of burial, apart from the averaging over a greater portion of the conductor as height increases. Small anomalies from deeply buried strong conductors are not confused with small anomalies from shallow weak conductors because the former will have larger conductance values.

Conductive overburden generally produces broad EM responses which may not be shown as anomalies on the EM maps. However, patchy conductive overburden in otherwise resistive areas can yield discrete anomalies with a conductance grade (cf. Table 5-1) of 1, 2 or even 3 for conducting clays which

have resistivities as low as 50 ohm-m. In areas where ground resistivities are below 10 ohm-m, anomalies caused by weathering variations and similar causes can have any conductance grade. The anomaly shapes from the multiple coils often allow such conductors to be recognized, and these are indicated by the letters S, H, and sometimes E on the electromagnetic anomaly map (see EM map legend).

For bedrock conductors, the higher anomaly grades indicate increasingly higher conductances. Examples: DIGHEM's New Inco copper discovery (Noranda, Canada) yielded a grade 5 anomaly, as did the neighbouring copper-zinc Magusi River ore body; Mattabi (copper-zinc, Sturgeon Lake, Canada) and Whistle (nickel, Sudbury, Canada) gave grade 6; and DIGHEM's Montcalm nickel-copper discovery (Timmins, Canada) yielded a grade 7 anomaly. Graphite and sulfides can span all grades but, in any particular survey area, field work may show that the different grades indicate different types of conductors.

Strong conductors (i.e., grades 6 and 7) are characteristic of massive sulfides or graphite. Moderate conductors (grades 4 and 5) typically reflect graphite or sulfides of a less massive character, while weak bedrock conductors (grades 1 to 3) can signify poorly connected graphite or heavily disseminated sulfides. Grades 1 and 2

conductors may not respond to ground EM equipment using frequencies less than 2000 Hz.

The presence of sphalerite or gangue can result in ore deposits having weak to moderate conductances. As an example, the three million ton lead-zinc deposit of Restigouche Mining Corporation near Bathurst, Canada, yielded a well-defined grade 2 conductor. The 10 percent by volume of sphalerite occurs as a coating around the fine grained massive pyrite, thereby inhibiting electrical conduction.

Faults, fractures and shear zones may produce anomalies which typically have low conductances (e.g., grades 1 to 3). Conductive rock formations can yield anomalies of any conductance grade. The conductive materials in such rock formations can be salt water, weathered products such as clays, original depositional clays, and carbonaceous material.

On the interpreted electromagnetic map, a letter identifier and an interpretive symbol are plotted beside the EM grade symbol. The horizontal rows of dots, under the interpretive symbol, indicate the anomaly amplitude on the flight record. The vertical column of dots, under the anomaly letter, gives the estimated depth. In areas where anomalies are crowded, the letter identifiers, interpretive

symbols and dots may be obliterated. The EM grade symbols, however, will always be discernible, and the obliterated information can be obtained from the anomaly listing appended to this report.

The purpose of indicating the anomaly amplitude by dots is to provide an estimate of the reliability of the conductance calculation. Thus, a conductance value obtained from a large ppm anomaly (3 or 4 dots) will tend to be accurate whereas one obtained from a small ppm anomaly (no dots) could be quite inaccurate. The absence of amplitude dots indicates that the anomaly from the coaxial coil-pair is 5 ppm or less on both the inphase and quadrature channels. Such small anomalies could reflect a weak conductor at the surface or a stronger conductor at depth. The conductance grade and depth estimate illustrates which of these possibilities fits the recorded data best.

Flight line deviations occasionally yield cases where two anomalies, having similar conductance values but dramatically different depth estimates, occur close together on the same conductor. Such examples illustrate the reliability of the conductance measurement while showing that the depth estimate can be unreliable. There are a number of factors which can produce an error in the depth estimate, including the averaging of topographic variations by the

altimeter, overlying conductive overburden, and the location and attitude of the conductor relative to the flight line. Conductor location and attitude can provide an erroneous depth estimate because the stronger part of the conductor may be deeper or to one side of the flight line, or because it has a shallow dip. A heavy tree cover can also produce errors in depth estimates. This is because the depth estimate is computed as the distance of bird from conductor, minus the altimeter reading. The altimeter can lock onto the top of a dense forest canopy. This situation yields an erroneously large depth estimate but does not affect the conductance estimate.

Dip symbols are used to indicate the direction of dip of conductors. These symbols are used only when the anomaly shapes are unambiguous, which usually requires a fairly resistive environment.

A further interpretation is presented on the EM map by means of the line-to-line correlation of anomalies, which is based on a comparison of anomaly shapes on adjacent lines. This provides conductor axes which may define the geological structure over portions of the survey area. The absence of conductor axes in an area implies that anomalies could not be correlated from line to line with reasonable confidence.

DIGHEM electromagnetic maps are designed to provide a correct impression of conductor quality by means of the conductance grade symbols. The symbols can stand alone with geology when planning a follow-up program. The actual conductance values are printed in the attached anomaly list for those who wish quantitative data. The anomaly ppm and depth are indicated by inconspicuous dots which should not distract from the conductor patterns, while being helpful to those who wish this information. The map provides an interpretation of conductors in terms of length, strike and dip, geometric shape, conductance, depth, and thickness. The accuracy is comparable to an interpretation from a high quality ground EM survey having the same line spacing.

The attached EM anomaly list provides a tabulation of anomalies in ppm, conductance, and depth for the vertical sheet model. The EM anomaly list also shows the conductance and depth for a thin horizontal sheet (whole plane) model, but only the vertical sheet parameters appear on the EM map. The horizontal sheet model is suitable for a flatly dipping thin bedrock conductor such as a sulfide sheet having a thickness less than 10 m. The list also shows the resistivity and depth for a conductive earth (half space) model, which is suitable for thicker slabs such as thick conductive overburden. In the EM anomaly list, a depth value of zero for the conductive earth model, in an area of thick

cover, warns that the anomaly may be caused by conductive overburden.

Since discrete bodies normally are the targets of EM surveys, local base (or zero) levels are used to compute local anomaly amplitudes. This contrasts with the use of true zero levels which are used to compute true EM amplitudes. Local anomaly amplitudes are shown in the EM anomaly list and these are used to compute the vertical sheet parameters of conductance and depth. Not shown in the EM anomaly list are the true amplitudes which are used to compute the horizontal sheet and conductive earth parameters.

Questionable Anomalies

DIGHEM maps may contain EM responses which are displayed as asterisks (*). These responses denote weak anomalies of indeterminate conductance, which may reflect one of the following: a weak conductor near the surface, a strong conductor at depth (e.g., 100 to 120 m below surface) or to one side of the flight line, or aerodynamic noise. Those responses that have the appearance of valid bedrock anomalies on the flight profiles are indicated by appropriate interpretive symbols (see EM map legend). The others probably do not warrant further investigation unless their locations are of considerable geological interest.

The thickness parameter

DIGHEM can provide an indication of the thickness of a steeply dipping conductor. The amplitude of the coplanar anomaly (e.g., CPI channel on the digital profile) increases relative to the coaxial anomaly (e.g., CXI) as the apparent thickness increases, i.e., the thickness in the horizontal plane. (The thickness is equal to the conductor width if the conductor dips at 90 degrees and strikes at right angles to the flight line.) This report refers to a conductor as thin when the thickness is likely to be less than 3 m, and thick when in excess of 10 m. Thick conductors are indicated on the EM map by parentheses "()". For base metal exploration in steeply dipping geology, thick conductors can be high priority targets because many massive sulfide ore bodies are thick, whereas non-economic bedrock conductors are often thin. The system cannot sense the thickness when the strike of the conductor is subparallel to the flight line, when the conductor has a shallow dip, when the anomaly amplitudes are small, or when the resistivity of the environment is below 100 ohm-m.

Resistivity mapping

Areas of widespread conductivity are commonly

encountered during surveys. In such areas, anomalies can be generated by decreases of only 5 m in survey altitude as well as by increases in conductivity. The typical flight record in conductive areas is characterized by inphase and quadrature channels which are continuously active. Local EM peaks reflect either increases in conductivity of the earth or decreases in survey altitude. For such conductive areas, apparent resistivity profiles and contour maps are necessary for the correct interpretation of the airborne data. The advantage of the resistivity parameter is that anomalies caused by altitude changes are virtually eliminated, so the resistivity data reflect only those anomalies caused by conductivity changes. The resistivity analysis also helps the interpreter to differentiate between conductive trends in the bedrock and those patterns typical of conductive overburden. For example, discrete conductors will generally appear as narrow lows on the contour map and broad conductors (e.g., overburden) will appear as wide lows.

The resistivity profiles and the resistivity contour maps present the apparent resistivity using the so-called pseudo-layer (or buried) half space model defined by Fraser (1978)¹. This model consists of a resistive layer overlying

¹ Resistivity mapping with an airborne multicoil electromagnetic system: Geophysics, v. 43, p.144-172

a conductive half space. The depth channels give the apparent depth below surface of the conductive material. The apparent depth is simply the apparent thickness of the overlying resistive layer. The apparent depth (or thickness) parameter will be positive when the upper layer is more resistive than the underlying material, in which case the apparent depth may be quite close to the true depth.

The apparent depth will be negative when the upper layer is more conductive than the underlying material, and will be zero when a homogeneous half space exists. The apparent depth parameter must be interpreted cautiously because it will contain any errors which may exist in the measured altitude of the EM bird (e.g., as caused by a dense tree cover). The inputs to the resistivity algorithm are the inphase and quadrature components of the coplanar coil-pair. The outputs are the apparent resistivity of the conductive half space (the source) and the sensor-source distance. The flying height is not an input variable, and the output resistivity and sensor-source distance are independent of the flying height. The apparent depth, discussed above, is simply the sensor-source distance minus the measured altitude or flying height. Consequently, errors in the measured altitude will affect the apparent depth parameter but not the apparent resistivity parameter.

The apparent depth parameter is a useful indicator of simple layering in areas lacking a heavy tree cover. The DIGHEM system has been flown for purposes of permafrost mapping, where positive apparent depths were used as a measure of permafrost thickness. However, little quantitative use has been made of negative apparent depths because the absolute value of the negative depth is not a measure of the thickness of the conductive upper layer and, therefore, is not meaningful physically. Qualitatively, a negative apparent depth estimate usually shows that the EM anomaly is caused by conductive overburden. Consequently, the apparent depth channel can be of significant help in distinguishing between overburden and bedrock conductors.

The resistivity map often yields more useful information on conductivity distributions than the EM map. In comparing the EM and resistivity maps, keep in mind the following:

- (a) The resistivity map portrays the absolute value of the earth's resistivity, where resistivity = $1/\text{conductivity}$.
 - (b) The EM map portrays anomalies in the earth's resistivity. An anomaly by definition is a change from the norm and so the EM map displays anomalies, (i) over narrow, conductive bodies
-

and (ii) over the boundary zone between two wide formations of differing conductivity.

The resistivity map might be likened to a total field map and the EM map to a horizontal gradient in the direction of flight². Because gradient maps are usually more sensitive than total field maps, the EM map therefore is to be preferred in resistive areas. However, in conductive areas, the absolute character of the resistivity map usually causes it to be more useful than the EM map.

Interpretation in conductive environments

Environments having background resistivities below 30 ohm-m cause all airborne EM systems to yield very large responses from the conductive ground. This usually prohibits the recognition of discrete bedrock conductors. However, DIGHEM data processing techniques produce three parameters which contribute significantly to the recognition of bedrock conductors. These are the inphase and quadrature difference channels (DIFI and DIFQ), and the resistivity and depth channels (RES and DP) for each coplanar frequency.

² The gradient analogy is only valid with regard to the identification of anomalous locations.

The EM difference channels (DIFI and DIFQ) eliminate most of the responses from conductive ground, leaving responses from bedrock conductors, cultural features (e.g., telephone lines, fences, etc.) and edge effects. Edge effects often occur near the perimeter of broad conductive zones. This can be a source of geologic noise. While edge effects yield anomalies on the EM difference channels, they do not produce resistivity anomalies. Consequently, the resistivity channel aids in eliminating anomalies due to edge effects. On the other hand, resistivity anomalies will coincide with the most highly conductive sections of conductive ground, and this is another source of geologic noise. The recognition of a bedrock conductor in a conductive environment therefore is based on the anomalous responses of the two difference channels (DIFI and DIFQ) and the resistivity channels (RES). The most favourable situation is where anomalies coincide on all channels.

The DP channels, which give the apparent depth to the conductive material, also help to determine whether a conductive response arises from surficial material or from a conductive zone in the bedrock. When these channels ride above the zero level on the digital profiles (i.e., depth is negative), it implies that the EM and resistivity profiles are responding primarily to a conductive upper layer, i.e., conductive overburden. If the DP channels are below the

zero level, it indicates that a resistive upper layer exists, and this usually implies the existence of a bedrock conductor. If the low frequency DP channel is below the zero level and the high frequency DP is above, this suggests that a bedrock conductor occurs beneath conductive cover.

The conductance channel CDT identifies discrete conductors which have been selected by computer for appraisal by the geophysicist. Some of these automatically selected anomalies on channel CDT are discarded by the geophysicist. The automatic selection algorithm is intentionally oversensitive to assure that no meaningful responses are missed. The interpreter then classifies the anomalies according to their source and eliminates those that are not substantiated by the data, such as those arising from geologic or aerodynamic noise.

Reduction of geologic noise

Geologic noise refers to unwanted geophysical responses. For purposes of airborne EM surveying, geologic noise refers to EM responses caused by conductive overburden and magnetic permeability. It was mentioned previously that the EM difference channels (i.e., channel DIFI for inphase and DIFQ for quadrature) tend to eliminate the response of conductive overburden. This marked a unique development in airborne EM

technology, as DIGHEM is the only EM system which yields channels having an exceptionally high degree of immunity to conductive overburden.

Magnetite produces a form of geological noise on the inphase channels of all EM systems. Rocks containing less than 1% magnetite can yield negative inphase anomalies caused by magnetic permeability. When magnetite is widely distributed throughout a survey area, the inphase EM channels may continuously rise and fall, reflecting variations in the magnetite percentage, flying height, and overburden thickness. This can lead to difficulties in recognizing deeply buried bedrock conductors, particularly if conductive overburden also exists. However, the response of broadly distributed magnetite generally vanishes on the inphase difference channel DIFI. This feature can be a significant aid in the recognition of conductors which occur in rocks containing accessory magnetite.

EM magnetite mapping

The information content of DIGHEM data consists of a combination of conductive eddy current responses and magnetic permeability responses. The secondary field resulting from conductive eddy current flow is frequency-dependent and consists of both inphase and quadrature components, which are

positive in sign. On the other hand, the secondary field resulting from magnetic permeability is independent of frequency and consists of only an inphase component which is negative in sign. When magnetic permeability manifests itself by decreasing the measured amount of positive inphase, its presence may be difficult to recognize. However, when it manifests itself by yielding a negative inphase anomaly (e.g., in the absence of eddy current flow), its presence is assured. In this latter case, the negative component can be used to estimate the percent magnetite content.

A magnetite mapping technique was developed for the coplanar coil-pair of DIGHEM. The technique yields a channel (designated FEO) which displays apparent weight percent magnetite according to a homogeneous half space model.³ The method can be complementary to magnetometer mapping in certain cases. Compared to magnetometry, it is far less sensitive but is more able to resolve closely spaced magnetite zones, as well as providing an estimate of the amount of magnetite in the rock. The method is sensitive to 1/4% magnetite by weight when the EM sensor is at a height of 30 m above a magnetitic half space. It can individually resolve steep dipping narrow magnetite-rich bands which are

³ Refer to Fraser, 1981, Magnetite mapping with a multi-coil airborne electromagnetic system: *Geophysics*, v. 46, p. 1579-1594.

separated by 60 m. Unlike magnetometry, the EM magnetite method is unaffected by remanent magnetism or magnetic latitude.

The EM magnetite mapping technique provides estimates of magnetite content which are usually correct within a factor of 2 when the magnetite is fairly uniformly distributed. EM magnetite maps can be generated when magnetic permeability is evident as negative inphase responses on the data profiles.

Like magnetometry, the EM magnetite method maps only bedrock features, provided that the overburden is characterized by a general lack of magnetite. This contrasts with resistivity mapping which portrays the combined effect of bedrock and overburden.

Recognition of culture

Cultural responses include all EM anomalies caused by man-made metallic objects. Such anomalies may be caused by inductive coupling or current gathering. The concern of the interpreter is to recognize when an EM response is due to culture. Points of consideration used by the interpreter, when coaxial and coplanar coil-pairs are operated at a common frequency, are as follows:

1. Channel CPS monitors 60 Hz radiation. An anomaly on this channel shows that the conductor is radiating power. Such an indication is normally a guarantee that the conductor is cultural. However, care must be taken to ensure that the conductor is not a geologic body which strikes across a power line, carrying leakage currents.

2. A flight which crosses a "line" (e.g., fence, telephone line, etc.) yields a center-peaked coaxial anomaly and an m-shaped coplanar anomaly.⁴ When the flight crosses the cultural line at a high angle of intersection, the amplitude ratio of coaxial/coplanar response is 4. Such an EM anomaly can only be caused by a line. The geologic body which yields anomalies most closely resembling a line is the vertically dipping thin dike. Such a body, however, yields an amplitude ratio of 2 rather than 4. Consequently, an m-shaped coplanar anomaly with a CXI/CPI amplitude ratio of 4 is virtually a guarantee that the source is a cultural line.

3. A flight which crosses a sphere or horizontal disk yields center-peaked coaxial and coplanar anomalies with a CXI/CPI amplitude ratio (i.e., coaxial/coplanar) of

⁴ See Figure 5-1 presented earlier.

- 1/4. In the absence of geologic bodies of this geometry, the most likely conductor is a metal roof or small fenced yard.⁵ Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
4. A flight which crosses a horizontal rectangular body or wide ribbon yields an m-shaped coaxial anomaly and a center-peaked coplanar anomaly. In the absence of geologic bodies of this geometry, the most likely conductor is a large fenced area.⁵ Anomalies of this type are virtually certain to be cultural if they occur in an area of culture.
5. EM anomalies which coincide with culture, as seen on the camera film or video display, are usually caused by culture. However, care is taken with such coincidences because a geologic conductor could occur beneath a fence, for example. In this example, the fence would be expected to yield an m-shaped coplanar anomaly as in case #2 above. If, instead, a center-peaked coplanar anomaly occurred, there would be concern that a thick

⁵ It is a characteristic of EM that geometrically similar anomalies are obtained from: (1) a planar conductor, and (2) a wire which forms a loop having dimensions identical to the perimeter of the equivalent planar conductor.

geologic conductor coincided with the cultural line.

6. The above description of anomaly shapes is valid when the culture is not conductively coupled to the environment. In this case, the anomalies arise from inductive coupling to the EM transmitter. However, when the environment is quite conductive (e.g., less than 100 ohm-m at 900 Hz), the cultural conductor may be conductively coupled to the environment. In this latter case, the anomaly shapes tend to be governed by current gathering. Current gathering can completely distort the anomaly shapes, thereby complicating the identification of cultural anomalies. In such circumstances, the interpreter can only rely on the radiation channel CPS and on the camera film or video records.

MAGNETICS

The existence of a magnetic correlation with an EM anomaly is indicated directly on the EM map. In some geological environments, an EM anomaly with magnetic correlation has a greater likelihood of being produced by sulfides than one that is non-magnetic. However, sulfide ore bodies may be non-magnetic (e.g., the Kidd Creek deposit near Timmins, Canada) as well as magnetic (e.g., the Mattabi deposit near Sturgeon Lake, Canada).

The magnetometer data are digitally recorded in the aircraft to an accuracy of one nT (i.e., one gamma) for proton magnetometers, and 0.01 nT for cesium magnetometers. The digital tape is processed by computer to yield a total field magnetic contour map. When warranted, the magnetic data may also be treated mathematically to enhance the magnetic response of the near-surface geology, and an enhanced magnetic contour map is then produced. The response of the enhancement operator in the frequency domain is illustrated in Figure 5-2. This figure shows that the passband components of the airborne data are amplified 20 times by the enhancement operator. This means, for example, that a 100 nT anomaly on the enhanced map reflects a 5 nT anomaly for the passband components of the airborne data.

The enhanced map, which bears a resemblance to a downward continuation map, is produced by the digital bandpass filtering of the total field data. The enhancement is equivalent to continuing the field downward to a level (above the source) which is 1/20th of the actual sensor-source distance.

Because the enhanced magnetic map bears a resemblance to a ground magnetic map, it simplifies the recognition of trends in the rock strata and the interpretation of geological structure. It defines the near-surface local

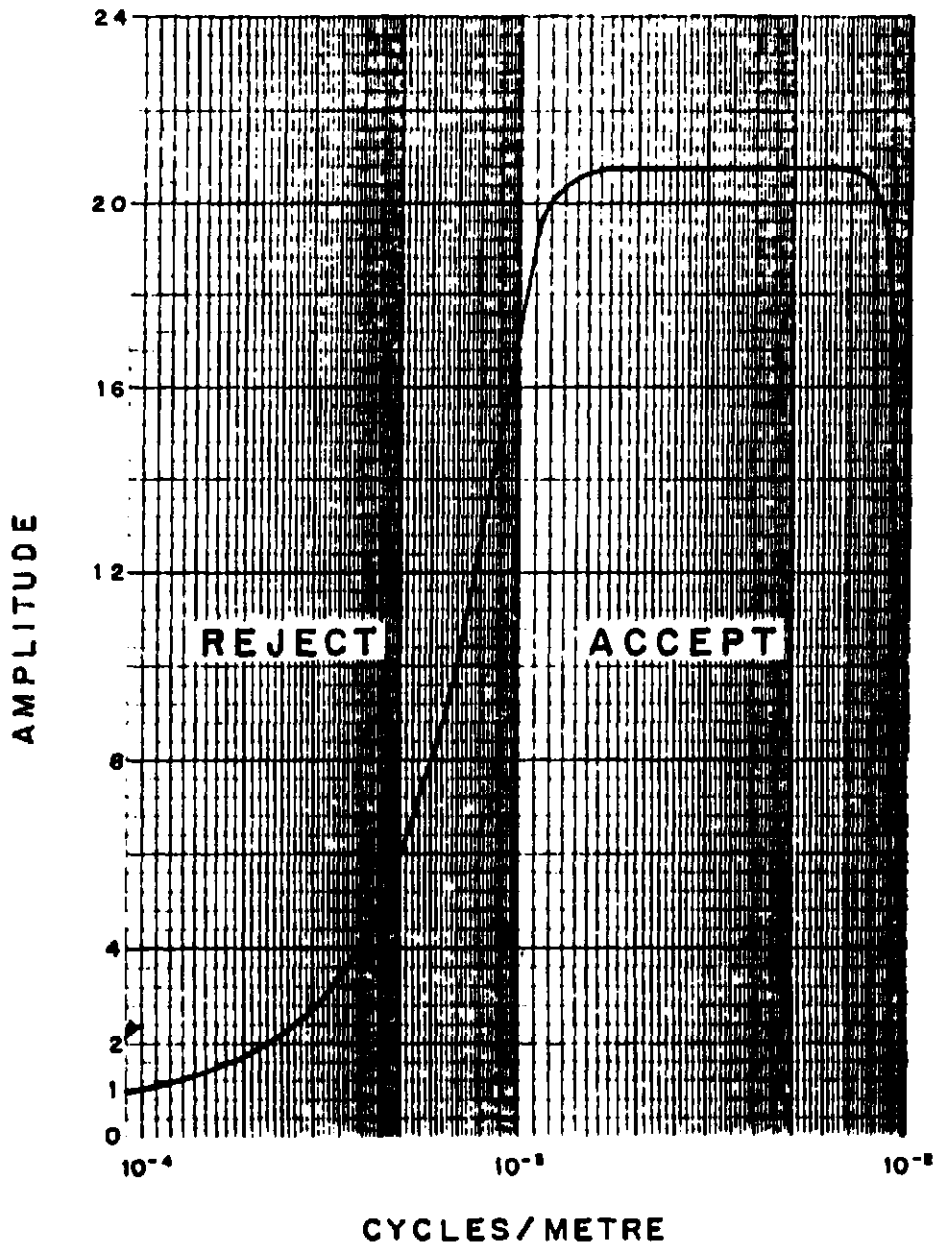


Fig. 5-2 Frequency response of magnetic enhancement operator for a sample interval of 50 m.

geology while de-emphasizing deep-seated regional features. It primarily has application when the magnetic rock units are steeply dipping and the earth's field dips in excess of 60 degrees.

Any of a number of filter operators may be applied to the magnetic data, to yield vertical derivatives, continuations, magnetic susceptibility, etc. These may be displayed in contour, colour or shadow.

VLF

VLF transmitters produce high frequency uniform electromagnetic fields. However, VLF anomalies are not EM anomalies in the conventional sense. EM anomalies primarily reflect eddy currents flowing in conductors which have been energized inductively by the primary field. In contrast, VLF anomalies primarily reflect current gathering, which is a non-inductive phenomenon. The primary field sets up currents which flow weakly in rock and overburden, and these tend to collect in low resistivity zones. Such zones may be due to massive sulfides, shears, river valleys and even unconformities.

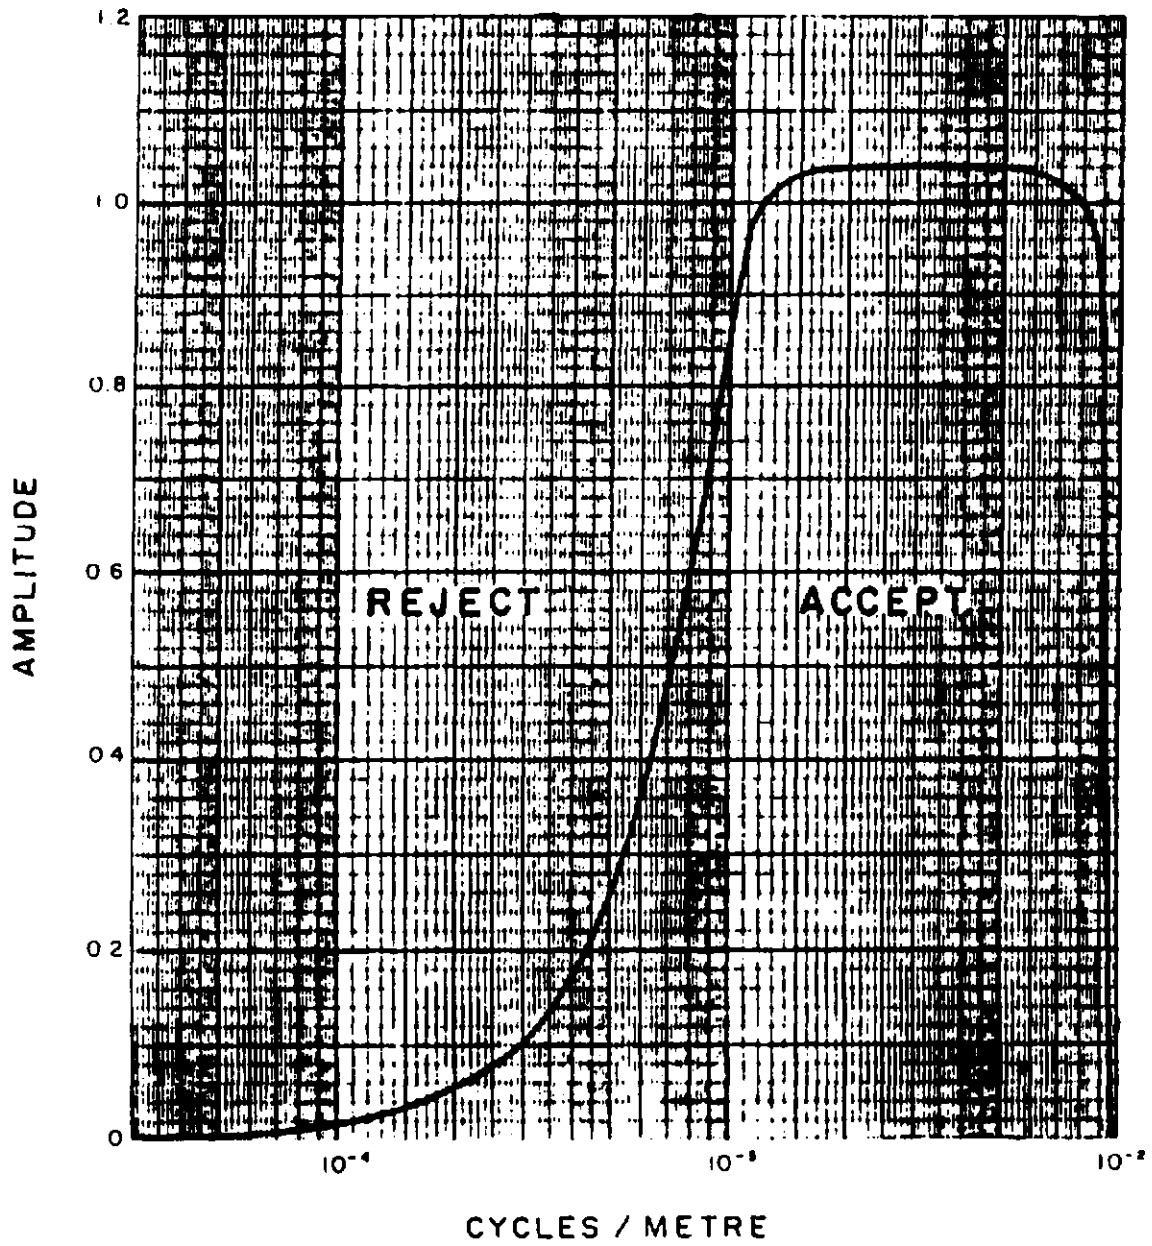


Fig. 5-3 Frequency response of VLF operator.

The VLF field is horizontal. Because of this, the method is quite sensitive to the angle of coupling between the conductor and the transmitted VLF field. Conductors which strike towards the VLF station will usually yield a stronger response than conductors which are nearly orthogonal to it.

The Herz Industries Ltd. Totem VLF-electromagnetometer measures the total field and vertical quadrature components. Both of these components are digitally recorded in the aircraft with a sensitivity of 0.1 percent. The total field yields peaks over VLF current concentrations whereas the quadrature component tends to yield crossovers. Both appear as traces on the profile records. The total field data are filtered digitally and displayed as contours to facilitate the recognition of trends in the rock strata and the interpretation of geologic structure.

The response of the VLF total field filter operator in the frequency domain (Figure 5-3) is basically similar to that used to produce the enhanced magnetic map (Figure 5-2). The two filters are identical along the abscissa but different along the ordinant. The VLF filter removes long wavelengths such as those which reflect regional and wave transmission variations. The filter sharpens short wavelength responses such as those which reflect local geological variations.

CONCLUSIONS AND RECOMMENDATIONS

This report provides a very brief description of the survey results and describes the equipment, procedures and logistics of the survey.

The survey was successful in locating many bedrock conductors and zones of interest. The various maps included with this report display the magnetic and conductive properties of the survey areas. It is recommended that the survey results be reviewed in detail, in conjunction with all available geophysical, geological and geochemical information. Particular reference should be made to the computer generated data profiles which clearly define the characteristics of the individual anomalies.

There are numerous anomalous responses in the survey area which are considered to be high priority targets.

The conductors detected by the survey show marked variations in magnetic correlation and conductance. These changes suggest that the conductive sources also vary in composition. Strike directions of the conductors vary throughout the survey area.

The magnetic data suggest that the area has been subject to deformation and/or alteration. There are many conductors which appear to be related to contacts between magnetically distinct units.

Other conductors, which are poorly defined, appear to transect the local geologic strike. In many areas, these trends may reflect faults or other structural features. Structural breaks, or deformation, are considered to be of particular interest as they may have influenced mineral deposition within the survey area.

The bedrock conductors defined by the survey should be subjected to further investigation, using appropriate surface exploration techniques. Anomalies which are currently considered to be of moderately low priority may require upgrading if follow-up results are favourable.

It is also recommended that additional processing of existing geophysical data be considered, in order to extract the maximum amount of information from the survey results. Colour maps and enhanced shadow maps often provide valuable information on structure and lithology, which may not be clearly evident on the contour maps. Current processing techniques can yield images which define subtle, but

significant, structural details.

Respectfully submitted,

DIGHRM SURVEYS & PROCESSING INC.

R Pritchard

Ruth A. Pritchard
Geophysicist

RAP/sdp

A1069JUL.90R

*Qual.
This report*

APPENDIX A

LIST OF PERSONNEL

The following personnel were involved in the acquisition, processing, interpretation and presentation of data, relating to a DIGHEM^{IV} airborne geophysical survey carried out for Champion Bear Resources Ltd., over a property in the Helder Lake Area, Ontario.

Kirby Mills	Survey Operations Manager
David E. Pritchard	Survey Operations Supervisor
Philip Miles	Geophysical Operator
David Miles	Second Geophysical Operator
Roger Morrow	Pilot (Questral Helicopters Ltd.)
Paul Bottomley	Computer Processor
Ruth A. Pritchard	Geophysicist/Interpreter
Gojko Mijac	Draftsperson
Susan Pothiah	Word Processing Operator

The survey consisted of 1612 km of coverage, flown from May 13 to May 15, 1989.

All personnel are employees of Dighem Surveys & Processing Inc., except for the pilot who is an employee of Questral Helicopters Ltd.

DIGHEM SURVEYS & PROCESSING INC.

R. Pritchard

Ruth A. Pritchard
Geophysicist

RAP/sdp

Ref: Report #1069

A1069JUL.90R

APPENDIX B
STATEMENT OF COST

Date: July 11, 1989

IN ACCOUNT WITH
DIGHEM SURVEYS & PROCESSING INC.

To: Dighem flying of Agreement dated April 28, 1989
pertaining to an Airborne Geophysical Survey in the
Helder Lake Area, Ontario

Survey Charges

Ferry and mobilization	\$ 8,000.00
1586 km of flying	<u>\$ 91,988.00</u>
	<u>\$ 99,988.00</u>

Allocation of Costs

- Data Acquisition	(60%)
- Data Processing	(20%)
- Interpretation, Report and Maps	(20%)

DIGHEM SURVEYS & PROCESSING INC.



Ruth A. Pritchard
Geophysicist

RAP/sdp

A1069JUL.90R

APPENDIX C

STATEMENT OF QUALIFICATIONS

I, Ruth A. Pritchard of the City of Brampton, Province of Ontario, do hereby certify that:

1. I am a geophysicist, residing at 31 Barrington Crescent, Brampton, Ontario, L6Z 1N2.
2. I am a graduate of York University, Downsview, Ontario, with a Specialized Honours B.Sc. Earth Sciences - Geophysics (1986).
3. I have been actively engaged in geophysical exploration since 1986.
4. The statements made in this report represent my best opinion and judgement.

R. Pritchard

Ruth A. Pritchard
Geophysicist

This report

A1069JUL.90R