


SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospatiale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 0° E / N 180° E
 Nominal Tie Line Spacing: 600 & 550 Meters
 Nominal Tie Line Direction: N 90° E / N 270° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter


INSTRUMENTS
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354,660 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 7.21 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 NTS: 041105 & 041112

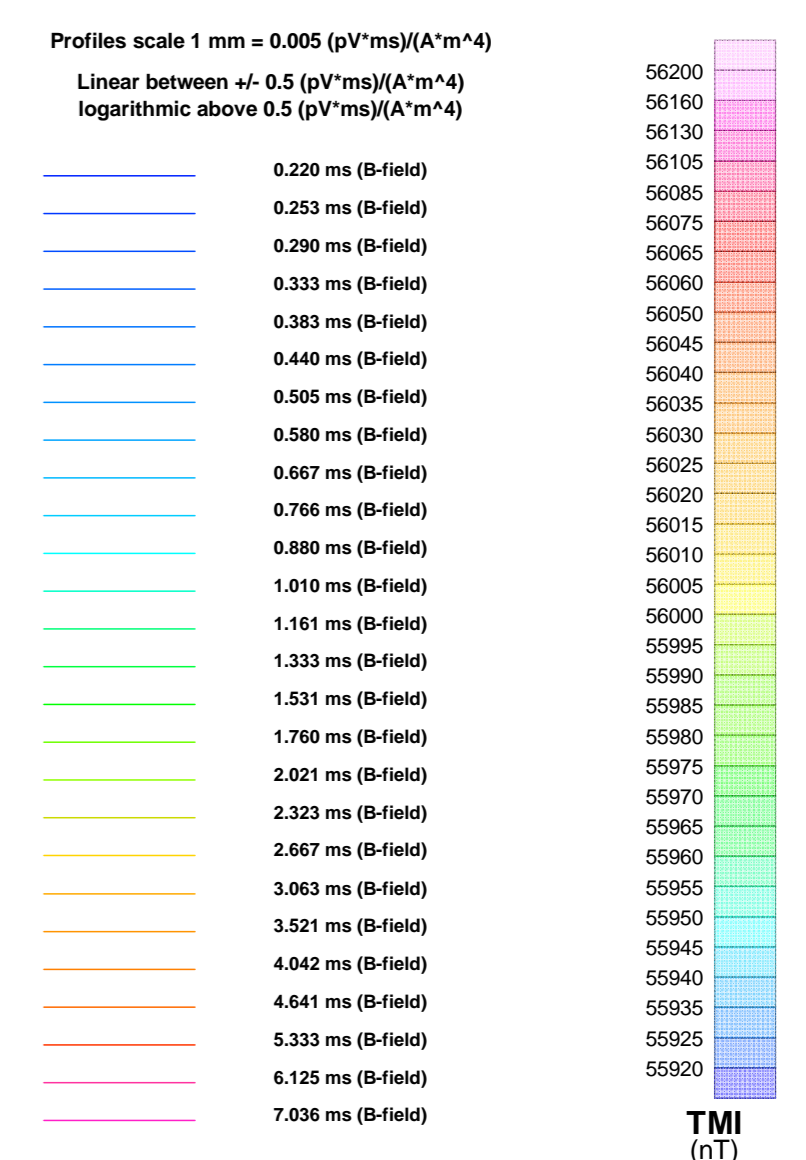

TOPOGRAPHIC LEGEND:

- Trails
- Roads
- Contours
- Rivers / Streams
- Lakes / Ponds
- Wetlands
- Mining Claims

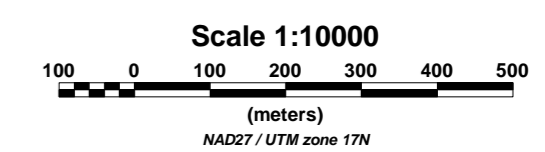


The topographic data base was derived from 1:50000 NRC (Natural Resources Canada) NTDB data
 Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data
 Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database
 Mining Claims are derived from the Ontario Ministry of Northern Development and Mines
 (www.geocomm.com/www.geogratis.ca/http://www.mndm.gov.on.ca)

Wallbridge Mining Company Limited
 Ermatinger Property - North
 Sudbury, Ontario

Geotech VTEM System
 Z-Component B-field Profiles
 Time Gates 0.220 to 7.036 ms
 displayed over TMI

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca

July 2011

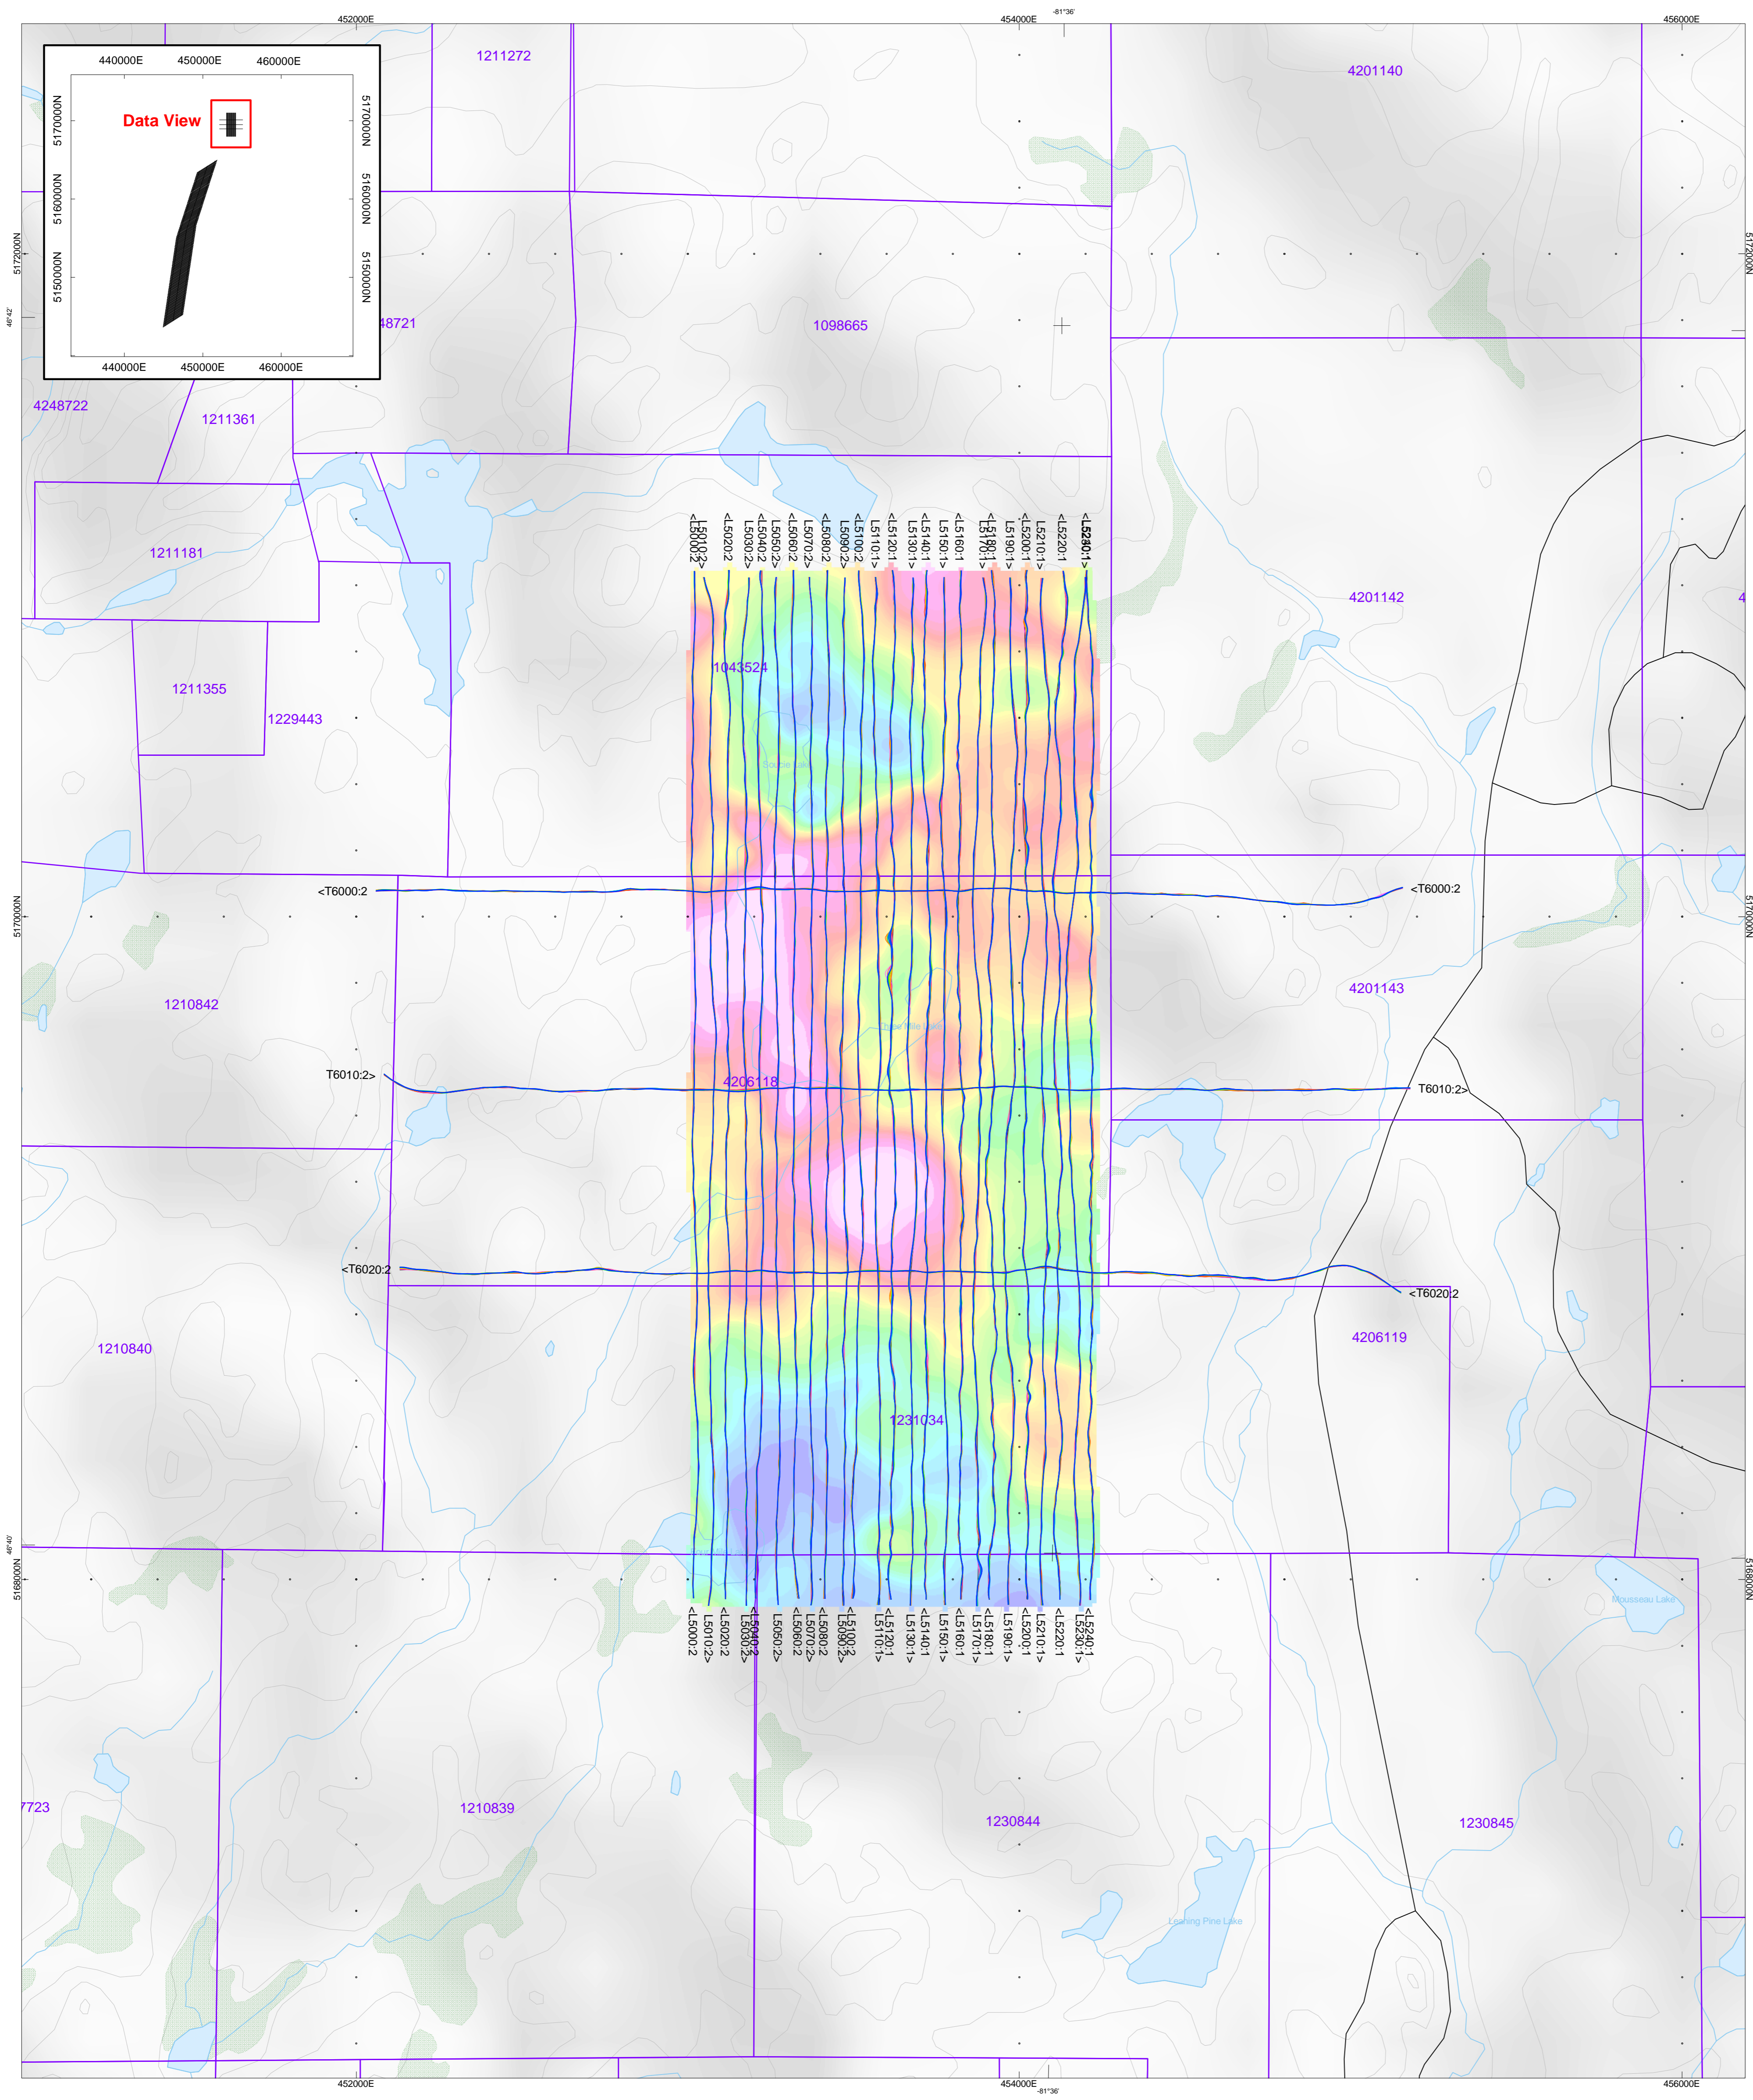




SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospatiale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 0° E / N 180° E
 Nominal Tie Line Spacing: 600 & 550 Meters
 Nominal Tie Line Direction: N 80° E / N 270° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter


INSTRUMENTS
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354,660 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 7.21 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 NTS: 041105 & 041112


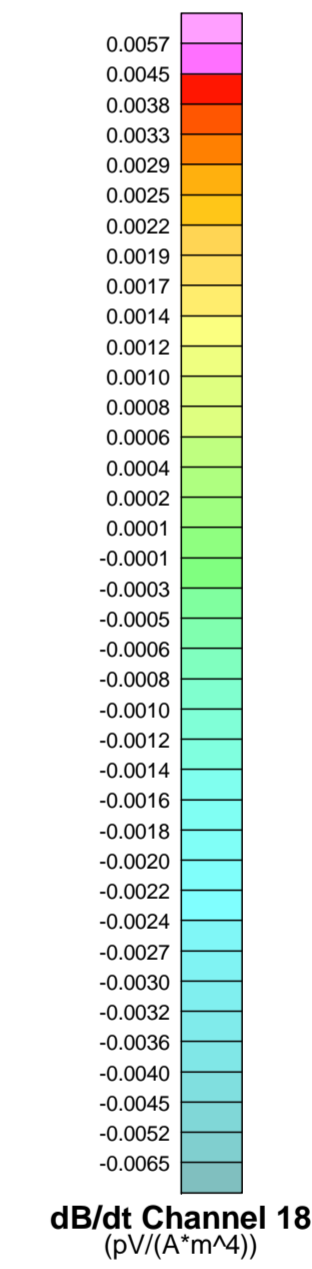


TOPOGRAPHIC LEGEND:

- Trails
- Roads
- Contours
- Rivers / Streams
- Lakes / Ponds
- Wetlands
- Mining Claims

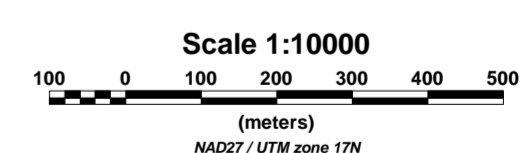

The topographic data base was derived from 1:50000 NRC (Natural Resources Canada) NTDB data
 Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data
 Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database
 Mining Claims are derived from the Ontario Ministry of Northern Development and Mines
 (www.geocomm.com/www.geogis.ca/http://www.mndm.gov.on.ca)

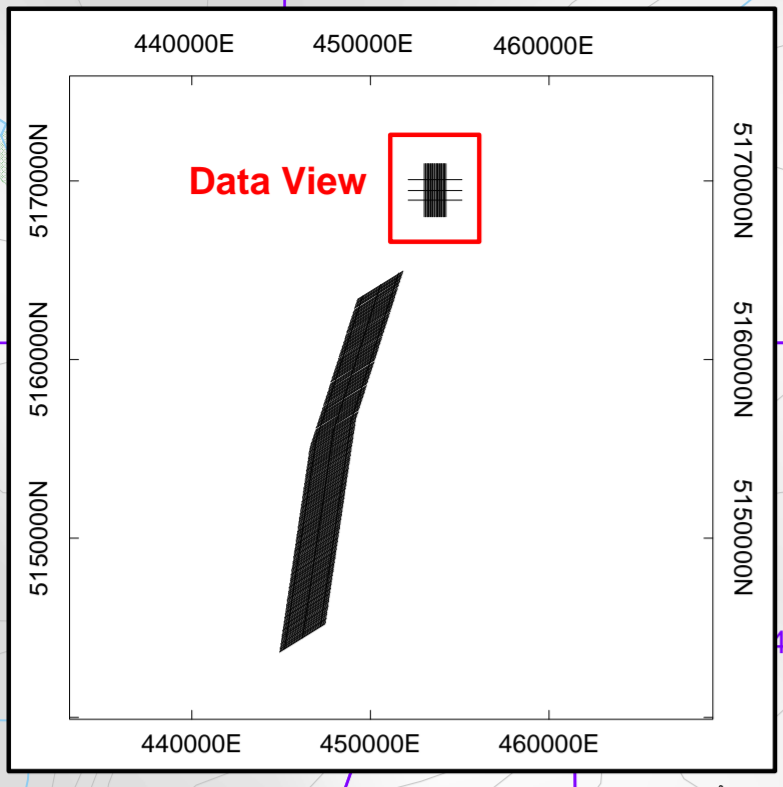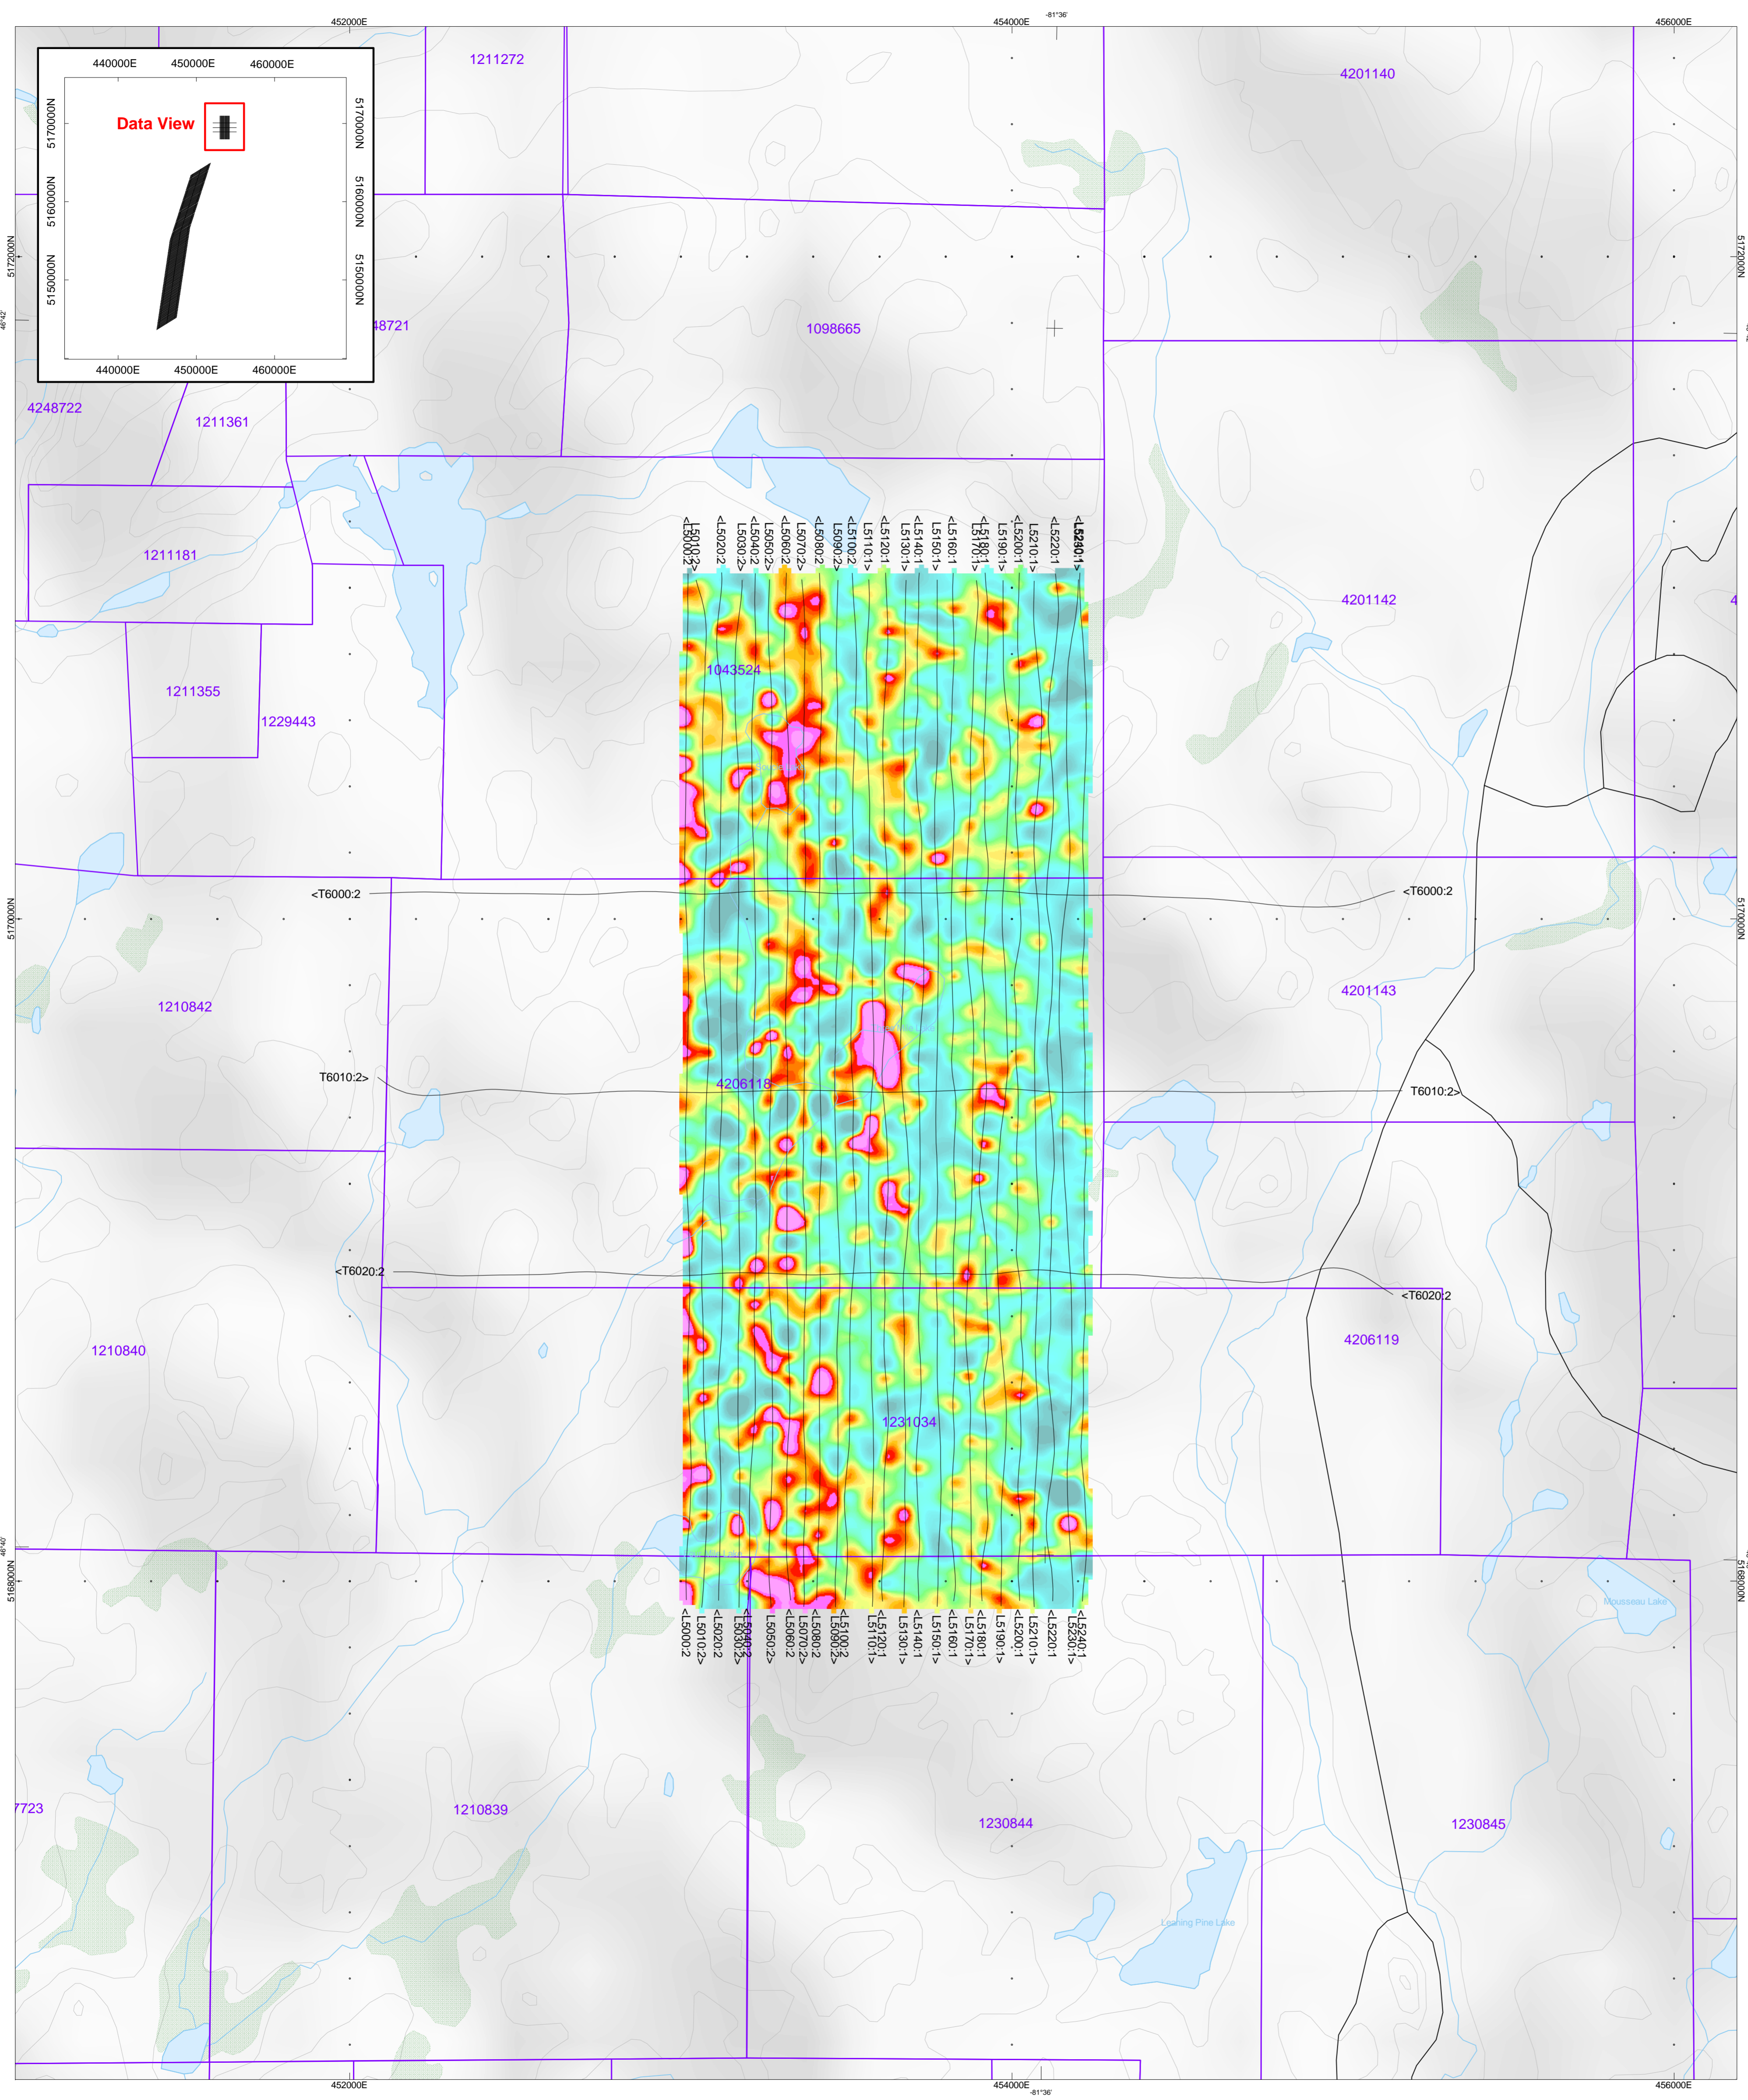



Wallbridge Mining Company Limited
 Ermatinger Property - North
 Sudbury, Ontario

Geotech VTEM System

Z-Component dB/dt Channel 18
 Time Gate 0.167 ms

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca


July 2011

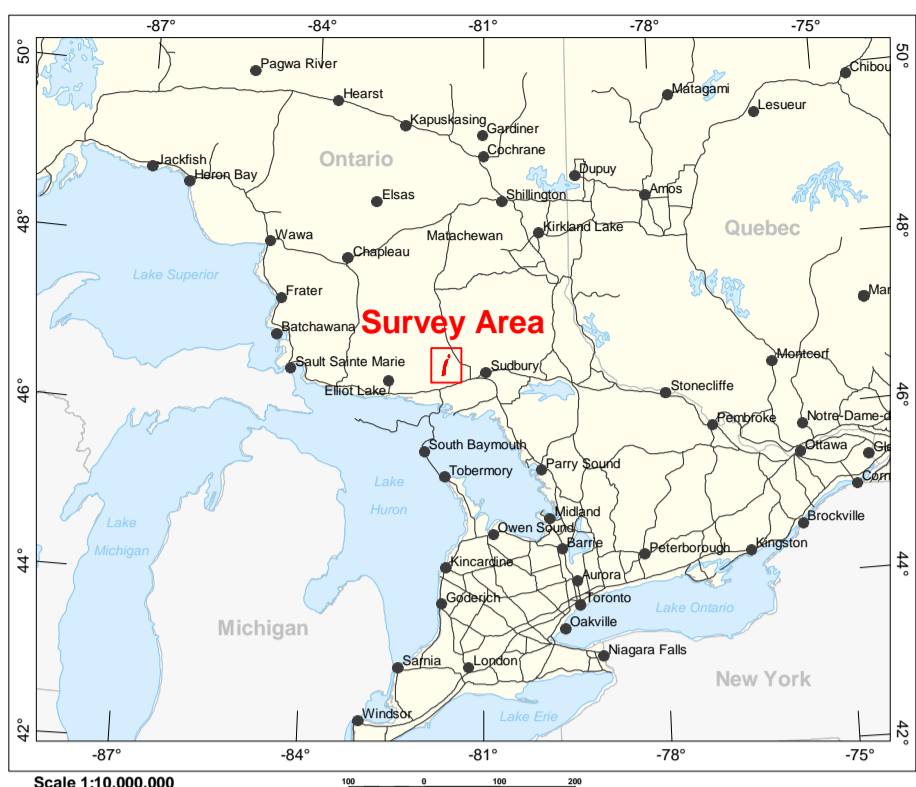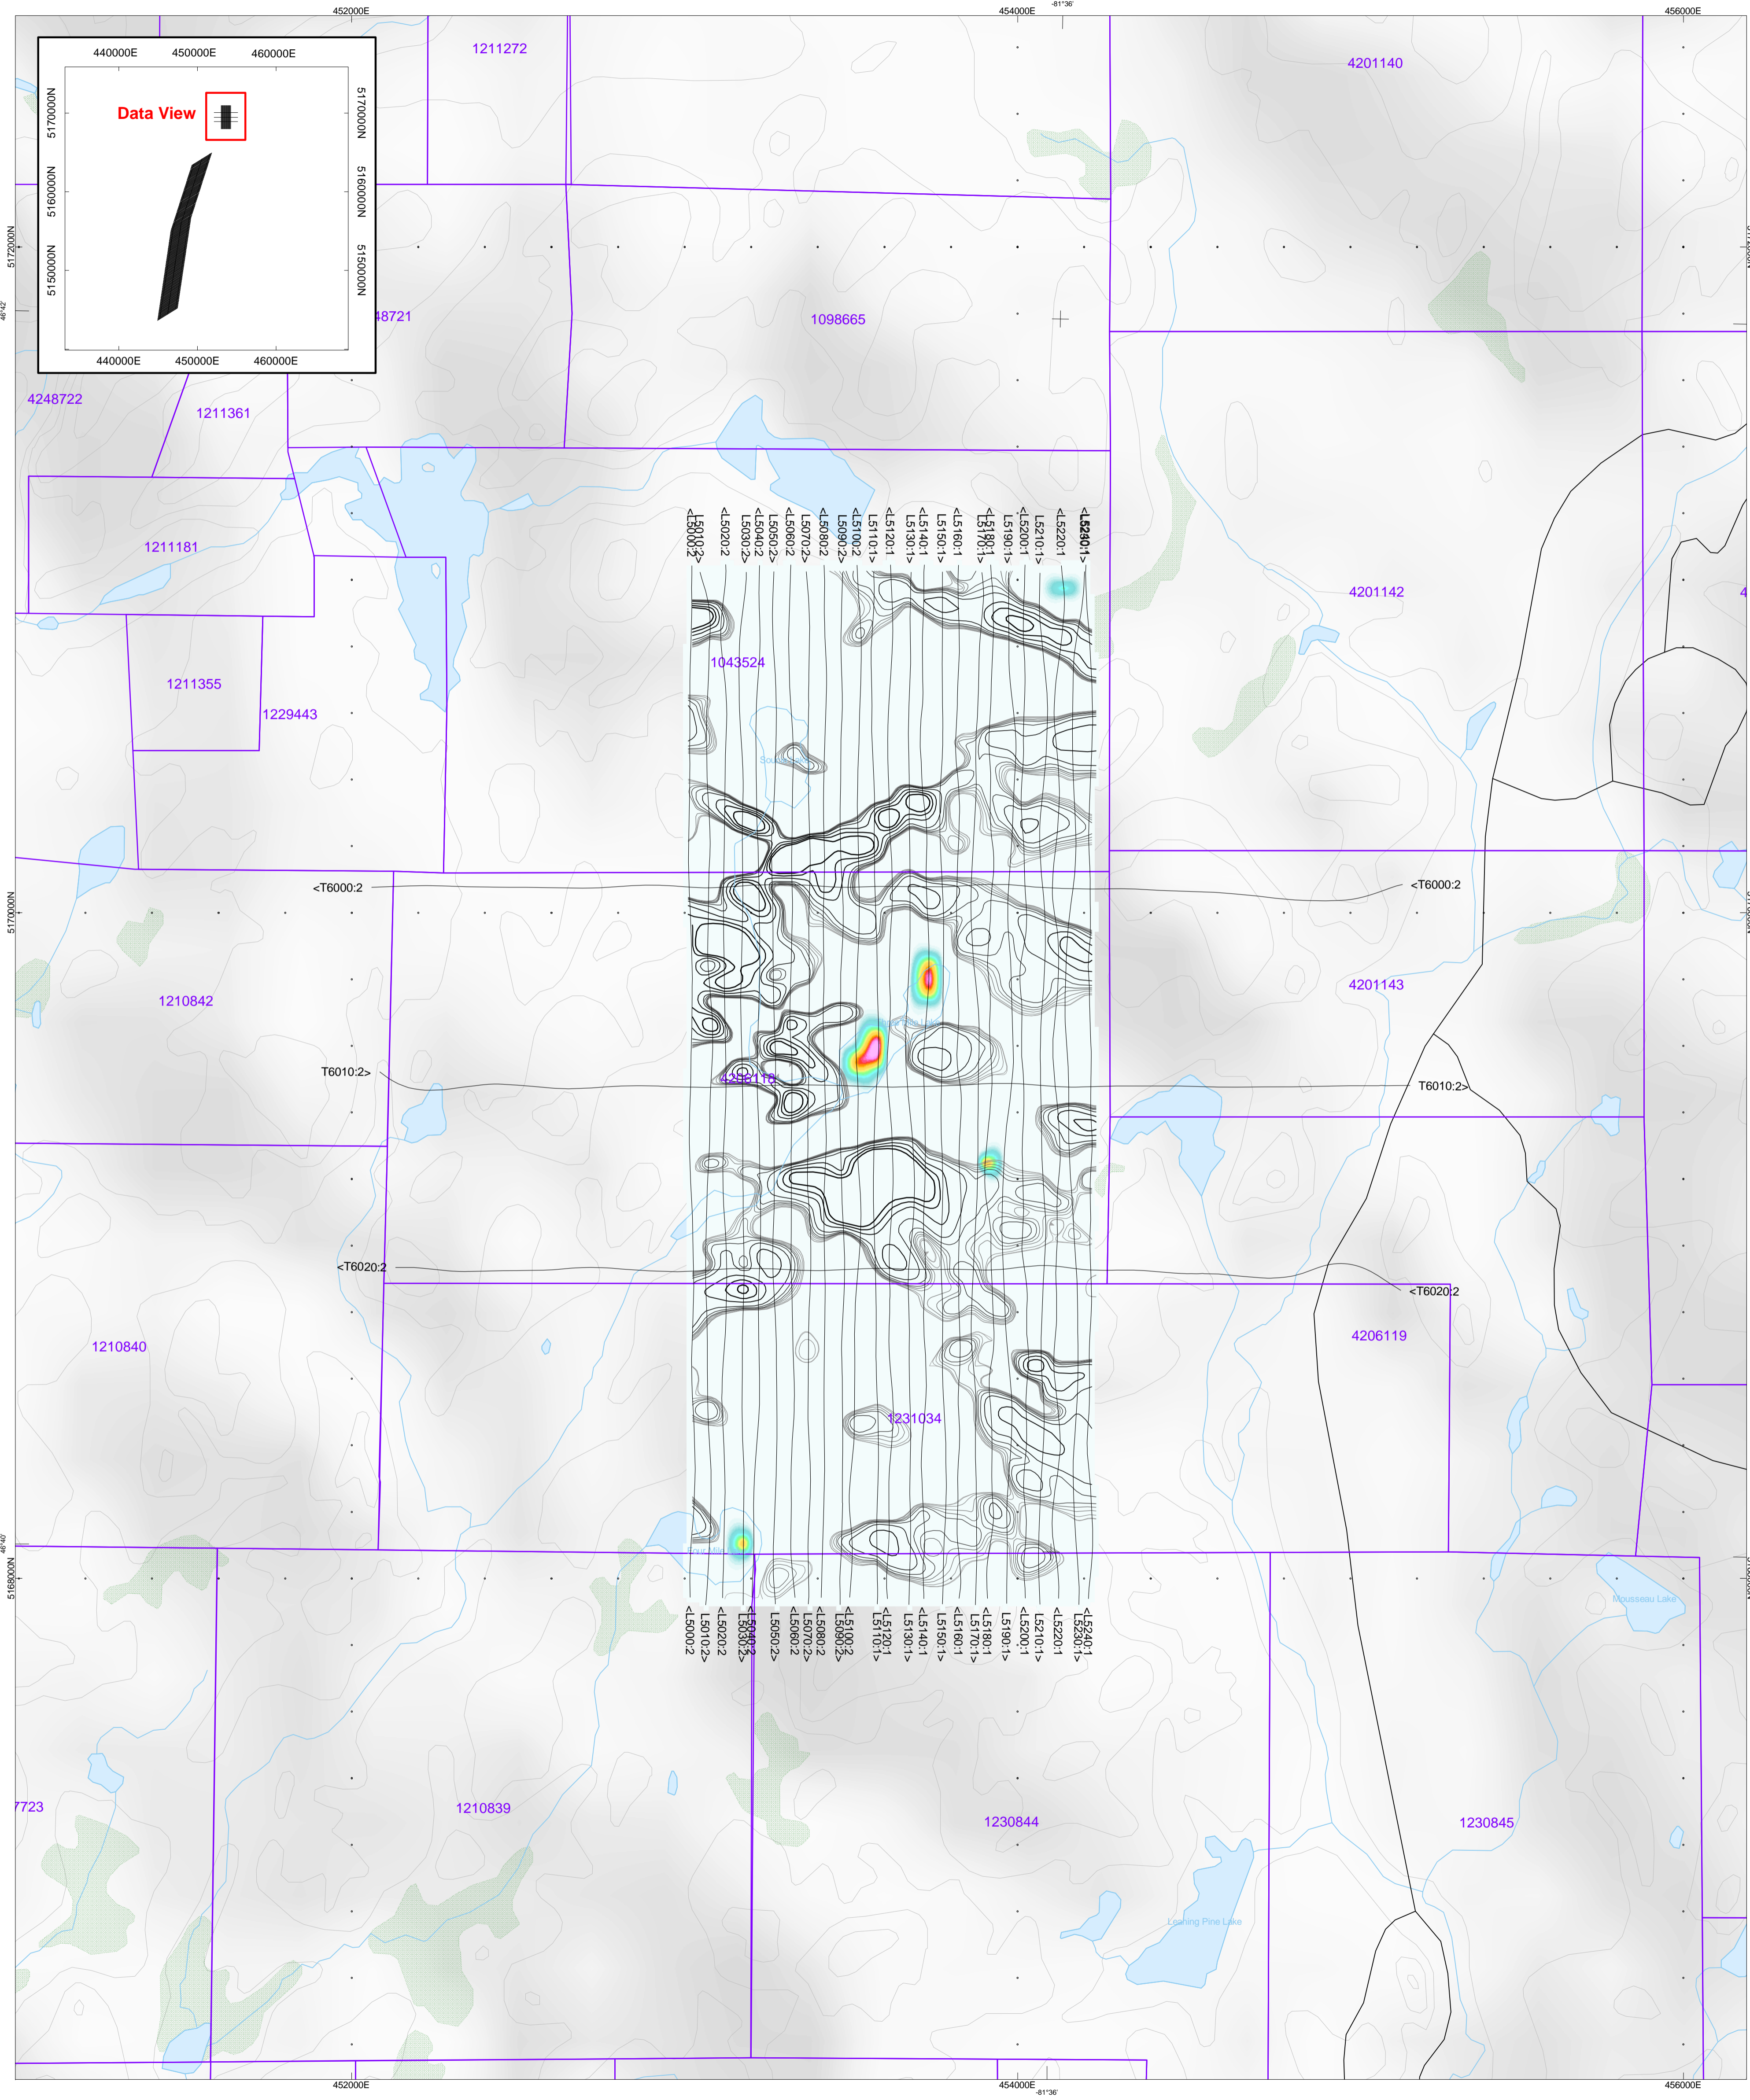

SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospaciale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 0° E / N 180° E
 Nominal Tie Line Spacing: 600 & 550 Meters
 Nominal Tie Line Direction: N 90° E / N 270° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter


INSTRUMENTS
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354,660 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 7.21 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 NTS: 041105 & 041112

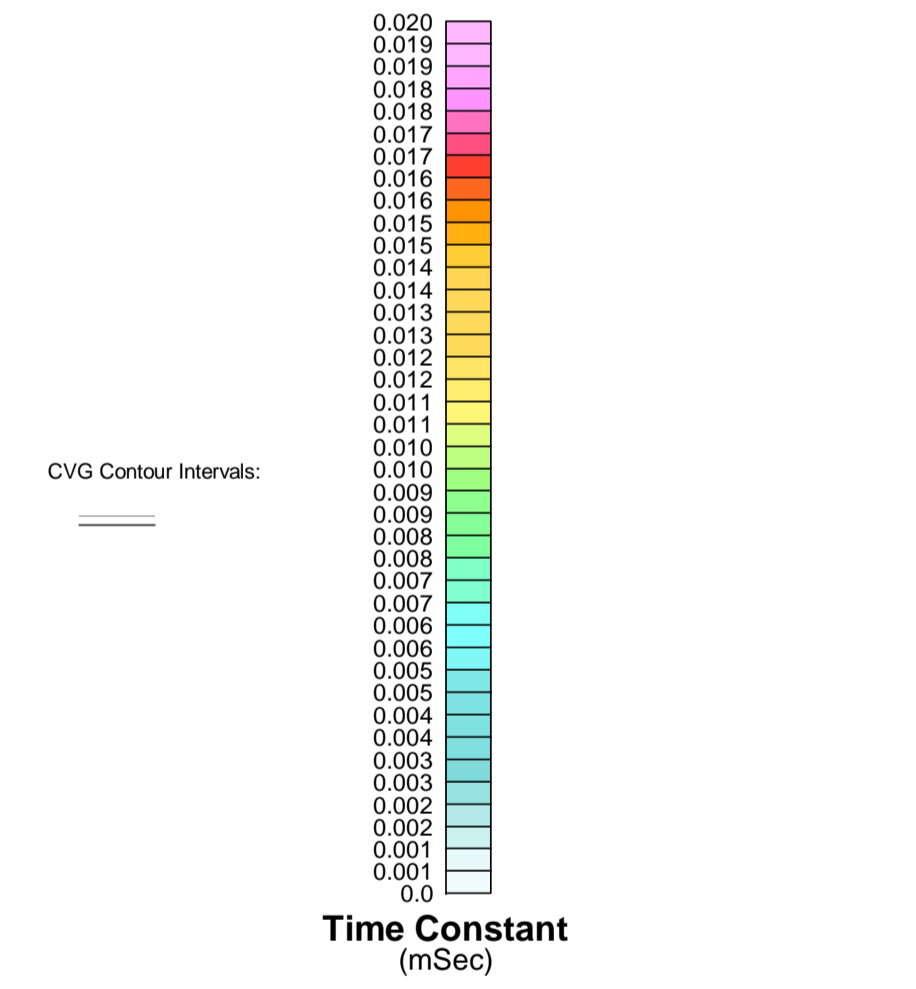

TOPOGRAPHIC LEGEND:

- Trails
- Roads
- Contours
- Rivers / Streams
- Lakes / Ponds
- Wetlands
- Mining Claims

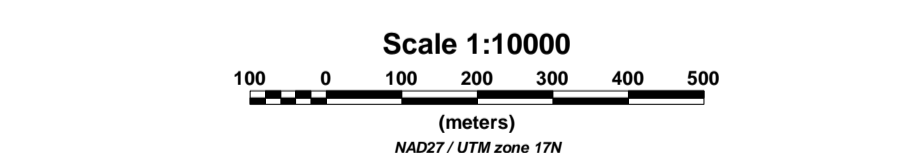


The topographic data base was derived from 1:50000 NRC (Natural Resources Canada) NTDB data
 Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data
 Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database
 Mining Claims are derived from the Ontario Ministry of Northern Development and Mines
 (www.geocomm.com/www.geogratis.ca/http://www.mdm.gov.on.ca)

Wallbridge Mining Company Limited
 Ermatinger Property - North
 Sudbury, Ontario

Geotech VTEM
 dB/dt Calculated Time Constant (Tau)
 with contours of the anomaly are of the
 Calculated Vertical Derivative of TMI

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca


July 2011

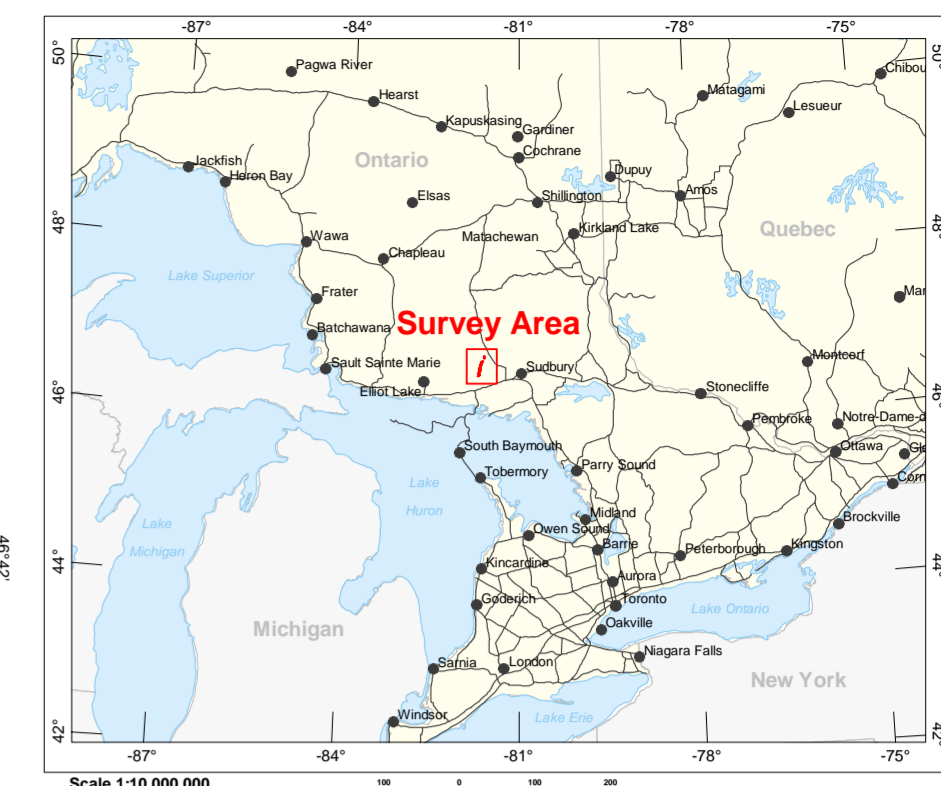

SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospatiale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 0° E / N 180° E
 Nominal Tie Line Spacing: 600 & 550 Meters
 Nominal Tie Line Direction: N 90° E / N 270° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter


INSTRUMENTS
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354,660 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 7.21 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 NTS: 041105 & 041112

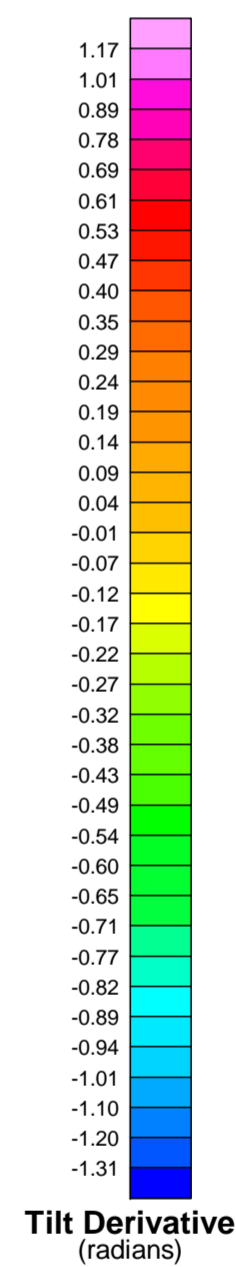


TOPOGRAPHIC LEGEND:

- Trails
- Roads
- Contours
- Rivers / Streams
- Lakes / Ponds
- Wetlands
- Mining Claims

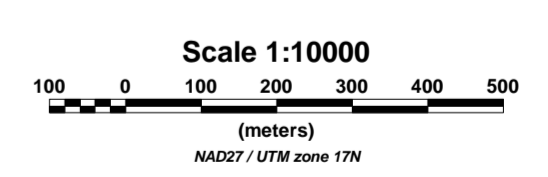

The topographic data base was derived from 1:50000 NRC (Natural Resources Canada) NTDB data. Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data. Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database. Mining Claims are derived from the Ontario Ministry of Northern Development and Mines (www.geocomm.ca)/(<http://www.mndm.gov.on.ca>)

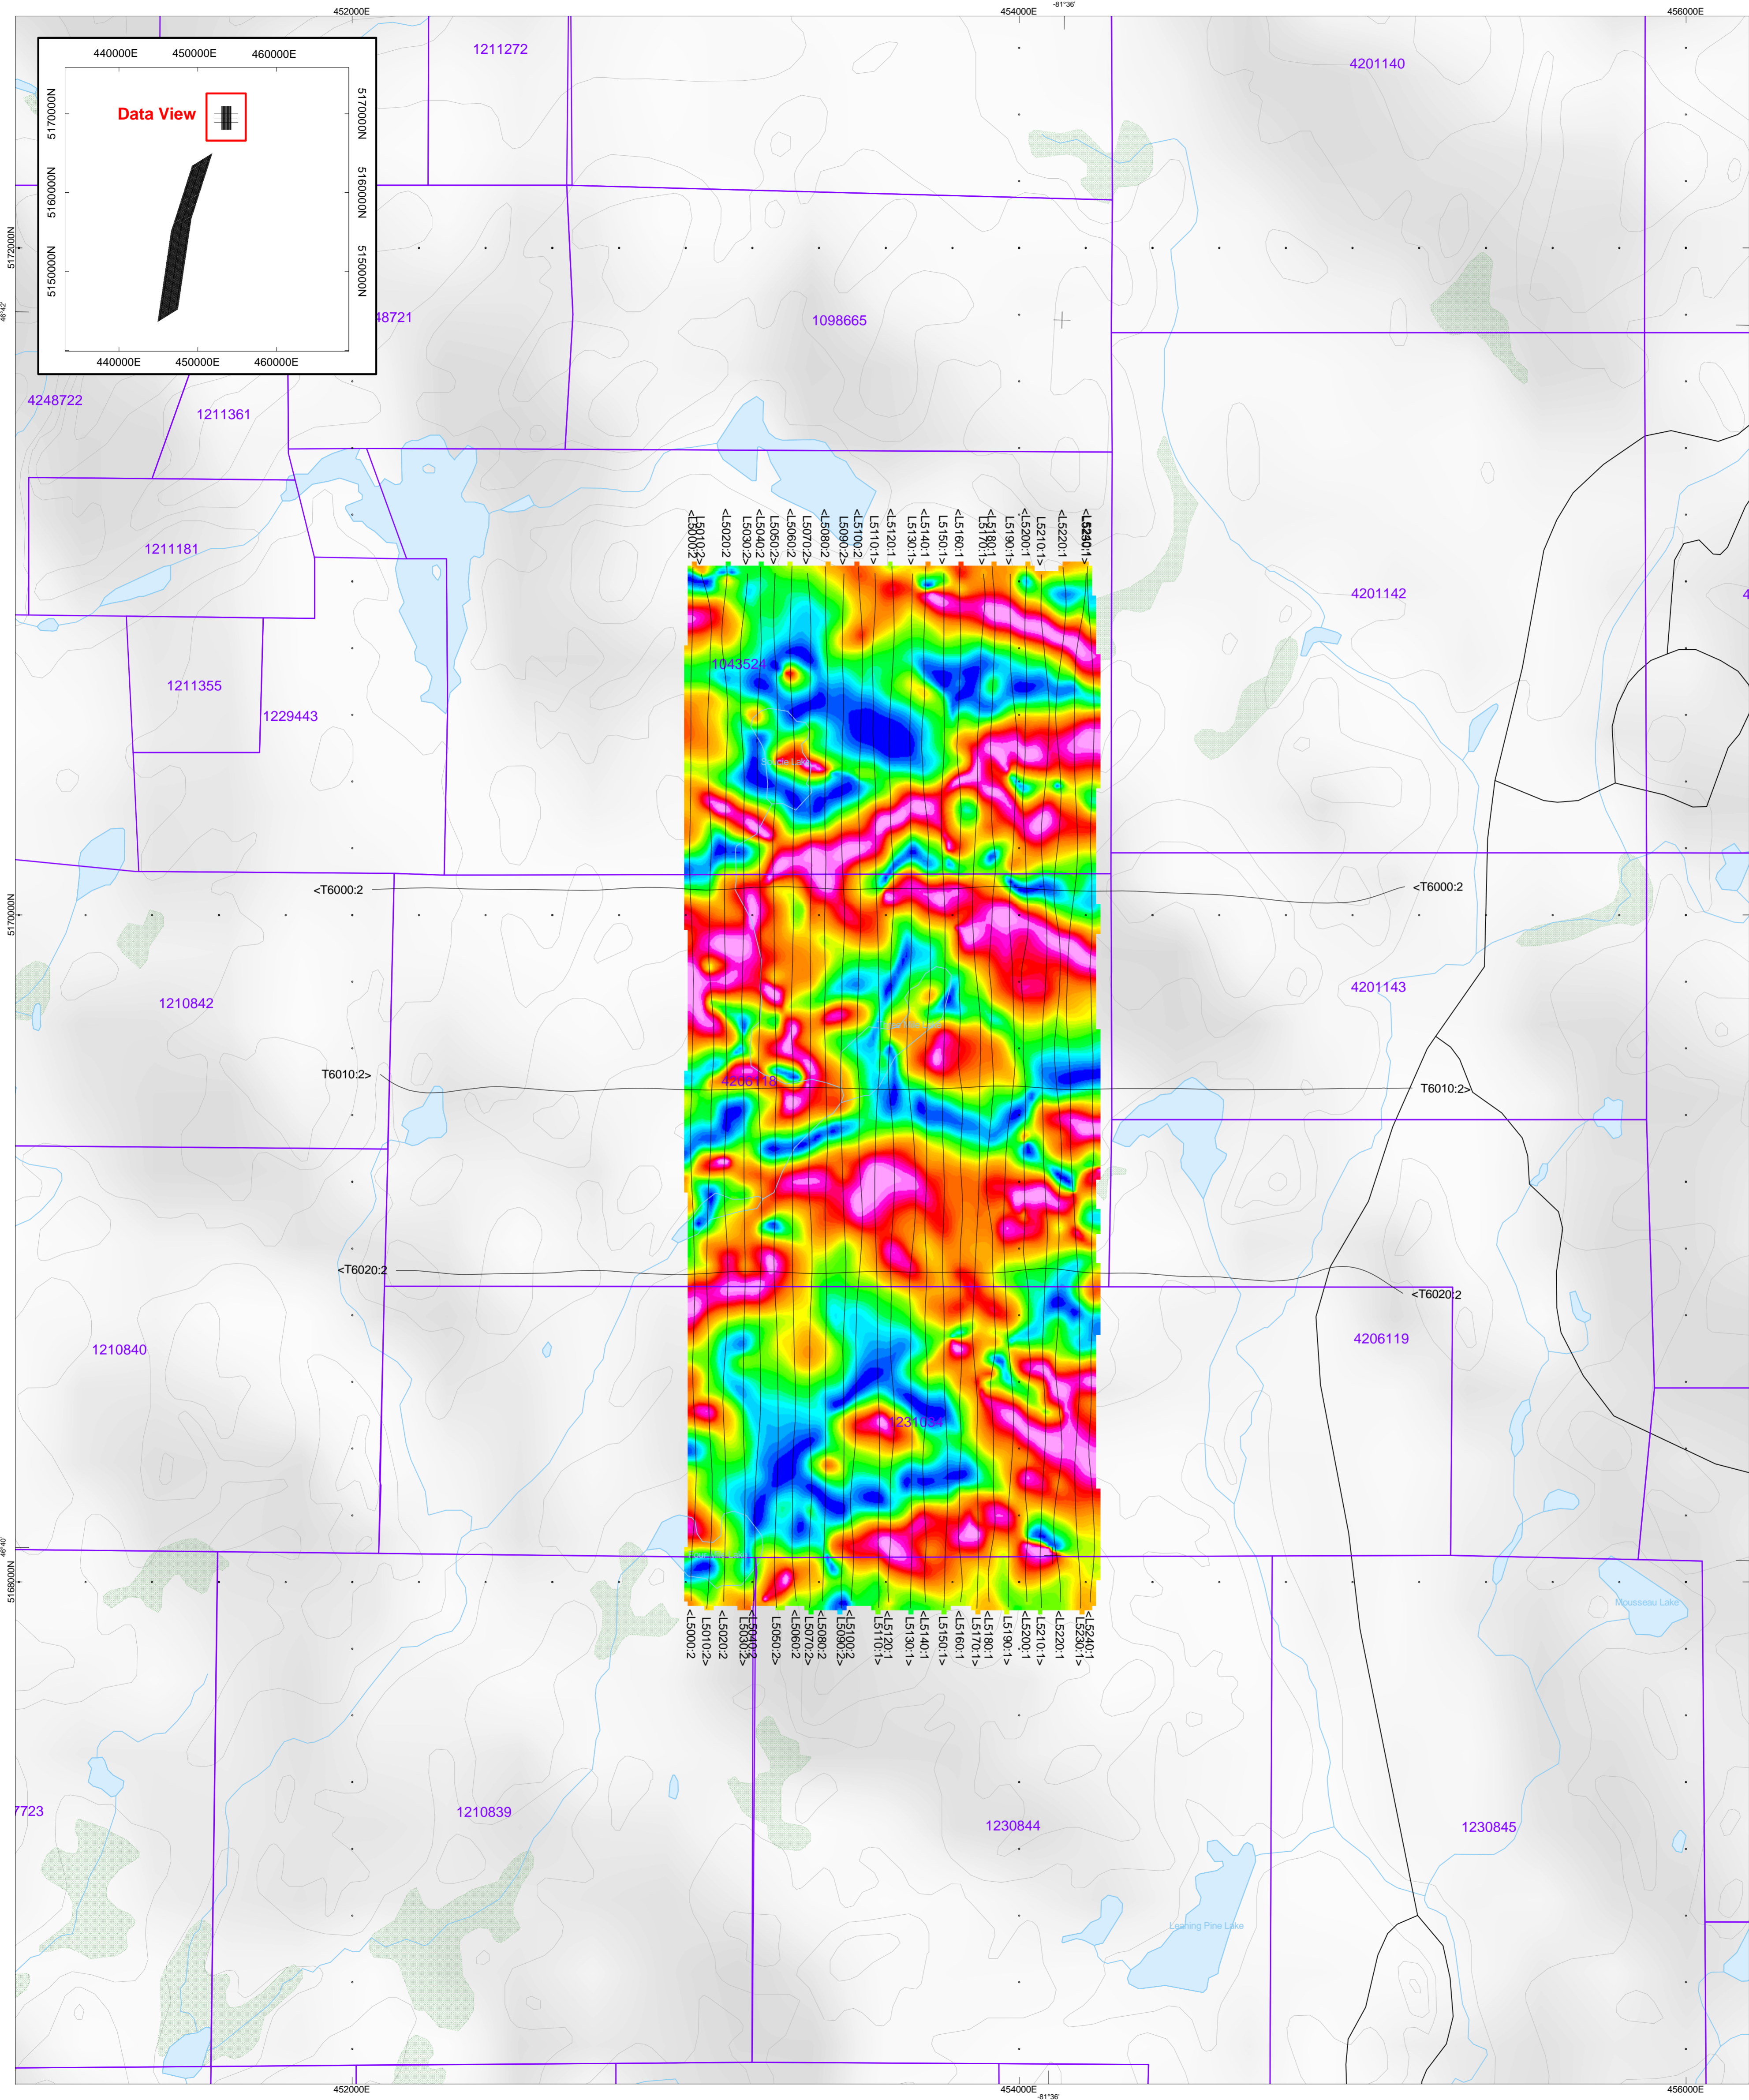

Wallbridge Mining Company Limited
 Ermatinger Property - North
 Sudbury, Ontario

Geotech VTEM System

Tilt Derivative of TMI





Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
www.geotech.ca
 July 2011



SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospatiale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 0° E / N 180° E
 Nominal Tie Line Spacing: 600 & 550 Meters
 Nominal Tie Line Direction: N 90° E / N 270° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter

INSTRUMENTS:
 Geotech Time Domain Electromagnetic System (VTM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354,660 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 7.21 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 NTS: 041105 & 041112

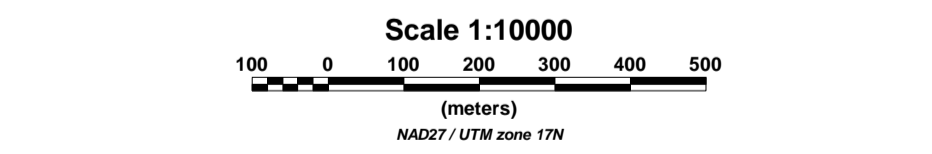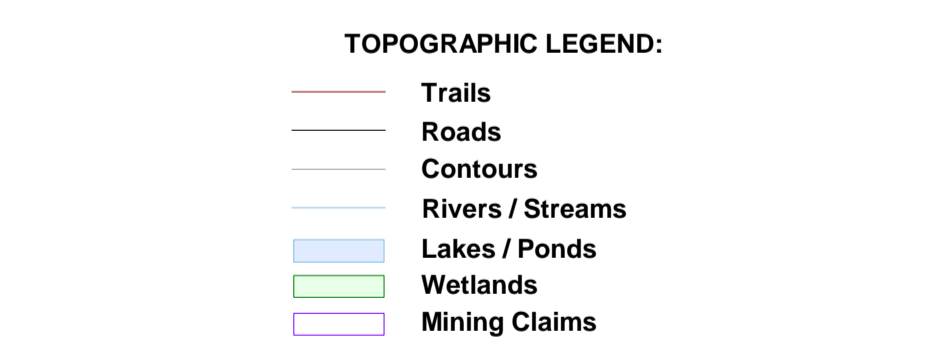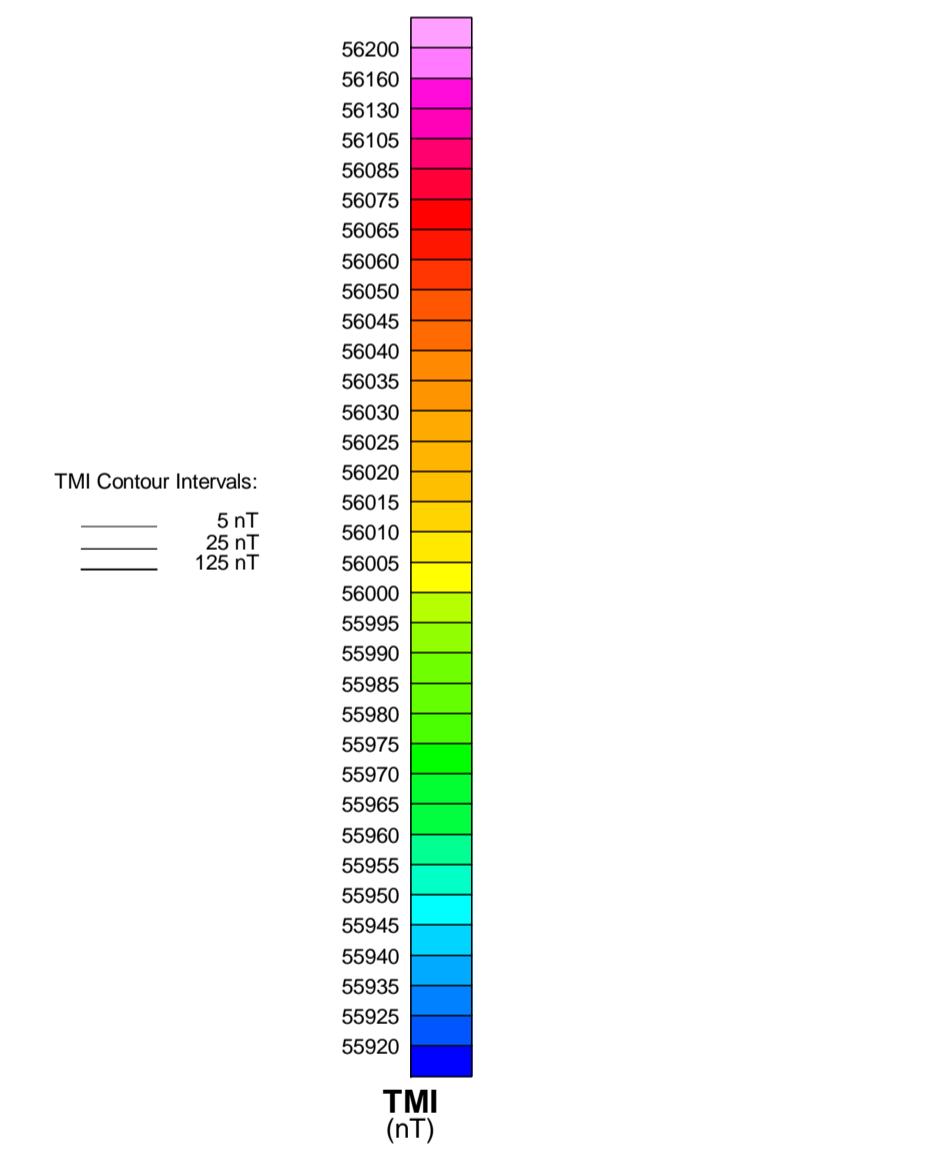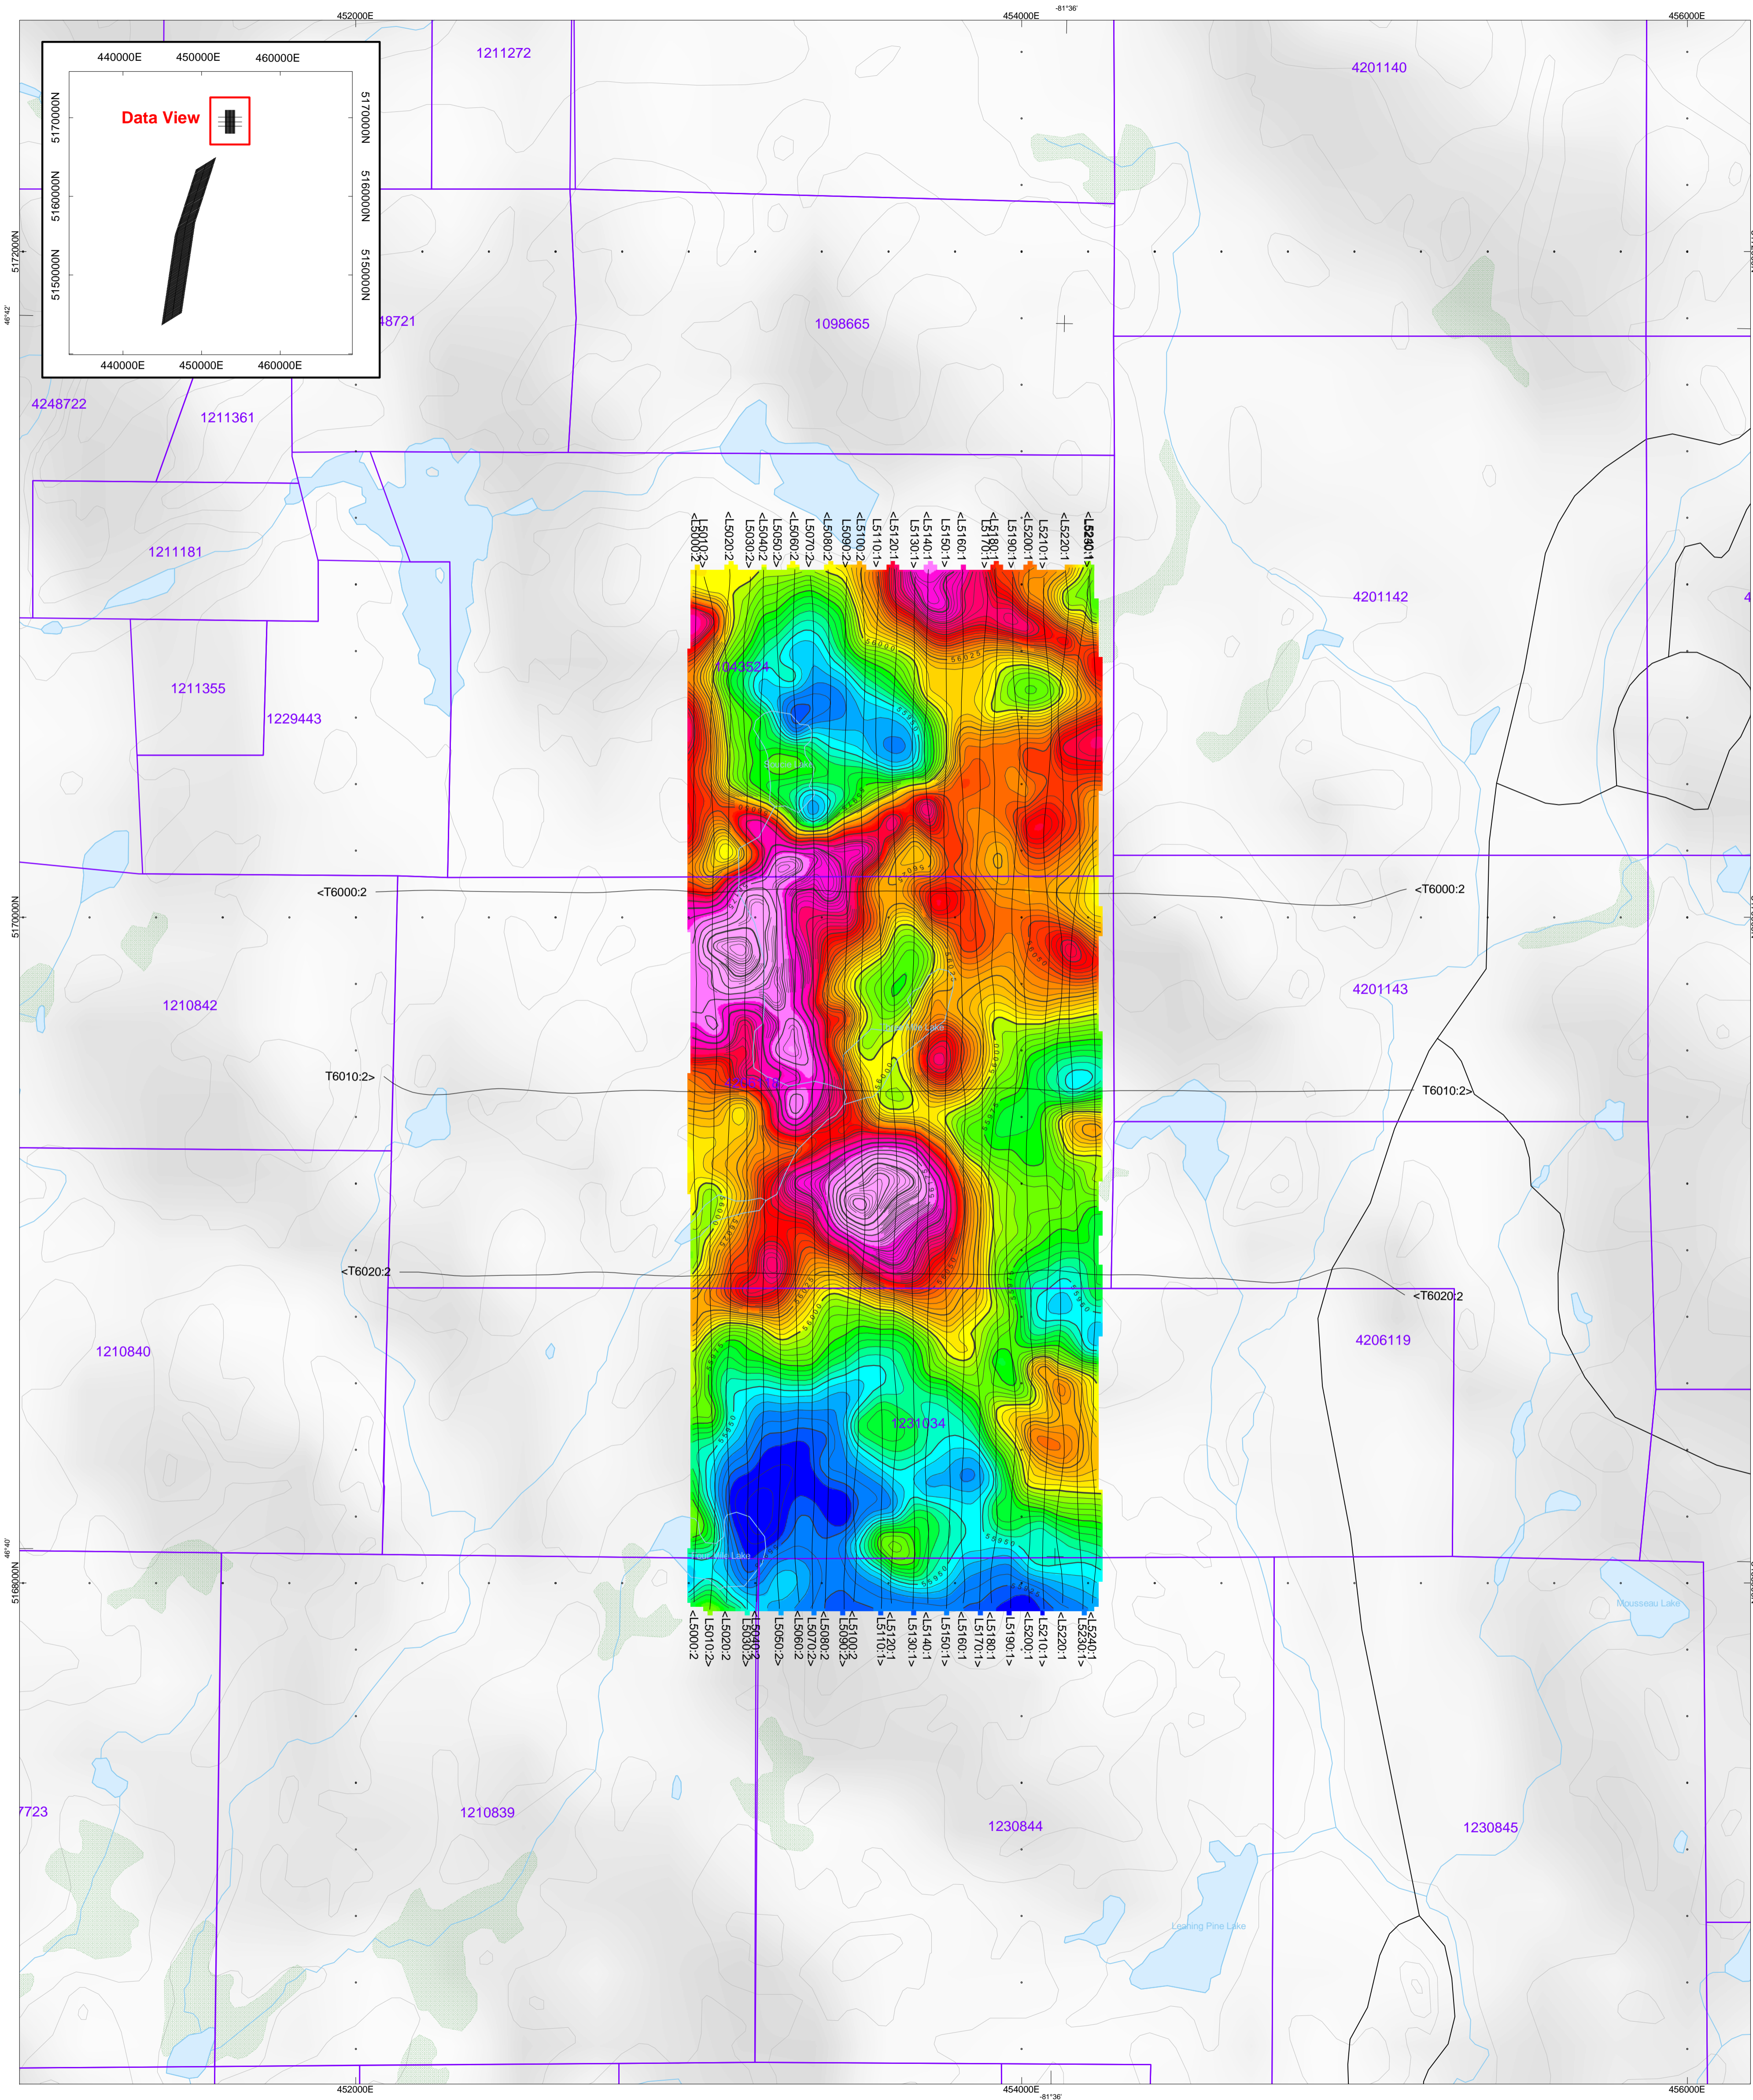

The topographic data base was derived from 1:50000 NRC (Natural Resources Canada) NTDB data
 Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data
 Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database
 Mining Claims are derived from the Ontario Ministry of Northern Development and Mines
 (www.geocomm.com/www.geogratis.ca/http://www.mndm.gov.on.ca)

Wallbridge Mining Company Limited
 Ermatinger Property - North
 Sudbury, Ontario

Geotech VTEM System
Total Magnetic Intensity (TMI)

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca
 July 2011





SURVEY SPECIFICATIONS:

Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospatiale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 0° E / N 180° E
 Nominal Tie Line Spacing: 600 & 550 Meters
 Nominal Tie Line Direction: N 90° E / N 270° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter

INSTRUMENTS
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354,660 nA
 Transmitter Wave Form: Trapezoid, Pulse Width 7.21 ms.
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec


MAP PROJECTION
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 NTS: 041105 & 041112

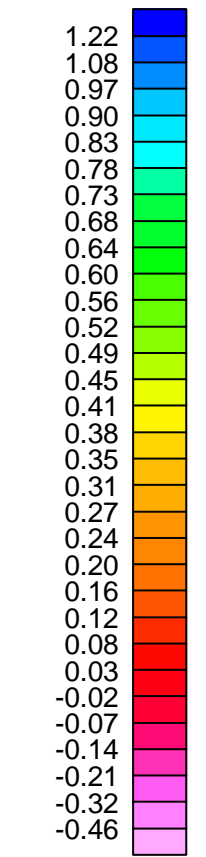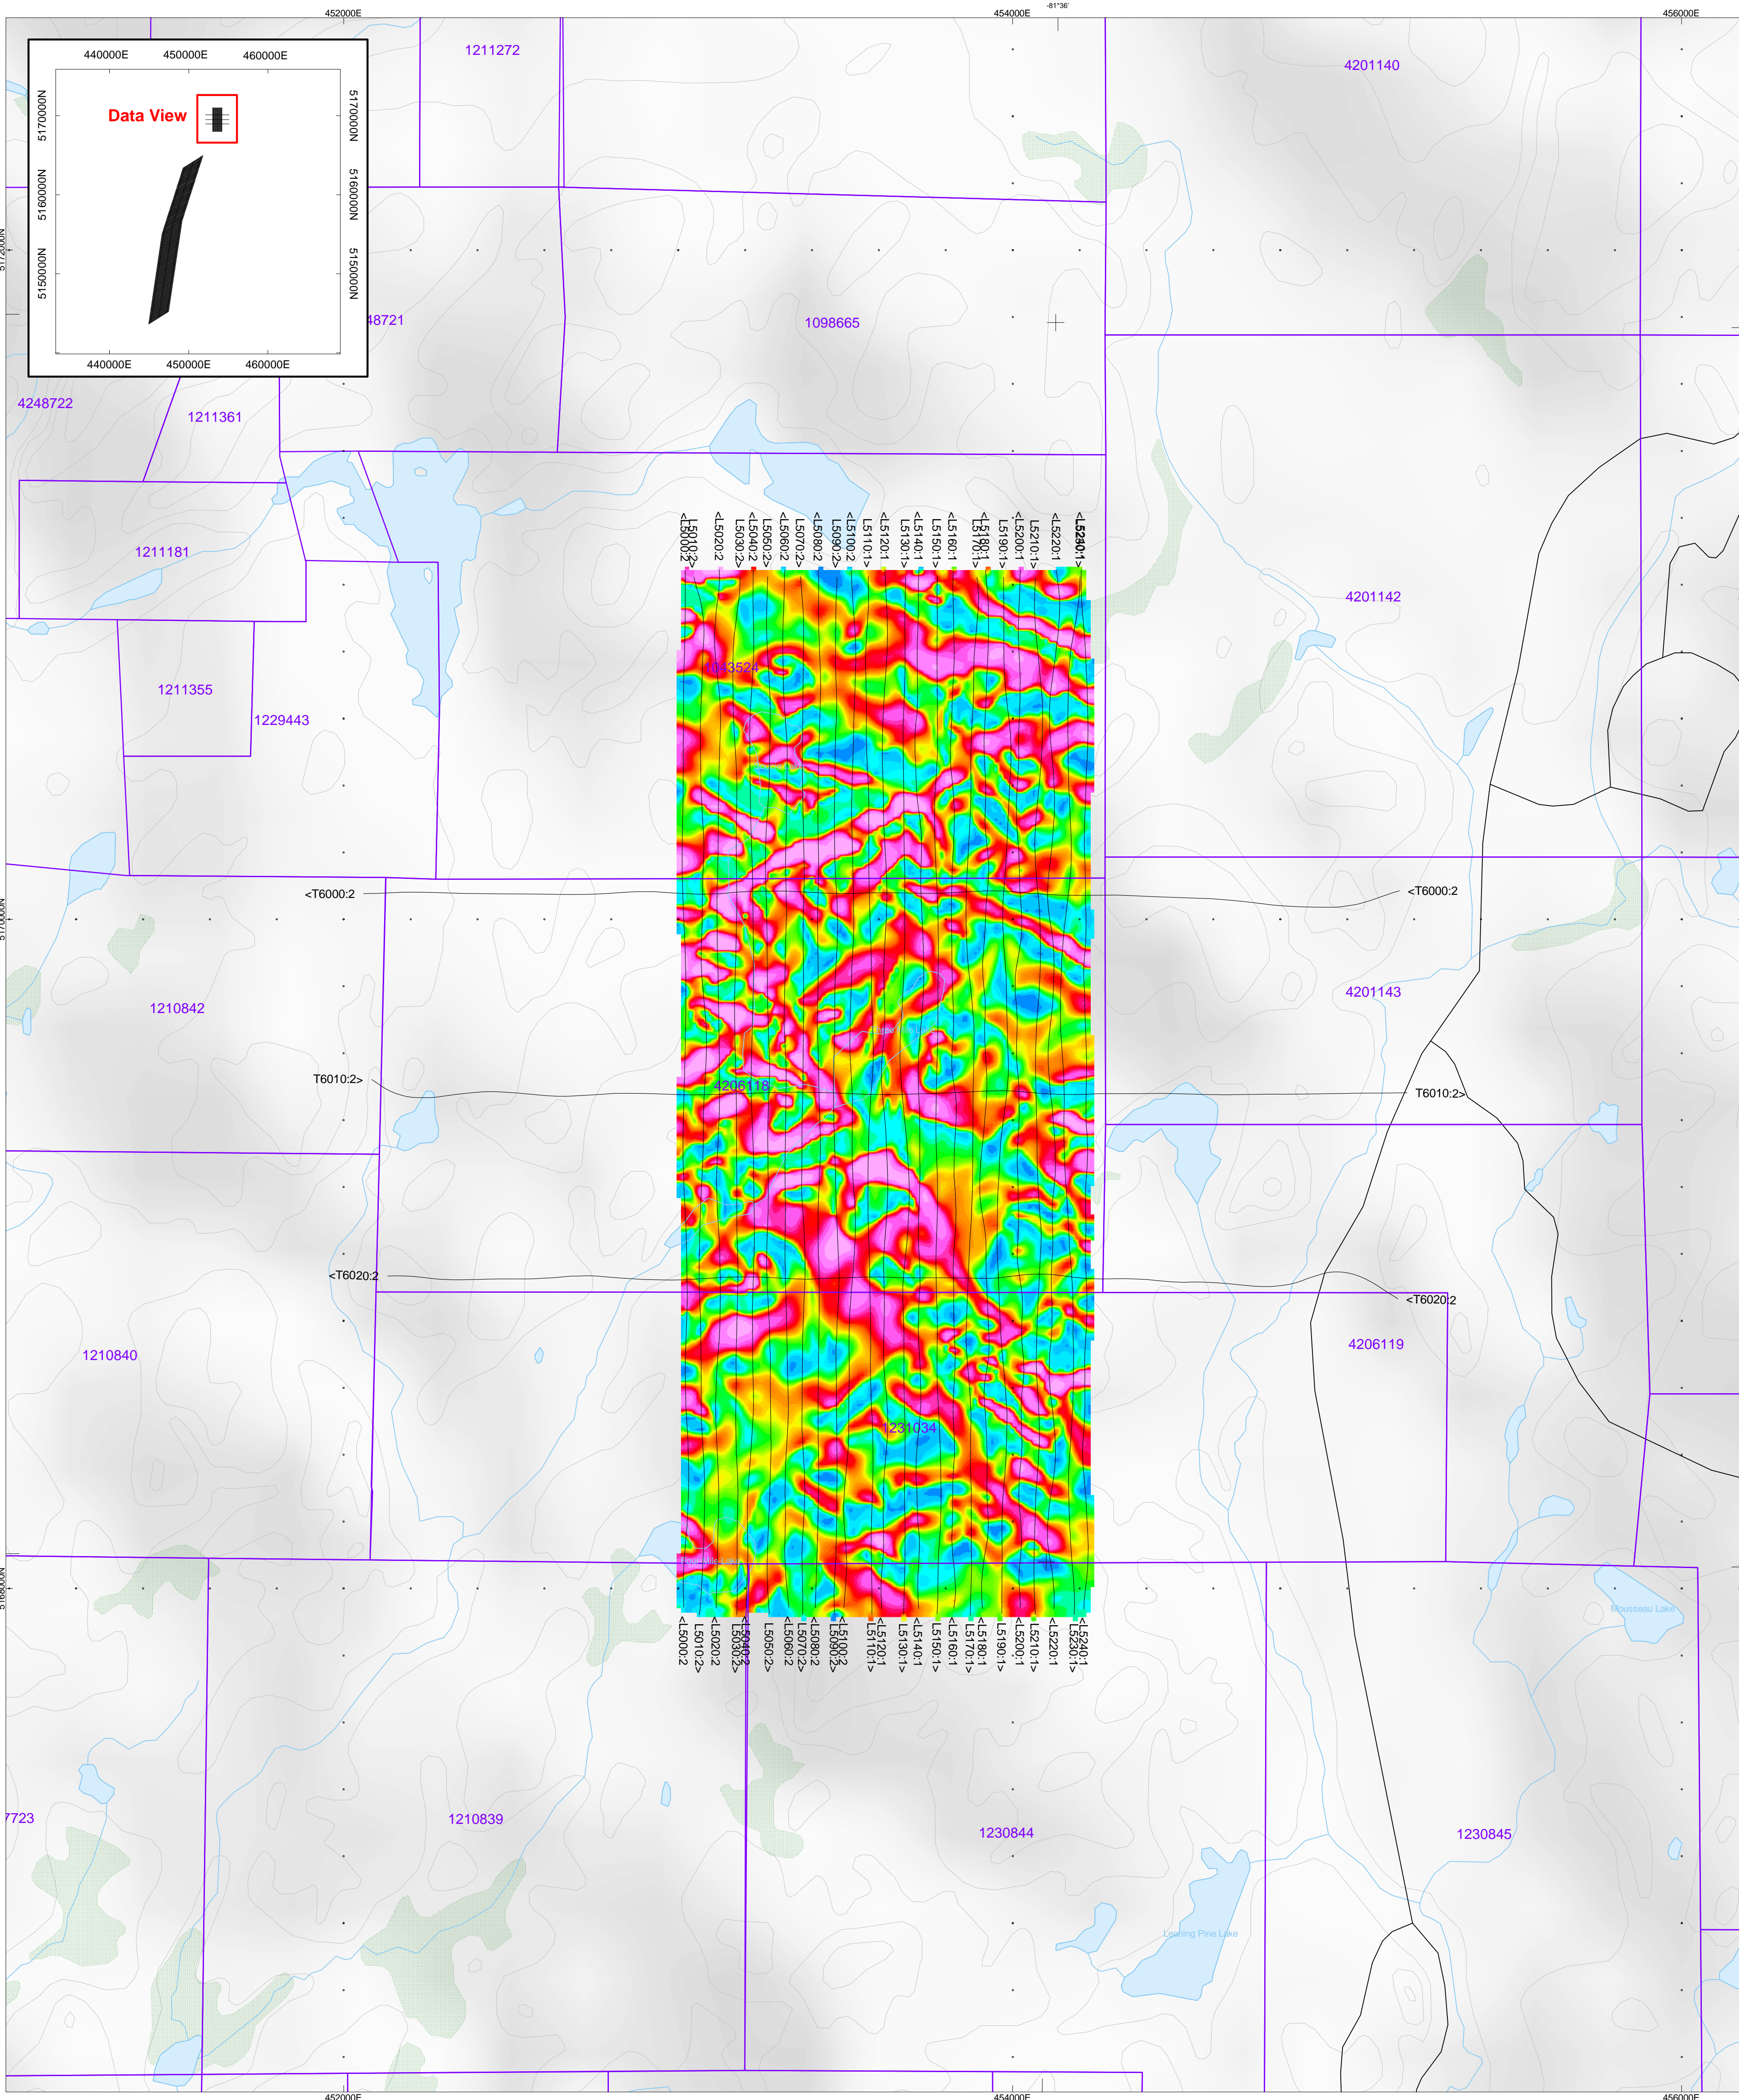

Total HGrad (nT/m)

TOPOGRAPHIC LEGEND:

- Trails
- Roads
- Contours
- Rivers / Streams
- Lakes / Ponds
- Wetlands
- Mining Claims

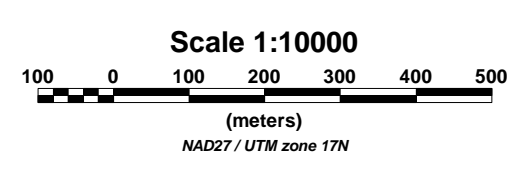

The topographic data base was derived from 1:50000 NRC (Natural Resources Canada) NTDB data
 Background shading is derived from NASA SRTM (Shuttle Radar Topography Mission) data
 Inset data derived from Geocommunities 1:250,000 Canadian National Topographic database
 Mining Claims are derived from the Ontario Ministry of Northern Development and Mines
 (www.geocomm.com/www.geogratis.ca/http://www.mndm.gov.on.ca)

Wallbridge Mining Company Limited
 Ermatinger Property - North
 Sudbury, Ontario

Geotech VTEM System
 Total Horizontal Gradient
 of TMI

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca




July 2011



SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospaciale A-Star 350 B3 (C-GEOC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 55° E / N 238° E
 Nominal Tie Line Spacing: 800 Meters
 Nominal Tie Line Orientation: N 6° E / N 188° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 25 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter


INSTRUMENTS:
 Geotech Time Domain Electromagnetic System (VTM)
 Concentric R/FX Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 25 Meters, Base Frequency 30 Hz
 Dipole Moment: 354.660 nA
 Transmitter Wave Form: Trapezoidal Pulse Width 7.21 ms
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION:
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81° W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Heighting: 500,000.000m
 Major Axis: 6378206.4
 Eccentricity: 0.082271854219
 WGS 84 NS & 84 NS

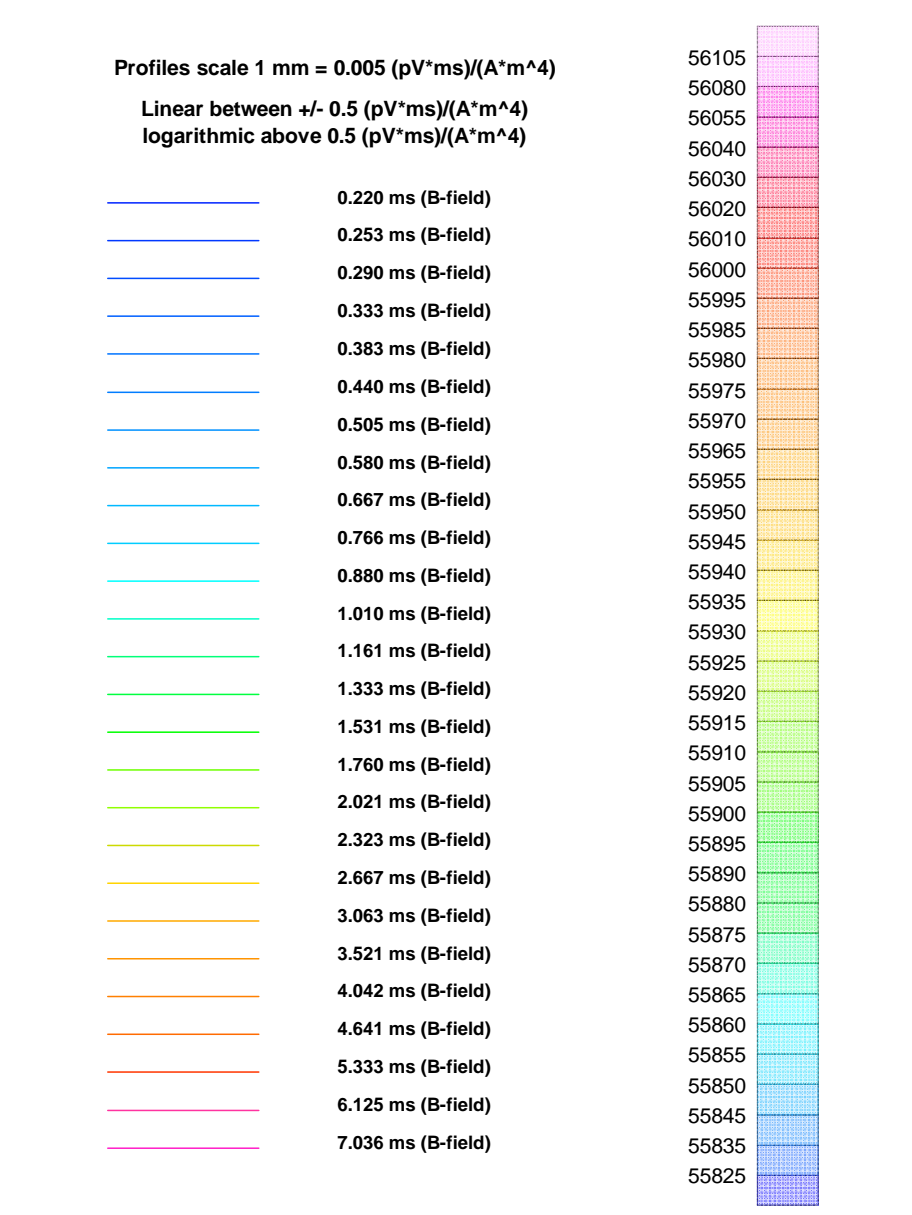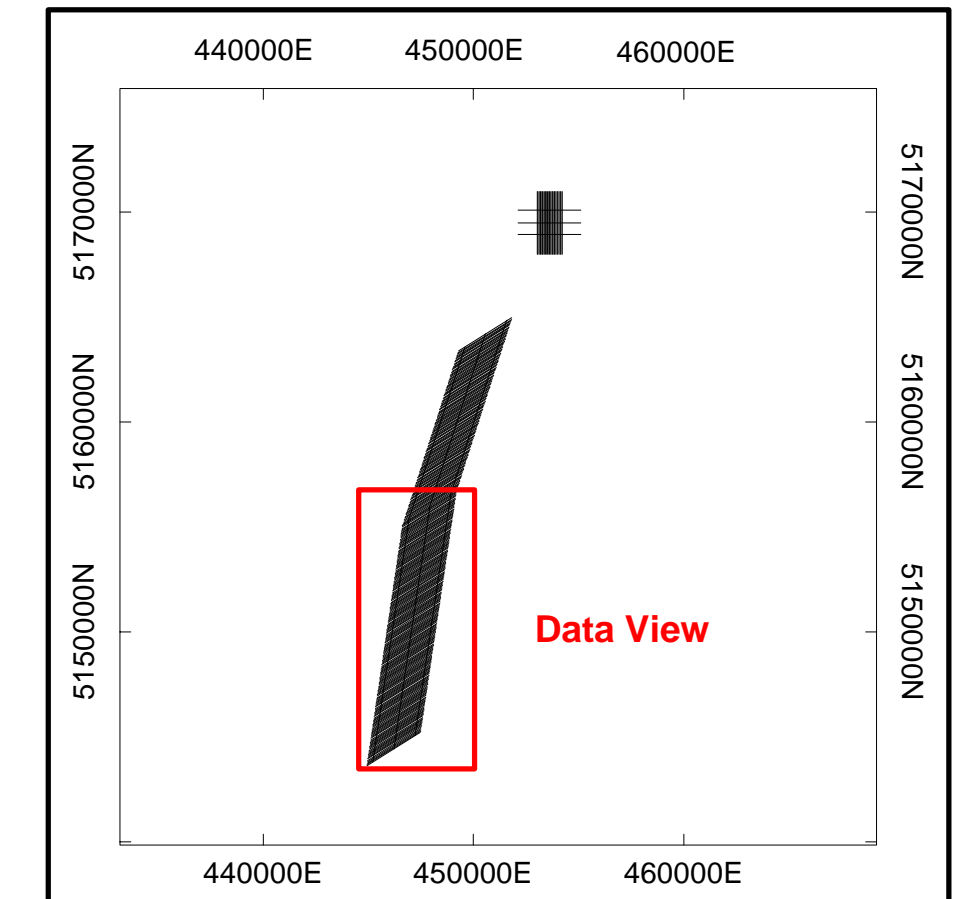

TOPOGRAPHIC LEGEND:

- Trails
- Roads
- Contours
- Rivers / Streams
- Lakes / Ponds
- Wetlands
- Mining Claims

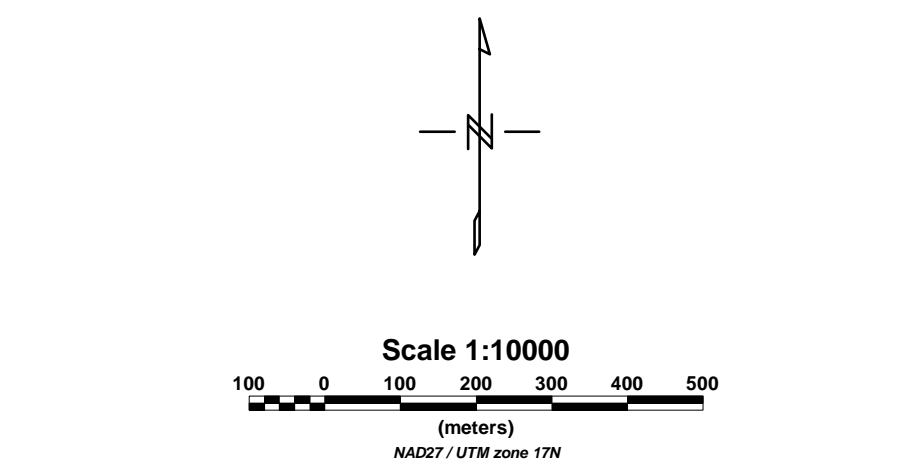

The topographic data base was derived from 1:50000 NRC, Natural Resources Canada (NRC) data. Background shading is derived from NADA 5878 (Shaded Relief) Topographic Metadata data base data derived from Geomatics 1:250,000 Canadian National Topographic database. Mining Claims are derived from the Ontario Ministry of Northern Development and Mines (www.geomatics.com) (<http://www.mrdm.gov.on.ca>)

Wallbridge Mining Company Limited
Ermatinger Property - South (A)
Sudbury, Ontario

Geotech VTEM System
 Z-Component B-field Profiles
 Time Gates 0.220 to 7.036 ms
 displayed over TMI

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca



July 2011



SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aeromaps A-Star 350 B3 (C-GECC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 50° E / N 230° E
 Nominal Tie Line Spacing: 800 Meters
 Nominal Tie Line Direction: N 8° E / N 188° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 35 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter

INSTRUMENTS:
 Geotech Time Domain Electromagnetic System (VTM)
 Coprocessor: P4/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 26 Meters, Base Frequency 30 Hz
 Dipole Moment: 354.60 nA
 Transmitter Wave Form: Trapezoidal, Pulse Width 7.21 ms
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION:
 Datum: NAD 83
 Projection: Universal Transverse Mercator
 Central Meridian: 81°W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Northing: 500,000m/0m
 Major Axis: 6378137.0
 Eccentricity: 0.082271854219
 NTS: 04768 & 04112

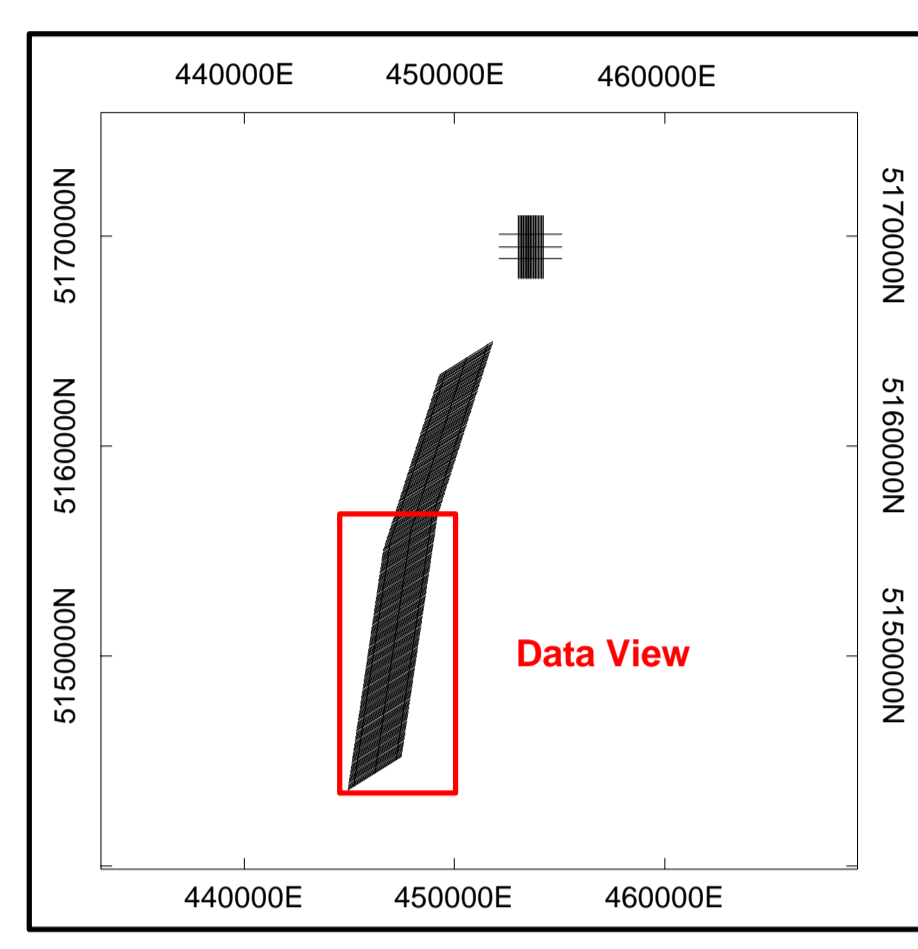

The topographic data base was derived from 1:50,000 NRC (Natural Resources Canada) NTDB data. Background shading is derived from SIDA 30716 (Shaded Relief) Topographic Relief data base data derived from Geocommunes 1:250,000 Canadian National Topographic database. Mining Claims are derived from the Ontario Ministry of Northern Development and Mines (www.geocomm.com) (<http://www.mrdm.gov.on.ca>)



Profiles scale 1 mm = 0.05 (pVA/m²)
 Linear between 0.15 (pVA/m²)
 logarithmic above 0.5 (pVA/m²)

TOPOGRAPHIC LEGEND:
 Trails
 Roads
 Contours
 Rivers / Streams
 Wetlands
 Mining Claims


Scale 1:10000
 100 0 100 200 300 400 500
 (meters)
 NAD83 UTM Zone 17N

Wallbridge Mining Company Limited
 Ermatinger Property - South (A)
 Sudbury, Ontario

Geotech VTEM System
 Z-Component dB/dt Profiles
 Time Gates 0.126 to 4.042 ms

Flown and processed by Geotech Ltd.
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca




July 2011

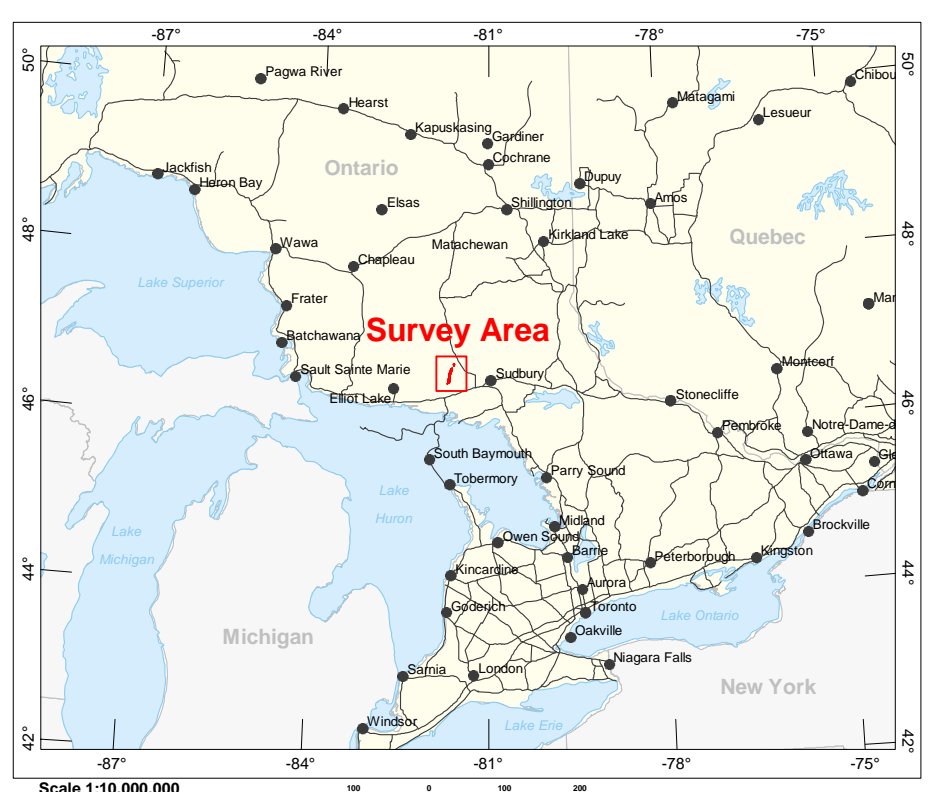



SURVEY SPECIFICATIONS:
 Survey Date: May 4th to June 6th, 2011
 Survey Base: Sudbury, Ontario
 Aircraft: Aerospaciale A-Star 350 B3 (G-GEQC)
 Nominal Survey Line Spacing: 50 Meters
 Nominal Survey Line Direction: N 55° E / N 238° E
 Nominal Tie Line Spacing: 800 Meters
 Nominal Tie Line Direction: N 8° E / N 188° E
 Nominal Terrain Clearance: 83 Meters
 EM Loop: Towed at a mean distance of 25 meters below the Helicopter
 Magnetic Sensor: Towed at a mean distance of 13 meters below the Helicopter

INSTRUMENTS:
 Geotech Time Domain Electromagnetic System (VTEM)
 Concentric Rx/Tx Geometry
 X-Coil Loop: Diameter 0.32 Meters, Base Frequency 30 Hz
 Transmitter Loop: Diameter 25 Meters, Base Frequency 30 Hz
 Dipole Moment: 354.660 nA
 Transmitter Wave Form: Trapezoidal Pulse Width 7.21 ms
 Geomagnetic High Sensitivity Cesium Magnetometer
 Mag Resolution: 0.02 nT at 10 samples/sec

MAP PROJECTION:
 Datum: NAD 27
 Projection: Universal Transverse Mercator
 Central Meridian: 81° W (Zone 17N)
 Central Scale Factor: 0.9996
 False Easting/Heighting: 500,000m/0m
 Major Axis: 6378246.4
 Eccentricity: 0.082271854219
 NFA: 61765 & 64812

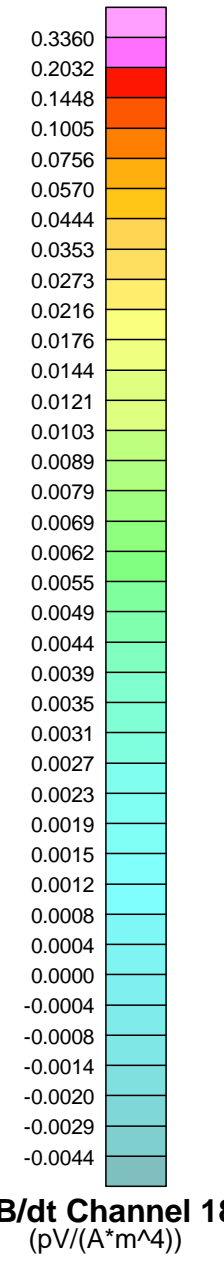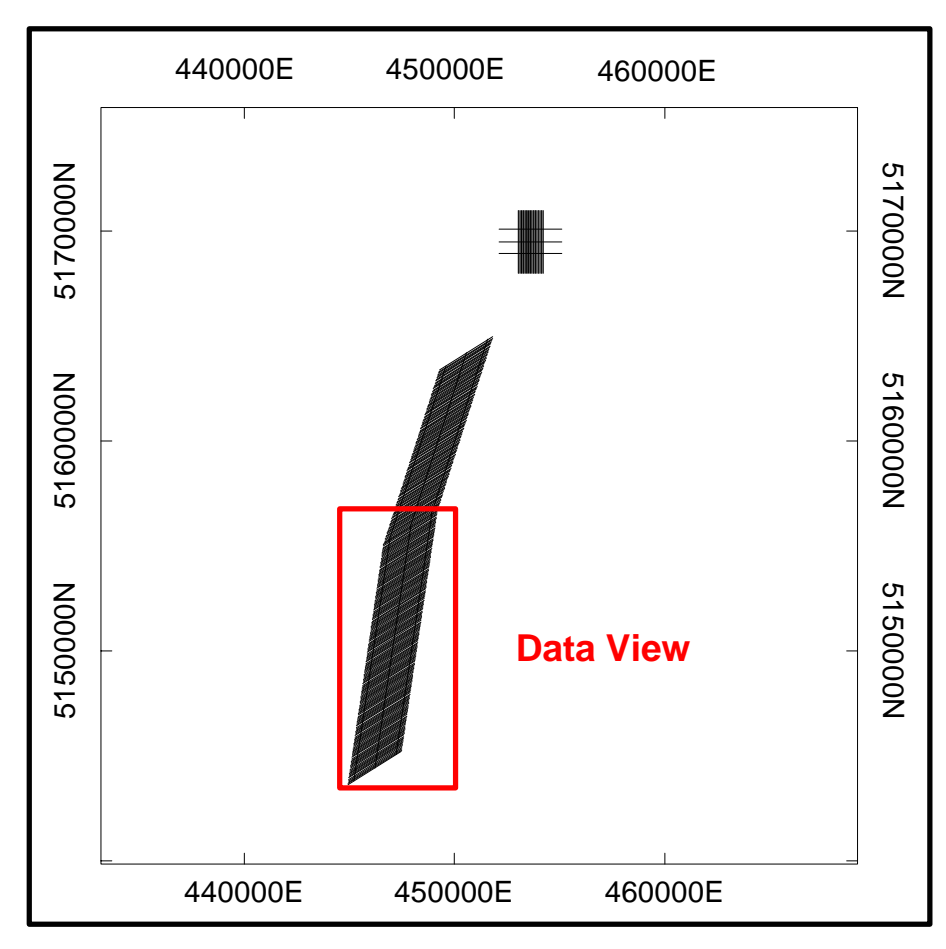

- TOPOGRAPHIC LEGEND:**
- Trails
 - Roads
 - Contours
 - Rivers / Streams
 - Lakes / Ponds
 - Wetlands
 - Mining Claims



The topographic data base was derived from 1:50,000 NRC, Natural Resources Canada (NTSB) data. Background shading is derived from NADA 5878 (Shaded Relief) Topographic Metadata data base data derived from Geocommunes 1:250,000 Canadian National Topographic database. Mining Claims are derived from the Ontario Ministry of Northern Development and Mines (www.geocomm.com) (<http://www.mrdm.gov.on.ca>)

Wallbridge Mining Company Limited
 Ermatinger Property - South (A)
 Sudbury, Ontario

Geotech VTEM System
 Z-Component dB/dt Channel 18
 Time Gate 0.167 ms

Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca