
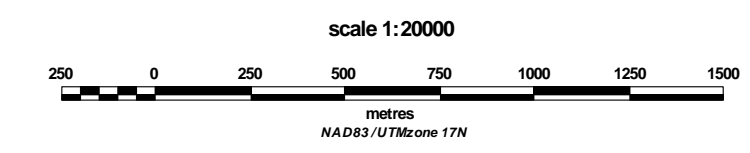
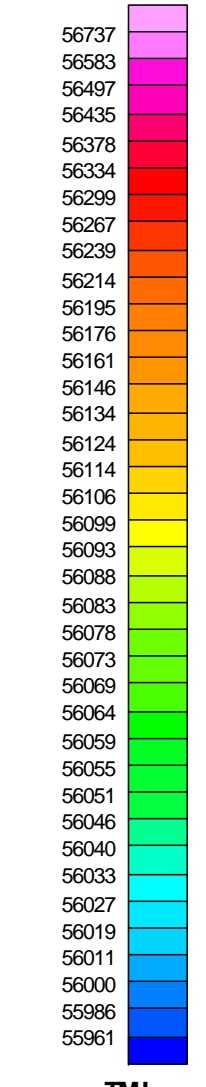


Survey Specifications:
 Survey date: Sept/12
 Survey base: Timmins, Ont.
 Aircraft: Asiar AS5650 (Reg. C-FKO)
 Nominal Survey line spacing: 200.0 metres
 Nominal Survey line direction: N0°E
 Nominal Tie line spacing: 2000.0 metres
 Nominal Tie line direction: N30°E
 Nominal terrain clearance: 75 metres
 EM Loop is 42 metres beneath helicopter
 Magnetic sensor: 15m below hook

Instruments:
 Geotech Time Domain Electromagnetic System (VTEM8) with concentric Rx/Tx geometry
 Transmitter Loop Diameter 26.0 m, Base Frequency 30 Hz
 Dipole Moment 371000 N/A
 Transmitter Wave Form: Trapezoid, Pulse Width 6.8 ms
 Geometrics High Sensitivity Cesium Magnetometer
 Mag Resolution 0.02 nT at 10 samples/sec

Map Projection:
 Datum: NAD83
 Projection: UTM zone 17N
 Central Meridian: -81°
 Central Scale Factor: 0.9996
 False Easting, Northing: 500000, 0 m
 Major Axis, Eccentricity: 6378137, 0.08181919104



Fletcher Nickel Inc.
Otter Block
 Hutt and Semple Twps., Ont.
 Geotech VTEM System
Total Magnetic Intensity
 Flown and processed by Geotech Ltd.
 245 Industrial Parkway North,
 Aurora, Ontario, Canada L4G 4C4
 www.geotech.ca