



**CANADIAN EXPLORATION SERVICES LTD**

PO Box 219, 14579 Government Road, Larder Lake, Ontario, P0K 1L0, Canada  
Phone (705) 643-2345 Fax (705) 643-2191 www.cxsltd.com

---

# **SKEAD HOLDINGS LTD.**

## **Magnetometer Survey Over the Cunningham-B Property**

### **Cunningham Township, Ontario**

## TABLE OF CONTENTS

<b>1.</b>	<b>SURVEY DETAILS .....</b>	<b>3</b>
1.1	PROJECT NAME.....	3
1.2	CLIENT .....	3
1.3	LOCATION .....	3
1.4	ACCESS.....	4
1.5	SURVEY GRID .....	4
<b>2.</b>	<b>SURVEY WORK UNDERTAKEN.....</b>	<b>5</b>
2.1	SURVEY LOG.....	5
2.2	PERSONNEL .....	5
2.3	SURVEY SPECIFICATIONS .....	5
<b>3.</b>	<b>OVERVIEW OF SURVEY RESULTS.....</b>	<b>6</b>
3.1	SUMMARY INTERPRETATION .....	6

## LIST OF APPENDICES

- APPENDIX A: STATEMENT OF QUALIFICATIONS**
- APPENDIX B: THEORETICAL BASIS AND SURVEY PROCEDURES**
- APPENDIX C: INSTRUMENT SPECIFICATIONS**
- APPENDIX D: LIST OF MAPS (IN MAP POCKET)**

## LIST OF TABLES AND FIGURES

Figure 1: Location of the Cunningham-B Property.....	3
Figure 2: Claim Map with Cunningham-B Property Traverses.....	4
Figure 3: Google Image with Magnetic Overlay.....	6
Table 1: Survey Log .....	5

## 1. SURVEY DETAILS

### 1.1 PROJECT NAME

This project is known as the **Cunningham-B Property**.


### 1.2 CLIENT

SKEAD HOLDINGS LTD.

28 Ford St.  
Sault Ste. Marie, Ontario  
P6A 4N4

### 1.3 LOCATION

The Cunningham-B Property is located in Cunningham Township approximately 10km northeast of Sultán, Ontario. The survey area covers claim numbered 4259265, located in Cunningham Township, within the Porcupine Mining Division.

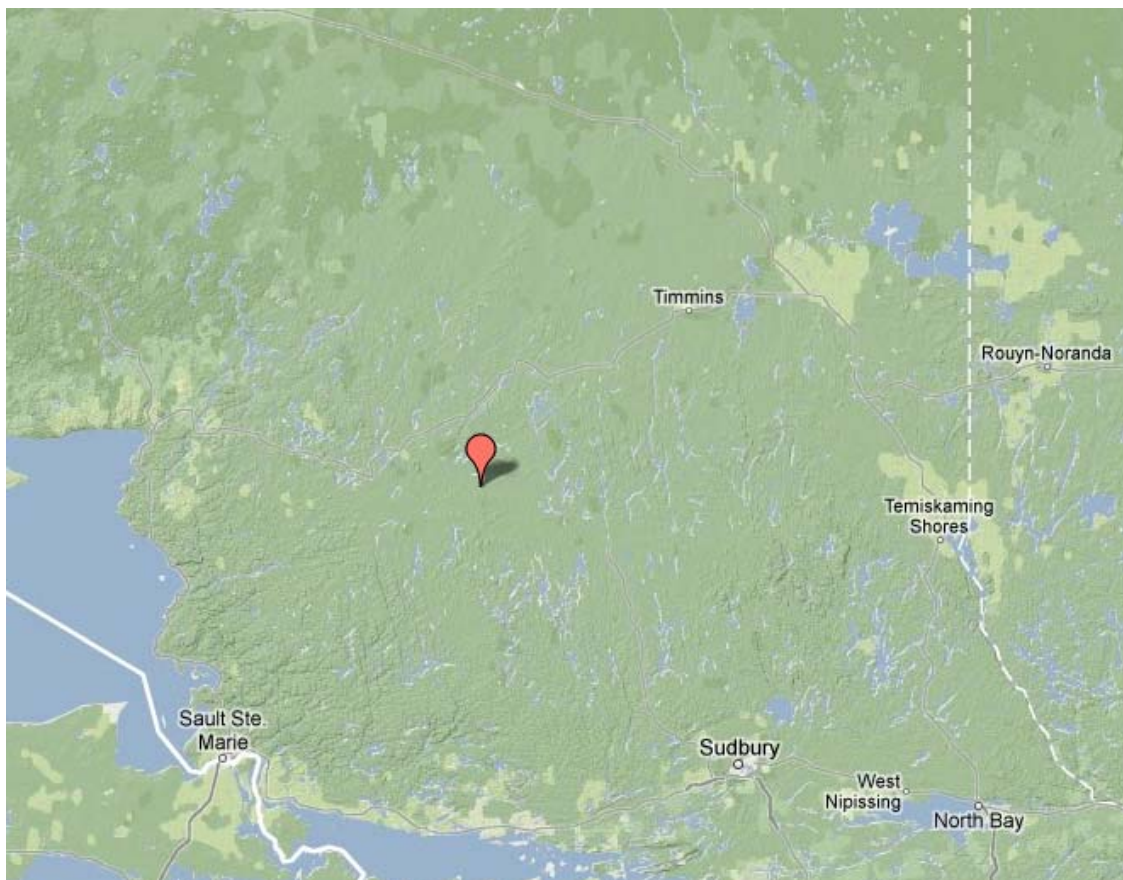


**Figure 1: Location of the Cunningham-B Property**

## 1.4 ACCESS

Access to the property was attained with a 4x4 truck on Highway 129 for approximately 28 km southeast from the Town of Chapleau to Regional Rd 667 for approximately 47km east. From that point, snowmachines were used to travel for an additional 20km north and east on a series of old logging roads to the beginning of the property.

## 1.5 SURVEY GRID

The traversed lines were established using a GPS in conjunction with the execution of the survey. The GPS operator would establish sample locations while remaining approximately 12.5m in front of the magnetometer operator. GPS waypoints and magnetic samples were taken every 12.5m along these controlled traverses. The GPS used was a Garmin GPSMAP 62s with an external antenna for added accuracy.

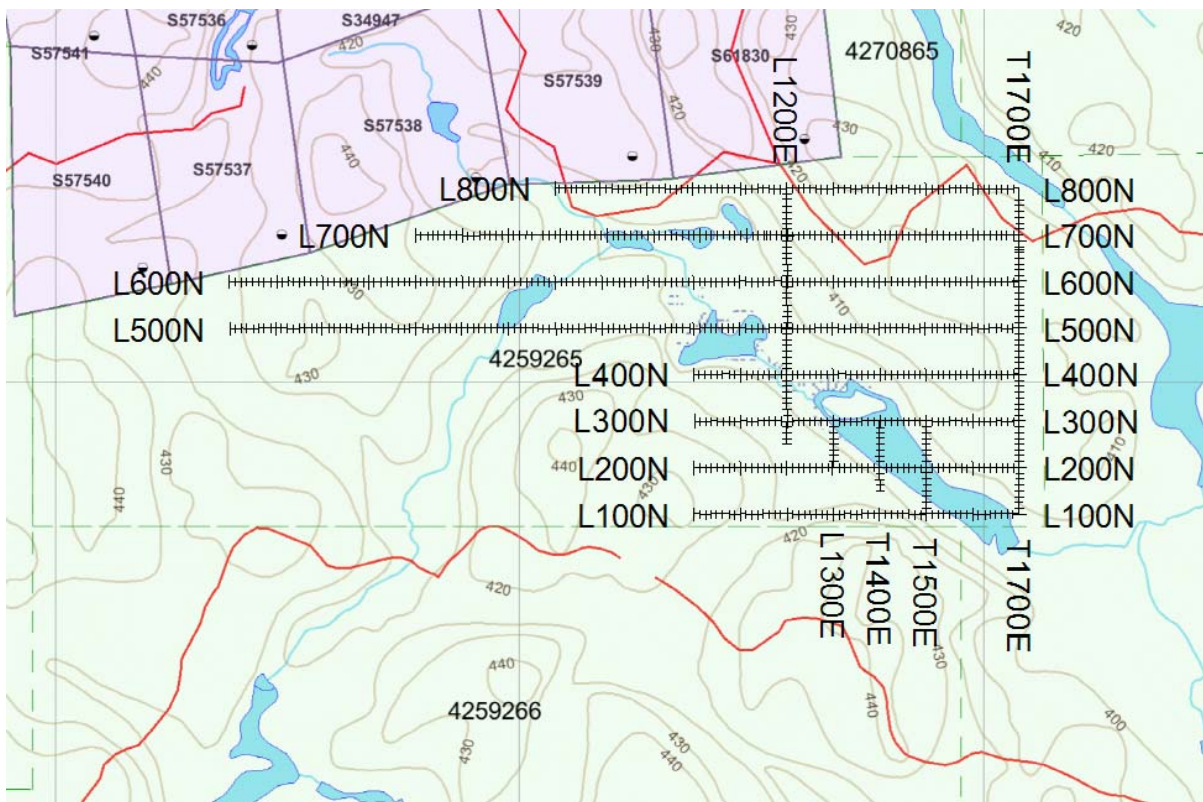

**Figure 2: Claim Map with Cunningham-B Property Traverses**

## 2. SURVEY WORK UNDERTAKEN

### 2.1 SURVEY LOG

Date	Description	Line	Min Extent	Max Extent	Total Survey (m)
December 19, 2014	Locate survey area and begin survey.	800N	700E	1700E	1000
		700N	1200E	1700E	500
		600N	0	400E	400
		500N	0	1200E	1200
		1200E	400N	800N	400
		1700E	600N	800N	200
December 20, 2014	Continue survey.	600N	1000E	1700E	700
		500N	1200E	1700E	500
		400N	1000E	1700E	700
		300N	1000E	1700E	700
		200N	1000E	1700E	700
		100N	1000E	1700E	700
		1200E	250N	400N	150
		1300E	200N	300N	100
		1400E	150N	300N	150
		1500E	100N	300N	200
		1700E	100N	600N	500
December 21, 2014	Complete survey.	700N	400E	1200E	800
		600N	400E	1000E	600

**Table 1: Survey Log**

### 2.2 PERSONNEL

Claudia Moraga of Britt, Ontario, conducted all the magnetic data collection with Bruce Lavalley also of Britt, Ontario responsible for GPS control and waypoint collection.


### 2.3 SURVEY SPECIFICATIONS

The survey was conducted with a GSM-19 v7 Overhauser magnetometer with a second GSM-19 magnetometer for a base station mode for diurnal correction.

A total of 10.2 line kilometers of magnetometer was read over the Cunningham-B Property between December 19<sup>th</sup> and 21<sup>th</sup>, 2014. This consisted of 816 magnetometer samples taken at a 12.5m sample interval.

### 3. OVERVIEW OF SURVEY RESULTS

#### 3.1 SUMMARY INTERPRETATION

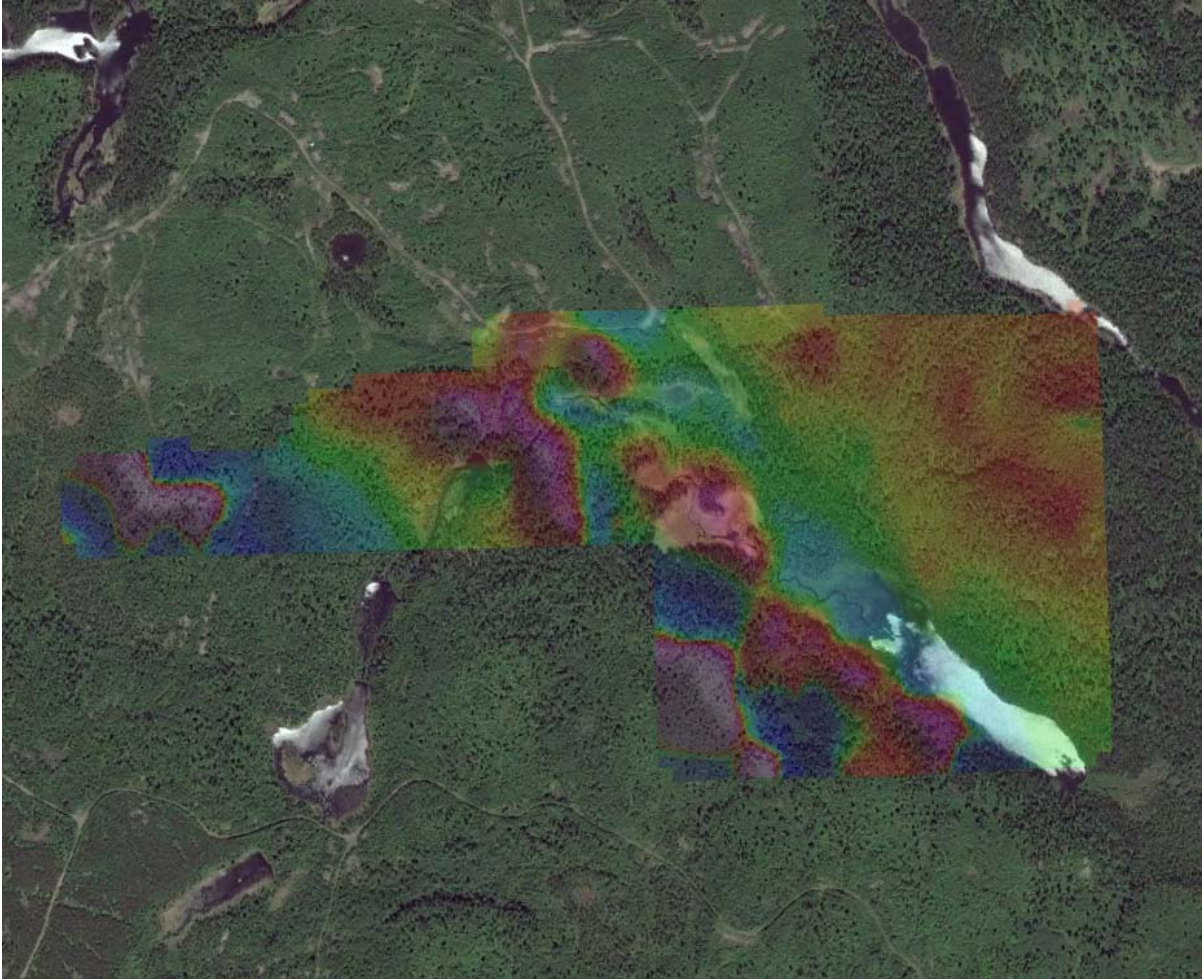

**Figure 3: Google Image with Magnetic Overlay**

Two intense magnetic signatures occur within the survey area. The intensity of these magnetic signatures indicates a probable iron formation. These two anomalies occur in a northwest trend and are parallel to each other. The westernmost of these trends appears to be the most intense; however, the survey coverage is poor over these areas.

These magnetic anomalies should be further investigated. There is a strong potential of mineralization within this unit. I would recommend cutting a grid and performing a follow-up program. This program should include: geology, MMI Survey and an IP Survey.

---

## APPENDIX A

### STATEMENT OF QUALIFICATIONS

I, C. Jason Ploeger, hereby declare that:

1. I am a professional geophysicist with residence in Larder Lake, Ontario and am presently employed as a Geophysicist and Geophysical Manager of Canadian Exploration Services Ltd. of Larder Lake, Ontario.
2. I am a Practising Member of the Association of Professional Geoscientists, with membership number 2172.
3. I graduated with a Bachelor of Science degree in geophysics from the University of Western Ontario, in London Ontario, in 1999.
4. I have practiced my profession continuously since graduation in Africa, Bulgaria, Canada, Mexico and Mongolia.
5. I am a member of the Ontario Prospectors Association, a Director of the Northern Prospectors Association and a member of the Society of Exploration Geophysicists.
6. I do not have nor expect an interest in the properties and securities of **Skead Holdings Ltd.**
7. I am responsible for the final processing and validation of the survey results and the compilation of the presentation of this report. The statements made in this report represent my professional opinion based on my consideration of the information available to me at the time of writing this report.



C. Jason Ploeger, P.Geo., B.Sc.  
Geophysical Manager  
Canadian Exploration Services Ltd.

Larder Lake, ON  
January 12, 2015

---

## APPENDIX B

### THEORETICAL BASIS AND SURVEY PROCEDURES

#### TOTAL FIELD MAGNETIC SURVEY

Base station corrected Total Field Magnetic surveying is conducted using at least two synchronized magnetometers of identical type. One magnetometer unit is set in a fixed position in a region of stable geomagnetic gradient, and away from possible cultural effects (i.e. moving vehicles) to monitor and correct for daily diurnal drift. This magnetometer, given the term 'base station', stores the time, date and total field measurement at fixed time intervals over the survey day. The second, remote mobile unit stores the coordinates, time, date, and the total field measurements simultaneously. The procedure consists of taking total magnetic measurements of the Earth's field at stations, along individual profiles, including Tie and Base lines. A 2 meter staff is used to mount the sensor, in order to optimally minimize localized near-surface geologic noise. At the end of a survey day, the mobile and base-station units are linked, via RS-232 ports, for diurnal drift and other magnetic activity (ionospheric and spheric) corrections using internal software.

For the gradiometer application, two identical sensors are mounted vertically at the ends of a rigid fiberglass tube. The centers of the coils are spaced a fixed distance apart (0.5 to 1.0m). The two coils are then read simultaneously, which alleviates the need to correct the gradient readings for diurnal variations, to measure the gradient of the total magnetic field.



---

## APPENDIX C

### GSM 19



### Specifications

#### Overhauser Performance

- Resolution: 0.01 nT
- Relative Sensitivity: 0.02 nT
- Absolute Accuracy: 0.2nT
- Range: 20,000 to 120,000 nT
- Gradient Tolerance: Over 10,000nT/m
- Operating Temperature: -40°C to +60°C

#### Operation Modes

- Manual: Coordinates, time, date and reading stored automatically at min. 3 second interval.
- Base Station: Time, date and reading stored at 3 to 60 second intervals.
- Walking Mag: Time, date and reading stored at coordinates of fiducial.
- Remote Control: Optional remote control using RS-232 interface.
- Input/Output: RS-232 or analog (optional) output using 6-pin weatherproof connector.

#### Operating Parameters

- Power Consumption: Only 2Ws per reading. Operates continuously for 45 hours on standby.
- Power Source: 12V 2.6Ah sealed lead acid battery standard, other batteries available
- Operating Temperature: -50°C to +60°C

#### Storage Capacity

- Manual Operation: 29,000 readings standard, with up to 116,000 optional. With 3 VLF stations: 12,000 standard and up to 48,000 optional.
- Base Station: 105,000 readings standard, with up to 419,000 optional (88 hours or 14 days uninterrupted operation with 3 sec. intervals)
- Gradiometer: 25,000 readings standard, with up to 100,000 optional. With 3 VLF stations: 12,000, with up to 45,000 optional.

---

## Omnidirectional VLF

Performance Parameters: Resolution 0.5% and range to  $\pm 200\%$  of total field.  
Frequency 15 to 30 kHz.

Measured Parameters: Vertical in-phase & out-of-phase, 2 horizontal components, total field coordinates, date, and time.

Features: Up to 3 stations measured automatically, in-field data review, displays station field strength continuously, and tilt correction for up to  $\pm 10^\circ$  tilts.

Dimensions and Weights: 93 x 143 x 150mm and weighs only 1.0kg.

## Dimensions and Weights

Dimensions:

Console: 223 x 69 x 240mm

Sensor: 170 x 71mm diameter cylinder

Weight:

Console: 2.1kg

Sensor and Staff Assembly: 2.0kg

## Standard Components

GSM-19 magnetometer console, harness, battery charger, shipping case, sensor with cable, staff, instruction manual, data transfer cable and software.

## Taking Advantage of a “Quirk” of Physics

Overhauser effect magnetometers are essentially proton precession devices except that they produce an order-of magnitude greater sensitivity. These "supercharged" quantum magnetometers also deliver high absolute accuracy, rapid cycling (up to 5 readings / second), and exceptionally low power consumption.

The Overhauser effect occurs when a special liquid (with unpaired electrons) is combined with hydrogen atoms and then exposed to secondary polarization from a radio frequency (RF) magnetic field. The unpaired electrons transfer their stronger polarization to hydrogen atoms, thereby generating a strong precession signal-- that is ideal for very high-sensitivity total field measurement. In comparison with proton precession methods, RF signal generation also keeps power consumption to an absolute minimum and reduces noise (i.e. generating RF frequencies are well out of the bandwidth of the precession signal).

In addition, polarization and signal measurement can occur simultaneously - which enables faster, sequential measurements. This, in turn, facilitates advanced statistical averaging over the sampling period and/or increased cycling rates (i.e. sampling speeds).

- The unique Overhauser unit blends physics, data quality, operational efficiency, system design and options into an instrumentation package that ... exceeds proton precession and matches costlier optically pumped cesium capabilities

## APPENDIX C

### GARMIN GPS MAP 62S



Physical & Performance:	
Unit dimensions, WxHxD:	2.4" x 6.3" x 1.4" (6.1 x 16.0 x 3.6 cm)
Display size, WxH:	1.43" x 2.15" (3.6 x 5.5 cm); 2.6" diag (6.6 cm)
Display resolution, WxH:	160 x 240 pixels
Display type:	transflective, 65-K color TFT
Weight:	9.2 oz (260.1 g) with batteries
Battery:	2 AA batteries (not included); NiMH or Lithium recommended
Battery life:	20 hours
Waterproof:	yes (IPX7)
Floats:	no
High-sensitivity receiver:	yes
Interface:	high-speed USB and NMEA 0183 compatible

Maps & Memory:	
Basemap:	yes
Preloaded maps:	no
Ability to add maps:	yes
Built-in memory:	1.7 GB
Accepts data cards:	microSD™ card (not included)
Waypoints/favorites/locations:	2000
Routes:	200
Track log:	10,000 points, 200 saved tracks

Features & Benefits:	
Automatic routing (turn by turn routing on roads):	yes (with optional mapping for detailed roads)
Electronic compass:	yes (tilt-compensated, 3-axis)
Touchscreen:	no
Barometric altimeter:	yes
Camera:	no
<u>Geocaching-friendly:</u>	yes (paperless)
<u>Custom maps compatible:</u>	yes
Photo navigation (navigate to geotagged photos):	yes
Outdoor GPS games:	no
Hunt/fish calendar:	yes
Sun and moon information:	yes
Tide tables:	yes
Area calculation:	yes

---

Custom POIs (ability to add additional points of interest):	yes
Unit-to-unit transfer (shares data wirelessly with similar units):	yes
Picture viewer:	yes
Garmin Connect™ compatible (online community where you analyze, categorize and share data):	yes

- *Specifications obtained from [www.garmin.com](http://www.garmin.com)*

---

## **APPENDIX D**

### **LIST OF MAPS (IN MAP POCKET)**



Posted contoured TFM plan map (1:2500)

- 1) SKEAD-CUNNINGHAM-B-MAG-CONT



Claim Map with Magnetic Traverses (1:20000)

- 2) SKEAD-CUNNINGHAM-B-GRID

**TOTAL MAPS = 2**

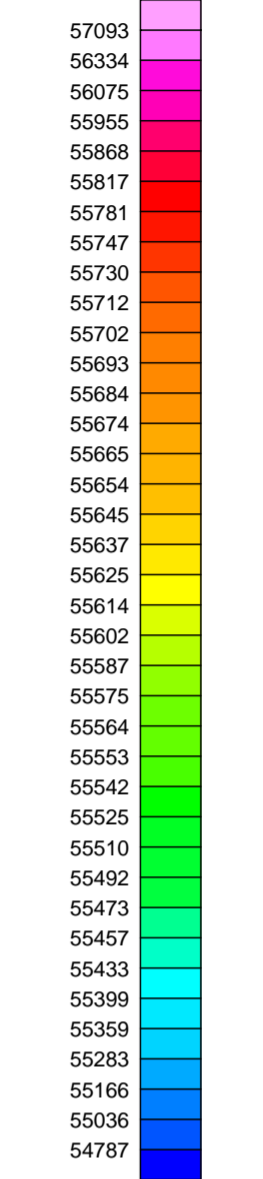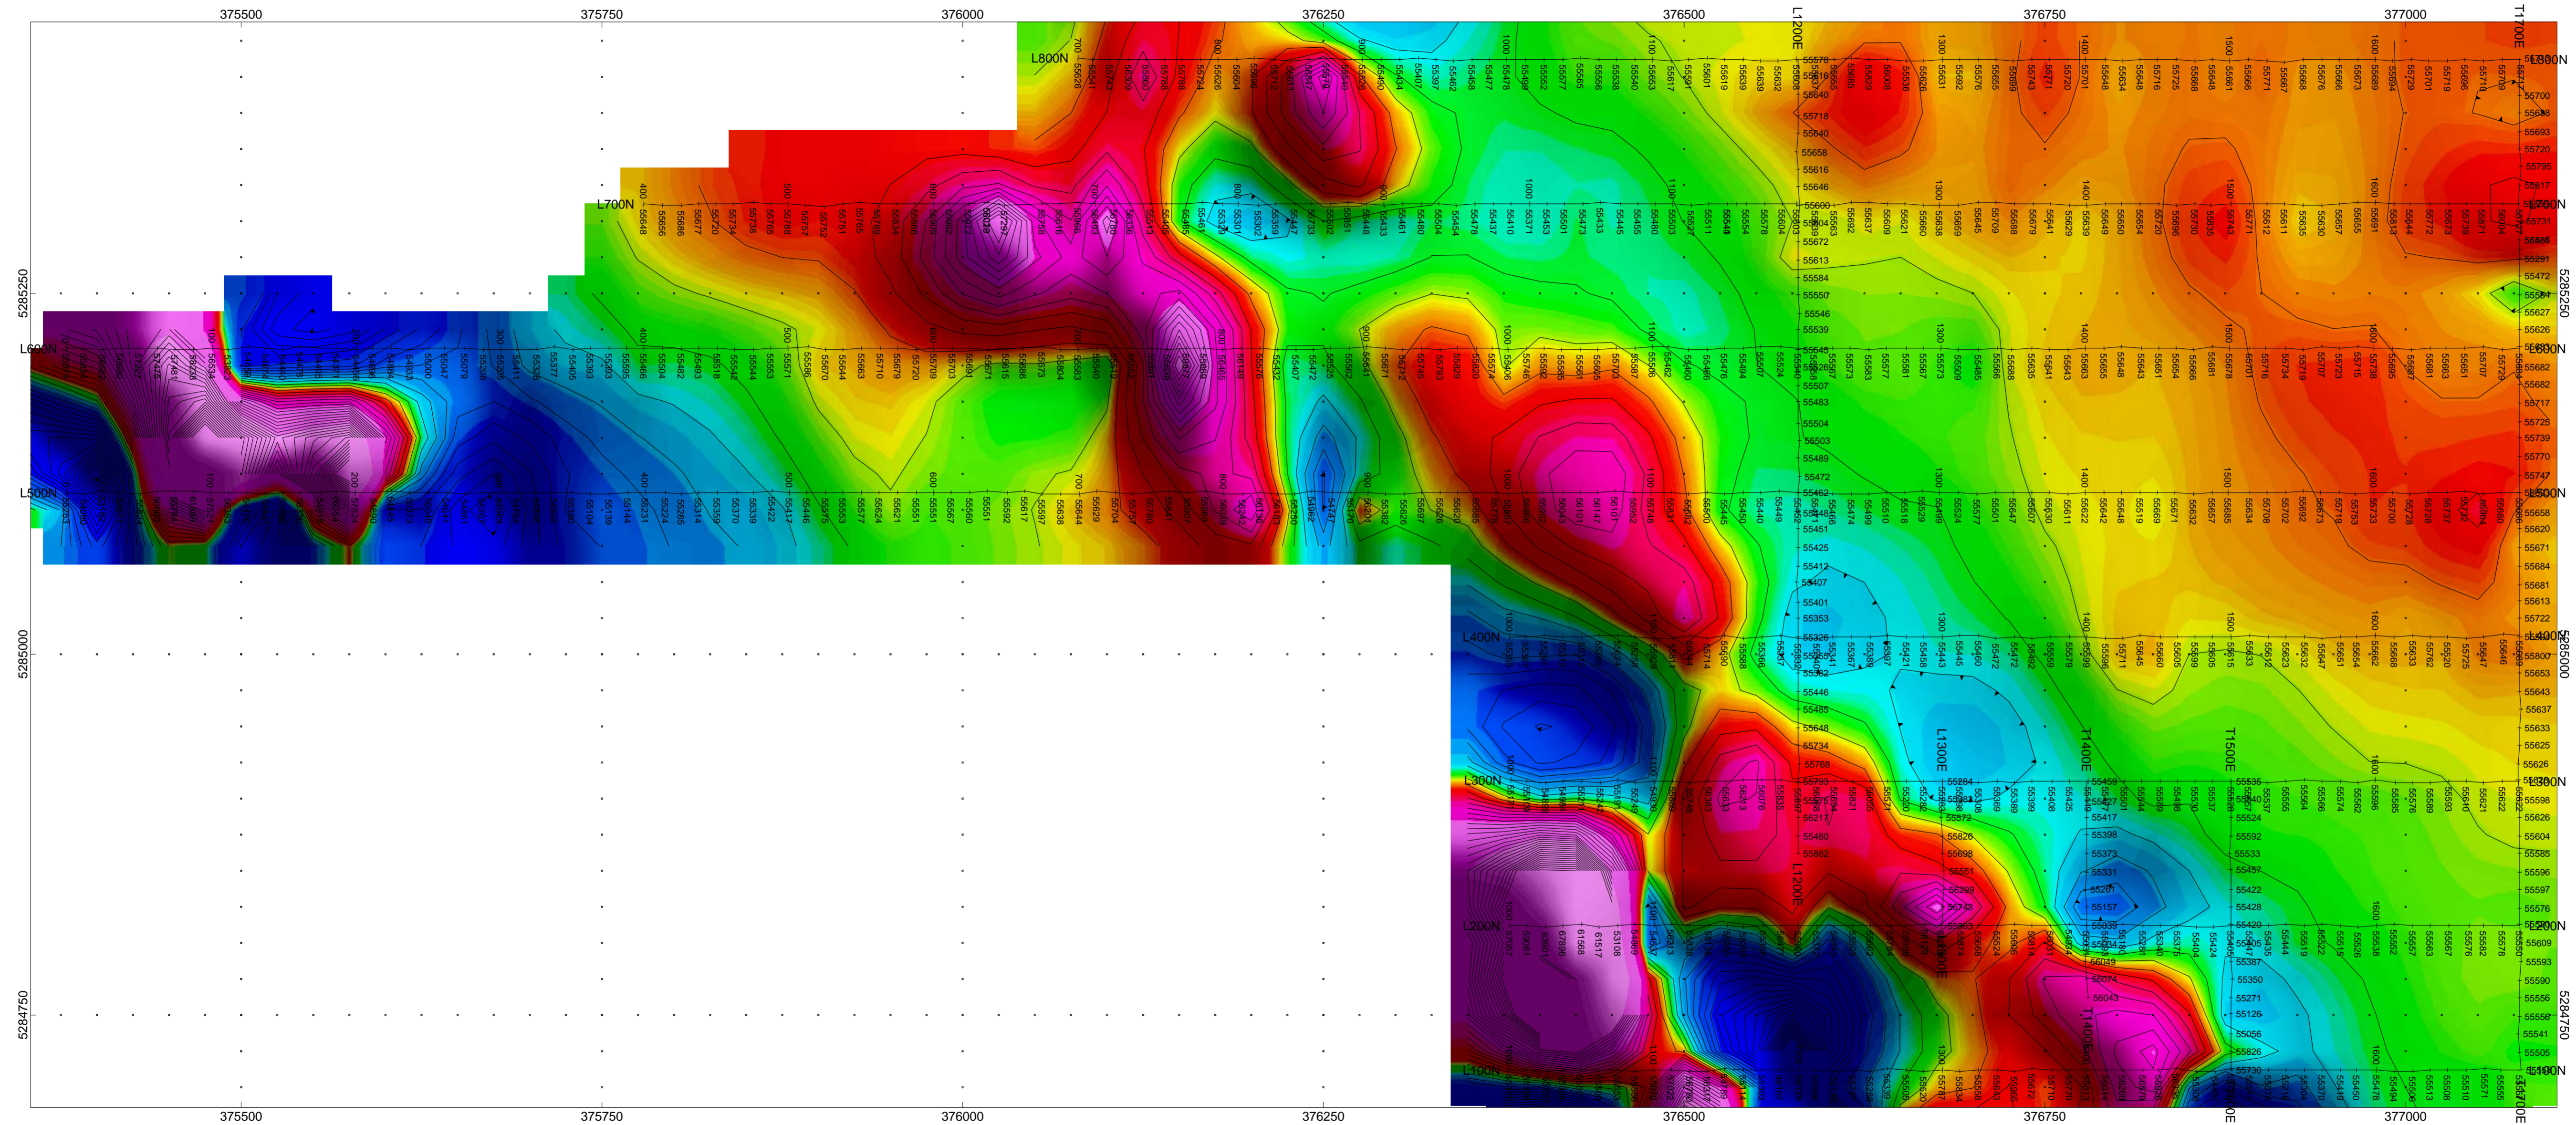

Magnetometer  
nanoTesla

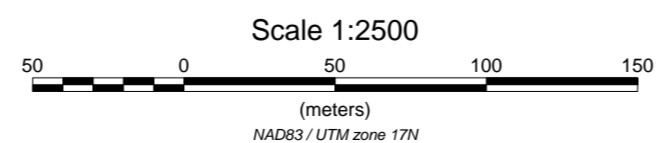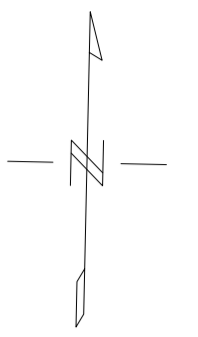

**SKEAD HOLDINGS LTD.**  
**CUNNINGHAM-B PROPERTY**  
Cunningham Township, Ontario

TOTAL FIELD MAGNETIC CONTOURED PLAN MAP  
Base Station Corrected

Posting Level: 0nT  
Field Inclination/Declination: 74degN/12degW  
Station Separation: 12.5 meters  
Total Field Magnetic Contours: 100nT

GSM-19 OVERHAUSER MAGNETOMETER/VLF v7

Receiver Operated By: Claudia Moraga  
GPS Operated By: Bruce Lavalley  
Processed by: Jason Ploeger  
Map Drawn By: C Jason Ploeger, PGeo  
January 2015



Date / Time of Issue: Tue Jun 24 15:22:58 EDT 2014


TOWNSHIP / AREA  
CUNNINGHAM

PLAN  
G-1095

ADMINISTRATIVE DISTRICTS / DIVISIONS

Mining Division  
Land Titles/Registry Division  
Ministry of Natural Resources District

Porcupine  
SUDBURY  
CHAPLEAU

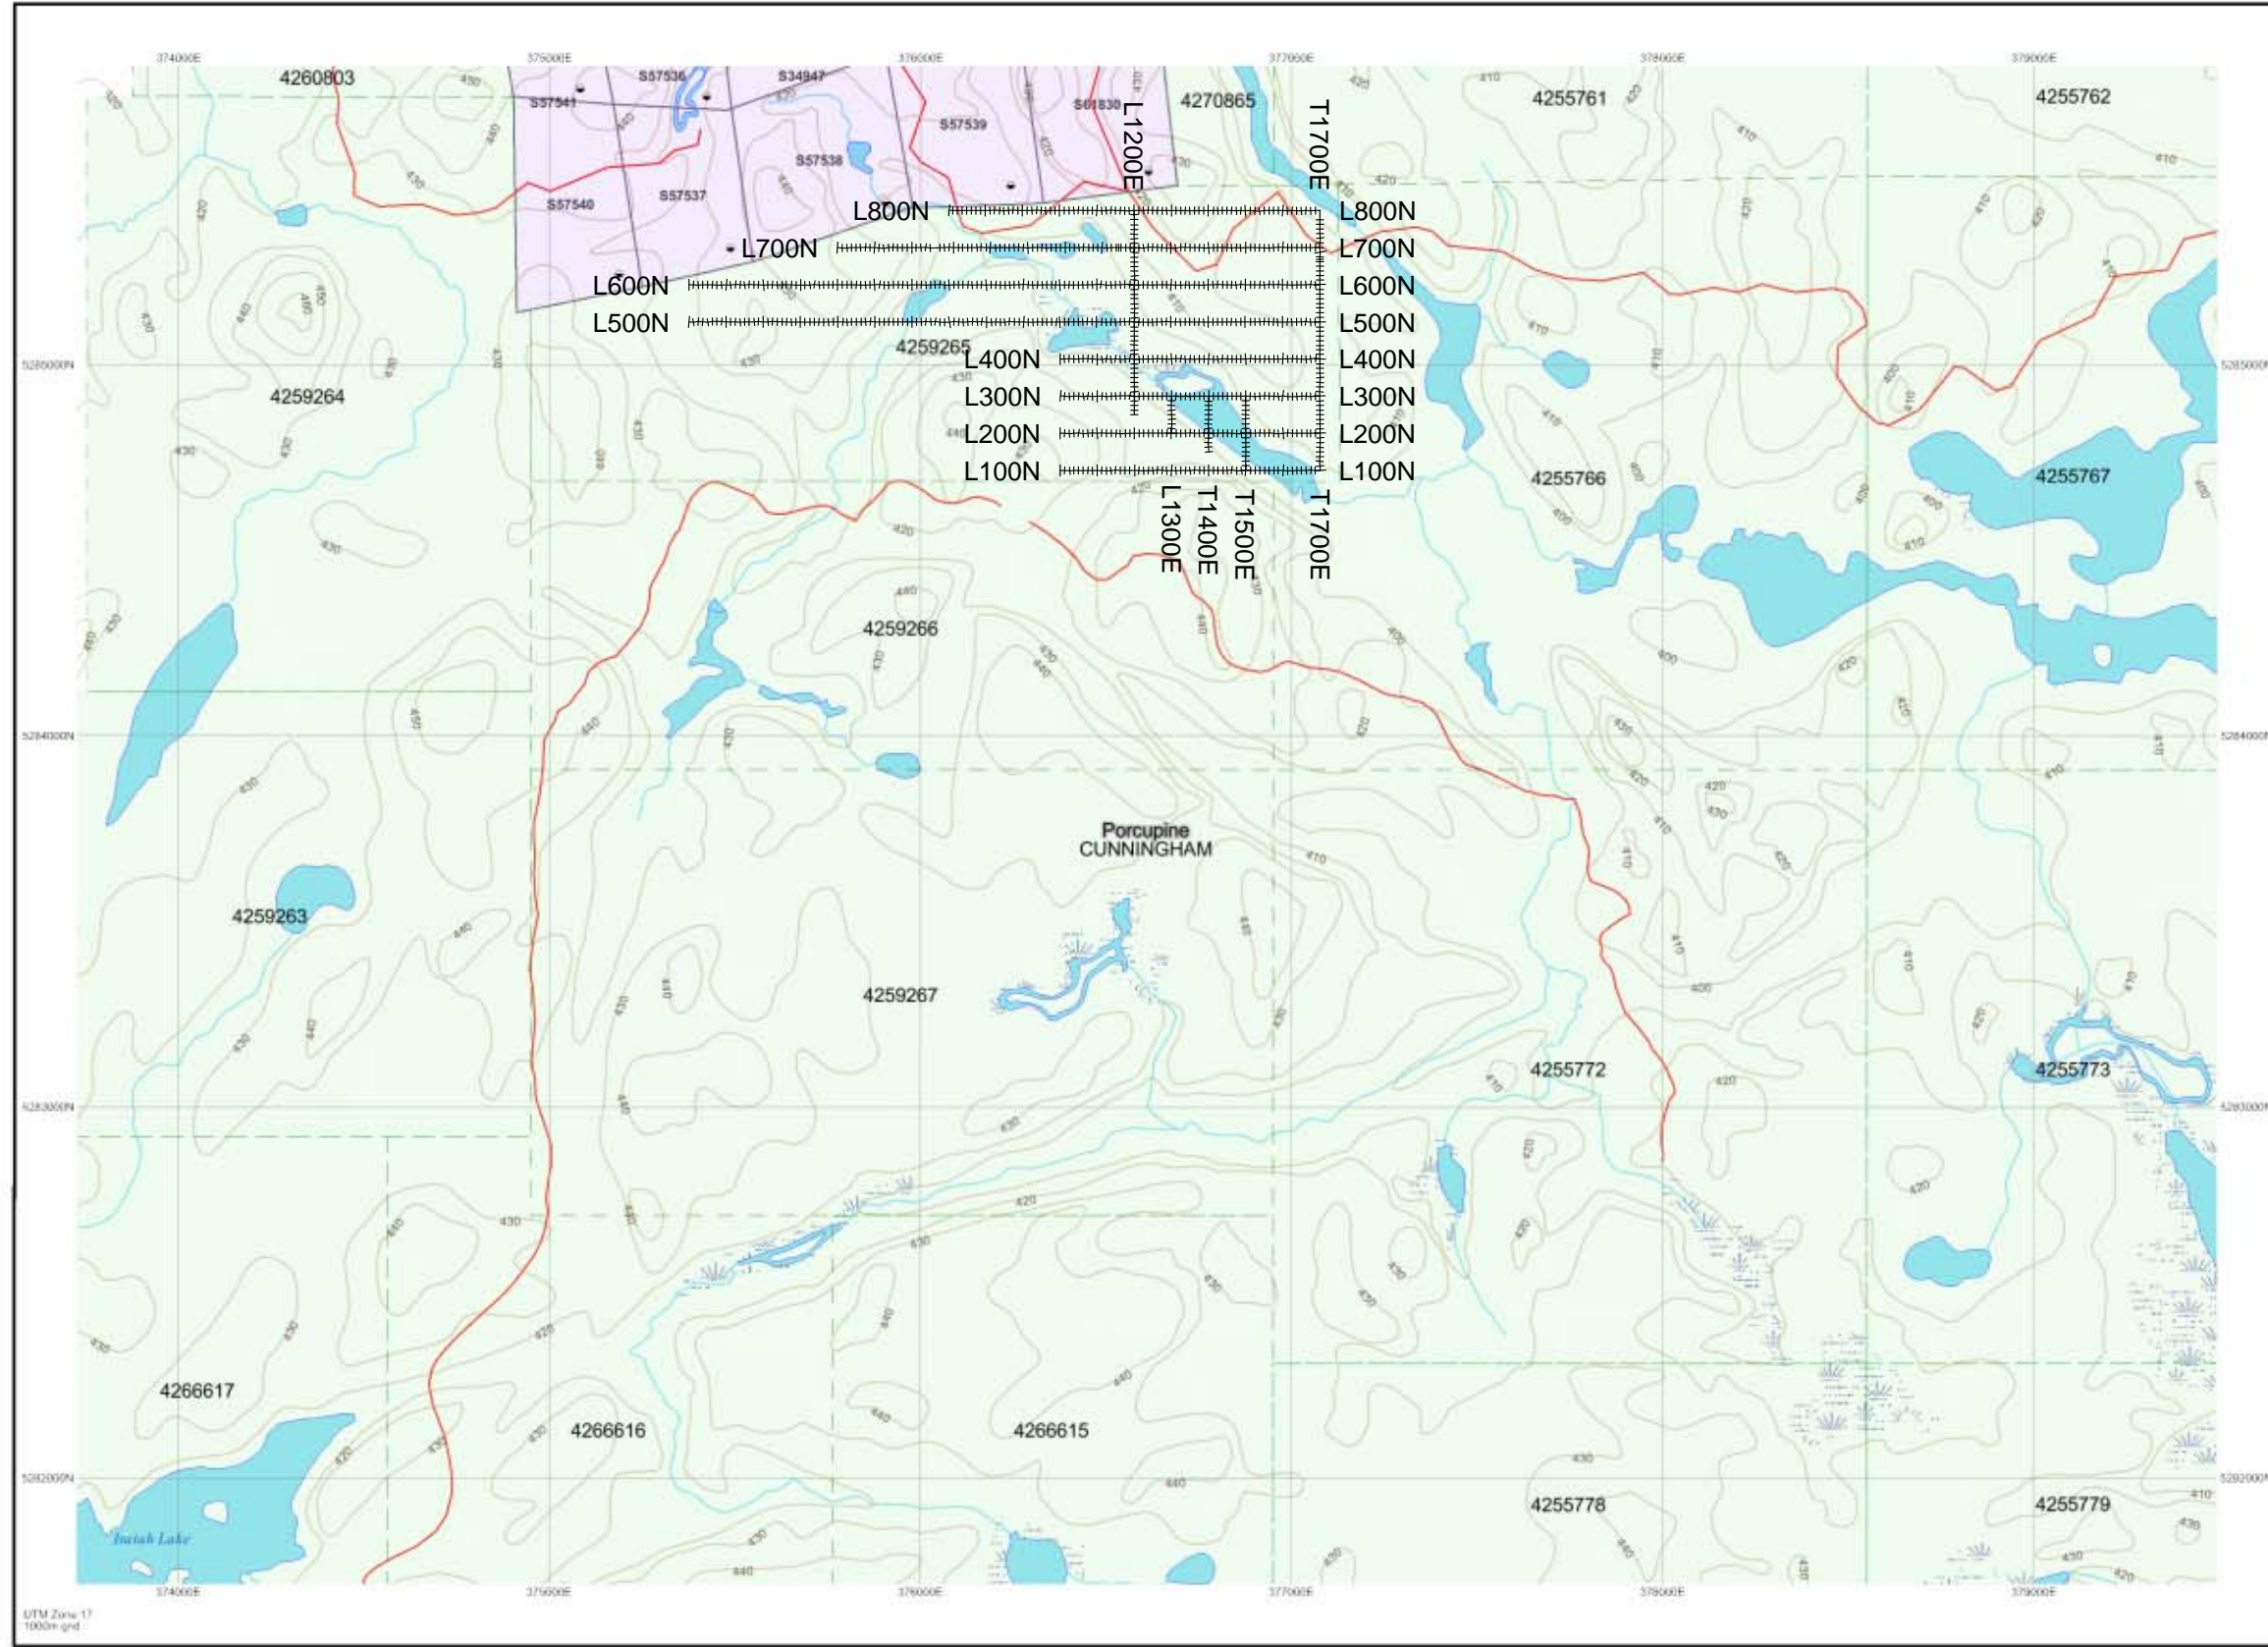

TOPOGRAPHIC

- Administrative Boundaries
- Township
- Concession Lot
- Provincial Park
- Indian Reserve
- Gift, Pt & Pile
- Contour
- Mine Shafts
- Mine Headframe
- Railway
- Road
- Trail
- Natural Gas Pipeline
- Mining
- Town

Land Tenure

- Freehold Patent
  - Surface And Mining Rights
  - Surface Rights Only
  - Mining Rights Only
- Leasehold Patent
  - Surface And Mining Rights
  - Surface Rights Only
  - Mining Rights Only
- License of Occupation
  - Uses Not Specified
  - Surface And Mining Rights
  - Surface Rights Only
  - Mining Rights Only
- Land Use Permit
- Order in Council (Not open for appeal)
- Water Power Lease Agreement

SHAW	SOLO	COPELL	
DEWEE	DEWEE	DORC	HEDRAH
GREENLAN	CUNNINGHAM	GARNET	BENTON
KAPLAN	KLAMY	FAWV	ESTHER
WAKAM	SHIPLEY	HONG KONG	EDITH

LAND TENURE WITHDRAWALS

- 1234 Areas Withdrawn from Disposition
- Mining Act Withdrawal Types
  - Surface And Mining Rights Withdrawal
  - Surface Rights Only Withdrawal
  - Mining Rights Only Withdrawal
- Order in Council Withdrawal Types
  - Surface And Mining Rights Withdrawal
  - Surface Rights Only Withdrawal
  - Mining Rights Only Withdrawal

No. IMPORTANT NOTICES



Those wishing to stake mining claims should consult with the Provincial Mining Recorders' Office of the Ministry of Northern Development and Mines for additional information on the status of the lands shown hereon. This map is not intended for navigational, survey, or land title determination purposes as the information shown on this map is compiled from various sources. Completeness and accuracy are not guaranteed. Additional information may also be obtained through the local Land Titles or Registry Office, or the Ministry of Natural Resources.

The information shown is derived from digital data available in the Provincial Mining Recorders' Office at the time of downloading from the Ministry of Northern Development and Mines web site.

General Information and Limitations  
 Contact Information:  
 Provincial Mining Recorders' Office  
 Wilket Green Mill Centre 933 Ramsey Lake Road  
 Sudbury ON P3E 8B5  
 Home Page: [www.mdm.gov.on.ca/MNDM/MINES/LANDS/Minerpage.htm](http://www.mdm.gov.on.ca/MNDM/MINES/LANDS/Minerpage.htm)

Tel Free: 1 (888) 415-2645 ext 574  
 Fax: 1 (877) 670-1444

Map Datum: NAD 83  
 Projection: UTM (6 degree)  
 Topographic Data Source: Land Information Ontario  
 Mining Land Tenure Source: Provincial Mining Recorders' Office

This map may not show unregistered land tenure and interests in land including certain patents, leases, easements, right of way, flooding rights, licences, or other forms of disposition of rights and interest from the Crown. Also certain land tenure and land uses that restrict or prohibit free entry to stake mining claims may not be illustrated.