


FOLLOW UP IP REPORT
FOR
EXPLOR RESOURCES INC.
ON
CLAIM 4220386
HOLLOWAY TOWNSHIP
LARDER LAKE MINING DIVISION
NORTHEASTERN, ONTARIO



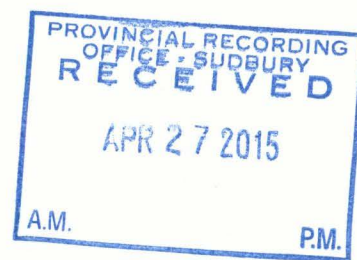

Prepared by: J. C. Grant,
April 2015

TABLE OF CONTENTS

INTRODUCTION.....1

PROPERTY LOCATION AND ACCESS..... 1

CLAIM BLOCK.....1

PERSONNEL.....1

GROUND PROGRAM.....2

VLF-EM SURVEY.....2,3

VLF-EM SURVEY RESULTS.....2,3

CONCLUSIONS AND RECOMMENDATIONS.....3

CERTIFICATE

LIST OF FIGURES: FIGURE 1, LOCATION MAP
 FIGURE 2, PROPERTY LOCATION MAP
 FIGURE 3, CLAIM MAP

APPENDICES: A: SCINTREX ENVI MAG SYSTEM

POCKET MAPS: VLF EM SURVEY 1:5000

INTRODUCTION:

The services of Exsics Exploration Limited were retained by Mr. Chris Dupont to complete a VLF-EM survey across a portion of their claim holdings in Holloway Townships of the Larder Lake Mining division in northeastern Ontario.

The purpose of the program was to test a portion of the property for a geological setting that would be considered a favorable environment for possible gold deposition as well as to meet assessment requirements on the claim block. The property is underlain by basaltic and andesitic volcanic rocks comprised of a tholeiitic suite of rocks consisting of black to dark green iron-rich basalts, massive fine grained flows and gabbroic and diabasic flows.

Initially it was assumed that the Destor-Porcupine fault zone cut across the northern sections of Marriott and Holloway Townships resulting in exploration programs concentrating of gold deposition in and along the Fault zone.

PROPERTY LOCATION AND ACCESS:

The Marriott Property is situated approximately 140 kilometers east-northeast of the City of Timmins and about 60 kilometers east of the Town of Matheson. The grid area is about 6.5 kilometers southeast of Highway 101 East and lies in the southeast section of the township.

Access to the 4 grid lines covered by this current survey is from Highway 101 East which travels from Matheson to the Quebec border. There is a good gravel road about 60 kilometers east of Matheson and just to the immediate east of Holloway Lake that provides access to the western and south central section of the grid area. Skidoos were used to access the western section of the grid area. Traveling time from Timmins to the grid is about 3 hours. Figures 1 and 2

CLAIM BLOCK:

The Explor claim group that was covered by this present survey was claim 4220386 which consists of 8 units.

Refer to Figure 3 copied from MNDM Plan Map G-3651 of Holloway Township for the positioning of the claim within the Township.

PERSONNEL:

The field crew directly responsible for the collection of all the raw data were as follows.

R. Bradshaw..... Timmins, Ontario
J. Francoeur..... Timmins, Ontario

The plotting and interpretation as well as the report were completed by J. C. Grant of Exsics Exploration Limited.



LEGEND / LEGENDE

- ⊙ National capital / Capitale nationale
- Provincial capital / Capitale provinciale
- Other populated places / Autres lieux habités
- ⊙— Trans-Canada Highway / La Transcanadienne
- Major road / Route principale
- - - International boundary / Frontière internationale
- Provincial boundary / Limite provinciale


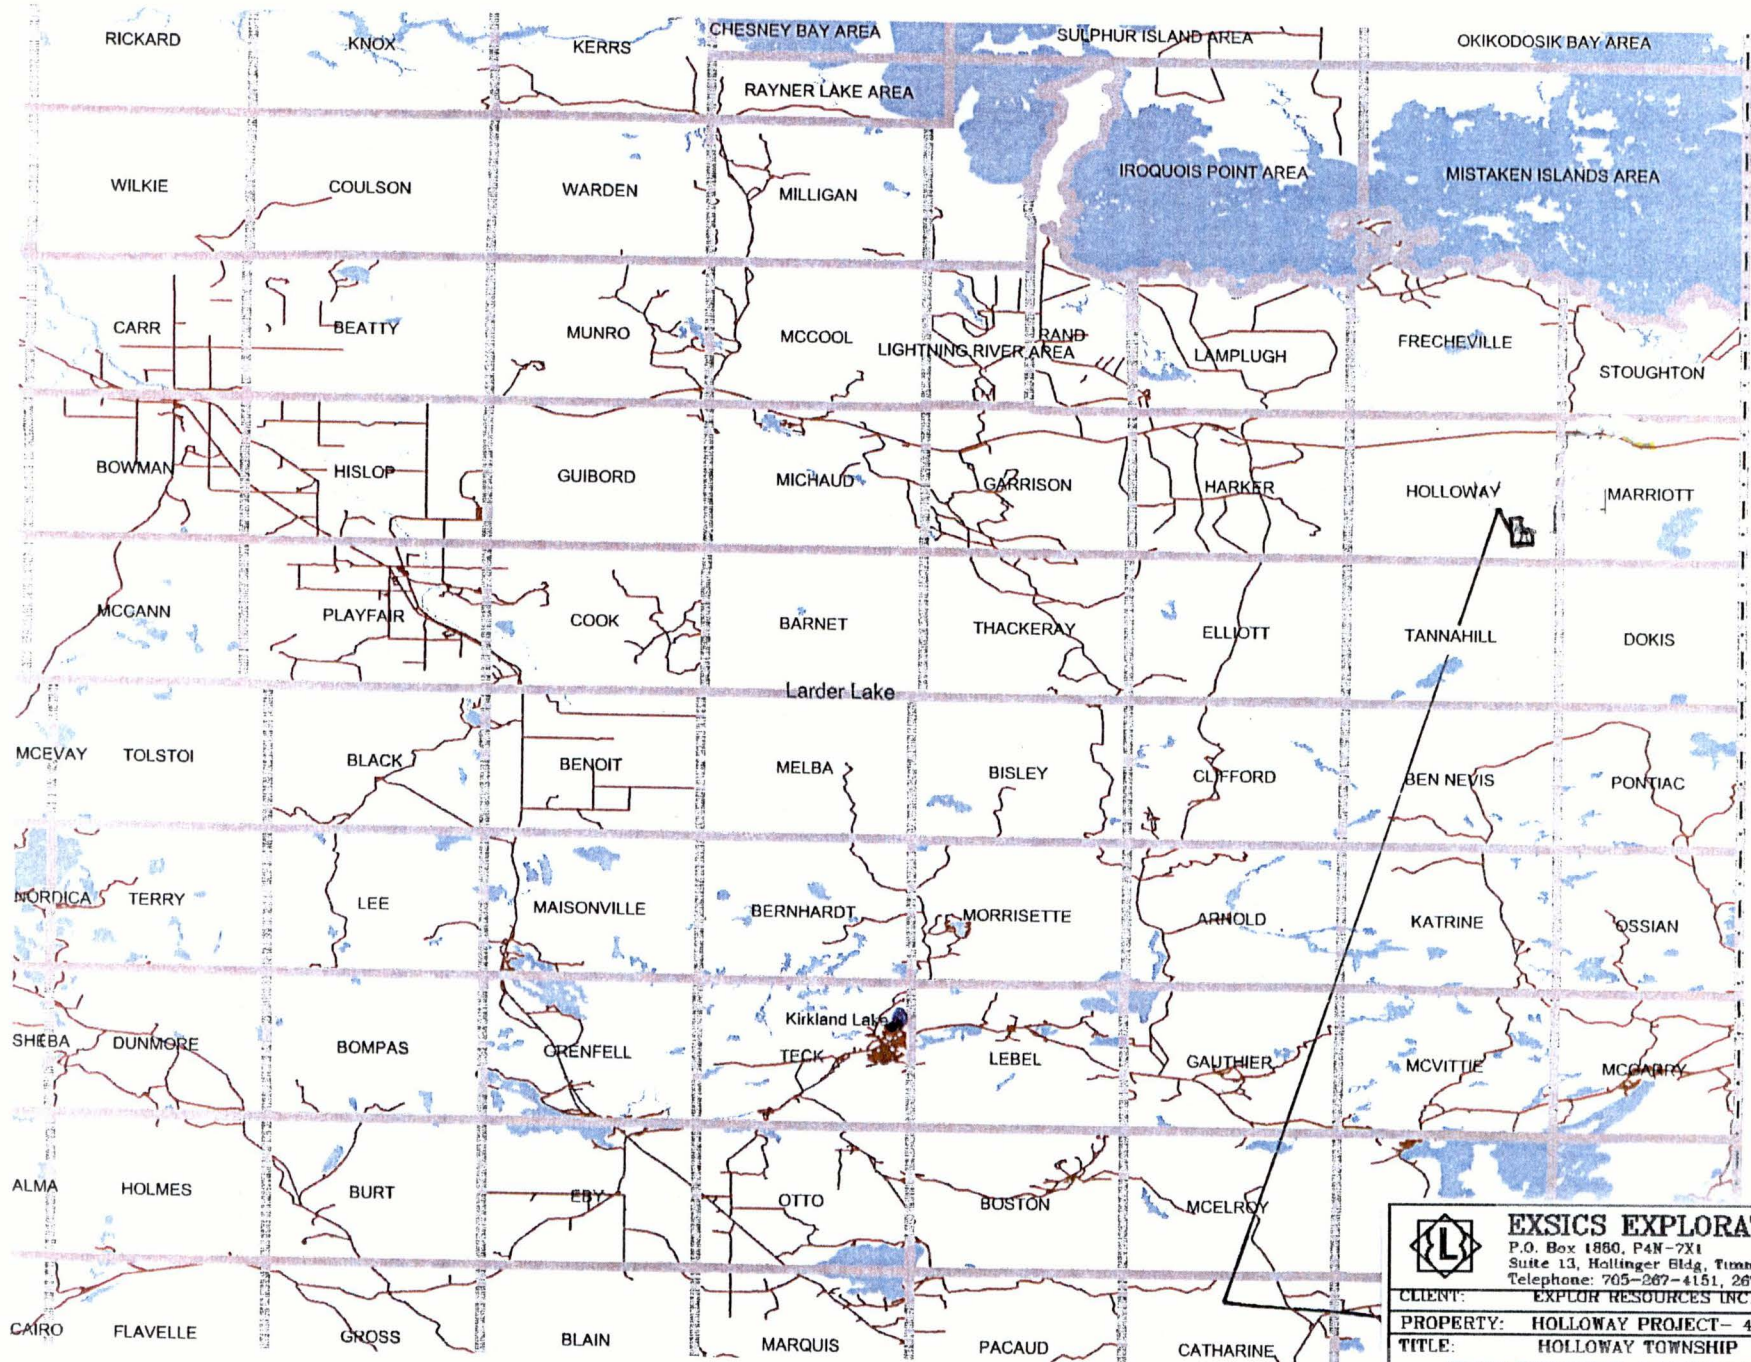
 EXSICS EXPLORATION LTD. P.O. Box 1830, P4N-2X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424		
CLIENT:	EXPLOR RESOURCES INC.	
PROPERTY:	HOLLOWAY PROJECT- 4220386	
TITLE:	HOLLOWAY TOWNSHIP	
LOCATION MAP		
Date: APR 2015	Scale: 1:600,000	NTS:
Drawn: J.C. Grant	Interp: J.C. Grant	Job No.: E-940

Fig. 1



NAD 83
5 degree grid


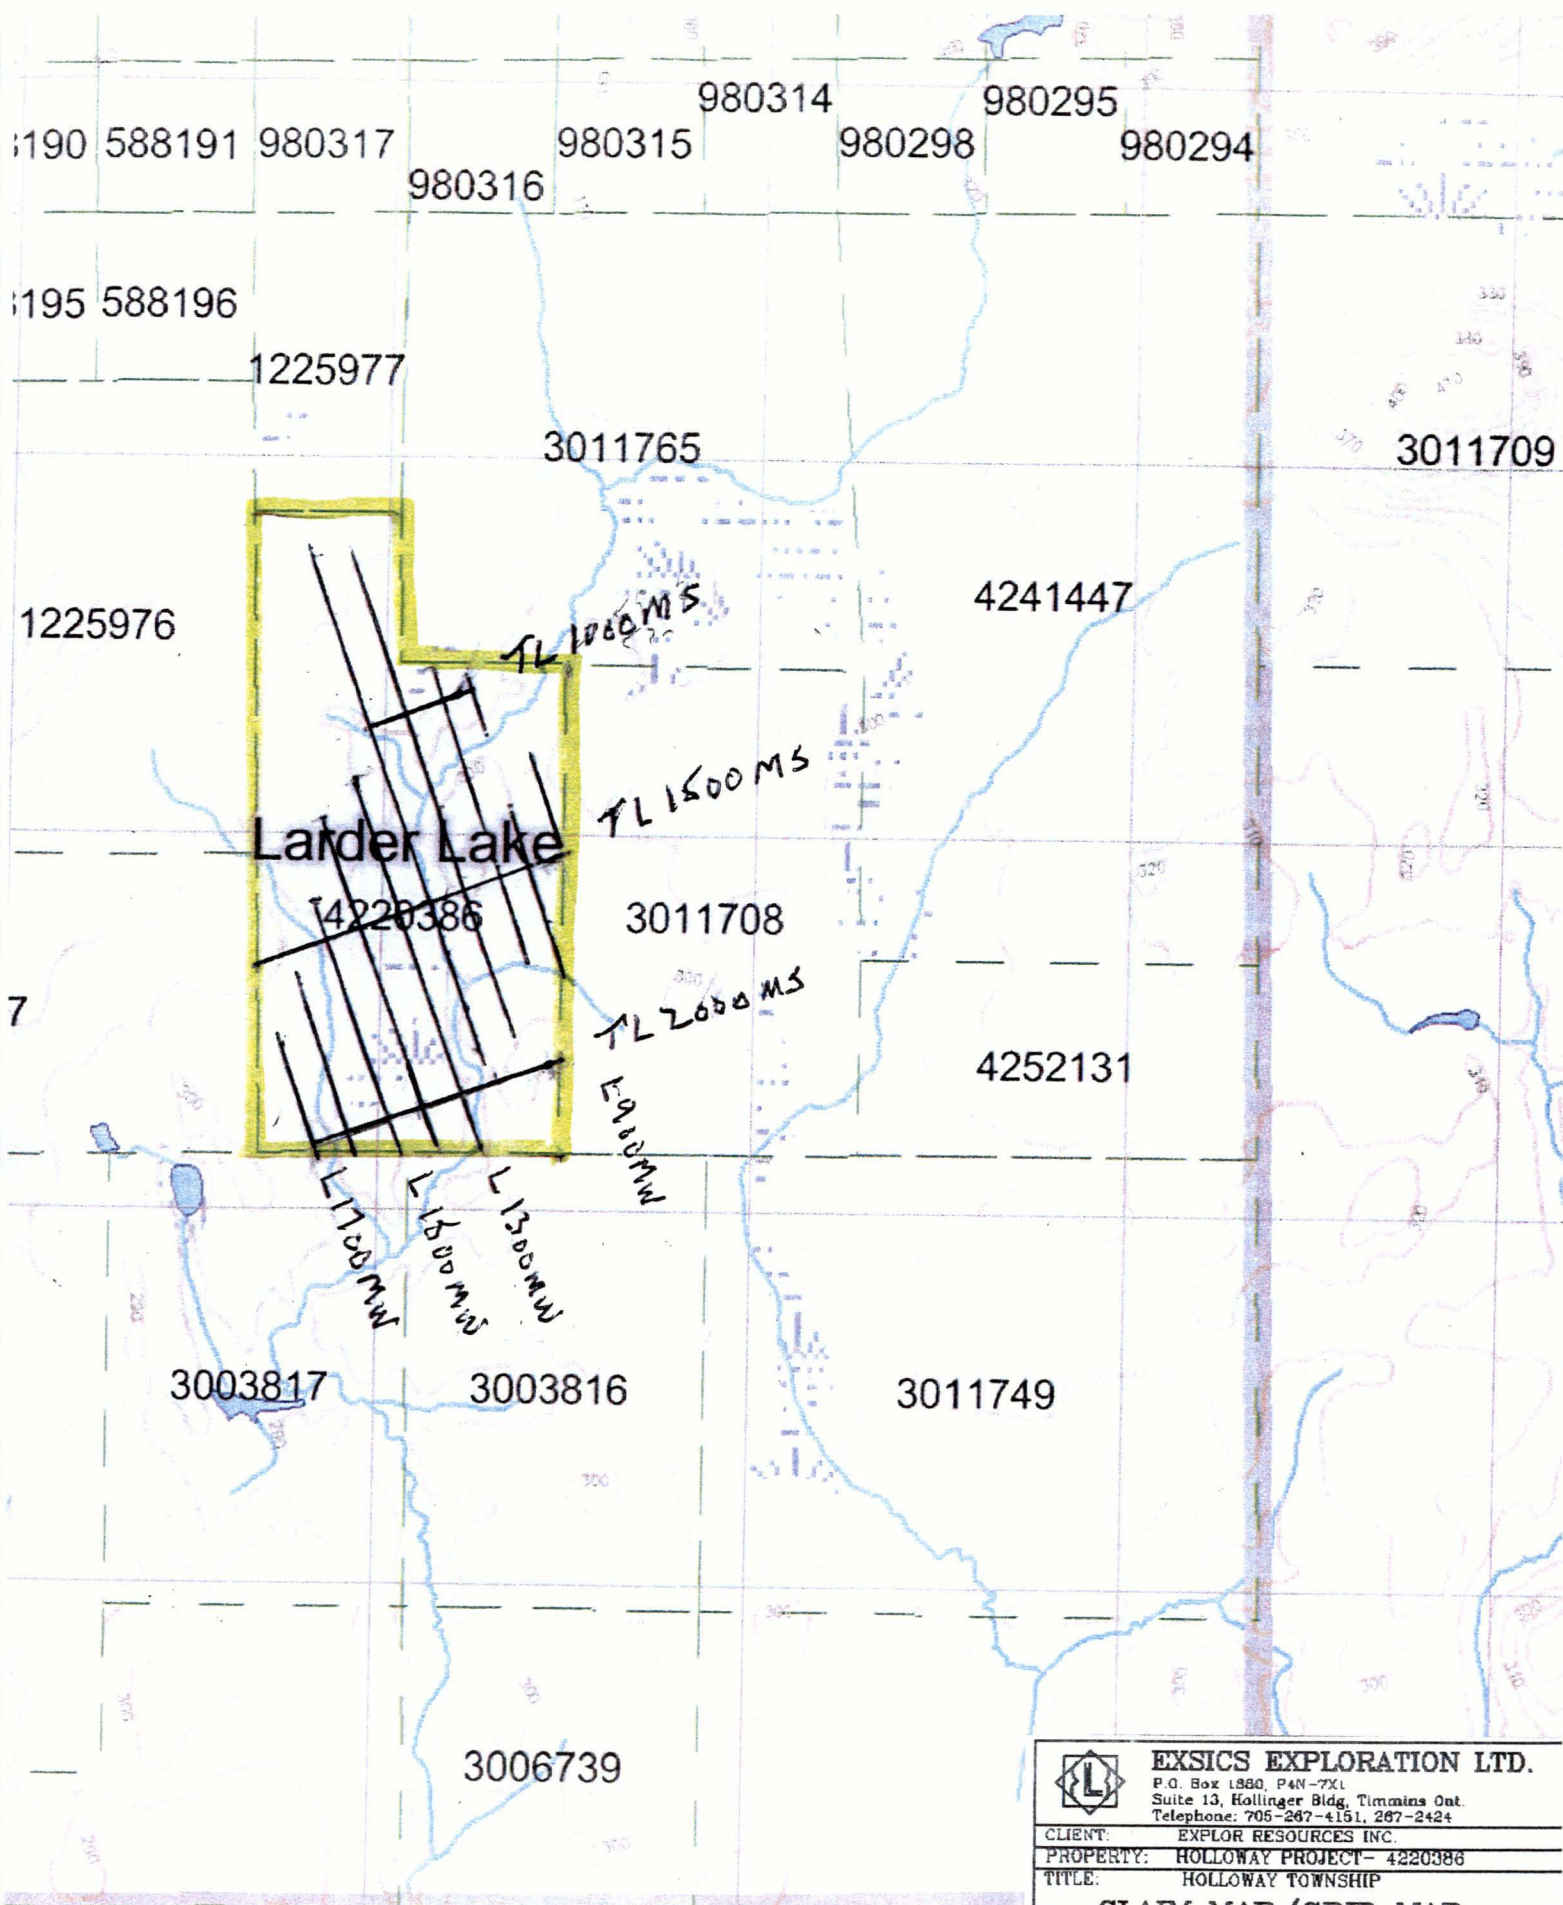
	EXSICS EXPLORATION LTD.		
	P.O. Box 1860, P4N-7X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424		
CLIENT:		EXPLOR RESOURCES INC.	
PROPERTY:		HOLLOWAY PROJECT- 4220386	
TITLE:		HOLLOWAY TOWNSHIP	
PROPERTY LOCATION MAP			
Date: APR.2015	Scale: 1:100,000	NTS:	
Drawn: J.C.Grant	Interp: J.C.Grant	Job No: E-940	

Fig. 2



	EXSICS EXPLORATION LTD.		
	P.O. Box 1980, P4N-7X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424		
CLIENT:	EXPLOR RESOURCES INC.		
PROPERTY:	HOLLOWAY PROJECT- 4220386		
TITLE:	HOLLOWAY TOWNSHIP		
CLAIM MAP/GRID MAP			
Date: APR.2015	Scale: 1:40,000	NTS: Fig. 3	
Drawn: J.C. Grant	Interp: J.C. Grant	Job No.: E-940	

GROUND PROGRAM:

The ground program was completed over a historical grid that was cut during the summer and fall of 2013. The original grid consisted of the cutting of a detailed metric grid across the claim block. This was done by first cutting a tie line, labelled 1500MS, at 065 degrees from the west boundary of claim 4220386 to the eastern edge of the claim. Cross lines were then turned off of this tie line at 100 meter intervals from line 800MW to approximately 1700MW and cut to the estimated claim boundaries of the claim block. All of these cut lines were chained with 25 meter pickets that had been metal tagged.

This original grid was then compassed and paced using hand held GPS units and was also covered by a VLF-EM survey using the Scintrex Envi Mag system. In all a total of 8.1 kilometers of grid lines were re-established and covered by the VLF survey between March 28th and April 12, 2015.

The following parameters were kept constant throughout the both surveys.

VLF-EM Survey:

Line spacing.....	100 meters
Station spacing.....	25 meters
Reading intervals.....	12.5 meters
Transmitter station.....	Cutler, Maine, 24.0Khz
Parameters measured.....	Inphase and Quadrature components Of the secondary field
Unit accuracy.....	+/- 0.5 %

Once the survey was completed the field data was plotted directly onto a base map at a scale of 1:5000. And then profiled at 1CM = +/- 20%. A copy of this profiled base map is included in the back pocket of this report.

VLF-EM SURVEY RESULTS:

The VLF-EM survey was successful in locating and outlining a number of VLF zones across the grid area. The majority of the zones outlined generally conform to the suspected strike of the geology in the area that being generally east to west.

Two of the VLF zones appear to represent strong albeit short structures that lie across lines 1200MW and 1100MW between 1000MS and 850MS and at 750MS on line 1100MW. These two structures appear to dip grid north.

Another zone of interest strikes from line 1100MW to 1200MW at 1300MS but it appears to correlate to the creek in the same area.

Another area of interest would be the zone lying between 1300MW and 1600MW but the zone is somewhat broken up between the lines and these zones lie between 1400MS and 1300MS.

The remainder of the zones at this writing are considered moderate to weak but their significance would improve should the more predominant structures prove to be of interest if they are followed up by soil sampling and or geological surveys.

CONCLUSIONS AND RECOMMENDATIONS:

The more predominant VLF zones should be followed up with a geological and or geochemical survey to better define their origins. The majority of the property appears to be covered by clays and or sand flats and with logging operations ongoing in the area, the access during the summer months would allow for a better survey period.

Respectfully submitted




J. C. Grant
April 2015.

CERTIFICATION

I, John Charles Grant, of 108 Kay Crescent, in the City of Timmins, Province of Ontario, hereby certify that:

- 1). I am a graduate of Cambrian College of Applied Arts and Technology, 1975, Sudbury Ontario Campus, with a 3 year Honors Diploma in Geological and Geophysical Technology.
- 2). I have worked subsequently as an Exploration Geophysicist for Teck Exploration Limited, (5 years, 1975 to 1980), and currently as Exploration Manager and Chief Geophysicist for Exsics Exploration Limited, since May, 1980.
- 3). I am a member in good standing of the Certified Engineering Technologist Association, (CET), since 1984.
- 4). I am in good standing as a Fellow of the Geological Association of Canada, (FGAC), since 1986.
- 5). I have been actively engaged in my profession since the 15th day of May, 1975, in all aspects of ground exploration programs including the planning and execution of field programs, project supervision, data compilation, interpretations and reports.
- 6). I have no specific or special interest nor do I expect to receive any such interest in the herein described property. I have been retained by the property holders and or their Agents as a Geological and Geophysical Consultant and Contract Manager.

John Charles Grant, CET., FGAC.

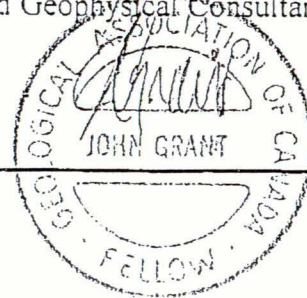

APPENDIX A

SCINTREX

ENVI-MAG Environmental Magnetometer/Gradiometer

Locating Buried Drums and Tanks?

The ENVI-MAG is the solution to this environmental problem. ENVI-MAG is an inexpensive, lightweight, portable "WALKMAG" which enables you to survey large areas quickly and accurately.

ENVI-MAG is a portable, proton precession magnetometer and/or gradiometer, for geotechnical, archaeological and environmental applications where high production, fast count rate and high sensitivity are required. It may also be used for other applications, such as mineral exploration, and may be configured as a total-field magnetometer, a vertical gradiometer or as a base station.

The ENVI-MAG

- easily detects buried drums to depths of 10 feet or more
- more sensitive to the steel of a buried drum than EM or radar
- much less expensive than EM or radar
- survey productivity much higher than with EM or radar

Features and Benefits

"WALKMAG" Magnetometer/Gradiometer

The "WALKMAG" mode of operation (sometimes known as "Walking Mag") is user-selectable from the keyboard. In this mode, data is acquired and recorded at the rate of 2 readings per second as the operator walks at a steady pace along a line. At desired intervals, the operator "triggers" an event marker by a single key stroke, assigning coordinates to the recorded data.

True Simultaneous Gradiometer

An optional upgrade kit is available to configure ENVI-MAG as a gradiometer to make true, simultaneous gradiometer measurements. Gradiometry is useful for geotechnical and archaeological surveys where small near surface magnetic targets are the object of the survey.

Selectable Sampling Rates

0.5 second, 1 second and 2 second reading rates user selectable from the keyboard.

Main features include:

- select sampling rates as fast as 2 times per second
- "WALKMAG" mode for rapid acquisition of data
- large internal, expandable memory
- easy to read, large LCD screen displays data both numerically and graphically
- ENVIMAP software for processing and mapping data

ENVI-MAG comprises several basic modules; a lightweight console with a large screen alphanumeric display and high capacity memory, a staff mounted sensor and sensor cable, rechargeable battery and battery charger, RS-232 cable and ENVIMAP processing and mapping software.

For gradiometry applications an upgrade kit is available, comprising an additional processor module for installation in the console, and a second sensor with a staff extender.

Large-Key Keypad


The large-key keypad allows easy access for gloved-hands in cold-weather operations. Each key has a multi-purpose function.



Front panel of ENVI-MAG showing a graphic profile of data and large-key keypad

Large Capacity Memory

ENVI-MAG with standard memory stores up to 28,000 readings of total field measurements, 21,000 readings of gradiometry data or 151,000 readings as a base station. An expanded memory option is available which increases this standard capacity by a factor of 5.

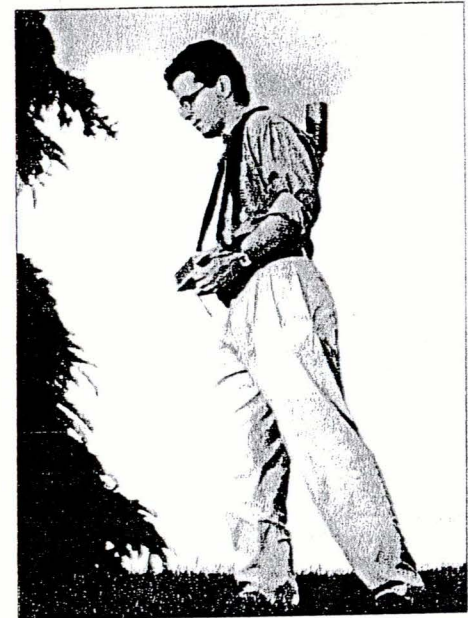

ENVI-MAG Proton Magnetometer in operation

For base station applications a Base Station Accessory Kit is available so that the sensor and staff may be converted into a base station sensor.

Easy Review of Data




For quality of data and for a rapid analysis of the magnetic characteristics of the survey line, several modes of review are possible. These include the measurements at the last four stations, the ability to scroll through any or all previous readings in memory, and a graphic display of the previous data as profiles, line by line. This feature is very useful for environmental and archaeological surveys.

Highly Productive

The "WALKMAG" mode of operation acquires data rapidly at close station intervals, ensuring high-definition results. This increases survey productivity by a factor of 5 when compared to a conventional magnetometer survey.

"Datacheck" Quality Control of Data

"Datacheck" provides a feature wherein at the end of each survey line, data may be reviewed as a profile on ENVI-MAG's screen. Datacheck confirms that the instrument is functioning correctly and

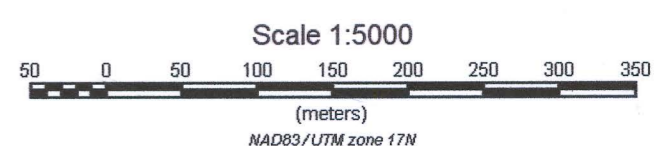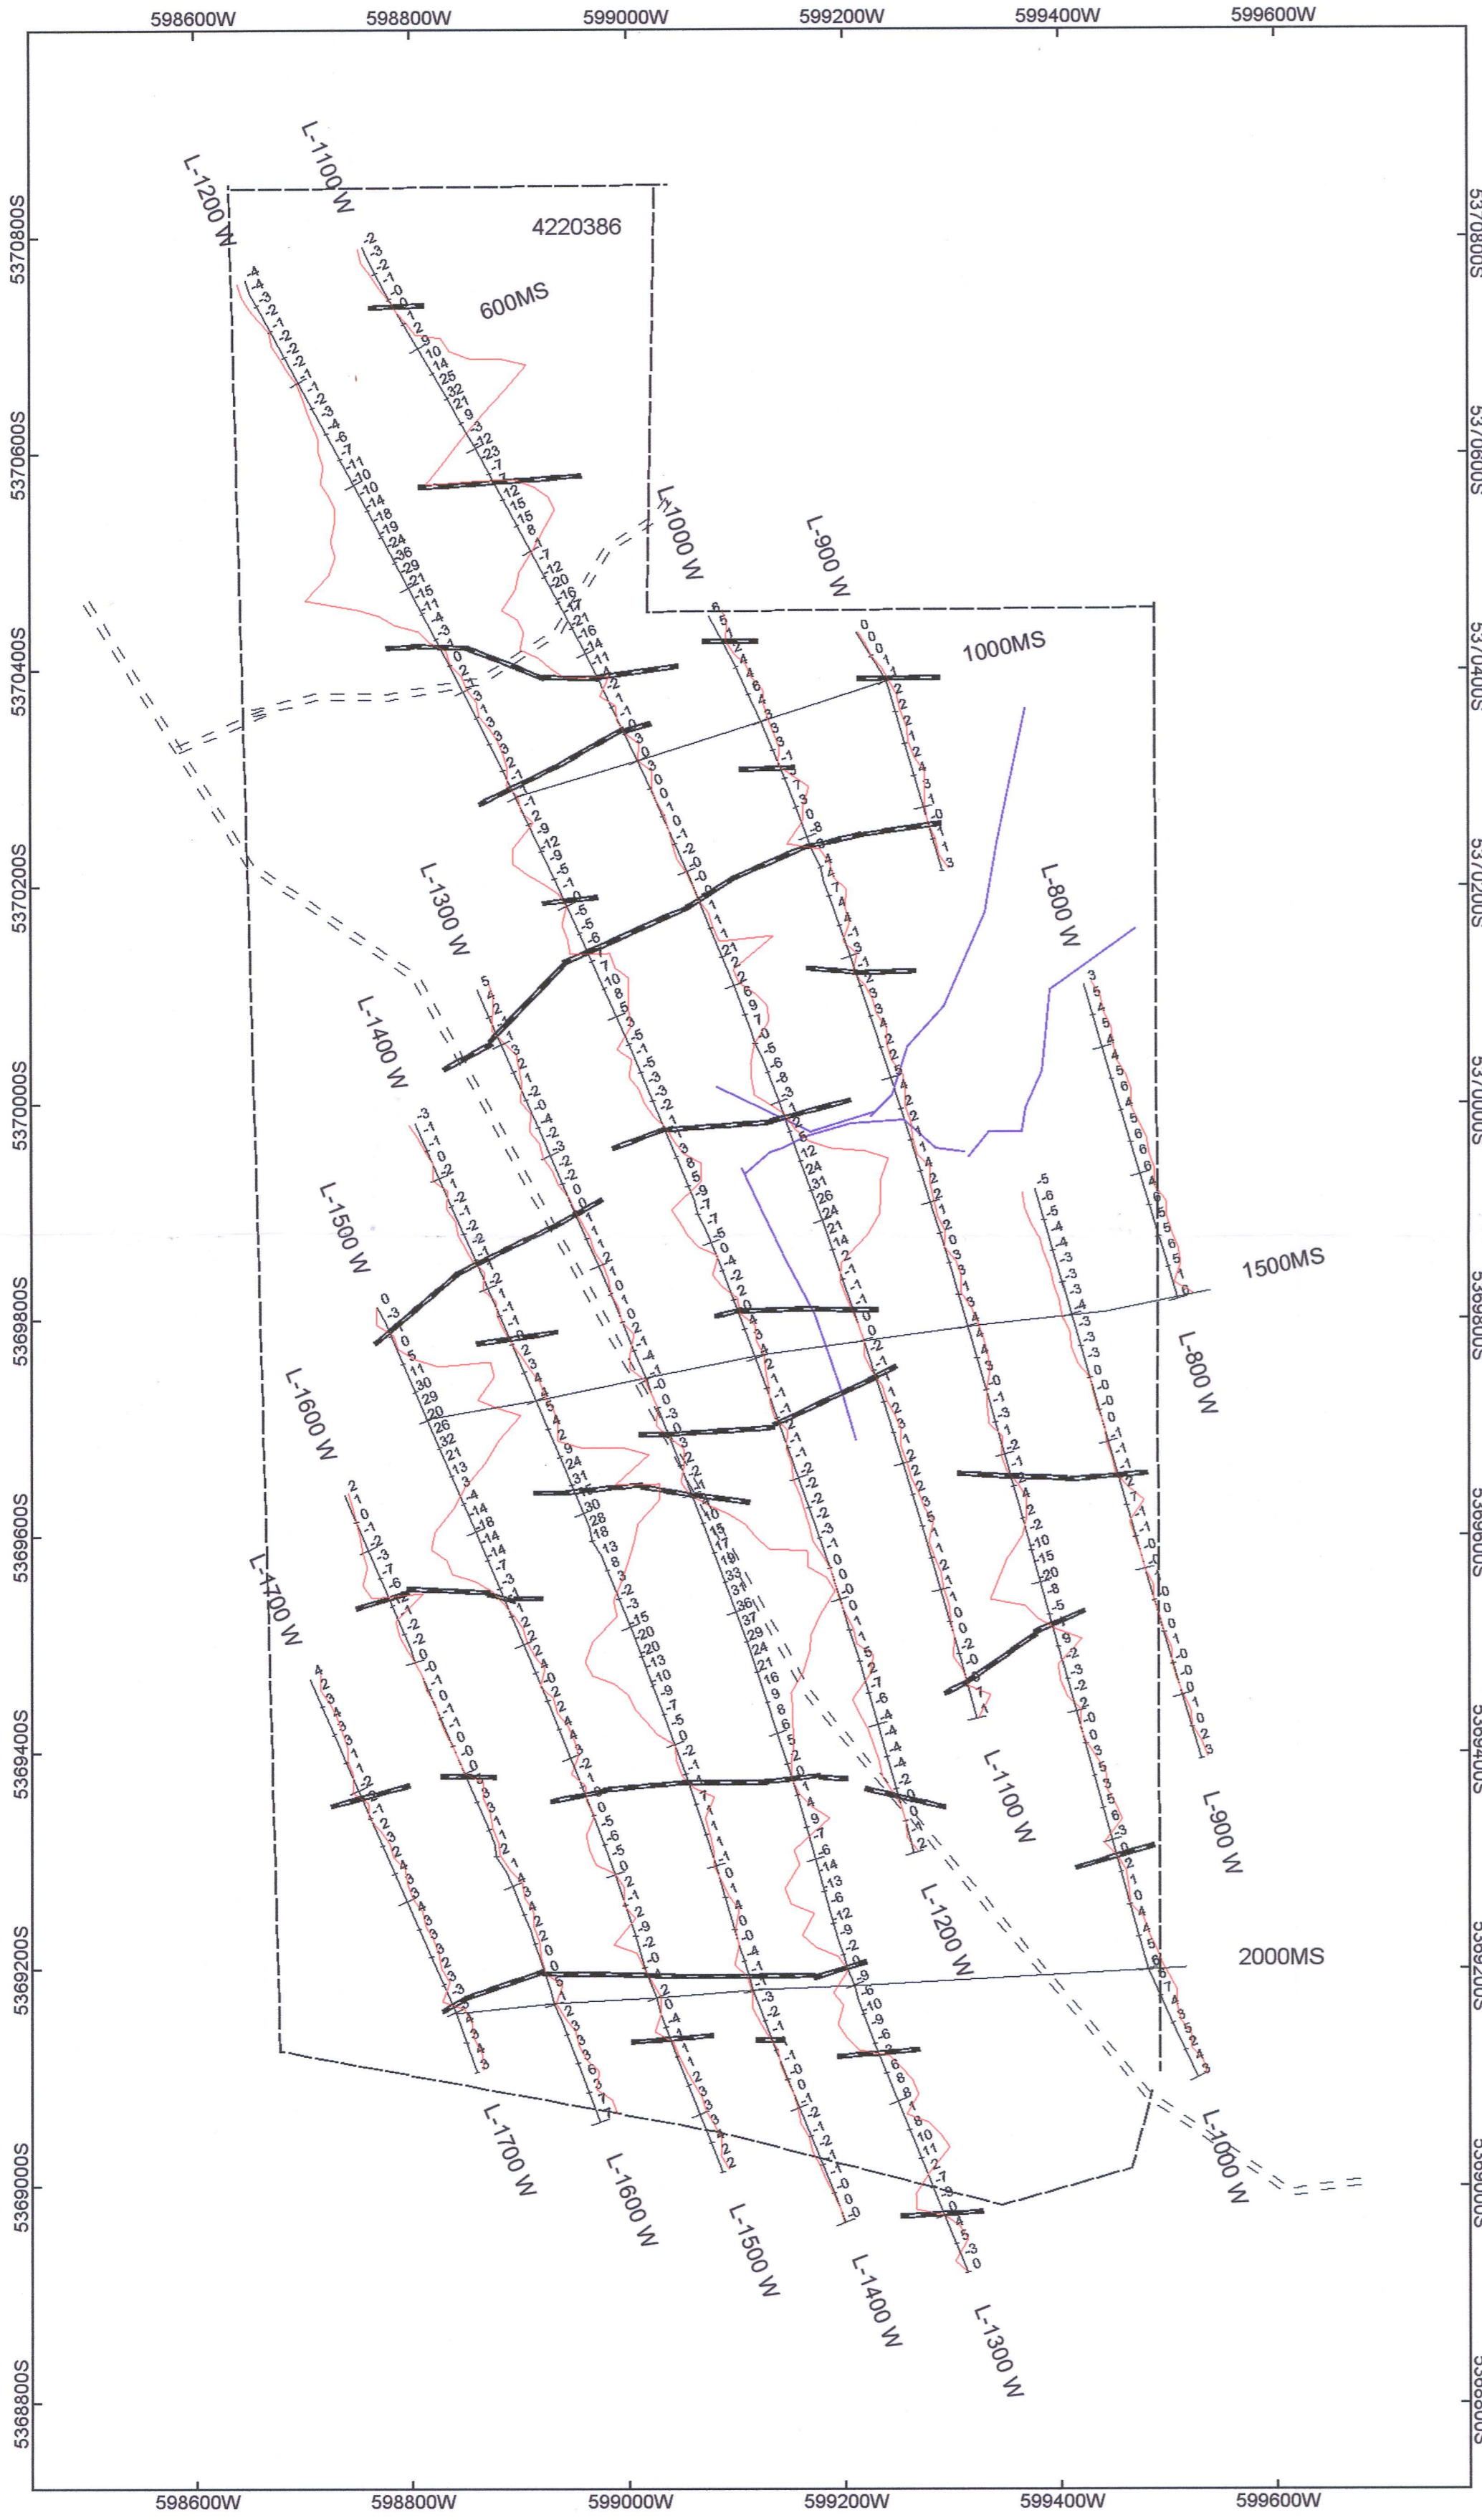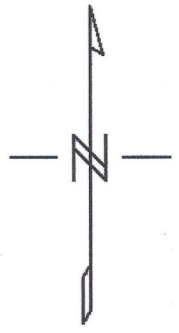

EXPLOR RESOURCES INC.
HOLLOWAY PROJECT, CLAIM 4220386
HOLLOWAY TOWNSHIP
VLF-EM SURVEY CUTLER MAINE 24.0kHz SCINTREX ENVI SYSTEM
PROFILED: 1CM +/- 20%
APRIL 2015 EXSICS EXPLORATION LIMITED E-940