

We are committed to providing [accessible customer service](#).
If you need accessible formats or communications supports, please [contact us](#).

Nous tenons à améliorer [l'accessibilité des services à la clientèle](#).
Si vous avez besoin de formats accessibles ou d'aide à la communication, veuillez [nous contacter](#).

Work Assessment Report
on the
JUNIOR LAKE PROPERTY
2015 Winter Diamond Drill Program
(B4-7 Deposit)

Falcon Lake Area
Thunder Bay North Mines and Minerals Division
Ontario

NTS 52I/08 and 42L/05

Landore Resources Canada Inc.
555 Central Ave., Suite #1
Thunder Bay, Ontario, P7B 5R5

Michele Tuomi, P.Geo

January 26, 2017
Thunder Bay, Ontario

Table of Contents

| | | |
|------|---|------|
| 1 | SUMMARY..... | 1-1 |
| 2 | INTRODUCTION..... | 2-1 |
| 3 | PROPERTY DESCRIPTION AND LOCATION..... | 3-1 |
| 4 | ACCESSIBILITY..... | 4-1 |
| 5 | HISTORY..... | 5-1 |
| 6 | GEOLOGICAL SETTING..... | 6-1 |
| 6.1 | Regional Geology..... | 6-1 |
| 6.2 | Local and Property Geology..... | 6-3 |
| 7 | MINERALIZATION..... | 7-1 |
| 7.1 | B4-7 Deposit – Nickel, Copper, Cobalt, PGE, Gold..... | 7-1 |
| 7.2 | Mineralization Elsewhere on the Property..... | 7-1 |
| 8 | EXPLORATION..... | 8-1 |
| 9 | SURVEY DESIGN AND PROCEDURES..... | 9-6 |
| 9.1 | 2015 Winter Drilling Program (B4-7 Deposit)..... | 9-6 |
| 9.2 | Diamond Drilling Operations..... | 9-4 |
| 9.3 | Down-hole Surveys and Deviation..... | 9-5 |
| 9.4 | Drill Core Logging Procedures..... | 9-5 |
| 10 | SAMPLING METHOD AND APPROACH..... | 10-1 |
| 11 | SAMPLE PREPARATION, ANALYSES AND SECURITY..... | 11-1 |
| 11.1 | ALS Chemex Laboratories Analytical Procedures..... | 11-1 |
| 11.2 | Accurassay Laboratories Analytical Procedures..... | 11-3 |
| 12 | DATA VERIFICATION..... | 12-1 |
| 12.1 | Quality Control and Quality Assurance..... | 12-1 |
| 13 | INTERPRETATION AND CONCLUSIONS..... | 13-1 |
| 14 | RECOMMENDATIONS..... | 14-1 |
| 15 | REFERENCES..... | 15-1 |
| 16 | SIGNATURE PAGE..... | 16-1 |
| 17 | CERTIFICATE OF QUALIFIED PERSON..... | 17-1 |

Figures

| | |
|---|-----|
| FIGURE 3-1: JUNIOR LAKE PROPERTY LOCATION..... | 3-2 |
| FIGURE 3-2: JUNIOR LAKE PROPERTY LEASES AND CLAIMS..... | 3-3 |
| FIGURE 6-1: JUNIOR LAKE REGIONAL GEOLOGY..... | 6-2 |

Tables

| | |
|---|-----|
| TABLE 3-1: LANDORE MINERAL CLAIMS (100% INTEREST)..... | 3-4 |
| TABLE 3-2: LANDORE LEASES (100% INTEREST) | 3-5 |
| TABLE 9-1: SUMMARY OF DRILLING CAMPAIGNS AT THE JUNIOR LAKE PROPERTY | 9-3 |
| TABLE 9-2: SUMMARY OF 2015 WINTER DRILLING (B4-7 DEPOSIT)..... | 9-4 |

Appendices

| | |
|-------------|---|
| Appendix A: | Map 1: Drill hole location plan B4-7 Deposit (scale 1:2,000) Map 2: Drill hole locations with first derivative magnetics B4-7 Deposit (scale 1:2,000) |
| Appendix B: | Cross-sections: L225W, L200W, L00E, L25E, L75E, L100E (scale 1:500) |
| Appendix C: | Diamond drill logs (0411-360, 0412-367, 0412-369 to 0412-385, 0412-407, 0412-411, 0412-413, 0412-415, 0412-416, 0412-420 to 0412-424, 0412-426, 0412-429, 0412-439, 0412-449, 0412-450, 0412-453, 0414-503, 0415-505 to 0415-512) Sampled intervals and assay results |
| Appendix D: | Assay certificates |
| Appendix E: | Geological legend |
| Appendix F: | Invoices and supporting financial documentation |

1 SUMMARY

The Junior Lake property is located approximately 230 kilometres north-northeast of the city of Thunder Bay, Ontario, within the central portion of the Caribou-O'Sullivan Greenstone Belt. The property is host to two NI 43-101 compliant mineral resources – the B4-7 Ni-Cu-Co-PGE deposit and the VW Ni deposit, located 3 kilometres apart. Other occurrences of Ni-Cu-PGE, Cu, Cu-Zn, Cr, Li and Au are known on the property.

This report covers the winter 2015 drilling program conducted on the B4-7 deposit in the central portion of the Junior Lake property. Drilling followed up on results from the fall 2014 drilling program which confirmed a down dip extension of the main B4-7 massive sulphide zone 140 metres below the existing B4-7 resource on line 00 as well as intersecting high grade Alpha zone platinum group element (PGE) mineralisation. During February to March 2015, a total of 8 drill holes (0415-505 to 0415-512) for 2,590 metres were drilled, logged and sampled. In addition, relogging and resampling of previously drilled core took place to identify additional palladium enriched Alpha Zone mineralisation within the B4-7 deposit.

Drilling confirmed the continuity of the Alpha Zone over a distance of 700 metres located sub-parallel and immediately adjacent to the B4-7 massive sulphide zone. Additionally, drilling further validated the Exploration Target immediately west of the B4-7 deposit, successfully intersecting B4-7 style massive sulphide mineralisation in drill-hole 0415-510. The Exploration Target, identified in the 2013 B4-7 National Instrument 43-101 (NI 43-101) compliant resource estimate, is located immediately along strike to the west of the B4-7 resource and contains a potential 1.5Mt to 2.0Mt of sulphide mineralisation similar in grade to the B4-7 deposit (NiEq 1.24%).

Mineralized intersections of winter 2015 drilling include:

- DDH 0415-506: 8.50 metres at 0.33% Ni, 0.14% Cu, 0.03% Co, 0.61g/t Pt, 2.46g/t Pd
Including 1.00 metre at 0.28% Ni, 0.18% Cu, 0.02% Co, 3.03g/t Pt, 9.56g/t Pd
- DDH 0415-506: 4.94 metres at 0.07% Ni, 0.06% Cu, 0.01% Co, 0.37g/t Pt, 3.72g/t Pd
- DDH 0415-507: 6.50 metres at 0.10% Ni, 0.02% Cu, 0.01% Co, 0.3g/t Pt, 3.20g/t Pd
Including 1.50 metres at 0.02% Ni, 0.85g/t Pt, 10.15g/t Pd
- DDH 0415-509 : 3.17 metres at 0.30% Ni, 0.04% Cu, 0.01% Co, 0.13g/t Pt, 1.46g/t Pd
- DDH 0415-509 : 1.42 metres at 0.08% Ni, 0.05% Cu, 0.01% Co, 0.34g/t Pt, 2.44g/t Pd
- DDH 0415-509 : 3.16 metres at 0.51% Ni, 0.47% Cu, 0.05% Co, 0.12g/t Pt, 0.91g/t Pd
- DDH 0415-510 : 5.00 metres at 0.43% Ni, 0.13% Cu, 0.02% Co, 0.18g/t Pt, 1.74g/t Pd
- DDH 0415-510 : 0.61 metres at 1.37% Ni, 0.05% Cu, 0.06% Co, 0.10g/t Pt, 3.41g/t Pd
- DDH 0415-510 : 1.00 metre at 0.46% Ni, 1.25% Cu, 0.05% Co, 0.08g/t Pt, 0.33g/t Pd
- DDH 0415-510 : 3.53 metres at 0.79% Ni, 0.35% Cu, 0.06% Co, 0.11g/t Pt, 0.86g/t Pd
- DDH 0415-510 : 3.92 metres at 0.79% Ni, 0.48% Cu, 0.06% Co, 0.16g/t Pt, 0.57g/t Pd
- DDH 0415-510 : 0.36 metres at 0.29% Ni, 3.42% Cu, 0.05% Co, 0.02g/t Pt, 0.34g/t Pd

The B4-7 combined open pit and underground NI 43-101 compliant resource is 2,695,000 tonnes at 1.24% Nickel equivalent (NiEq) for 33,248 tonnes of contained metal, all within the Indicated

category (2013 Mineral Resource estimate and a NI 43-101 Technical Report on the B4-7 Deposit, RPA, Toronto, Canada).

The Alpha Zone mineralisation was not included in this resource due to insufficient drilling along strike. However, a review of Alpha style mineralisation intercepts in drilling completed since then has established that the Alpha Zone is far more significant than previously determined. Current drilling this campaign has been successful in further establishing the continuity of the PGE enriched Alpha Zone for 700 metres from line 350W to 350E.

Follow-up drilling is required to further establish continuity of the high grade Alpha PGE zone in the B4-7 deposit, and to bring the 'Exploration Target' up to inferred status within the NI 43-101-compliant B4-7 resource. The delineation of the Exploration Target and Alpha Zone has the potential to add significant tonnage to the existing B4-7 resource.

The winter 2015 exploration drilling program included program preparation, 2,590 metres of NQ size diamond drilling, assaying, and geological analysis of results. The total amount from this exploration program claimed for assessment credit is \$720,798.56.

2 INTRODUCTION

This report and accompanying documentation presents the results of the winter 2015 drilling program conducted on Landore Resources Canada Inc.'s Junior Lake property. The Junior Lake property is located approximately 230 kilometres north-northeast of the city of Thunder Bay, Ontario, within the central portion of the Caribou-O'Sullivan Greenstone Belt. It is host to several PGE-Cu-Ni, Cu, Cu-Zn, Li, Au, and Ag occurrences. In the vicinity of the winter 2015 drilling program, the property hosts two NI 43-101 compliant nickel deposits – the B4-7 Ni-Cu-Co-PGE deposit and the VW Ni deposit, located three kilometres apart.

The winter 2015 drilling program was conducted on the B4-7 Ni-Cu-Co-PGE deposit. During this drilling program a total of 8 drill holes (0415-505 to 0415-512) for 2,590 metres were drilled, logged and sampled. In addition, relogging and resampling of previously drilled core took place to identify additional palladium enriched Alpha Zone mineralisation within the B4-7 deposit.

Drilling confirmed the continuity of the Alpha Zone over a distance of 700 metres located sub-parallel and immediately adjacent to the B4-7 massive sulphide zone. Additionally, drilling further validated the Exploration Target immediately west of the B4-7 deposit, successfully intersecting B4-7 style massive sulphide mineralisation in drill-hole 0415-510. The Exploration Target, identified in the 2013 B4-7 National Instrument 43-101 (NI 43-101) compliant resource estimate, is located immediately along strike to the west of the B4-7 resource and contains a potential 1.5Mt to 2.0Mt of sulphide mineralisation similar in grade to the B4-7 deposit (NiEq 1.24%).

Base metals, PGE and gold assaying were undertaken by ALS-Chemex of Vancouver, British Columbia, and Accurassay of Thunder Bay, Ontario.

This report is submitted to the Ontario Ministry of Northern Development and Mines Geoscience Assessment Office to claim assessment credit.

3 PROPERTY DESCRIPTION AND LOCATION

The Junior Lake property is located approximately 230 km north-northeast of Thunder Bay, Ontario, and approximately 75 km east-northeast of the village of Armstrong, Ontario (Figure 2-1). The centre of the property is located at 87°59'4"W longitude and 50°23'9"N latitude; NAD83 UTM coordinates Zone 16, 430,000E and 5,580,000N. The property area is within the NTS 1:50,000 Jackfish Lake and Toronto Lake topographic map sheets NTS 52I/08 and 44L/05, respectively. The Junior Lake property claims and leases are located on the Falcon Lake, Junior Lake, Toronto Lake, Kapikotongwa River, Summit Lake, and Willet Lake claim maps (Thunder Bay Mining Division areas NTS 52I/08NE and SE, 42L/05NW, SE and SW).

LAND TENURE

Landore's Junior Lake property consists of 95 mineral claims (1,145 units) and four mining leases totaling 3,793 hectares (Tables 3-1 and 3-2, Figure 3-2).

Landore held a 100% interest in claims TB1077140 to TB1077142, TB1217179 to TB1217181, and TB1233556 and TB1233557, subject to a 2% net smelter return (NSR) royalty held by Wing Resources Inc. The above claims, except TB1077140, have been taken to lease. The B4-7 Deposit lies on patented claims PA39127, PA39128 and lease CLM460, whereas the VW Deposit lies on lease CLM461.

The exploration work undertaken by Landore prior to 28th August, 2008 was on mining leases in which Landore held a 100% interest: mining claims TB1077142, TB1217179. These claims were taken to lease (CLM 461) on 28th August, 2008.

Figure 3-1: Junior Lake Property Location



Figure 3-2: Junior Lake Property Leases and Claims

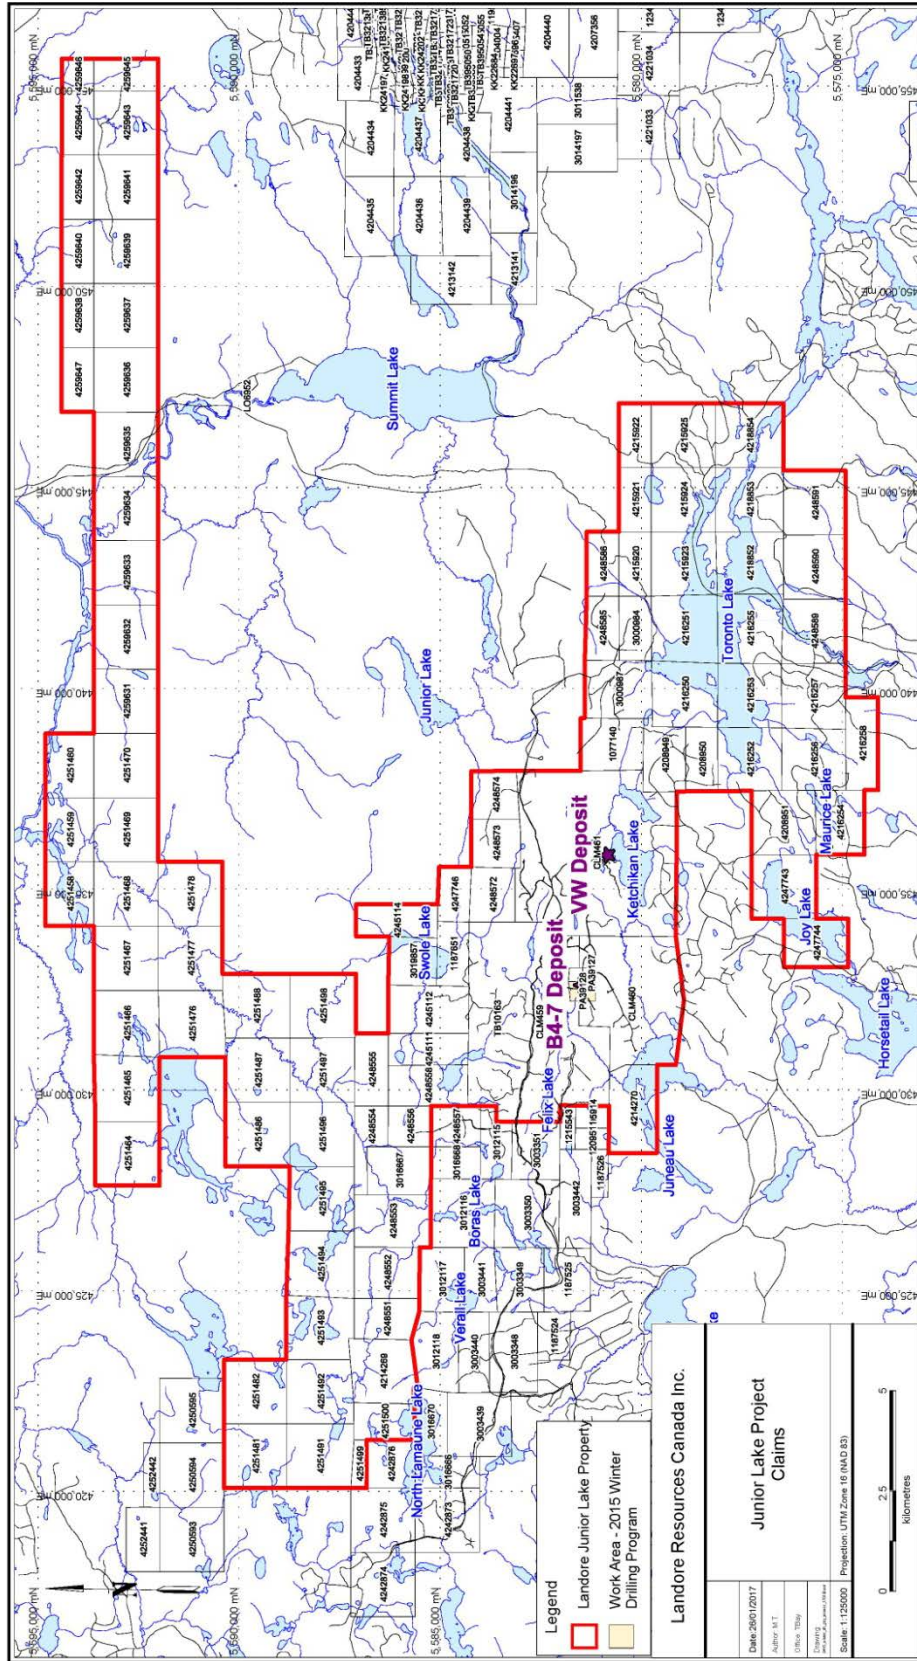


Table 3-1: Landore Mineral Claims (100% Interest)

| Claim | Calculated Area (ha) | Units | Area | Claim | Calculated Area (ha) | Units | Area |
|---------|----------------------|-------|--------------|-----------|----------------------|--------------|-----------------|
| 1077140 | 201.533 | 9 | Junior Lake | 4251487 | 255.274 | 16 | Junior Lake |
| 1187651 | 126.417 | 8 | Junior Lake | 4251488 | 262.535 | 16 | Junior Lake |
| 3000984 | 129.049 | 8 | Toronto Lake | 4251491 | 263.875 | 16 | Falcon Lake |
| 3000987 | 241.242 | 14 | Toronto Lake | 4251492 | 268.399 | 16 | Falcon Lake |
| 3016667 | 191.05 | 12 | Falcon Lake | 4251493 | 262.351 | 16 | Falcon Lake |
| 3019857 | 143.257 | 9 | Junior Lake | 4251494 | 271.898 | 16 | Falcon Lake |
| 4208949 | 174.532 | 10 | Toronto Lake | 4251495 | 258.004 | 16 | Falcon Lake |
| 4208950 | 127.147 | 8 | Toronto Lake | 4251496 | 255.947 | 16 | Junior Lake |
| 4208951 | 252.102 | 16 | Toronto Lake | 4251497 | 257.811 | 16 | Junior Lake |
| 4215920 | 128.463 | 8 | Toronto Lake | 4251458 | 191.468 | 12 | Kapikotongwa R. |
| 4215921 | 128.45 | 8 | Toronto Lake | 4251459 | 191.47 | 12 | Kapikotongwa R. |
| 4215922 | 128.443 | 8 | Willet Lake | 4251460 | 191.467 | 12 | Kapikotongwa R. |
| 4215923 | 255.325 | 16 | Toronto Lake | 4251464 | 255.269 | 16 | Junior Lake |
| 4215924 | 255.568 | 16 | Toronto Lake | 4251465 | 262.916 | 16 | Junior Lake |
| 4215925 | 255.604 | 16 | Willet Lake | 4251466 | 262.901 | 16 | Junior Lake |
| 4216250 | 262.832 | 16 | Toronto Lake | 4251467 | 255.274 | 16 | Junior Lake |
| 4216251 | 272.55 | 16 | Toronto Lake | 4251468 | 255.272 | 16 | Junior Lake |
| 4216252 | 250.524 | 16 | Toronto Lake | 4251469 | 255.284 | 16 | Junior Lake |
| 4216253 | 252.657 | 16 | Toronto Lake | 4251470 | 255.289 | 16 | Junior Lake |
| 4216254 | 194.379 | 12 | Toronto Lake | 4251476 | 269.928 | 16 | Junior Lake |
| 4216255 | 277.21 | 16 | Toronto Lake | 4251477 | 255.274 | 16 | Junior Lake |
| 4216256 | 244.297 | 16 | Toronto Lake | 4251478 | 255.285 | 16 | Junior Lake |
| 4248585 | 132.61 | 8 | Junior Lake | 4251481 | 247.747 | 16 | Falcon Lake |
| 4248586 | 127.648 | 8 | Junior Lake | 4251498 | 262.503 | 16 | Junior Lake |
| 4248589 | 251.612 | 16 | Toronto Lake | 4251499 | 42.8057 | 3 | Falcon Lake |
| 4248590 | 246.935 | 16 | Toronto Lake | 4251500 | 135.24 | 8 | Falcon Lake |
| 4248591 | 246.981 | 16 | Toronto Lake | 4259631 | 255.3975 | 16 | Junior Lake |
| 4216257 | 259.137 | 16 | Toronto Lake | 4259632 | 255.2966 | 16 | Junior Lake |
| 4216258 | 184.68 | 12 | Toronto Lake | 4259633 | 255.4375 | 16 | Junior Lake |
| 4218852 | 257.424 | 16 | Toronto Lake | 4259634 | 254.9172 | 16 | Junior Lake |
| 4218853 | 269.098 | 16 | Toronto Lake | 4259635 | 255.9382 | 16 | Summit Lake |
| 4218854 | 269.053 | 16 | Willet Lake | 4259636 | 255.4302 | 16 | Summit Lake |
| 4245111 | 157.295 | 10 | Junior Lake | 4259637 | 255.5525 | 16 | Summit Lake |
| 4245112 | 236.437 | 15 | Junior Lake | 4259638 | 127.6468 | 8 | Summit Lake |
| 4245114 | 164.202 | 10 | Junior Lake | 4259639 | 255.2938 | 16 | Summit Lake |
| 4247743 | 254.86 | 16 | Toronto Lake | 4259640 | 127.657 | 8 | Summit Lake |
| 4247744 | 191.684 | 12 | Toronto Lake | 4259641 | 255.3059 | 16 | Summit Lake |
| 4247746 | 108.215 | 6 | Junior Lake | 4259642 | 127.6557 | 8 | Summit Lake |
| 4248551 | 160.761 | 10 | Falcon Lake | 4259643 | 255.3034 | 16 | Summit Lake |
| 4248552 | 206.752 | 12 | Falcon Lake | 4259644 | 127.1522 | 8 | Summit Lake |
| 4248553 | 248.178 | 15 | Falcon Lake | 4259645 | 127.654 | 8 | Summit Lake |
| 4248554 | 123.24 | 8 | Junior Lake | 4259646 | 63.16516 | 4 | Summit Lake |
| 4248555 | 151.516 | 9 | Junior Lake | 4259647 | 127.6481 | 8 | Summit Lake |
| 4248556 | 107.904 | 8 | Junior Lake | 4214269 | 249.927 | 16 | Falcon Lake |
| 4248558 | 200.808 | 10 | Junior Lake | 4214270 | 258.207 | 16 | Toronto Lake |
| 4248572 | 151.125 | 9 | Junior Lake | 95 | 18,495.98 | 1,145 | |
| 4248573 | 147.231 | 9 | Junior Lake | | | | |
| 4248574 | 137.856 | 9 | Junior Lake | | | | |
| 4251482 | 247.088 | 16 | Falcon Lake | | | | |
| 4251486 | 255.278 | 16 | Junior Lake | | | | |

Table 3-2: Landore Leases (100% Interest)

| Lease # | Description | G-Number | Anniversary Date | Area (ha) | Annual Rent (\$) | Expiry Date | Total Work in Reserve (\$) |
|---------------|---------------------|------------------|------------------|------------------|------------------|-------------|----------------------------|
| 107421 | PA 39127, 39128 | 4000476 | 98-Jan-01 | 52.969 | 158.91 | 2019-Jan-01 | 1,096,271 |
| 108257 | CLM459 ¹ | 4040218 | 08-Aug-01 | 1,460.795 | 4,382.39 | 2029-Aug-01 | 17,284 |
| 108258 | CLM461 ¹ | 4040217 | 08-Aug-01 | 1527.388 | 4,582.16 | 2029-Aug-01 | 2,468,109 |
| 108259 | CLM460 ¹ | N/A ² | 08-Aug-01 | 687.794 | 2,063.38 | 2029-Aug-01 | 0 |
| Totals | 4 Leases | | | 3,728.946 | 11,186.84 | | 3,581,664 |

Notes:

1. Wing Resources holds a 2% NSR on 3 claims within CLM459, 1 claim within 460 and 3 claims within 461.
2. G-number is generated when work reports are filed.

Landore has been granted four mining leases, which include mining and surface rights, over an area encompassing the B4-7 and VW Deposits. The leases cover 23 mineral claims and two patents for a total area of 3,729 ha and have been granted for 21 years renewable for further terms of 21 years (Table 3-2).

Within the mining leases, Landore has the right, subject to provisions of certain Acts and reservations, to:

- sink shafts, excavations, etc., for mining purposes;
- construct dams, reservoirs, railways, etc., as needed; and
- erect buildings, machinery, furnaces, etc., as required, and treat ores.

There are no known environmental liabilities on the property.

4 ACCESSIBILITY

Access to the Junior Lake property from Thunder Bay is via paved provincial highways No. 17 (15 km) and No. 527 to Armstrong, with an overall distance of approximately 235 km. From Armstrong, the Buchanan Forest Products Inc. gravel haulage road (BHR) is taken east to kilometre 105, where a skidder haulage road leads approximately one kilometre to the Landore Junior Lake camp. Skidder and drill roads provide access on the property. The site of the winter 2015 drilling program is located in the central portion of the Junior Lake property, within the B4-7 Nickel-Copper-Cobalt-PGE deposit.

There are no power lines or railway lines on the property; however, the main CNR line is approximately 13 kilometres to the south.

During the summer, most drill sites are accessible by 4-wheel-drive vehicles.

5 HISTORY

Routledge (2010) has summarized the exploration and development history of the Junior Lake property as:

Geological mapping and exploration in the vicinity of the Junior Lake property is recorded as early as 1917. In 1968, Canadian Dyno Mines Limited staked 333 claims in 15 groups to cover conductors picked from an airborne electromagnetic (EM) and magnetic (MAG) survey. Two groups, B3 and B4, included the Junior Lake property. The company merged with Mogul Mines Limited, and the successor, International Mogul Mines Limited, in joint venture with Coldstream Mines Limited, carried out prospecting, mapping, ground MAG and EM surveys, soil sampling, and trenching on the B3 and B4 claim groups. Eight diamond drill holes totaling 674.8 m (2,213.9 ft.) were drilled to test conductors in January 1969, resulting in the discovery of the B4-7 zone. The discovery hole, No. 69-5, intersected 8.26 m (27.1 ft.) of massive pyrrhotite-pyrite-chalcopyrite mineralization grading 0.80% Ni and 0.53% Cu. The B4-7 deposit was delineated by an additional 30 holes (6,850 m, or 22,479 ft.) in 1969. In the same campaign, eight holes for 628.2 m (2,061 ft.) explored other conductors on the property. A detailed MAG and EM survey was also completed over the deposit and petrographic work done on core at that time.

In late 1969, 136.1 kg (300 lbs) of drill core was composited from 71 assay rejects in 11 drill holes, split to 56.7 kg (125 lbs), and submitted to SGS for flotation recovery (metallurgical) testing, which included semi-quantitative spectrographic analysis for 30 elements. A manual tonnage/grade estimate for the B4-7 deposit was carried out, to total 2,282,520 tons (2,070,689 tonnes) averaging 0.87% Ni and 0.59% Cu (Zurowski, 1970). This historical estimate is not NI 43-101 compliant.

Coldstream Mines Limited acquired 100% of the property in 1970 and took two claims to lease in 1976.

In 1983-1986, Québec Cobalt and Exploration Limited staked part of the south portion of the Junior Lake property and carried out mapping, geophysics, and soil and rock sampling. Conwest Exploration Co. Ltd., the successor to Coldstream Mines Limited, optioned the leases covering the B4-7 deposit to Menacorp Limited in 1990, which resampled B4-7 core, and then to Minatco Exploration Ltd. in 1993.

In addition to the B4-7 deposit, exploration in the Junior Lake-Lamaune area prior to Landore work also revealed two low-grade Cu-Ni zones and occurrences of copper, iron, lithium, chrome, asbestos, zinc, and gold-molybdenite. Most of the occurrences are within two kilometres of the VW and B4-7 deposits.

Landore optioned part of the property from North Coldstream Mines Limited in 1998 and additional claims from Brancote Canada in 2000.


6 GEOLOGICAL SETTING

The regional, local and property geology has been for the most part summarized from Routledge, (2010), Lester (2009b), MacTavish (2004, 2004a), and Routledge (2006). Additional contributions are from various others, including Cooper (2009, 2014), Mungall (2009), and Pressacco (2013).

6.1 Regional Geology

The Junior Lake property is located within the Wabigoon Subprovince of the Superior Province of the Precambrian Shield and within the east-west trending Caribou-O'Sullivan greenstone belt. The belt is flanked to the south by the Robinson Lake Batholith of the Lamaune Batholithic Complex and to the north by a major, east-west-striking shear zone / terrain boundary that marks the southern limit of the English River Subprovince. Northeast of the property the belt is intruded by the elliptical, tonalitic to quartz dioritic Summit Lake Batholith. The western portion of the greenstone belt has been intruded by undulating, flat-lying, NeoProterozoic-age Nipigon diabase sills and localized dykes. These sills are the discontinuous, erosional remnants of laterally extensive sills comprising the Nipigon Plate which is centred on Lake Nipigon, approximately 30 kilometres to the south (MacTavish, 2004, 2004a). The regional geology of the Junior Lake property area is shown in Figure 6-1.

Figure 6-1: Junior Lake Regional Geology

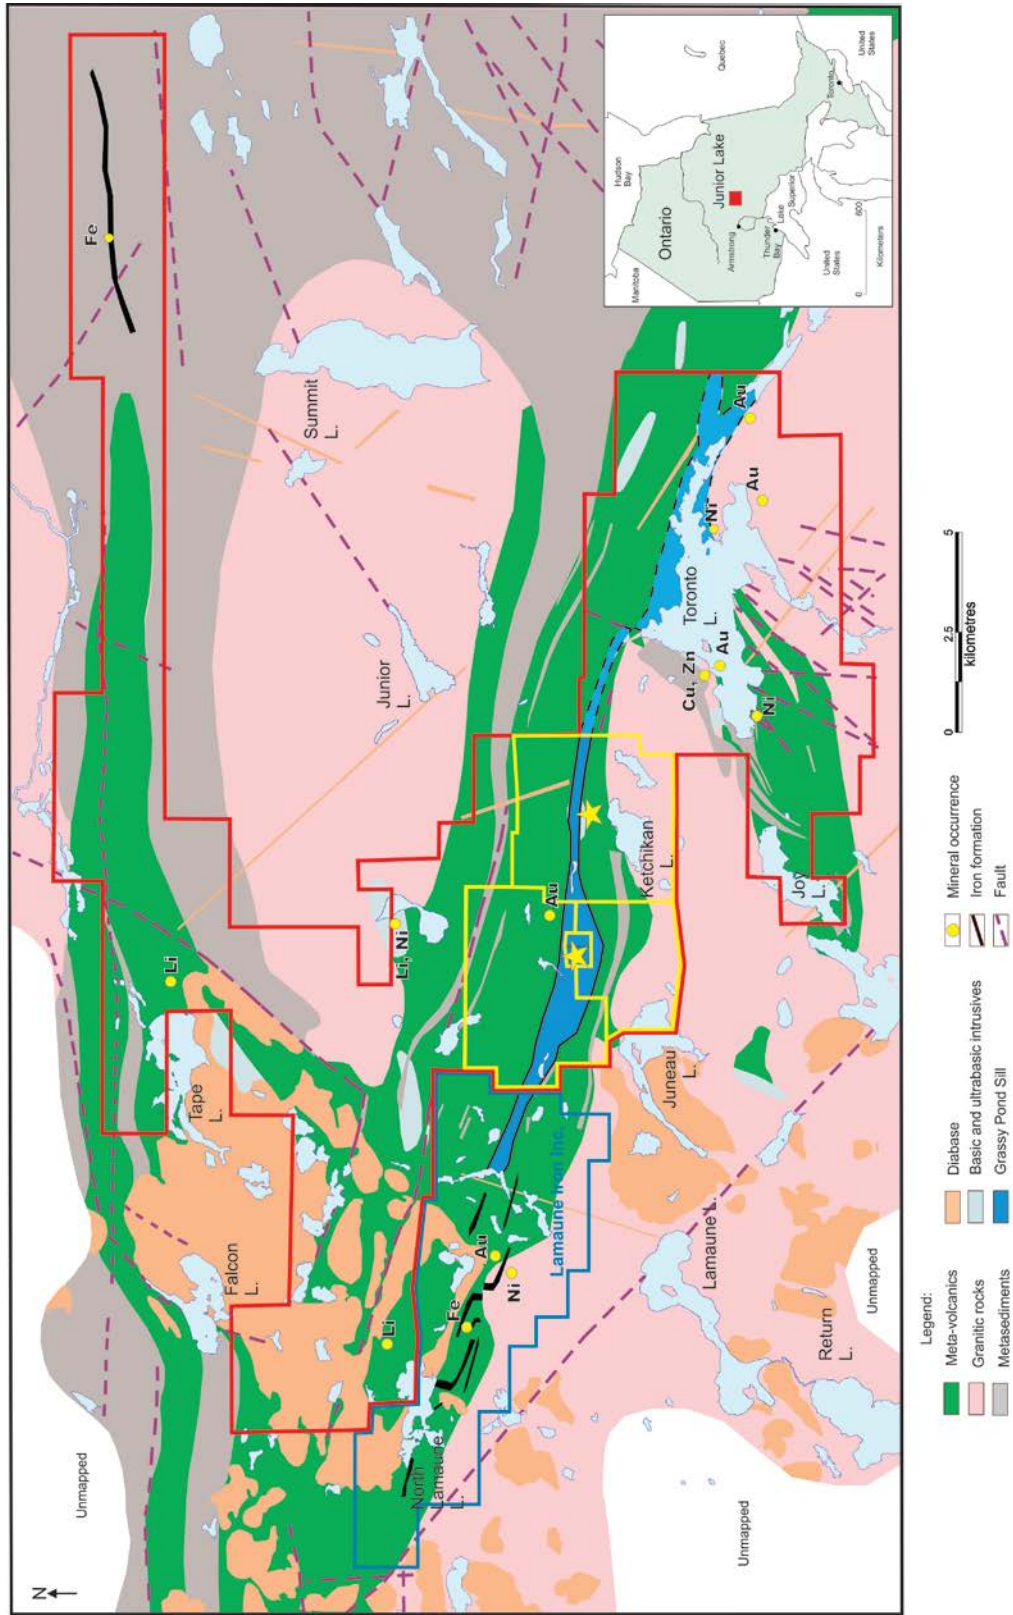

6.2 Local and Property Geology

The supracrustal rocks and associated mafic to ultramafic intrusions of the Caribou-O'Sullivan greenstone belt are subdivided by Berger (1992) into the Archean-age Toronto and Marshall Lake groups. The two lithostratigraphic groups are similar in many respects; however, the Marshall Lake Group (MLG) contains a higher proportion of clastic metasedimentary rocks and apparently lesser amounts of mafic intrusive rocks.

The Toronto Lake Group (TLG) underlies the southern third of the Junior Lake property and consists of a bimodal assemblage of tholeiitic mafic flows and calc-alkaline rhyolitic to dacitic tuff, tuff breccias, and subordinate flows. The assemblage has been intruded by numerous mafic to ultramafic sills, dykes, and small stocks.

Four lithostratigraphic sequences defined within the TLG are as follows:

- The laterally extensive Carrot Top sequence trends west-northwest within the southern portions of the TLG and is comprised of magnetic talc-carbonatechlorite+/-tremolite schists derived from deformed and altered ultramafic rocks and clastic and chemical metasedimentary rocks. This sequence is 300 to more than 600 metres thick and hosts the D-Z iron occurrence, and several Ni-PGE (including Carrot Top and Zap Zone), Cu, Zn-Cu and Ag occurrences. Strong centimetre to metre scale folding is evident in the iron formation, and as such likely exists on a larger scale, possibly causing thickening and thinning along the main trends.
- The west-northwest trending Grassy Pond Sill intrudes the top of the TLG at its contact with the Marshall Lake Group (MLG) through the centre of the Junior Lake property. The Grassy Pond sill is a thick (100m to 500 metre wide), deformed, laterally continuous, gabbroic to locally anorthositic intrusive. The sill's most identifying characteristic is the presence of large (up to 10 cm in diameter) subhedral to euhedral plagioclase phenocrysts that often collect to form leucogabbro and anorthositic intervals of highly variable thicknesses. The Grassy Pond Sill hosts PGE, Cu and Ni occurrences, and is interpreted as being on the same geophysical structure as the B4-7 zone to the east.
- The B4-7 Sequence is a composite sequence, 1.9 kilometres long and up to 400 metres thick, of primarily mafic metavolcanic flows, intrusives and clastic and chemical metasediments that host the B4-7 Ni-Cu-Co-PGE deposit including the B4-7, Alpha and Beta Zones. The B4-7 sequence lies between the Carrot Top Sequence and the Grassy Pond Sill.
- The BAM Sequence is a composite sequence composed of mafic metavolcanic flows, mafic dykes and sills, and intermediate dykes. The BAM sequence is estimated to be 1.65 kilometres long and up to 160 m thick, possibly associated with an oblique structure. Archean Lamprophyre Dykes cut the TLG rocks.

In the north portions of the Junior Lake property, the Marshall Lake Group (MLG) includes tholeiitic, amphibolite mafic flows and calc-alkalic dacitic tuff, minor tuff breccias, and intercalated greywacke, chert and sulphide iron formation. Thin, discontinuous intermediate to felsic metavolcanic rock units also occur in the MLG. A higher portion of metasedimentary rocks and fewer mafic intrusives occur in the MLG compared to the TLG. Most of the rocks observed on the property are finely amphibolites, pillowed, mafic metavolcanic flows with well-defined pillow selvage and a greater occurrence of plagioclase phenocrysts than observed within mafic flows south of the Grassy Pond Sill. Some outcrops exhibit an irregular, pervasive alteration,

characterized by large, acicular actinolite porphyroblasts contained within a fine-grained matrix of chlorite, sericite, actinolite/tremolite, and epidote. This alteration is very similar to localized alteration observed within the Toronto Lake Group.

Pye (1968) interprets the presence of a large-scale fold on the western portion of the Junior Lake property southeast of Lamaune Lake and east-northeast-trending syncline in the vicinity of Toronto Lake to the east. The east-southeast trending, north-dipping North Lamaune Lake anticline is interpreted from magnetometer surveys tracing Iron Formation.

Structural Geology

Regional deformation rotated the supracrustal packages into near vertical orientation and developed a large west-northwest trending deformation zone (local portion referred to as the Junior Lake Shear Zone) north and west of Toronto Lake. This zone is the most prominent structural feature in the area and is characterized by narrow discrete zones of intensely sheared rock displaying dextral rotation separated by relative undeformed rock packages (Larouche, 1999). The deformation zone is evident as an aeromagnetic lineament which extends east and west of the Junior Lake property and appears to join the regional 450 km long Sydney Lake-Lake St. Joseph (SL-LSJ) Fault zone to the north, which also coincides with the boundary of the English River (ERT) and East Wabigoon subprovinces (EWT). The brittle-ductile fault zone of the SL-LSJ is steeply dipping, one to four kilometres wide, and is estimated to have accommodated about 30 km of right-lateral transcurrent displacement and 2.5 km of north vergent thrust movement (Percival, 2007).

A second, more local deformation in the east part of the property is confined to the supracrustal rocks around the periphery of the Robinson Lake Batholith, with deformation expressed as crenulation cleavage, northeast trending faults, and lineations which clearly post-date the regional deformation (Larouche, 1999).

Junior Lake Shear Zone and Associated Geology

Narrow, discrete zones of intense shearing (Junior Lake Shear Zone) form a corridor up to 800 m wide along the contact between the TLG and MLG. This shearing roughly follows the north contact of the Grassy Pond Sill. The evidence for the shear zone at Junior Lake is based on known geology and textures in drill holes and from limited exposures with deformation textures found from the micro to the macro level encompassing mylonites, cataclasites, sharp thin failure planes, and pressure-solution features such as stylolites. The widespread occurrence of pseudotachylite veinlets and infill demonstrates localized melting on failure planes.

Within the shear zone, the TLG is dominated by a large gabbro intrusive centred in the Grassy Pond Sill to VW area. It is a long linear intrusive and possibly split into several individual units. It is intruded into a mafic volcanic pile consisting of submarine pillow lavas and volcanoclastics. Cooper (2009) speculates that the gabbro has been the feeder for the volcanism and has then intruded its own lava pile.

Although the shear zone is slightly sinuous through Junior Lake, three of the mineral occurrences, Carrot Top, B4-7 and VW, fall on a straight line and Grassy Pond is only slightly to the north of this line. The length of the shear zone is uncertain, however, a length of at least 10 km has been defined. Along this length, there are variations in intensity with local domains of low deformation surrounded by high deformation zones as a result of competency contrast, general heterogeneity through the zone and lithology types. The rock succession in Junior Lake was deformed within a

mobile greenstone belt and all geology became subvertical and with continued deformation within a deep ductile-regime, shear zones developed. During and post to shearing, gabbroic intrusive episodes occurred with a final pulse of very extensive vertical gabbro dikes. Major hydrothermal mineralizing events post-dated the gabbro dike swarm possibly as the result of heat from the post-tectonic sanukitoid style granites, such as high-Mg granitoid found in convergent margin settings (Cooper, 2009).

Less obvious at surface but no less voluminous are ultramafic lithologies such as peridotite, dunite, serpentinite, and their derivatives as talc dominated schistose metamorphic rocks. The ultramafic lava and/or intrusive suite was probably coeval with the basic suite but has suffered much more degradation of original texture and mineralogy within the mobile belt and shear environment. Variably textured granite and quartz diorite to tonalite gneiss and migmatite mapped along the south property boundary are part of the Robinson Lake Batholith.

Metamorphism

Metamorphism on the property is characterized by staurolite-cordierite-garnet, and rare sillimanite, in clastic metasediments; garnet-aluminosilicates-amphibole and rarely staurolite in the felsic and intermediate metavolcanic rocks; and garnet and amphibole in mafic meta-volcanic rocks. Most of the supracrustal rocks attained lower amphibolite grade metamorphic conditions, and greenschist grade metamorphism is only locally present (Larouche, 1999).

B4-7 DEPOSIT

The B4-7 Deposit is located in the south central area of the Junior Lake property. The B4-7 Deposit consists of polymetallic Ni-Cu-Co+PGE+Au mineralization hosted in massive sulphide (vein) and disseminated sulphides in a gabbro-basic volcanic setting coinciding with the Junior Lake shear zone. Strike length attains at least 600 m. Widths are up to approximately 18 m but are usually less than five metres. The B4-7 massive sulphide vein system appears to be a fairly simple dilational structure with marked pinch and swell in the vertical plane with an apparent plunge to the west. The mineralization was possibly introduced rapidly along pre-disposed failure planes under conditions of shearing. B4-7 consists of a continuous tabular body of semi-massive pyrrhotite-rich sulphides hosted in an assemblage of mafic volcanics and mafic intrusive. The contacts of the massive sulphide are typically very sharp and linear with minor wall rock contamination. Host rocks include leucogabbro, melanogabbro, gabbro, as well as mafic metavolcanics at the east end and may play an important role in hosting mineralization. Proximal to the sulphide mineralized zone are mafic schists, shear zones, metasedimentary rocks, locally iron formation, amphibolite, as well as pyroxenite, particularly at the east end.

The Alpha Zone occurs parallel to and approximately 50 m up dip of the B4-7 hanging wall in the gabbro and amphibolitized mafic volcanics. The zone, as described by MacTavish (2004a), is a broad envelope of narrow, moderate to high grade erratic, sulphide-rich carbonate and quartz carbonate veinlets and mineralized shears that generally trend oblique to stratigraphy. This hanging wall mineralization is localized in small fractures, foliations, and gashes and was probably introduced over a much longer time frame than the massive sulphides as the deformation progressed from foliation, through shear failure and into cataclasis. Disseminated sulphide mineralization consists of pyrrhotite, pyrite, and chalcopyrite, occurring as blebs and clots at the margin of gabbro intrusives against the host basic volcanics. Such mineralization is widespread but the better and more contiguous contact style mineralization occurs on the major gabbro contact. Thickness varies from <5 m to >15 m (Pressacco, 2013).

MacTavish (2004a) reported the ancillary Beta Zone, identified during 2001 drilling, as a net textured extension of the massive B4-7 zone and concluded that it was the probable magmatic source for the massive sulphides injected/emplaced into the fault/breccia zone.

B4-7 EAST AREA – Grassy Pond Sill

The B4-7 East Area is located immediately east of the B4-7 deposit and extends for at least 1.5 kilometres roughly along Landore's local grid baseline 00. This vicinity is dominated by gabbroic rocks ranging from anorthosite to gabbro cut by melagabbro dykes, interpreted to be the southern margin of the Grassy Pond sill. The geophysical anomaly (as seen in airborne magnetic, ground DCIP+MT, maxmin and vlf data) which delineates the B4-7 deposit extends eastwards through this area defining the boundary of the Grassy Pond sill with the mafic volcanic (typically mafic flows/pillow units) and metasedimentary rocks (commonly metapelites, with some cherty iron formation) located immediately to the south.

As interpreted by C. Cooper, the Grassy Pond sill is the largest of a cluster of gabbro sills in the centre of the Junior Lake greenstone belt. These sills are interpreted as palaeo-magma chambers which originally fed sub-aerial and submarine volcanoes with tholeiitic lava.

As reported by Cooper (2014):

The Grassy Pond is a sill or lopolith of basic to ultrabasic composition intruded into a basaltic lava and meta-sediment package that was possibly still presenting a high thermal gradient. The sill was most likely to have been horizontal or sub-horizontal at time of emplacement as it presents conformable contacts with the host rocks and is not particularly chilled near contacts. The sill is a composite intrusion consisting of several differing compositions but all in the proximity to the gabbro field. The feeder for the sill was a dyke or series of dykes (that may have been eroded and in fact a good part of the sill has also been eroded but we do not know how much). Composite magma chambers are sills kept molten by repeated magma supply by dykes. This is particularly true of magma chambers at divergent spreading centres such as mid-ocean ridges. It is possible that the sill could be the result of a magma chamber intruding its own lava sequence.

The feeder dykes are interpreted as the melanorite dykes seen on the long drill fence 1700E. They should be found south of the sill contact if they are true feeder dykes.

Considering all the known evidence so far it is likely that there was a primary genetic relationship between the basaltic lava piles and the Grassy Pond Sill and the latter is a fossil magma chamber within a volcanic pile at a spreading centre.

In the area of B4-7 the Grassy Pond sill is at its thickest and also most differentiated compositionally with a range from anorthosite to gabbro. Several of the smaller gabbro bodies may in fact be later dykes and the largest gabbro, the Grassy Pond Sill is more likely to be a complex nest of individual sills or an interfingered sill/host succession.

It can readily be appreciated that all significant nickel mineralisation is sited around the southern margin of the largest sill but other occurrences adjacent to some of the smaller sills cannot be ruled out.

The Grassy Pond sill, compared to other sills observed on the property, is the most differentiated in terms of composition. But the high degree of differentiation seems to be limited to the central, thicker part of the sill. This could be a critical point for the deposition of PGEs, and thus the development of Alpha PGE-enriched zones (delineated in the adjacent B4-7 deposit).

7 MINERALIZATION

7.1 B4-7 Deposit – Nickel, Copper, Cobalt, PGE, Gold

B4-7 deposit mineralization has been summarized from Pressacco (2013), with contributing information from MacTavish (2004).

Mineralization in the B4-7 zone is composed of semi-massive to massive sulphides primarily composed of pyrrhotite (25%-75%), with minor pentlandite and chalcopyrite (1%-5%). Other sulphides include pyrite, violarite, sphalerite, and covellite. Magnetite concentrations are minor (1%-5%) to moderate (5%-25%) and generally occur where oxide iron formation is proximal to the zone walls.

The pyrrhotite is fine grained and carries pentlandite and violarite exsolved as very fine grains (20 microns to 40 microns). Pentlandite occurs as relatively coarse grains as well as fine pentlandite flames. Nickel contents of up to 3% occur in the B4-7 lenses, whereas in the disseminated sulphides the nickel content is usually less than 1%.

The disseminated style of blebby and network style mineralization is, however, generally much richer in PGEs, with up to 10 g/t Pd and up to 1 g/t Pt. Both Cu and Co occur as sulphides in both styles of mineralization. PGE mineral species are represented by kotulskite and borovskite, both palladium tellurides.

MacTavish (2004) described the B4-7 zone mineralization as composed of massive, fine-grained pyrrhotite, highly variable disseminated, stringer, locally semi-massive, fine-grained chalcopyrite, and localized coarse-grained secondary pyrite. Most of the chalcopyrite is concentrated as fine to medium grains near contacts, within fragment-rich portions of the zone, or as veins and stringers within the adjacent hanging wall and footwall rocks. Pyrite occurs as coarse cubes, up to three centimetres in diameter, that usually concentrate near the upper and lower contacts of the massive sulphide zone. Cobalt content correlates directly with the amount of coarse-grained pyrite. The B4-7 zone is locally rich in disseminated magnetite, which, in most cases is correlatable to the presence of oxide facies iron formation in the adjacent hanging wall or footwall rocks.

7.2 Mineralization Elsewhere on the Property

Prior to Landore ownership, exploration in the Junior Lake–Lamaune Lake area that located the B4-7 deposit in 1969 also revealed two low-grade Cu-Ni zones and occurrences of copper, iron, lithium, chromite, asbestos, zinc, and gold-molybdenite. Most of these are within two kilometres of the VW Zone.

From 1990 to 2003, Landore found nine PGE-Cu-Ni occurrences, one Cu-Pd zone, one gold zone, and Zn-Au-Ag and Zn-Co occurrences in old trenches and boulders bearing base and precious metal or arsenic mineralization. The VW deposit was discovered in 2005.

Four lithostratigraphic sequences favourable for nickel mineralization on the Junior Lake property have been identified by MacTavish (2004b) as follows:

- VW Sequence: a 1.9 km long, up to 400 m thick package of mafic metavolcanic flows, mafic intrusive dikes and sills, and clastic and chemical metasedimentary rocks that host the VW Zone.
- B4-7 Sequence: 1.9 km long and up to 400 m thick, is composed of primarily mafic metavolcanic flows (2AF1), gabbroic intrusive (9A,B,C), and clastic and chemical metasediments (6P) that lies between the Carrot Top Sequence and the Grassy Pond Sill. This sequence hosts the B4-7 Ni-Cu-Co-PGE deposit including the B4-7 massive sulphide zone and the Alpha and Beta zones.
- Grassy Pond Sill, a laterally extensive 100 m to >500 m thick gabbroic sill that hosts Cu-Ni-PGE mineralization near its base.
- Carrot Top Sequence: a complex laterally extensive 300 m to >600 m thick sequence of mafic metavolcanic flows, ultramafic schists, and clastic and chemical metasedimentary rocks that host several Ni-Cu-PGE occurrences. This sequence is located in the west portion of the Junior Lake property.
- BAM Sequence: a 1.65 km long, up to 165 m wide assemblage composed of mafic metavolcanic flows, mafic dikes and sills, and intermediate dikes that host the BAM gold occurrence. The BAM sequence is located northwest of the VW deposit in the north central portion of the Junior Lake property.

8 EXPLORATION

Cheatle (2010a) outlined the exploration history of the Junior Lake property:

Landore optioned part of the property from North Coldstream Mines Limited in 1998 and additional claims from Brancote Canada in 2000. Since then, Landore exploration has found nine PGE-Cu-Ni occurrences, one Cu-Pd zone, one gold zone, and Zn-Au-Ag and Zn-Co occurrences in old trenches and boulders bearing base and precious metals or arsenic mineralization. Landore has successfully delineated several deposits and other potential areas of significant mineralization throughout the Junior Lake property including two Ni+PGE deposits (B4-7 and VW).

Landore initial work in 2000 involved data compilation, Landsat image interpretation, prospecting, mapping, and resampling of the 1969 core, and followed up an Ontario Geological Survey (OGS) airborne EM and MAG survey flown over the area.

Ground magnetometer MaxMin II EM surveys, in addition to drilling, were completed in 2001. In 2003, Landore conducted drilling, stripping, trenching and channel sampling. All drilling data were digitized and reinterpreted, 856 core samples were assayed to fill in unsampled runs in the B4-7 deposit, in its hanging wall mineralization known as the Alpha Zone as well as in mineralization in the east extension of the B4-7 zone known as the Beta Zone.

A low level helicopter AeroTEM time-domain electromagnetic and magnetometer survey was flown in 2004. Principal geophysical sensors utilized in this survey included AeroQuest's AeroTEM© time domain helicopter electromagnetic system and a high sensitivity cesium vapour magnetometer. Bedrock EM anomalies were interpreted and graded according to the conductance.

The VW deposit was discovered in 2005 by follow-up prospecting of an AeroTEM conductor where 0.45% Ni was returned in a surface grab sample. Landore subsequently drilled the new VW deposit, as well as the Whale, NO and BAM zones, and other areas on the Junior Lake and Lamaune projects.

In 2006, Landore drilled the VW deposit, B4-7 zone, and other exploration targets including the Junior Lake, Pichette, and Lamaune claims. The 2006 campaign at the VW deposit included two surface trenches which were excavated and channel sampled. Metallurgical work included preliminary flotation and work indexes were carried out at Lakefield in September–October. Scott Wilson RPA also prepared a technical report (NI 43-101) on the B4-7 zone in 2006.

During 2007, diamond drilling of the VW and B4-7 deposits was the main focus of exploration activity. The following work was completed on the Landore property:

- Relogging of pre-2007 VW deposit drill core was initiated.
- Drill collars of the VW and B4-7 deposits and topographic control areas of the Junior Lake property were surveyed by an Ontario Land Surveyor.

- Minor line cutting was completed near Ketchikan Lake and the B4-7 deposit area to support the drilling operations.
- Baseline environmental studies were initiated and conducted by or under the guidance of Golder Associates Ltd. (Golder), of Sudbury, Ontario:
 - These studies were started in March 2007 and include quarterly sampling and analysis of lake and stream waters
 - Lake and stream sediment sampling was completed during the summer.
 - A benthic study, bathymetric study, and a fisheries study of Ketchikan Lake were completed.
- A weather station was installed at the Landore Junior Lake camp to record wind speed and direction, temperatures and three seasons of precipitation data.
- Sampling of the VW deposit drill core (quarter-cut core) was completed for metallurgical purposes.
- Claim lines were rehabilitated and the claim boundary surrounding an area to be leased was cut and surveyed in advance of filing the application to the Mining Recorder to lease the claims. Four leases have subsequently been granted.
- The land package was expanded to the southeast by staking an additional 24 claims totalling 5,056 ha.
- Aerial photography (stereo) was completed over the lease area by KBM Forestry Consulting in late 2007 to produce an air photo mosaic for exploration and infrastructure planning. The photographic data were processed to establish a detailed digital terrain topographic model (DTM).
- Golder commenced baseline aquatic studies in February 2007 on lakes and drainage tributaries in the vicinity of Junior Lake. These studies, repeated three monthly, are proceeding well and will continue through to economic studies. In addition, Golder completed a “Fish community and Fish habitat” survey of Ketchikan Lake, immediately south of the VW deposit, in addition to a bedrock resistivity survey on the northern side of the lake to determine depth of silt and evaluate bedrock competence.
- The camp was expanded and core storage was improved to hold the Junior Lake drill core on site.
- Core from previous Landore drilling in the VW deposit was relogged with a view to better understanding the controls on mineralization and identifying the disposition of mafic intrusives (dikes and sills) in the zone. In addition, further petrographic investigation was carried out on the VW deposit (Mungall, 2007). The drill hole collars were resurveyed to the Ontario base.
- In early 2007, a resource estimate was carried out by Scott Wilson RPA on the VW deposit.

In May 2008, Scott Wilson RPA prepared an updated resource estimate and NI 43-101 compliant technical report for the VW deposit. Scott Wilson RPA updated the VW deposit estimated resources to reflect 2008 to 2009 drilling and prepared a separate NI 43-101 compliant technical report (Routledge and Scott, 2009).

A non-NI 43-101 compliant mineral resource estimate to JORC standards was carried out by the Snowden Group (Snowden) on the B4-7 deposit in 2008. Scott Wilson RPA prepared resource estimates for the B4-7 deposit in 2006 and 2009.

Exploration efforts in 2009 included drilling, mapping and prospecting throughout the contiguous claims covering approximately 10 km², with work concentrated in the Lamaune Iron, BAM and VW areas. Additional exploration completed included prospecting and mapping at Swole Lake and Toronto Lake as well as east and west of the VW deposit.

To 2009, the VW deposit has been delineated and tested by 141 drill holes with 2,766 analyzed intervals over 2,838.36 m completed in the deposit subzones. Scott Wilson RPA has updated the VW deposit estimated resources to reflect 2008 to 2009 drilling and has prepared a separate NI 43-101 compliant technical report (Routledge and Scott, 2009).

Other exploration efforts in 2009 included mapping and prospecting throughout the contiguous claims covering approximately 10 km², with work concentrated in the Lamaune Iron, BAM and VW areas. Additional exploration completed included prospecting and mapping at Swole Lake and Toronto Lake as well as east and west of the VW deposit.

Overview of Recent Exploration

Recent exploration activity at Junior Lake from 2006 to 2015 has seen drilling focused on several areas including additional resource drilling at VW and B4-7 deposits, Lamaune area exploration drilling, the Whale Zone, Felix Lake, Swole Lake and B4-7 West and East exploration drilling.

Other recent work, in 2007-2015, included detailed geologic mapping (B4-7, VW, BAM, Lamaune), 55 trenches over approximately 13km (Lamaune Iron, Grassy Pond, Felix Lake, Juno Lake, BAM Zone, Toronto Lake), additional geophysical work (impulse EM survey, ground magnetic, and reinterpretation and integration with historic magnetic data), as well as approximately 70 km of line cutting. Regional scale prospecting, regional reconnaissance and geologic mapping, including an airborne geophysical coverage (AeroTEM electromagnetic and magnetic) of the Toronto Lake area (various Ni, Au, PGE potential), and Swole Lake (pegmatite lithium) prospecting were also undertaken. Numerous consultant reviews and studies have been completed, including detailed Scanning Electron Microscope (SEM) and petrography studies of the VW and B4-7 deposits; relogging, resampling and reinterpretation of geology for the VW, B47, and BAM sites; as well as reviewing of regional exploration potential. Surveying of drill collars, claim lines, additional claim staking, initiation of environmental baseline study, aerial photography, and metallurgical testing were also undertaken.

In June 2011, the Lamaune block, comprised of 23 claims, for 4,096 hectares, containing the Lamaune Iron deposit as well as the Lamaune Gold prospect, was transferred into a separate private company ('Lamaune Iron Inc.').

In October 2012, a deep penetrating ORION 3D 'Direct Current Induced Polarization' (DCIP) and Magnetotellurics (MT) survey was performed over the Scorpion zone of the Junior Lake property by Quantec Geoscience Ltd. This survey encompassed the western portion of the Scorpion zone, from line 1400W eastwards to line 400E in the B4-7 deposit.

Tuomi (2013) describes the 2012 DCIP+MT survey:

This survey acquired three sets of data in multi-directions; DC (direct current), IP (induced polarization) and MT (magnetotellurics), and is a true three dimensional survey. Sophisticated digital signal processing was utilized to obtain high resolution imaging at depths up to 1000+ metres below surface. This survey utilized DC resistivity to identify prospective nickel mineralization, and used IP chargeability to investigate potential copper and PGE targets.

The survey identified three areas of interest, located in the central, eastern and northern parts of the survey area, which appear to be interconnected and geologically controlled by fault lines. A portion of the eastern survey area is drill tested and hosts the B4-7 deposit.

The DCIP + MT survey results indicate that the conductive horizon which harbours the B4-7 massive sulphide mineralization extends to the west through the Exploration Target, an area identified west along strike and down dip from the B4-7 resource containing a potential 1.5 Mt to 2.0 Mt of sulphide mineralization of similar grade range to that which has been outlined to-date (Pressacco, 2013).

Subsequent drilling in winter 2013 has tested the DC resistivity and IP chargeability results at various localities along the western portion of the Scorpion zone. Drilling in the Exploration Target area between lines 175W and 300W successfully intersected B4-7 massive sulphide mineralization as well as Alpha zone disseminated sulphide mineralization.

In December 2013, an Electromagnetic (MaxMin), VLF and Magnetometric ground geophysics program was completed over the VW deposit and VW West areas, from line 900E to line 4000E and covering 35.7 line kilometres. The survey was conducted by Geosig Inc., Québec, for Landore Resources.

Results from these surveys have been highly encouraging, identifying multiple near-surface conductor anomalies along the VW Nickel deposit trend with similar signatures to the VW deposit conductive anomaly itself.

From January 17 to February 14 2014, a 3-Dimensional (3D) Direct Current Induced Polarization and Magnetotellurics (DCIP + MT) ground geophysics program was completed over the VW deposit, VW West, and B4-7 East areas, from line 300E to line 3700E and from 700N to 1500S. The survey, covering 739.02 hectares, was conducted by Quantec Geoscience Ltd., Toronto, for Landore Resources. This survey is located directly adjacent to the east of Landore Resources' 2012 Orion 3D DCIP + MT survey block covering the B4-7 West zone.

Results from the 2014 survey have been highly encouraging, delineating nine significant new zones ranging from approximately 400m to 1,200m in length of potential nickel sulphide mineralization along strike and adjacent to the existing B4-7 Nickel-Copper-Cobalt-PGEs

resource and the VW Nickel resource. Numerous targets are at depth and below existing Landore exploration drilling.

During July to August 2014, a total of 16 drill holes (0414-477 to 0414-492) for 4,201 metres were drilled on the B4-7 East area, a prospective zone extending eastwards 1.5 kilometres from the B4-7 Nickel-Copper-Cobalt-PGEs deposit. Drilling followed up on results from the 2014 3D DCIP + MT ground geophysical survey, which identified several prospective anomalies through this area.

Drilling confirmed the extension of a significant copper/gold mineralized structure previously delineated from line 900W in the B4-7 West zone eastwards adjacent to the B4-7. Values as high as 5.49% copper over 0.77 metres in drill-hole 0412-368 and 26.1g/t gold over 0.75 metres in drill-hole 0406-252 had been intersected by previous drilling. The drilling in July-August 2014 extended this copper/gold trend through to line 1600E, with a further 500 metres potential strike length indicated by historical drill hole S-5 on line 2100E with 0.21 metres at 8.97% Cu, giving an overall potential strike extension of 3.0 kilometres.

The drilling also intersected elevated polymetallic mineralization on line 1200E with drill-hole 0414-485 returning 5 metres at 0.25% Ni, 0.33% Cu, 0.01% Co, 497ppb Pd, 100ppb Pt, and 48ppb Au from 61 metres down-hole which together with previous highly encouraging trench results on line 1350E holds potential for near-surface, economic polymetallic mineralization which would provide added value to the B4-7 deposit.

In late January to early February 2015, an Electromagnetic (MaxMin), VLF and Magnetometric ground geophysics program was completed over the B4-7 East and VW North areas, from line 100W to line 4000E and covering 44.7 line kilometres. Results from the 2015 survey have identified further drill targets north of the pre-existing surveys from 2001 and 2013, an area in which the B4-7 polymetallic trend and the BAM gold trend intersect. To date there has been little exploration north of 200N, an area which is highly prospective for further polymetallic nickel, copper, cobalt, PGEs and gold mineralization.

During February and March 2015, a drilling program was conducted on the B4-7 deposit in the central portion of the Junior Lake property. Drilling followed up on results from the fall 2014 drilling program which confirmed a down dip extension of the main B4-7 massive sulphide zone 140 metres below the existing B4-7 resource on line 00 as well as intersecting high grade Alpha zone platinum group element (PGE) mineralisation. A total of 8 drill holes (0415-505 to 0415-512) for 2,590 metres were drilled, logged and sampled. In addition, relogging and resampling of previously drilled core took place to identify additional palladium enriched Alpha Zone mineralisation within the B4-7 deposit.

Drilling confirmed the continuity of the Alpha Zone over a distance of 700 metres located sub-parallel and immediately adjacent to the B4-7 massive sulphide zone. Additionally, drilling further validated the Exploration Target immediately west of the B4-7 deposit, successfully intersecting B4-7 style massive sulphide mineralisation in drill-hole 0415-510. The Exploration Target, identified in the 2013 B4-7 National Instrument 43-101 (NI 43-101) compliant resource estimate, is located immediately along strike to the west of the B4-7 resource containing a potential 1.5Mt to 2.0Mt of sulphide mineralisation similar in grade to the B4-7 deposit (NiEq 1.24%).

9 SURVEY DESIGN AND PROCEDURES

The winter 2015 exploration drilling program was conducted from February to March 2015. A total of 8 drill holes (0415-505 to 0415-512) for 2,590 metres were drilled, logged and sampled. In addition, relogging and resampling of previously drilled core took place to identify additional palladium enriched Alpha Zone mineralisation within the B4-7 deposit. Drilling is summarized in Table 9-1.

9.1 2015 Winter Drilling Program (B4-7 Deposit)

Winter 2015 drilling followed up on results from the fall 2014 drilling program which confirmed a down dip extension of the main B4-7 massive sulphide zone 140 metres below the existing B4-7 resource on line 00 as well as intersecting high grade Alpha zone platinum group element (PGE) mineralisation (Table 9-2, Appendix B and C).

Mineralized intersections of winter 2015 drilling include:

- DDH 0415-506: 8.50 metres at 0.33% Ni, 0.14% Cu, 0.03% Co, 0.61g/t Pt, 2.46g/t Pd
Including 1.00 metre at 0.28% Ni, 0.18% Cu, 0.02% Co, 3.03g/t Pt, 9.56g/t Pd
- DDH 0415-506: 4.94 metres at 0.07% Ni, 0.06% Cu, 0.01% Co, 0.37g/t Pt, 3.72g/t Pd
- DDH 0415-507: 6.50 metres at 0.10% Ni, 0.02% Cu, 0.01% Co, 0.3g/t Pt, 3.20g/t Pd
Including 1.50 metres at 0.02% Ni, 0.85g/t Pt, 10.15g/t Pd
- DDH 0415-509 : 3.17 metres at 0.30% Ni, 0.04% Cu, 0.01% Co, 0.13g/t Pt, 1.46g/t Pd
- DDH 0415-509 : 1.42 metres at 0.08% Ni, 0.05% Cu, 0.01% Co, 0.34g/t Pt, 2.44g/t Pd
- DDH 0415-509 : 3.16 metres at 0.51% Ni, 0.47% Cu, 0.05% Co, 0.12g/t Pt, 0.91g/t Pd
- DDH 0415-510 : 5.00 metres at 0.43% Ni, 0.13% Cu, 0.02% Co, 0.18g/t Pt, 1.74g/t Pd
- DDH 0415-510 : 0.61 metres at 1.37% Ni, 0.05% Cu, 0.06% Co, 0.10g/t Pt, 3.41g/t Pd
- DDH 0415-510 : 1.00 metre at 0.46% Ni, 1.25% Cu, 0.05% Co, 0.08g/t Pt, 0.33g/t Pd
- DDH 0415-510 : 3.53 metres at 0.79% Ni, 0.35% Cu, 0.06% Co, 0.11g/t Pt, 0.86g/t Pd
- DDH 0415-510 : 3.92 metres at 0.79% Ni, 0.48% Cu, 0.06% Co, 0.16g/t Pt, 0.57g/t Pd
- DDH 0415-510 : 0.36 metres at 0.29% Ni, 3.42% Cu, 0.05% Co, 0.02g/t Pt, 0.34g/t Pd

Exploration Target:

Geophysical (magnetic) surveying of the B4-7 Deposit area discovered the presence of a linear, east-west striking magnetic anomaly. The western projection of this contact is considered to hold good potential for the discovery of additional B4-7 type mineralization. RPA Inc., retained by Landore Resources to complete the 2013 mineral resource estimate on the B4-7 deposit, outlined an 'Exploration Target' in this area of a potential 1.5 Mt to 2.0 Mt of sulphide mineralization of similar range grade to that which has been outlined to date (NiEq 1.24%).

Winter 2015 drilling has further validated this Exploration Target immediately along strike to the west of the B4-7 resource, successfully intersecting B4-7 style massive sulphide mineralisation in drill-hole 0415-510. Further drilling is warranted to bring this 300+ metre strike length into the formal resource.

Alpha Zone:

The Alpha zone, identified by drilling in 2001, consists of net-textured and disseminated sulphides containing significant palladium with elevated nickel, copper, cobalt, platinum and gold mineralisation and is found in both the open pit and the underground portions of the B4-7 deposit.

The Alpha Zone mineralisation was not included in the B4-7 National Instrument 43-101 (NI 43-101) compliant resource published in 2013 due to insufficient drilling along strike. However, a review of Alpha style mineralisation intercepts in drilling completed since then has established that the Alpha Zone is far more significant than previously determined.

Landore's winter 2015 drill program successfully intersected Alpha Zone style disseminated sulphide mineralisation containing high grade palladium with drill hole 0415-507 reporting 1.5 metres at 10.15g/t Pd and 0.85g/t Pt.

This drilling has been successful in further establishing the continuity of the PGE enriched Alpha Zone for 700 metres from line 350W to 350E. The Alpha Zone pinches and swells along strike with true widths ranging from a few metres to 17.1 metres in drill-hole 0406-93 on line 75W; 8.8 metres in drill-hole 0415-503 on line 00E and 10.2 metres in drill-hole 0407-167 on line 100E. The Alpha Zone is open both up and down dip and to the west along strike.

Similar to the previously-intersected high grade palladium and platinum in 0414-503, the 0415-507 intersection was not located within a unit bearing significant visually discernible sulphides. These intersections indicate the substantial potential to delineate further high grade palladium and platinum within low-sulphide portions of the deposit.

With this in mind, a comprehensive re-logging and sampling programme of existing drill core from the B4-7 deposit was completed with more than 3,000 metres of 2012 drill core being re-visited. This exercise proved successful in identifying potential Alpha Zone mineralisation previously not sampled due to low visually discernible sulphide content.

Development of the Alpha Zone could supply significant credits for the B4-7 deposit and form an integral part of the B4-7 resource.

The B4-7 combined open pit and underground NI 43-101 compliant resource is 2,695,000 tonnes at 1.24% Nickel equivalent (NiEq) for 33,248 tonnes of contained metal, all within the Indicated category (2013 Mineral Resource estimate and a NI 43-101 Technical Report on the B4-7 Deposit, RPA, Toronto, Canada).

Table 9-1: Summary of Drilling Campaigns at the Junior Lake Property

| Year | Sector | # Drill Holes | No. Metres ¹ | Drilled Holes |
|-------------------|--------------------------|---------------|-------------------------|--|
| 1969 | Exploration | 8 | 720 | S1 to S8 ² |
| 1969 | B4-7 | 31 | 6,941 | 69-5, 69-9 to 383 ³ |
| 1969 | Exploration | 7 | 583 | 69-1, 69-4, 69-6 to 8 ³ |
| 2001 ⁴ | B4-7 | 21 | 5405 | 0401-07 to 24; 0401-01 to 03 |
| 2001 | Exploration | 3 | 600 | 0401-04 to 06 |
| 2003 | B4-7 | 4 | 480 | 0403-07 to 10 |
| 2003 | BAM | 6 | 438 | 0403-01 to 06 |
| 2005 | VW | 15 | 4,730 | 0405-29 to 30; 0405-35 to 47 |
| 2005 | Exploration | 12 | 1,959 | 0405-25 to 34; 44, 45 |
| 2005 ⁵ | Lamaune | 17 | 2,599 | 1105-01 to 17 |
| 2006 | VW | 38 | 8,288 | 0406-48 to 64; 0406-71 to 88; 0406-97 to 98: 52A |
| 2006 | B4-7 | 7 | 1,562 | 0406-89 to 95 |
| 2006 | Exploration | 12.3 | 2,398 | 0406-61 to 70; 0406-96, 1506-01(part), well |
| 2006 | Lamaune | 3.7 | 499 | 1106-18 to 20, 1506-01 (part) |
| 2007 | B4-7 | 16 | 3,580 | 0407-162 to 0407-177 |
| 2007 ⁵ | VW | 68 | 16,843 | 0407-99 to 161, 113A, 117A, 124A, 151A, 151B, 178 |
| 2008 | VW | 19 | 4,823 | 0408-179 to 195; 0407-114RE, 0407-136RE |
| 2008 | Exploration | 4 | 795 | 0408-196 to 0408-199 |
| 2008 | Lamaune | 20 | 1,034 | 1108-21 to 40 Carrot Top/Zap Grassy Pond |
| 2008 | Lamaune | 14 | 2,040 | 1108-41 to 54 Lamaune Iron |
| 2009 ⁶ | B4-7 | 44 | 9,286 | 0409-200 to 28; 0409-232 to 243; 0409-255 to 257 |
| 2009 | VW | 3 | 1,350 | 0409-229 to 231 |
| 2009 | Exploration | 12 | 2,277 | 0409-244 to 254, 258 (Whale Zone and B4-8 Zone) |
| 2009 | Lamaune | 30 | 7,133 | 1109-55 to 83 (incl 59A), extension of 0408-41 to 1108-43 and 1108-53 Lamaune Gold, Iron |
| 2010 | Lamaune | 69 | 10,605 | 1105-05ext, 1110-84 to 151 Lamaune Gold/Carrot Top Zone |
| 2010 | Exploration | 27 | 4,422 | 0410-259 to 285 (Felix, West Ladle, VW West) |
| 2011 | Exploration | 10 | 1,441 | 0411-304 to 313 (Swole Lake) |
| 2011 | Exploration | 63 | 13,907 | 0410-285, 0411-286 to 0411-297 (VW West); 0406-69, 0411-298 to 0411-303, 0411-314 to 0411-357 (B4-8) |
| 2011 | B4-7 | 10 | 4,911 | 0411-358(A and B) to 0411-366 |
| 2012 | B4-7 | 86 | 15,783 | 0412-367 to 0412-448, 0409-202RE, 0409-237RE, 0409-238RE, 0411-359RE |
| 2012 | Scorpion/B4-7 | 15 | 7,138 | 0412-449 to 0412-462, 0411-317RE |
| 2013 | Scorpion | 14 | 5,778 | 0413-463 to 0413-476 |
| 2014 | B4-7 East | 16 | 4,201 | 0414-477 to 0414-492 |
| 2014 | Exploration, B4-7, VW | 12 | 2,675 | 0414-493 to 0414-504 |
| 2015 | B4-7 | 8 | 2,590 | 0415-505 to 0415-512 |
| | Total | 745 | 159,814 | |

Notes:

- 1) Rounded to nearest metre.
- 2) AX core, 30.2 mm diameter.
- 3) BQ? core, 36.5 mm diameter.
- 4) Landore drilling 2001-2015 is all NQ core, 47.6 mm diameter.

- 5) Two holes deepened in 2008 campaign. Excludes 2008 abandoned holes.
- 6) Includes three metallurgical test sample holes not included in resource estimate.
- 7) The highlighted 2015 B4-7 drilling forms the basis for this assessment report.

Table 9-2: Summary of 2015 Winter Drilling (B4-7 Deposit)

| DDH | Start Date | Completion Date | Lease No | Final Depth (m) |
|----------|--------------|-----------------|----------|-----------------|
| 0415-505 | Feb 12, 2015 | Feb 19, 2015 | PA39128 | 549.7 |
| 0415-506 | Feb 19, 2015 | Feb 22, 2015 | PA39128 | 384 |
| 0415-507 | Feb 23, 2015 | Feb 25, 2015 | PA39128 | 308.92 |
| 0415-508 | Feb 25, 2015 | Feb 27, 2015 | PA39128 | 192.08 |
| 0415-509 | Feb 27, 2015 | Mar 3, 2015 | PA39128 | 437.93 |
| 0415-510 | Mar 3, 2015 | Mar 8, 2015 | PA39128 | 490 |
| 0415-511 | Mar 9, 2015 | Mar 10, 2015 | PA39128 | 141 |
| 0415-512 | Mar 10, 2015 | Mar 11, 2015 | PA39128 | 86.72 |

9.2 Diamond Drilling Operations

Landore's Junior Lake camp, located at kilometre 105 on the East Road / Jackfish Road from Armstrong, was used as a base of operations. During dry seasons when access trail conditions permit, drill sites can be accessed by 4-wheel drive truck and all-terrain vehicle (ATV).

Drill holes were positioned and oriented by chaining from previous casings along cut lines of the established grid or by GPS and compass where there was no grid. Upon completion of each hole, the casing location was recorded using a Geneq Inc. SkyBlue II handheld Trimble GPS in UTM projection NAD 83 for Zone 16. All casings were left in the holes and capped. The water source for this drilling was drill casing 0409-207.

Drilling was conducted by Chibougamau Diamond Drilling, of Chibougamau, QC. Drill core from this program is stored on covered core racks at Landore's Junior Lake camp.

Landore's core is stored at Junior Lake and is available for review.

9.3 Down-hole Surveys and Deviation

Down-hole deviation was minimized by the use of NQ size drill rods, hexagonal core barrel and long (18”) reaming shell.

Inclination deviation was monitored as the holes progressed using a Reflex Instruments EZ-Shot down-hole survey instrument and upon completion of each hole a Reflex Instruments Maxibor II instrument (optical method) was used to survey the hole to obtain reliable information on both inclination and azimuth deviation. Both instruments digitally record the down-hole survey data. Survey data is presented on the header page of each drill log in Appendix C.

9.4 Drill Core Logging Procedures

Drill core was aligned, measured and logged for geology. Logging records major and minor rock units (grain sizes, texture structural information: core angles of geological contacts, foliation and bedding, fractures, faults, veins, joints etc.), alteration and sulphide species, content and mode of occurrence. Logging and sampling information was recorded by hand on paper and/or in Microsoft Word and Excel software, then edited as required. Access and MapInfo GIS databases are maintained for drilling information. A copy of Landore’s geological legend is presented in Appendix E.

All drill core is digitally photographed and photos maintained on file in Landore’s Thunder Bay office.

Specific gravity (SG), RQD and magnetic susceptibility (MS) measurements of the mineralized zones and surrounding host rocks in the core were also recorded. The methodology for testing SG and magnetic susceptibility is summarized below:

9.4.1 Specific Gravity (SG) Methodology

- SG measurements were taken where there was visible mineralization, and at 3 metres intervals in select holes for background measurements.
- SG was measured utilizing a Denver Instrument Model PI-2002 scale, accurate to 0.01 gram. The scale was securely setup on a sturdy table, and levelled. A plastic weighting basket was suspended beneath the scale so that it is completely submerged in a pail of water (at room temperature) and then the scale is calibrated to read zero.
- The dry sample is weighted on the scale and the dry weight (DW) recorded. The sample is then placed in the basket, completely submerged in the water and the wet weight (WW) is recorded.
- All dry and wet weights are entered into an Excel spreadsheet and the specific gravity is calculated using the following formula:

$$SG = \frac{DW}{DW - WW}$$

9.4.2 Magnetic Susceptibility (MS) Methodology

MS measurements were taken where there was visible mineralization, and at 3 metres intervals in select holes for background measurements. MS was measured utilizing a Kappameter, model KP-6 magnetic susceptibility meter. The measurements were entered into an Excel spreadsheet either directly or after they had been recorded by hand on paper.

9.4.3 Rock-Quality Designation and Core Recovery

Rock-Quality Designation (RQD) and core recovery was determined over 3 metre intervals. RQD is calculated using the following formula:

$$\text{RQD} = (\text{Sum of all pieces over 0.1m/ Metres recovered}) * 100$$

Core recovery is typically +80% except in rare cases over narrow intervals of highly sheared, foliated intervals. As such it is considered that samples accurately reflect drilled widths sampled. Core recovery is calculated using the following formula:

$$\text{Core recovery} = (\text{Metres recovered/metres drilled}) * 100$$

Longest and smallest piece of drill core in the 3 metre interval was measured and recorded, as well as the fracture density. The fracture density is the visual inspection of the intensity of natural fractures in a given 3 metres, and is a numerical value on a scale of 0 to 9 (0 being no fractures, 9 being very intensely fractured). RQD data is available at Landore's Thunder Bay Office.

10 SAMPLING METHOD AND APPROACH

Sampling for the 2015 winter drilling program has consisted entirely of drill core sampling. Cheatle (2010b) outlines the sampling methodology utilized by Landore:

Core is logged and sampled in the Landore field camp on site, with occasional additional logging and sampling done on mineralized core in the Landore warehouse in Thunder Bay. Logging records major and minor rock units (grain sizes, texture structural information: core angles of geological contacts, foliation and bedding, fractures, faults, veins, joints, etc.), alteration and sulphide species, content and mode of occurrence. Geotechnical measurements including core recovery, rock quality designator (RQD) and fracture density have been taken. Specific gravity tests were carried out on. Sampling was conducted in the visibly mineralized zones and continuous sampling was undertaken throughout the hole length when the target was PGE's.

Industry standard core sampling procedures were employed:

- all drill core is aligned and measured prior to sampling
- samples for assay are selected and marked for sampling on the basis of sulphide geology/mineralogy and rock units
- sample intervals avoid crossing geological contacts
- samples are sawn in half with a diamond saw blade
- one half of the sample is placed in a standard, numbered transparent plastic bag with an identifying sample tag and
- the remaining half returned to the core box with a corresponding tag placed at the beginning of the sample interval
- the halved drill core is retained in core racks on site.

All core sample bags are sealed with plastic sequentially numbered security tags and eight to ten of these sample bags are placed in larger rice bags also sealed with a numbered security tag. All security tag numbers are recorded prior to shipping and checked upon delivery at the lab.

Sample intervals are typically 1.0m to 1.5m in length.

Only the gold, platinum and palladium are analyzed by fire assay (with AA finish). Nickel, copper, cobalt and silver are digested by aqua regia, then analyzed by AAS.

11 SAMPLE PREPARATION, ANALYSES AND SECURITY

Taken from Cheatle (2010b):

Core samples are secured in the logging/sampling building at site. The samples are then transported directly from the site to the Accurassay or ALS Chemex lab in Thunder Bay by Landore or Chibougamau Diamond Drilling personnel. There have been no samples lost and no indications of sample tampering.

Prior to 2007, Landore's Lamaune core was stacked outdoors on site with some mineralized intersections stored in a secure warehouse at Landore's office in Thunder Bay. New core racks were constructed on site during 2007 and stacked core was placed on the racks to improve its longevity, storage and accessibility.

11.1 ALS Chemex Laboratories Analytical Procedures


ALS Chemex is an independent, commercial mineral laboratory accredited by the Standards Council of Canada (SCC) under ISO 17025 guidelines. Each ALS lab has a Quality Management System (QMS) to ensure the production of consistently reliable data, and ensures that standard operating procedures are in place, and are being followed. The QMS is monitored by global and regional Quality Control teams. ALS participates in a number of proficiency tests, such as those managed by Geostats and CANMET.

The rock samples are first entered into ALS Chemex Laboratories Local Information System (LIMS), then bar-coded and weighed. The samples are dried, riffled split, then pulverized to better than 70% -2mm. Silica sand is used to clean out the pulverizing dishes between each sample to prevent cross contamination. The homogeneous sample then receives final preparation and analyzed as per the required methods. Assay results are checked by the lab manager before the hard copy is sent in the mail, and/or emailed to the client.

Analysis descriptions below are verbatim from ALS Chemex website:
www.alsglobal.com

Aqua regia digestion:

The standard aqua regia digestion consists of treating a geological sample with a 3:1 mixture of hydrochloric and nitric acids. Nitric acid destroys organic matter and oxidizes sulphide material. It reacts with concentrated hydrochloric acid to generate aqua regia:



Aqua regia is an effective solvent for most base metal sulphates, sulphides, oxides and carbonates.

Atomic Absorption Finish:

In atomic absorption spectroscopy, an element in its atomic form is introduced into a light beam of appropriate wavelength causing the atom to absorb light (atomic absorption) and enter an excited state. At the same time there is a reduction in the intensity of the light beam which can be measured and directly correlated with the concentration of the elemental atomic species. This is carried out by comparing the light absorbance of the unknown sample with the light absorbance of known calibration standards.

A typical atomic absorption spectrometer consists of an appropriate light source (usually a hollow cathode lamp containing the element to be measured), an absorption path (usually a flame but occasionally an absorption cell), a monochromator (to isolate the light of appropriate wavelength) and a detector.

The most common form of atomic absorption spectroscopy is called flame atomic absorption. In this technique, a solution of the element of interest is drawn through a flame in order to generate the element in its atomic form. At the same time, light from a hollow cathode lamp is passed through the flame and atomic absorption occurs. The flame temperature can be varied by using different fuel and oxidant combinations; for example, a hotter flame is required for those elements which resist atomization by tending to form refractory oxides.

Lithium Borate fusion:

At ALS Chemex, lithium metaborate fusions are carried out in an automated fashion using a Claisse-type fluxer. The fusion melts can be poured into disks in preparation for X-ray fluorescence (XRF) analysis or they can be dissolved in acid for subsequent ICPMS analysis.

XRF:

In X-ray fluorescence spectroscopy, a beam of electrons strikes a target (such as Mo or Au) causing the target to release a primary source of X-rays. These primary X-rays are then used to irradiate a secondary target (the sample), causing the sample to produce fluorescent (secondary) X-rays. These fluorescent X-rays are emitted with characteristic energies that can be used to identify the nucleus (i.e. element) from which they arise. The number of X-rays measured at each characteristic energy can therefore in principle be used to measure the concentration of the element from which it arises.

The fluorescent X-rays are then dispersed and sorted by wavelength using a selection of different diffraction crystals, hence the term wavelength-dispersive X-ray fluorescence. The dispersed X-rays are then detected with a thallium-doped sodium iodide detector or a flow proportional counter. Each X-ray striking the detector causes a small electrical impulse which can be amplified and measured using a computer-controlled multichannel analyzer. Samples of unknown concentration are compared with well-

known international standard reference materials in order to define precise concentration levels of the unknown sample.

Detection limits for the principal metals are:

Metal Detection limit

Pd 10 ppb
Pt 15 ppb
Au 5 ppb
Ag 1 ppm
Cu 1 ppm
Ni 1 ppm
Co 1 ppm
Pb 1 ppm
Zn 1 ppm

11.2 Accurassay Laboratories Analytical Procedures

Accurassay is an independent, commercial mineral laboratory accredited by the Standards Council of Canada (SCC) under ISO/IEC 17025 guidelines for PGM, Cu, Ni, and Co analysis by atomic absorption spectroscopy (AA). The laboratory undergoes proficiency testing PTP-MAL through the SCC and participates in Round Robin testing through the Society of Mineral Analysts (SMA).

Accurassay Laboratories analytical procedures are as follows (Moore, J., 2008):

The rock samples are first entered into Accurassay Laboratories Local Information System (LIMS). The samples are dried, if necessary and then jaw crushed to -8mexh, riffle split, a 250 to 400 gram cut is taken and pulverized to 90%-150mesh, and then matted to ensure homogeneity. Silica sand is used to clean out the pulverizing dishes between each sample to prevent cross contamination. The homogeneous sample then receives final preparation and analyzed as per the analysis required require.

Precious Metal Fire Assay:

The sample is mixed with a lead based flux and fused for an appropriate length of time. The fusing process results in a lead button, which is then placed in a cupelling furnace where all of the lead is absorbed by the cupel and a silver bead, which contains any gold, platinum and palladium, is left in the cupel. The cupel is removed from the furnace and allowed to cool. Once the cupel has cooled sufficiently, the silver bead is placed in an appropriately labeled small test tube and digested using a 1:3 ratio of nitric acid to hydrochloric acid. The samples are bulked up with 1.0mls of distilled deionized water and 1.0mls of 1% digested lanthanum solution. The total volume is 3.0mls.

The samples cool and are vortexed. The contents are allowed to settle. Once the samples have settled they are analyzed for gold, platinum and palladium using atomic absorption spectroscopy. The atomic absorption spectroscopy unit is calibrated for each element using the appropriate ISO 9002 certified standards in an air-acetylene flame. The results for the atomic absorption are checked by the technician and then forwarded to data entry by means of electronic transfer and a certificate is produced. The Laboratory Manager checks the data and validates it if it is error free. The results are then forwarded to the client by fax, email, floppy or zip disk, or by hardcopy in the mail. NOTE: This method may be altered according the client's demands. All changes in the method will be discussed with the client and approved by the laboratory manager.

Base Metals-Geochemical:

Base metal samples are prepped in the same way as precious metals but are digested using a multi acid digest (HNO₃, HF, HCl). The samples are bulked up with 2.0mls of hydrochloric acid and brought to a final volume of 12.0mls with distilled deionized water. The samples are vortexed and allowed to settle. Once the samples have settled they are analyzed for copper, nickel and cobalt using atomic absorption spectroscopy.

Base Metals-Full Assay:

Full assay samples are prepped the same way as geochemical base metals. They are weighed at 2.5g instead of 0.25g and digested using a combination of acids (nitric, hydrochloric and/or hydrofluoric). The samples are bulked up with 30mls of hydrochloric acid and brought to a final volume of 250mls with distilled deionized water using a 250ml volumetric flask. The samples are capped and inverted several times in the volumetric flask until the contents are homogeneous. A portion of the solution is transferred to a labelled test tube and then analyzed for the required elements using absorption spectroscopy.

In Landore's opinion, the sampling, assaying and security protocols, procedures and standards in place for the exploration drilling are industry standard and adequate for mineral resource and mineral reserve estimation.

12 DATA VERIFICATION

Drill hole and assay data entered or imported into Landore's Microsoft Access database is checked by the software and Senior Geologist for data entry errors.

To validate the drill hole database is checked for potential problems such as:

- 1) Intervals exceeding the hole length (from-to problem).
- 2) Negative length intervals (from-to problem).
- 3) Zero length intervals (from-to problem).
- 4) Inconsistent downhole survey records.
- 5) Out of sequence and overlapping intervals (from-to problem; additional sampling/QAQC/check sampling included in table).
- 6) No interval defined within analyzed sequences (not sampled or missing samples/results).

12.1 Quality Control and Quality Assurance

Upon receiving assay results, Landore checks that all standards and blanks are within +/- 3 standard deviations from their certified mean. Landore has in place and follows a standard procedure to ensure that failed assay batches are re-run.

Certified standards used include various standards from Geostats Party Ltd, Australia. Also, certified standards from CDN Resource Laboratories Ltd. were used.

The silica sand blank was obtained from ALS Chemex laboratory in Thunder Bay, Ontario.

The base metal standards are inserted every 20th submitted sample. A precious metal standard is inserted in every sample batch.

The silica sand blank was inserted every 20th submitted sample. Landore ensured that at least 2 standards and 1 blank were placed in every batch.

As part of the QAQC regimen, rejects and split pulps for 5% of the samples (selection at geologist's discretion) are submitted to Accurassay (with one portion of the split pulps going to ALS) for confirmation. Original assay results are reported unless the check assay results question the original assays. In addition to this, other results that may be questionable (i.e. low value amongst high values) are check assayed.

12.1.1 ALS Chemex Quality Control

ALS employs an internal quality control system that tracks certified reference materials and in-house quality assurance standards. ALS uses a combination of reference materials, including primary, certified reference, or in-house reference materials. Should any of the standards not fall within an acceptable range, re-assays will be performed with

a new certified reference material. The number of re-assays depends on how far the certified reference material falls outside its acceptable range. Additionally, ALS verifies the accuracy of any measuring or dispensing device (i.e. scales, dispensers, pipettes, etc.) on a daily basis and is corrected as required.

12.1.2 Accurassay Quality Control

Accurassay Laboratories employs an internal quality control system that tracks certified reference materials and in-house quality assurance standards. Accurassay uses a combination of reference materials, including reference materials purchased from CANMET, standards created in-house and tested in round robin analyses with laboratories across Canada, and ISO certified calibration standards purchased from suppliers. Should any of the standards fall outside the warning limits ($\text{mean} \pm 2\sigma$), re-analysis is performed on 10% of the samples analyzed in the same batch and the new values are compared with the original values. If the values from the re-analysis match original assays, the data is certified. If they do not match, the entire batch is re-analyzed. Should any of the analyses for standards fall outside the control limit ($\text{mean} \pm 3\sigma$), all analyses in that batch are rejected and all of the batch samples are re-analyzed prior to returning results to Landore.

Accurassay also re-assays every 10th sample as a duplicate and inserts a blank control sample in the batch as part the internal laboratory QA/QC process.

13 INTERPRETATION AND CONCLUSIONS

The 2015 winter drilling program was completed over the B4-7 Ni-Cu-Co-PGE deposit. Drilling followed up on results from the fall 2014 drilling program which confirmed a down dip extension of the main B4-7 massive sulphide zone 140 metres below the existing B4-7 resource on line 00 as well as intersecting high grade Alpha zone platinum group element (PGE) mineralisation.

Drilling successfully confirmed the continuity of the Alpha Zone over a distance of 700 metres located sub-parallel and immediately adjacent to the B4-7 massive sulphide zone. Additionally, drilling further validated the Exploration Target immediately west of the B4-7 deposit, successfully intersecting B4-7 style massive sulphide mineralisation in drill-hole 0415-510. The Exploration Target, identified in the 2013 B4-7 National Instrument 43-101 (NI 43-101) compliant resource estimate, is located immediately along strike to the west of the B4-7 resource and contains a potential 1.5Mt to 2.0Mt of sulphide mineralisation similar in grade to the B4-7 deposit (NiEq 1.24%).

Follow-up drilling is required to further establish continuity of the high grade Alpha PGE zone in the B4-7 deposit, and to bring the 'Exploration Target' up to inferred status within the NI 43-101-compliant B4-7 resource. The delineation of the Exploration Target and Alpha Zone has the potential to add significant tonnage to the existing B4-7 resource.

14 RECOMMENDATIONS

The 2015 winter drilling program was successfully completed on the B4-7 Ni-Cu-Co-PGE deposit located on the central portion of Landore's Junior Lake property. Drilling tested the down dip extension of the main B4-7 massive sulphide zone up to 140 metres below the existing B4-7 resource as well as tested for Alpha zone platinum group element (PGE) mineralisation within the deposit.

Drilling successfully confirmed the continuity of the Alpha Zone over a distance of 700 metres located sub-parallel and immediately adjacent to the B4-7 massive sulphide zone. Additionally, drilling further validated the Exploration Target immediately west of the B4-7 deposit, successfully intersecting B4-7 style massive sulphide mineralisation in drill-hole 0415-510.

Follow-up drilling is required to further establish continuity of the high grade Alpha PGE zone in the B4-7 deposit, and to bring the Exploration Target up to inferred status within the NI 43-101-compliant B4-7 resource. The delineation of the Exploration Target and Alpha Zone has the potential to add significant tonnage to the existing B4-7 resource.

15 REFERENCES

- Barnes, S. J. 2000 Chromite in Komatiites, II. Modification during Greenschist to Mid-Amphibole Facies Metamorphism; *Journal of Petrology*, Vol. 41 # 3., pp. 387-409
- Berger, B.R. (1992): *Geology of the Toronto Lake Area, District of Thunder Bay, Ontario Geological Survey, Open File Report 5784, 145p.*
- Cheatle, A.M. (2010): 2008 Diamond Drill Program on the Junior Lake Property, Lamaune Lake Section (Grassy Pond, Carrot Top, Zap, DC Zones), Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, April 21, 2010.
- Cheatle, A.M. (2010a): 2008-2009 Work Assessment Report for the VW Deposit, Junior Lake Property, Ontario, Canada, Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, June 25, 2010.
- Cheatle, A.M. (2010b): 2008 Diamond Drill Program on the Junior Lake Property, Lamaune Lake Section (Grassy Pond, Carrot Top, Zap, DC Zones), Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, April 21, 2010.
- Cooper, C. C. (2011): VW Deposit Ni Cu Co mineralization. A review; Galloway Mineral Services Mineral Exploration Consultant: Landore intercompany memo, 4 pp.
- Cooper, C. C. (2009): Notes on ophicarbonates in the Ketchican West-VW zone.; Galloway Mineral Services Mineral Exploration Consultant: Landore intercompany memo, 3 pp.
- Cooper, C. C. (2009): B47 Short review; Galloway Mineral Services Mineral Exploration Consultant: Landore intercompany memo, 3 pp.
- Cooper, C. C. (2009): VW Short review; Galloway Mineral Services Mineral Exploration Consultant: Landore intercompany memo, 2 pp.
- Cooper, C. C. (2009): Exploration potential of Lamaune Properties, Junior Lake during 2009, results of recent drilling campaign and a property review; Galloway Mineral Services Mineral Exploration Consultant: Landore intercompany memo, 27 pp.
- Cooper, C. C. (2009): Exploration potential of the Junior Lake Area, Ontario Canada; Galloway Mineral Services Mineral Exploration Consultant: Landore intercompany memo, 14 pp.
- Cooper, C.C. (2014): Exploration for economic PGE in the base of the Grassy Pond Gabbro complex, and other Magmatic Ni-Cu-PGE mineralisation, Junior Lake, Ontario; Galloway Mineral Services Mineral Exploration Consultant: Landore internal report, 29p.
- Eng, T. (2001) Report on the Exploration of the Junior Lake/Auden Property with Drilling Recommendations, Thunder Bay District, Ontario Canada; Unpublished Field Maps Map1 and Plate 2 [B4-8 West] intercompany report, Sept 2001, 17 pp.

- Gharibi, M/McGill, D. (2013): ORION-3D DC/IP/MT Survey Geophysical Report, Junior Lake Project (Armstrong, Ontario, Canada) on behalf of Landore Resources Canada Inc. (Thunder Bay, Ontario); Unpublished report prepared by Quantec Geoscience Ltd. for Landore Resources, Feb 11, 2013, 139p.
- Gharibi, M/McGill, D. (2014): ORION-3D DC/IP/MT Survey Phase 2 Geophysical Report, Junior Lake Project (Armstrong, Ontario, Canada) on behalf of Landore Resources Canada Inc. (Thunder Bay, Ontario); Unpublished report prepared by Quantec Geoscience Ltd. for Landore Resources, June 30, 2014, 215p.
- Kjarsgaard, I (2011) Petrographic Description of 10 Polished Thin Sections for Landore Resources; Vancouver Petrographics Consulting, un-published report, Oct 2011, 39 pp.
- Landore (2014): Landore Resources Ltd. Press release, Geophysics Survey Identifies Significant Anomalies on VW Nickel Trend, released on the AIM Market of the London Stock Exchange (LSE) January 13, 2014.
- Landore (2014b): Landore Resources Ltd. Press release, Drilling Intersects high Grade Palladium and Platinum, Junior Lake Nickel-Copper-PGE Property, released on the AIM Market of the London Stock Exchange (LSE) November 19, 2014.
- Larouche, C. (1999): Results of the exploration program stripping-trenching-sampling completed on the Auden Project for Wing Resources Inc/Landore Resources Inc. Ontario Thunder Bay Mining Division Assessment File Report 2.19123, January 20, 1999, 31 pp.
- Leitch C. (2011) [Petrographic Report on 11 Samples for M. Tuomi Landore Resources-*unofficial title*] Report # 110921: Contents: Swole Lake and B4-8 West Petrographic Report Oct 2011, un-published report. Oct 2011, 15 pp.
- Lester, J. (2009b): Geology VW 091309. Unpublished summary report prepared for Landore Resources Canada Inc., September 13, 2009, 12 p.
- Lester, J./Tuomi, M. (2012): Work Assessment Report on the Junior Lake Property, 2011 Exploration Diamond Drill Program (B4-8 zone, VW West), Unpublished Landore Resources Canada Inc. report submitted to the MNDM for assessment credit, May 10, 2012.
- MacTavish, A.D. (2004): Summary Report on the 2003 Exploration of the Junior Lake and Lamaune Properties, Unpublished report prepared for Landore Resources Inc.
- MacTavish, A.D. (2004a): Diamond Drilling of the BAM and B4-7 Zones, Junior Lake Property, 2003, Unpublished report prepared for Landore Resources Inc.
- MacTavish, A. D. (2004b): Summary report on the 2003 exploration of the Junior Lake and Lamaune properties. Unpublished Landore Resources report, February 15, 2004.
- McKay, B. J. (2006): Technical report of the Junior Lake Project Falcon Lake and Junior

- Lake areas NTS 2I/08NE and SE, 42L/05NW and SW for Landore Resources Canada Inc. Unpublished draft company report, Volumes I to IV, 35 pp. (Vol. 1).
- Mungall, J. E. (2009): Preliminary petrological report on samples from the Junior Lake Property; Picrite Consulting Inc. unpublished report, 28 pp.
- Percival, J. A. (2007): Geology and metallogeny of the Superior Province, Canada; *in* Goodfellow, W.D., ed., Mineral deposits of Canada: A synthesis of major deposit-types, district metallogeny, the evolution of the Geological Provinces, and exploration methods: Geological Association of Canada, Mineral Deposits Division, Special Publication, No 5, pp. 903-928.
- Pressacco, R. (2013): Technical Report on the Mineral Resource Estimate for the B4-7 Zone, Junior Lake Project, Ontario, Canada, NI 43-101 Report prepared for Landore Resources Canada Inc., February 20, 2013.
- Pye, E.G., (1968): Geology of the Crescent Lake Area, District of Thunder Bay; Ontario Department of Mines, Geological Report 55, 72p.
- Routledge, R.E. (2010): Technical Report on the Resource Estimate for the B4-7 Zone, Junior Lake Property, Ontario, Canada, NI 43-101 Report prepared for Landore Resources Canada Inc., March 5, 2010.
- Routledge, R.E. (2010b): Technical Report on the Resource Estimate Update for the VW Deposit, Junior Lake Property, Ontario, Canada, NI 43-101 Report prepared for Landore Resources Canada Inc., January 15, 2010.
- Routledge, R. E. (2006): Technical report on the B4-7 zone Junior Lake property prepared for Landore Resources Canada Inc. Unpublished Roscoe Postle Associates Inc. report, March 17, 2006, 90 pp.
- Routledge, R. E. (2006): Technical report on the B4-7 zone Junior Lake property prepared for Landore Resources Canada Inc. Unpublished Roscoe Postle Associates Inc. report, March 17, 2006, 90 pp.
- Simoneau, P. (2013): Technical report on the Electromagnetic (MaxMin), VLF and Magnetometric Surveys on Junior Lake property, Toronto Lake Area, prepared by Geosig Inc. for Landore Resources Inc. December 20, 2013, 27p.
- Tuomi, M. (2010): Work Assessment Report on the Junior Lake Property – 2008-2009 Exploration Diamond Drill Program (Whale Zone, B4-8 Zone, Windy Hill), Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, September 2, 2010.
- Tuomi, M. (2010): Work Assessment Report on the Junior Lake Property, 2010 Lamaune Diamond Drill Program (Lamaune Gold Prospect, Carrot Top Zone), Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, December 3, 2010.

- Tuomi, M. (2013): Work Assessment Report on the Junior Lake Property, 2012 Ground Geophysics Program, DCIP + MT Survey (Scorpion Zone), Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, June 19, 2013.
- Tuomi, M. (2016): Work Assessment Report on the Junior Lake Property, 2014 Summer Diamond Drill Program (B4-7 East Area), Unpublished Landore Resources Canada Inc. report submitted to the MNDMF for assessment credit, April 7, 2016.
- Zurowski, M. (1970): Report on the exploration activities in the Pikitigushi-Crescent-Toronto lakes area, Thunder Bay Mining Division, Province of Ontario for the calendar year 1969. Unpublished M.E.M. Consultants Limited report, October 19, 1970, 24 p.

16 SIGNATURE PAGE

This report titled “Work Assessment Report on the Junior Lake Property – 2015 Winter Diamond Drill Program (B4-7 Deposit) – January 26, 2017” was prepared by M. Tuomi and signed by the following Author:



Michele Tuomi, P.Geol.
Landore Resources Canada Inc.

Thunder Bay, Ontario
January 26, 2017

17 CERTIFICATE OF QUALIFIED PERSON

Michele Tuomi, P.Geol.
Landore Resources Canada Inc.
555 Central Avenue, Suite 1
Thunder Bay, ON
P7B 5R5

Tel: +1 807 623 3770

I, Michele Tuomi, am a Professional Geoscientist, employed as a VP Exploration of Landore Resources Canada Inc.

This certificate applies to the geological report titled “Work Assessment Report on the Junior Lake Property – 2015 Winter Diamond Drill Program (B4-7 Deposit) – January 26, 2017)” dated September 9, 2016.

I am a member of the Association of Professional Geoscientists of Ontario. I graduated with a BSc. degree in Geology from Lakehead University in 1999.

I have practiced my profession for 17 years. I have been directly involved in mineral exploration and mineral project assessment, as well as mineral resource estimations.


I have visited the Junior Lake property in northern Ontario, Canada on numerous occasions, the most recent being November 17, 2016.

I am responsible for all items of the assessment report “Work Assessment Report on the Junior Lake Property – 2015 Winter Diamond Drill Program (B4-7 Deposit) – January 26, 2017”.

As of the date of this certificate, to the best of my knowledge, information and belief, the technical report contains all scientific and technical information that is required to be disclosed to make the assessment report not misleading.



Michele Tuomi, P.Geol.

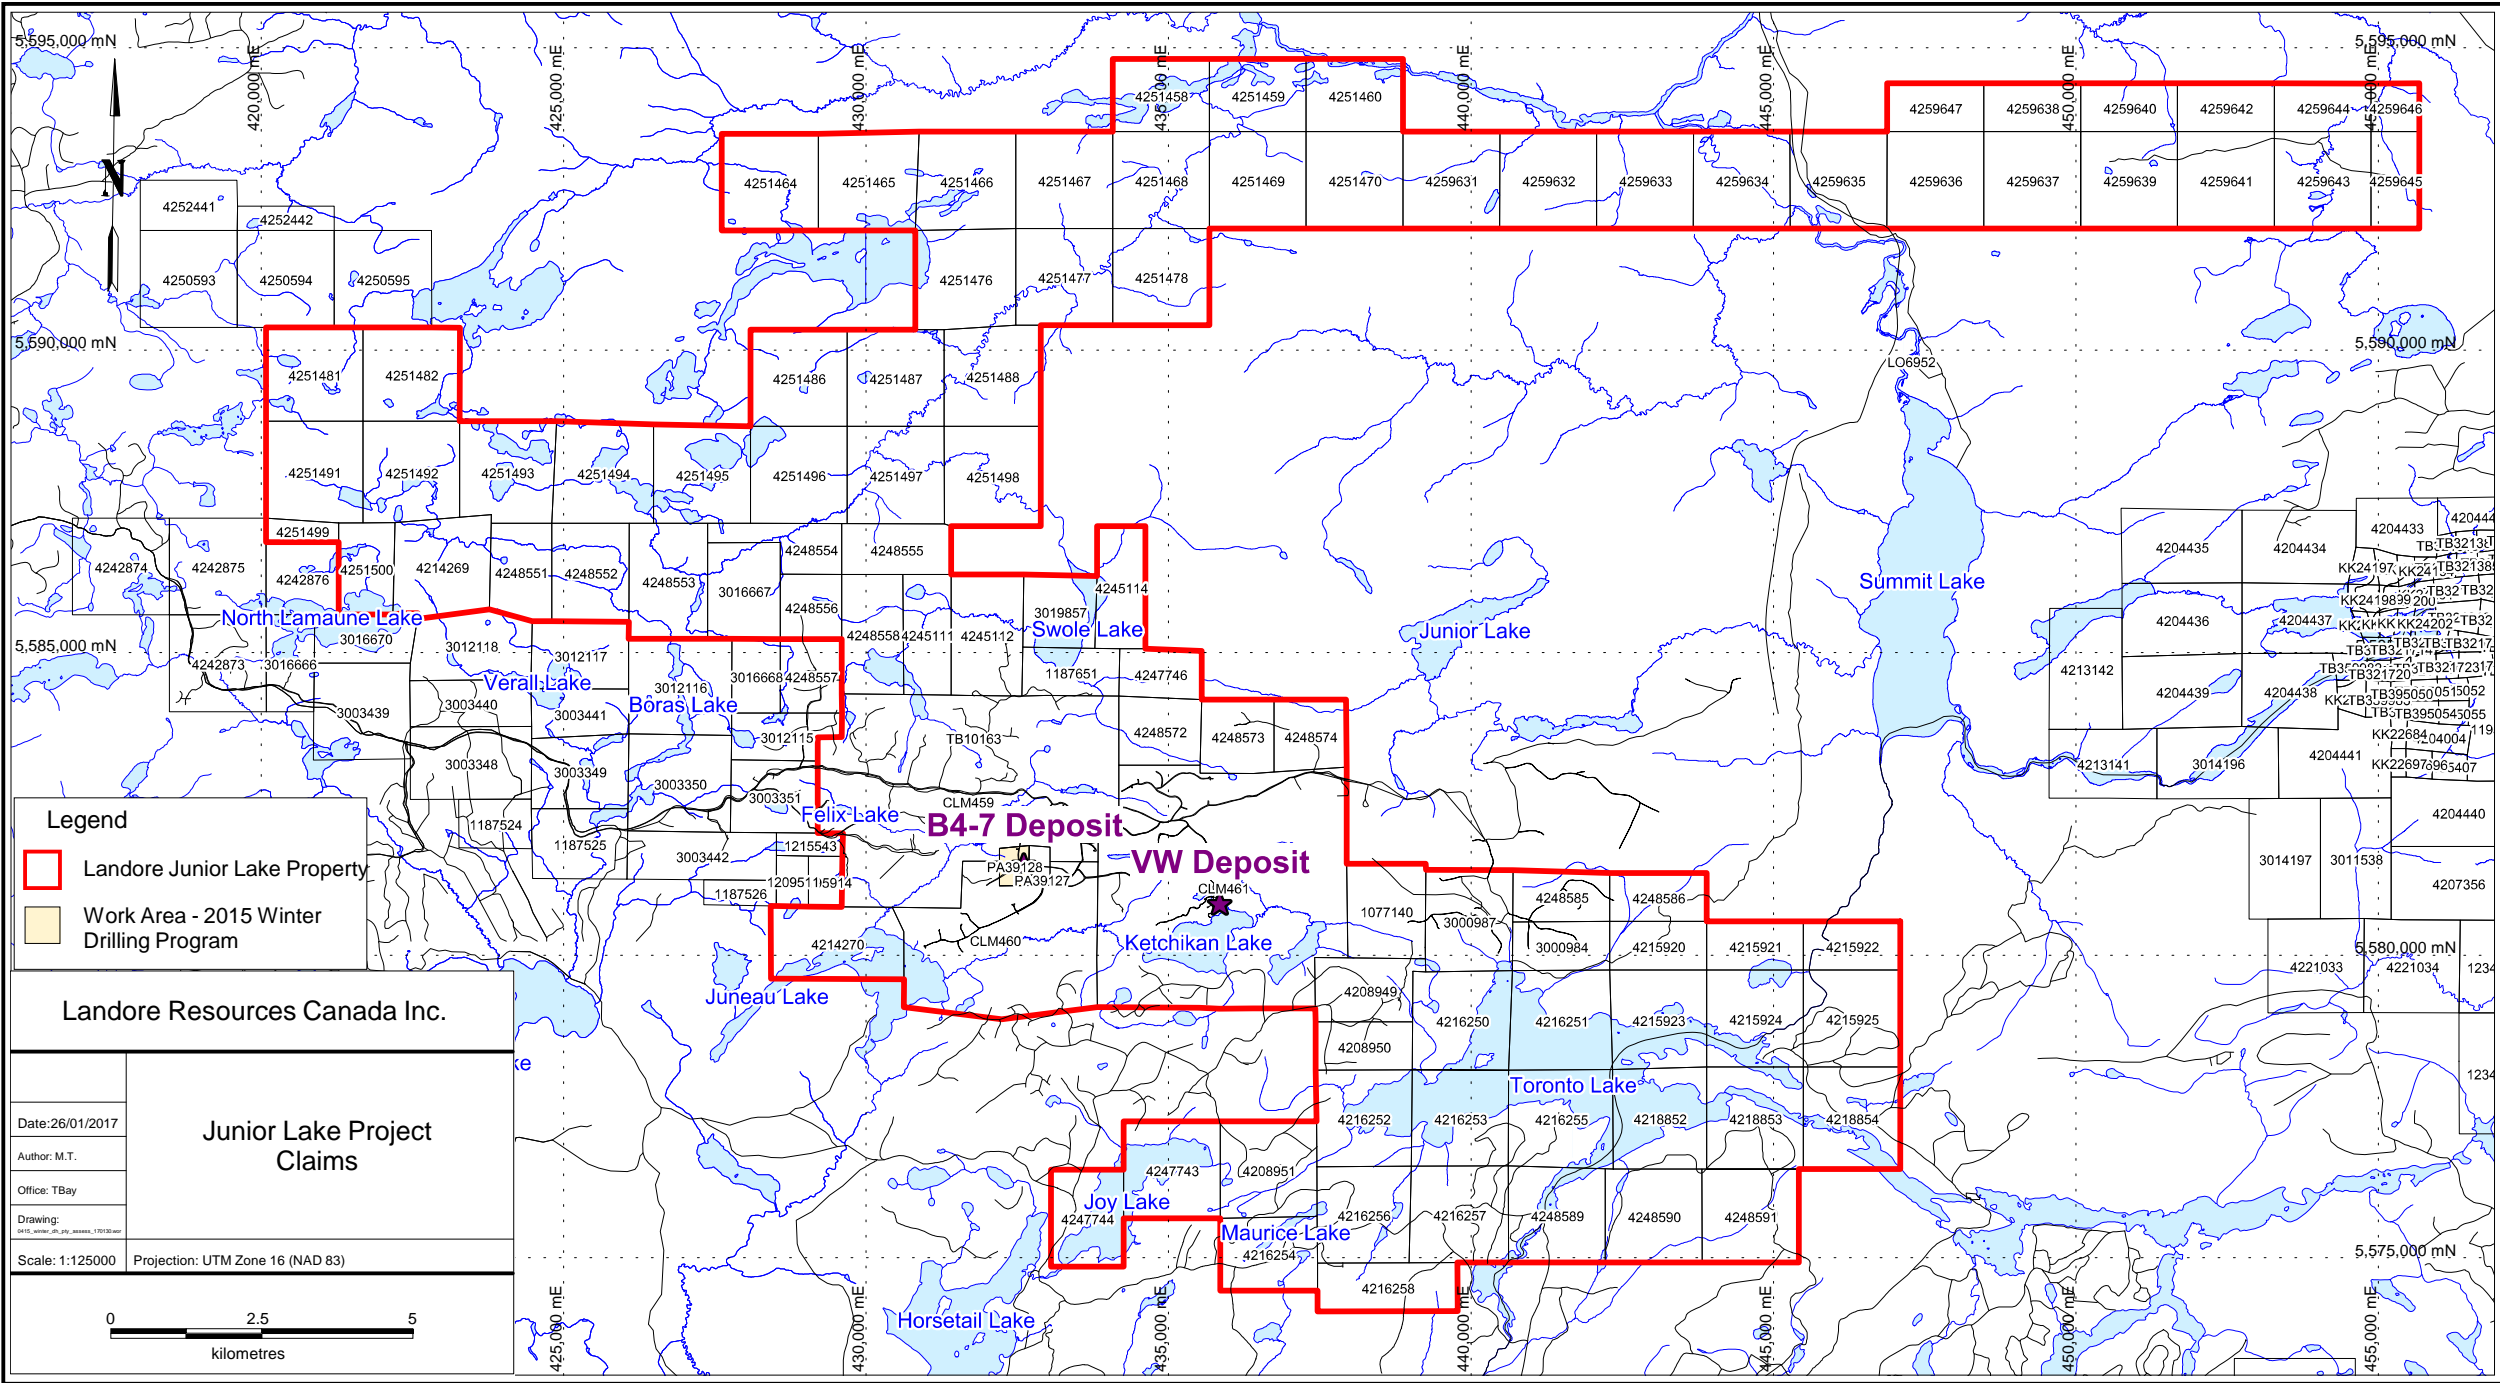


Legend

- Landore Junior Lake Property
- Work Area - 2015 Winter Drilling Program

Landore Resources Canada Inc.

Junior Lake Project Claims

| | |
|---|----------------------------------|
| Date: 26/01/2017 | |
| Author: M.T. | |
| Office: TBay | |
| Drawing: <small>0410_winter_dr_prog_junior_lake_170110.dwg</small> | |
| Scale: 1:125000 | Projection: UTM Zone 16 (NAD 83) |



Map 1
Junior Lake Property
B4-7 Deposit
2015 Winter Drilling Program

Date: 26/01/2017

Author: owner


Office: TBay

Drawing:


0415_winter_dr_assess_170126.dwg

Scale: 1:2000

Projection: UTM Zone 16 (NAD 83)



Magnetic Declination 2014
5°37' West

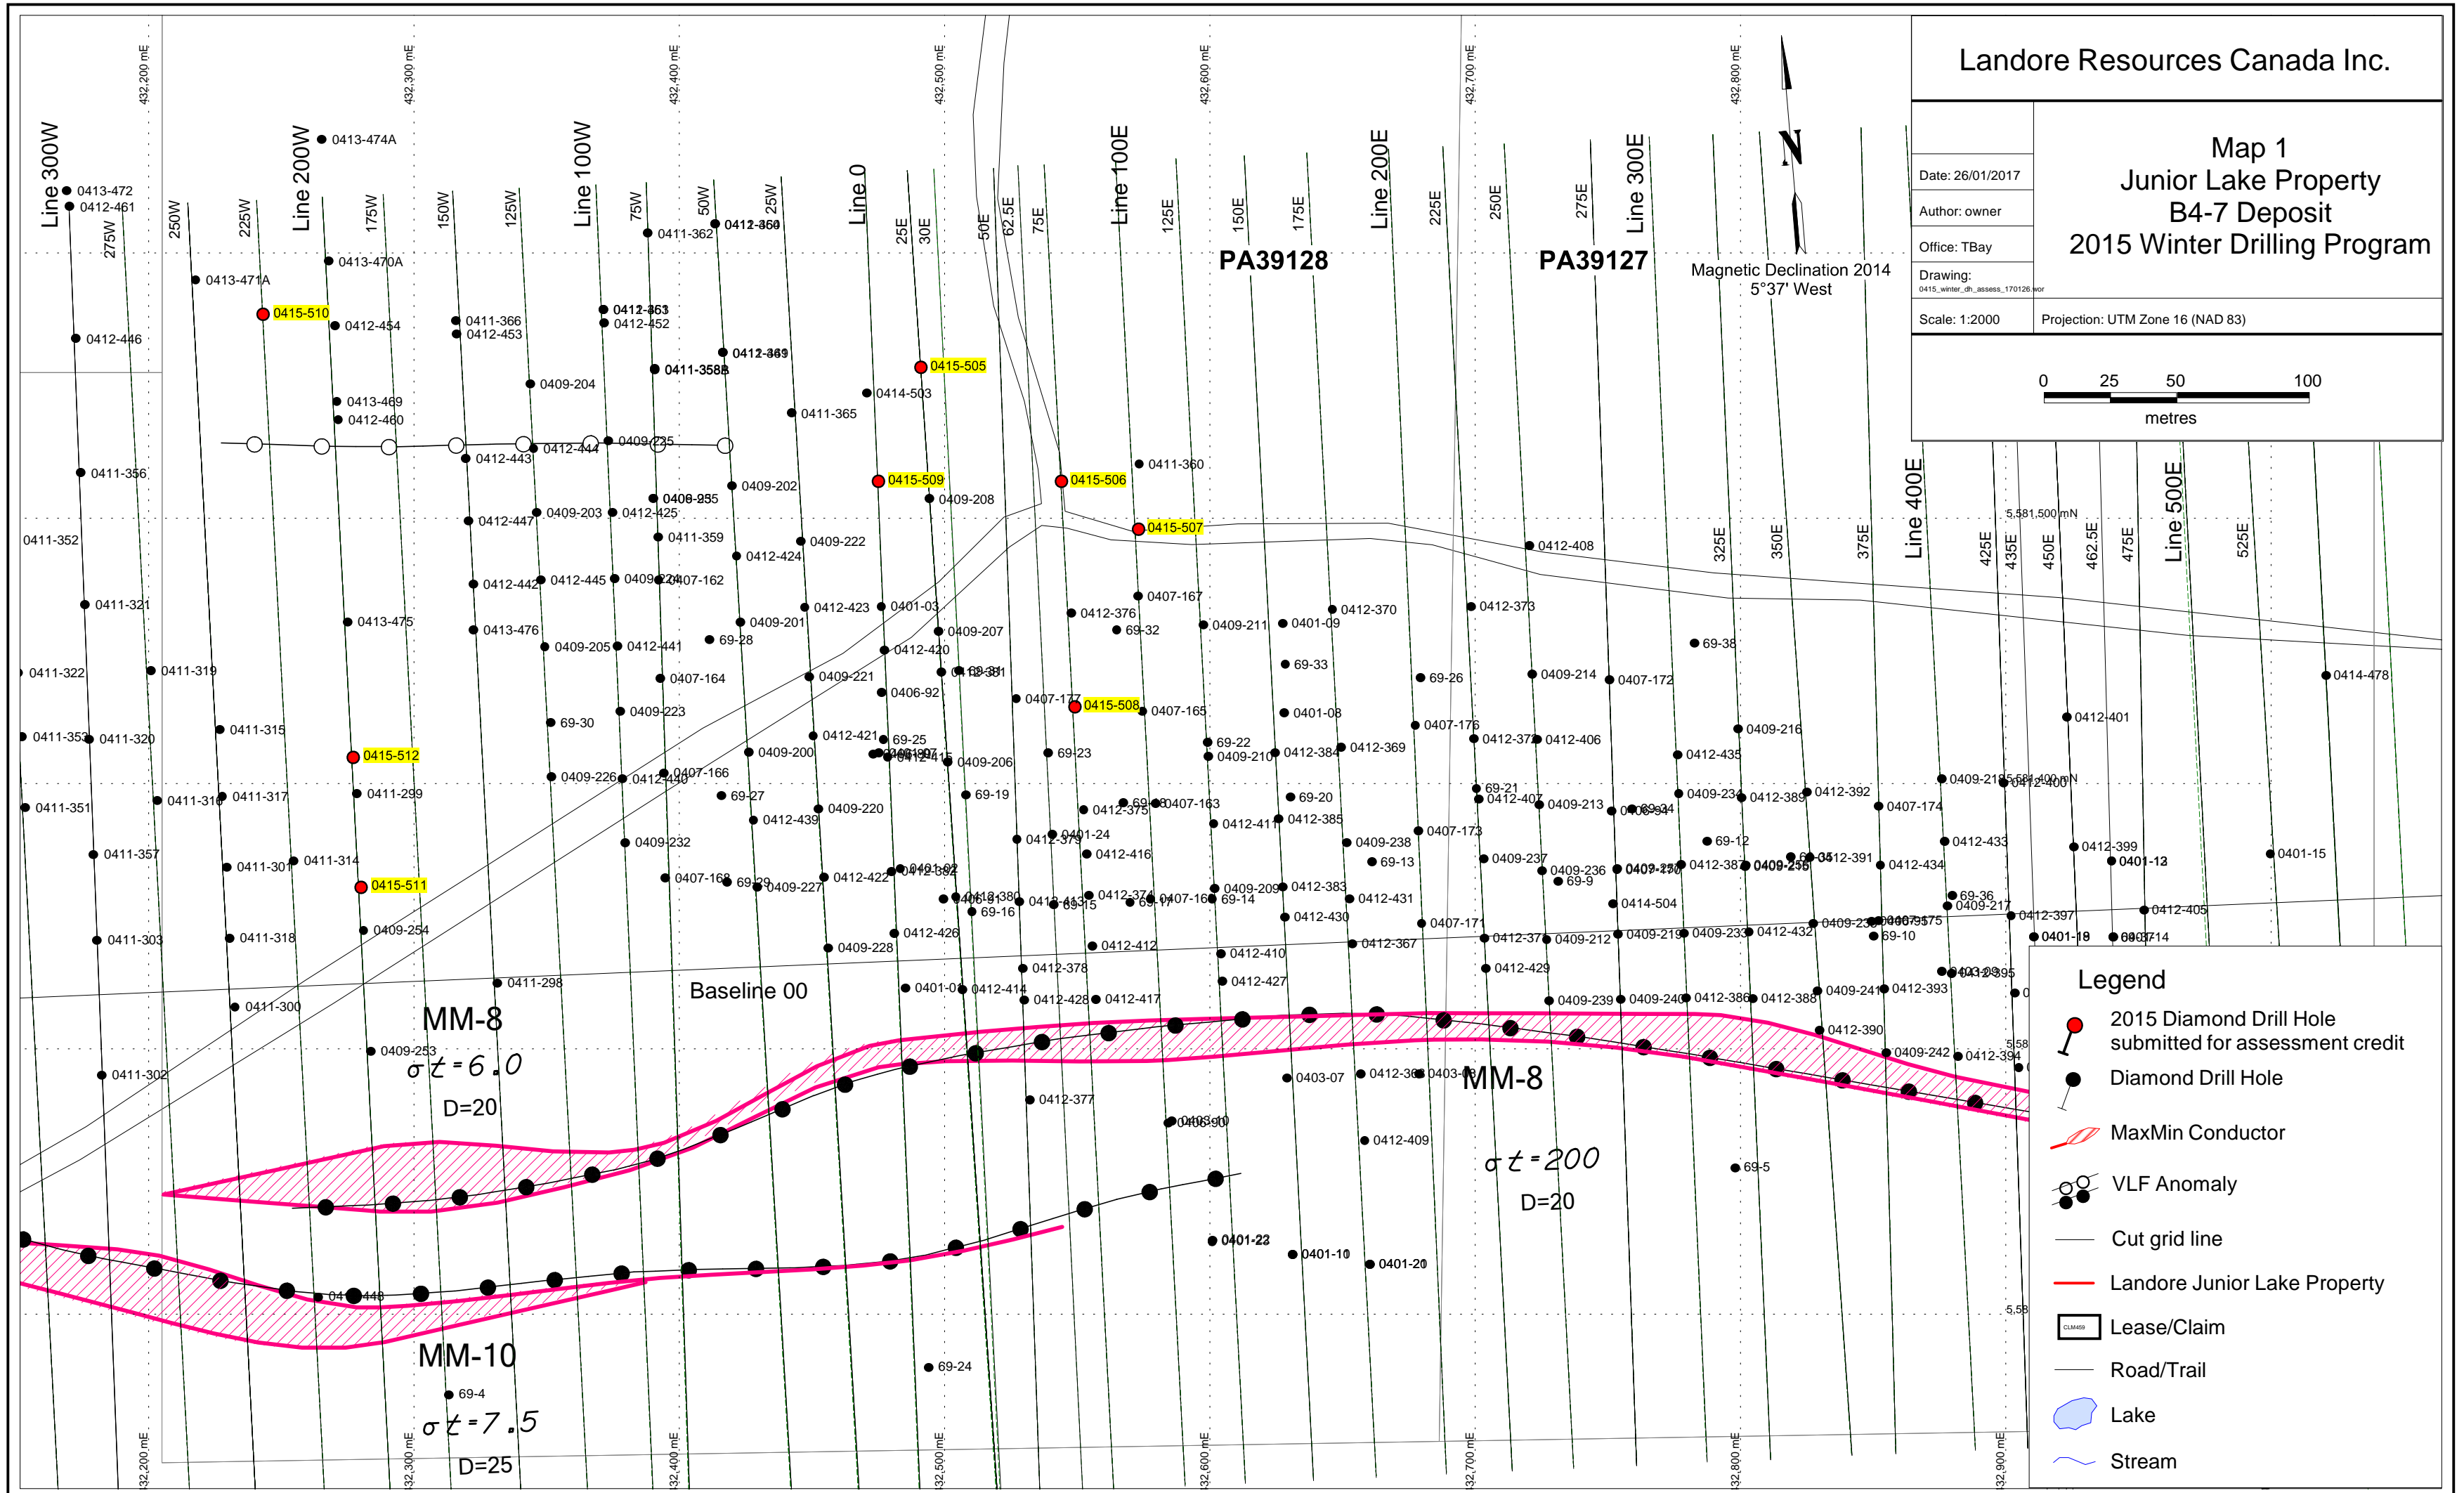

Legend

- 2015 Diamond Drill Hole submitted for assessment credit
- Diamond Drill Hole
- MaxMin Conductor
- VLF Anomaly
- Cut grid line
- Landore Junior Lake Property
- Lease/Claim
- Road/Trail
- Lake
- Stream

Map 2
Junior Lake Property
B4-7 Deposit
2015 Winter Drilling Program
Mag 1vd Base

Date: 26/01/2017

Author: owner



Office: TBay

Drawing:
0415_winter_dr_assess_170126.wor

Scale: 1:2000


Projection: UTM Zone 16 (NAD 83)

Magnetic Declination 2014
5°37' West

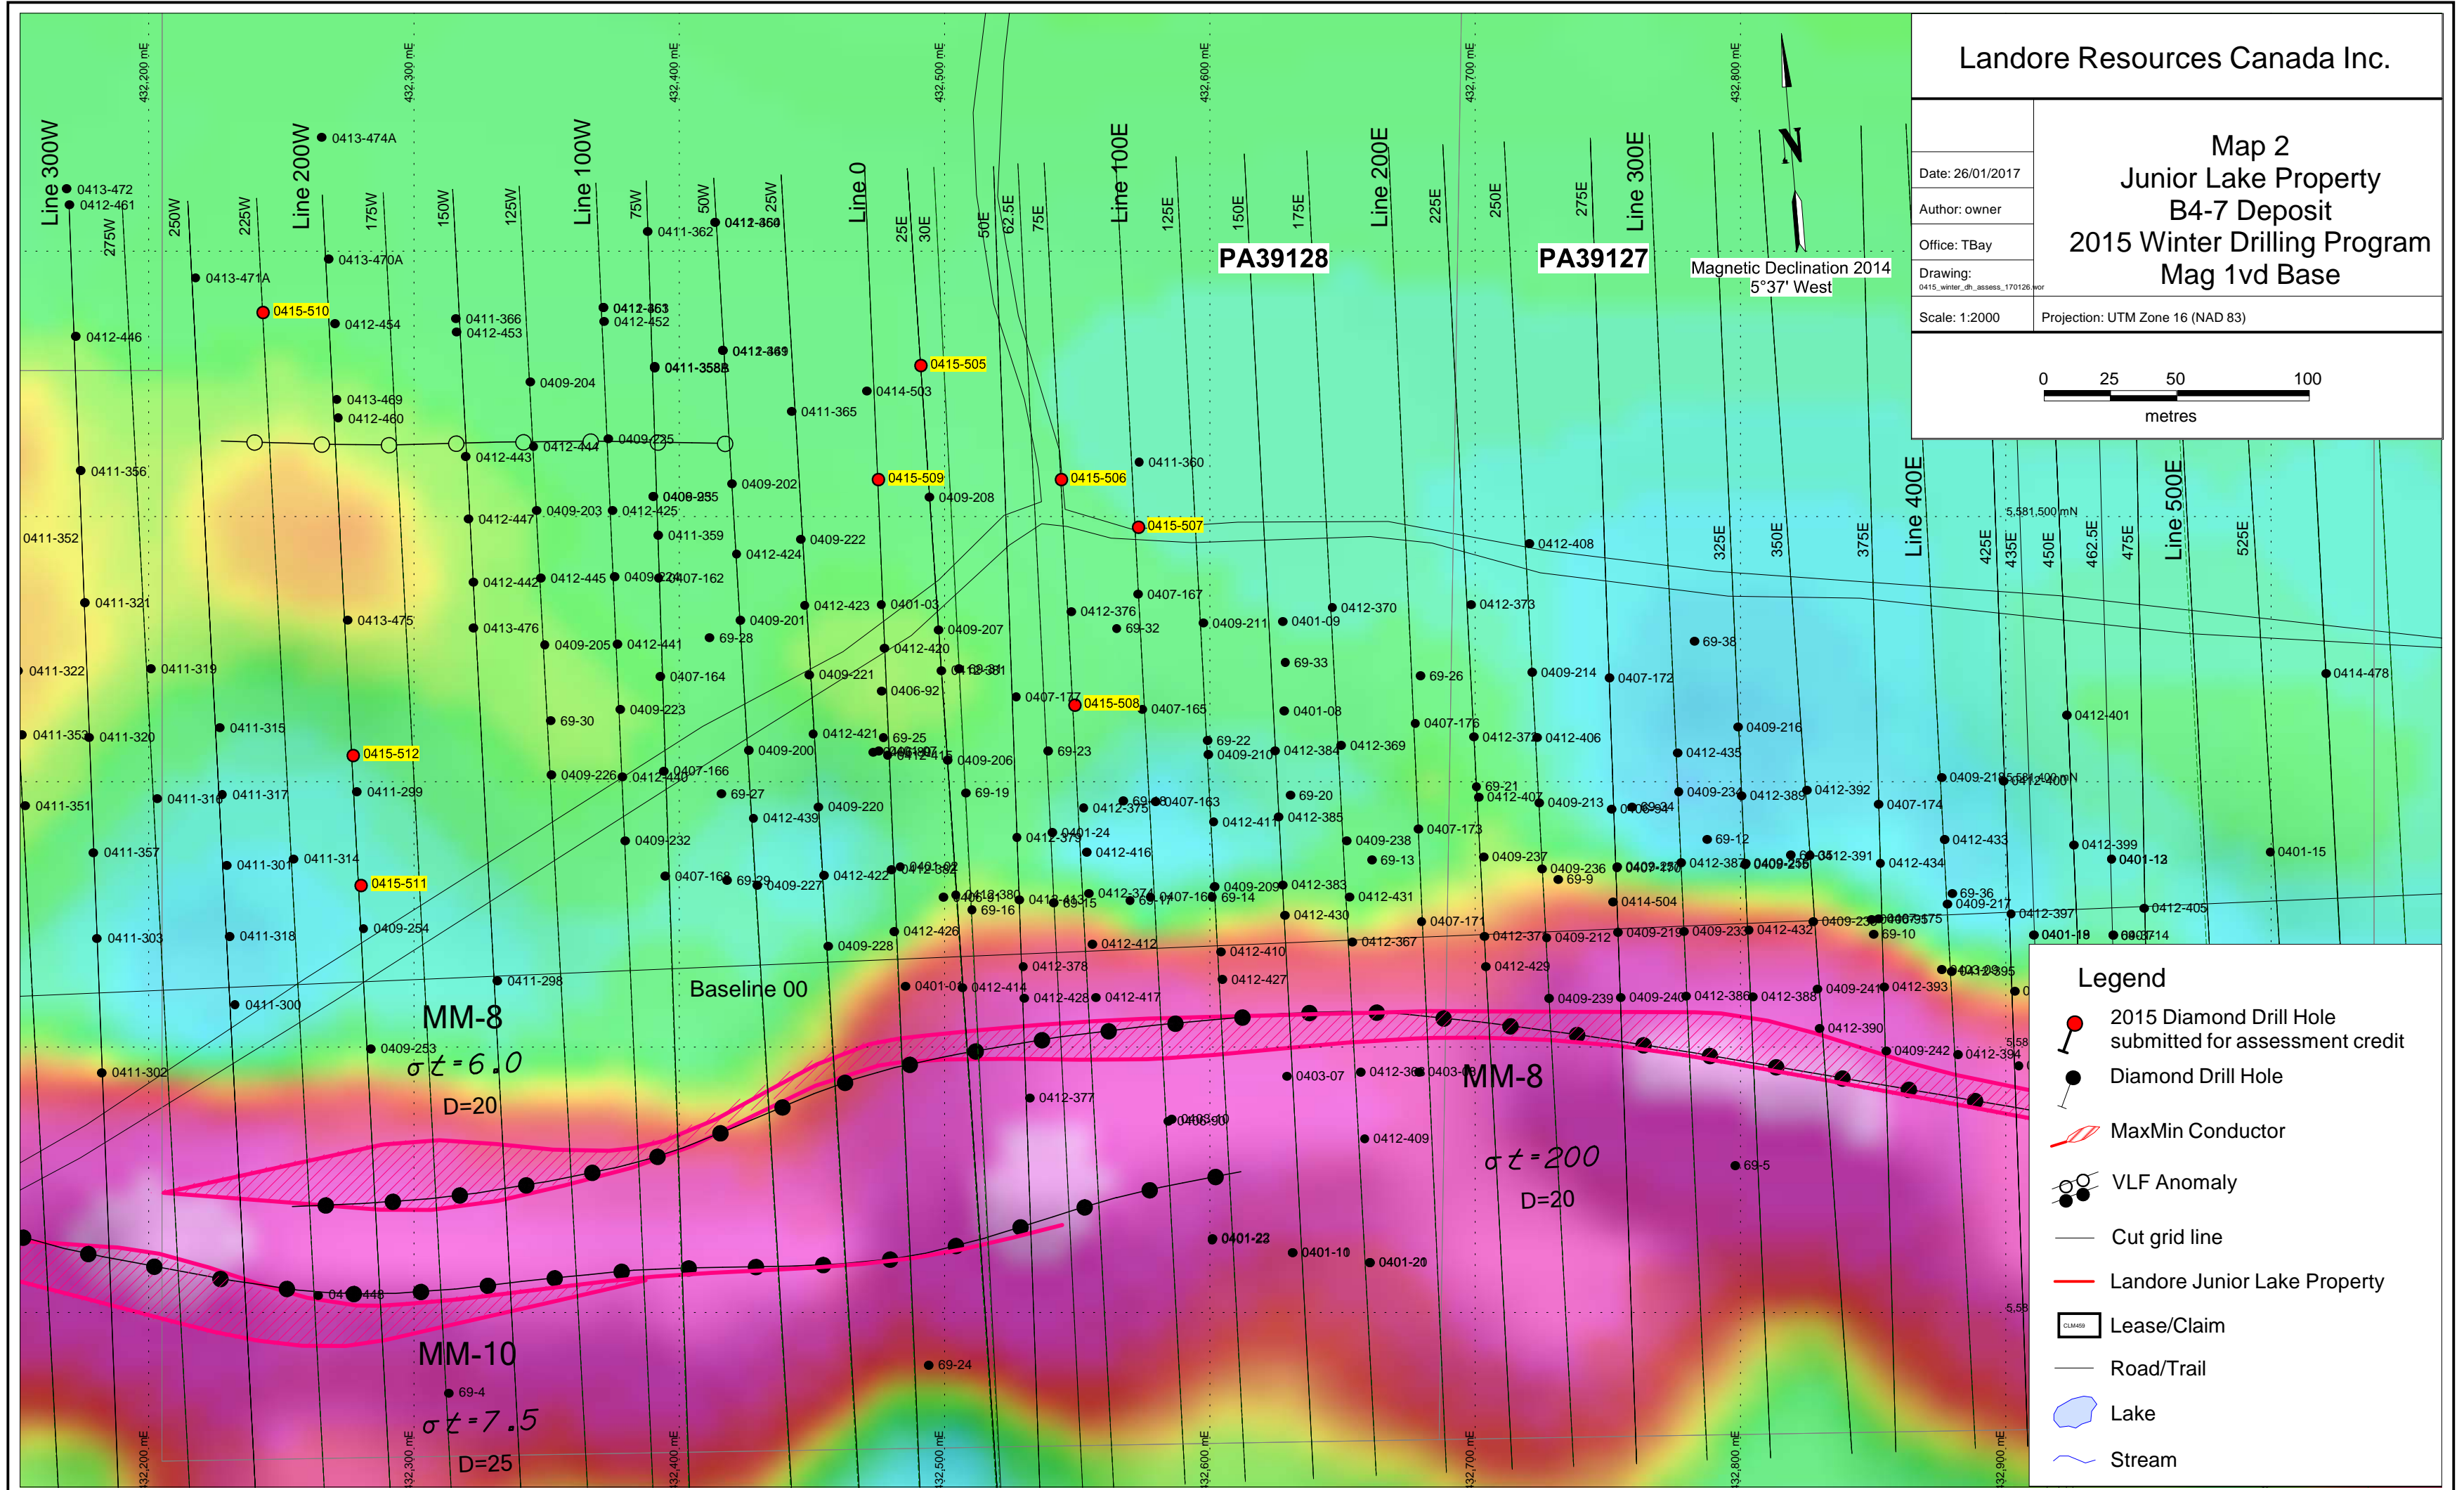

Legend

- 2015 Diamond Drill Hole submitted for assessment credit
- Diamond Drill Hole
- MaxMin Conductor
- VLF Anomaly
- Cut grid line
- Landore Junior Lake Property
- Lease/Claim
- Road/Trail
- Lake
- Stream

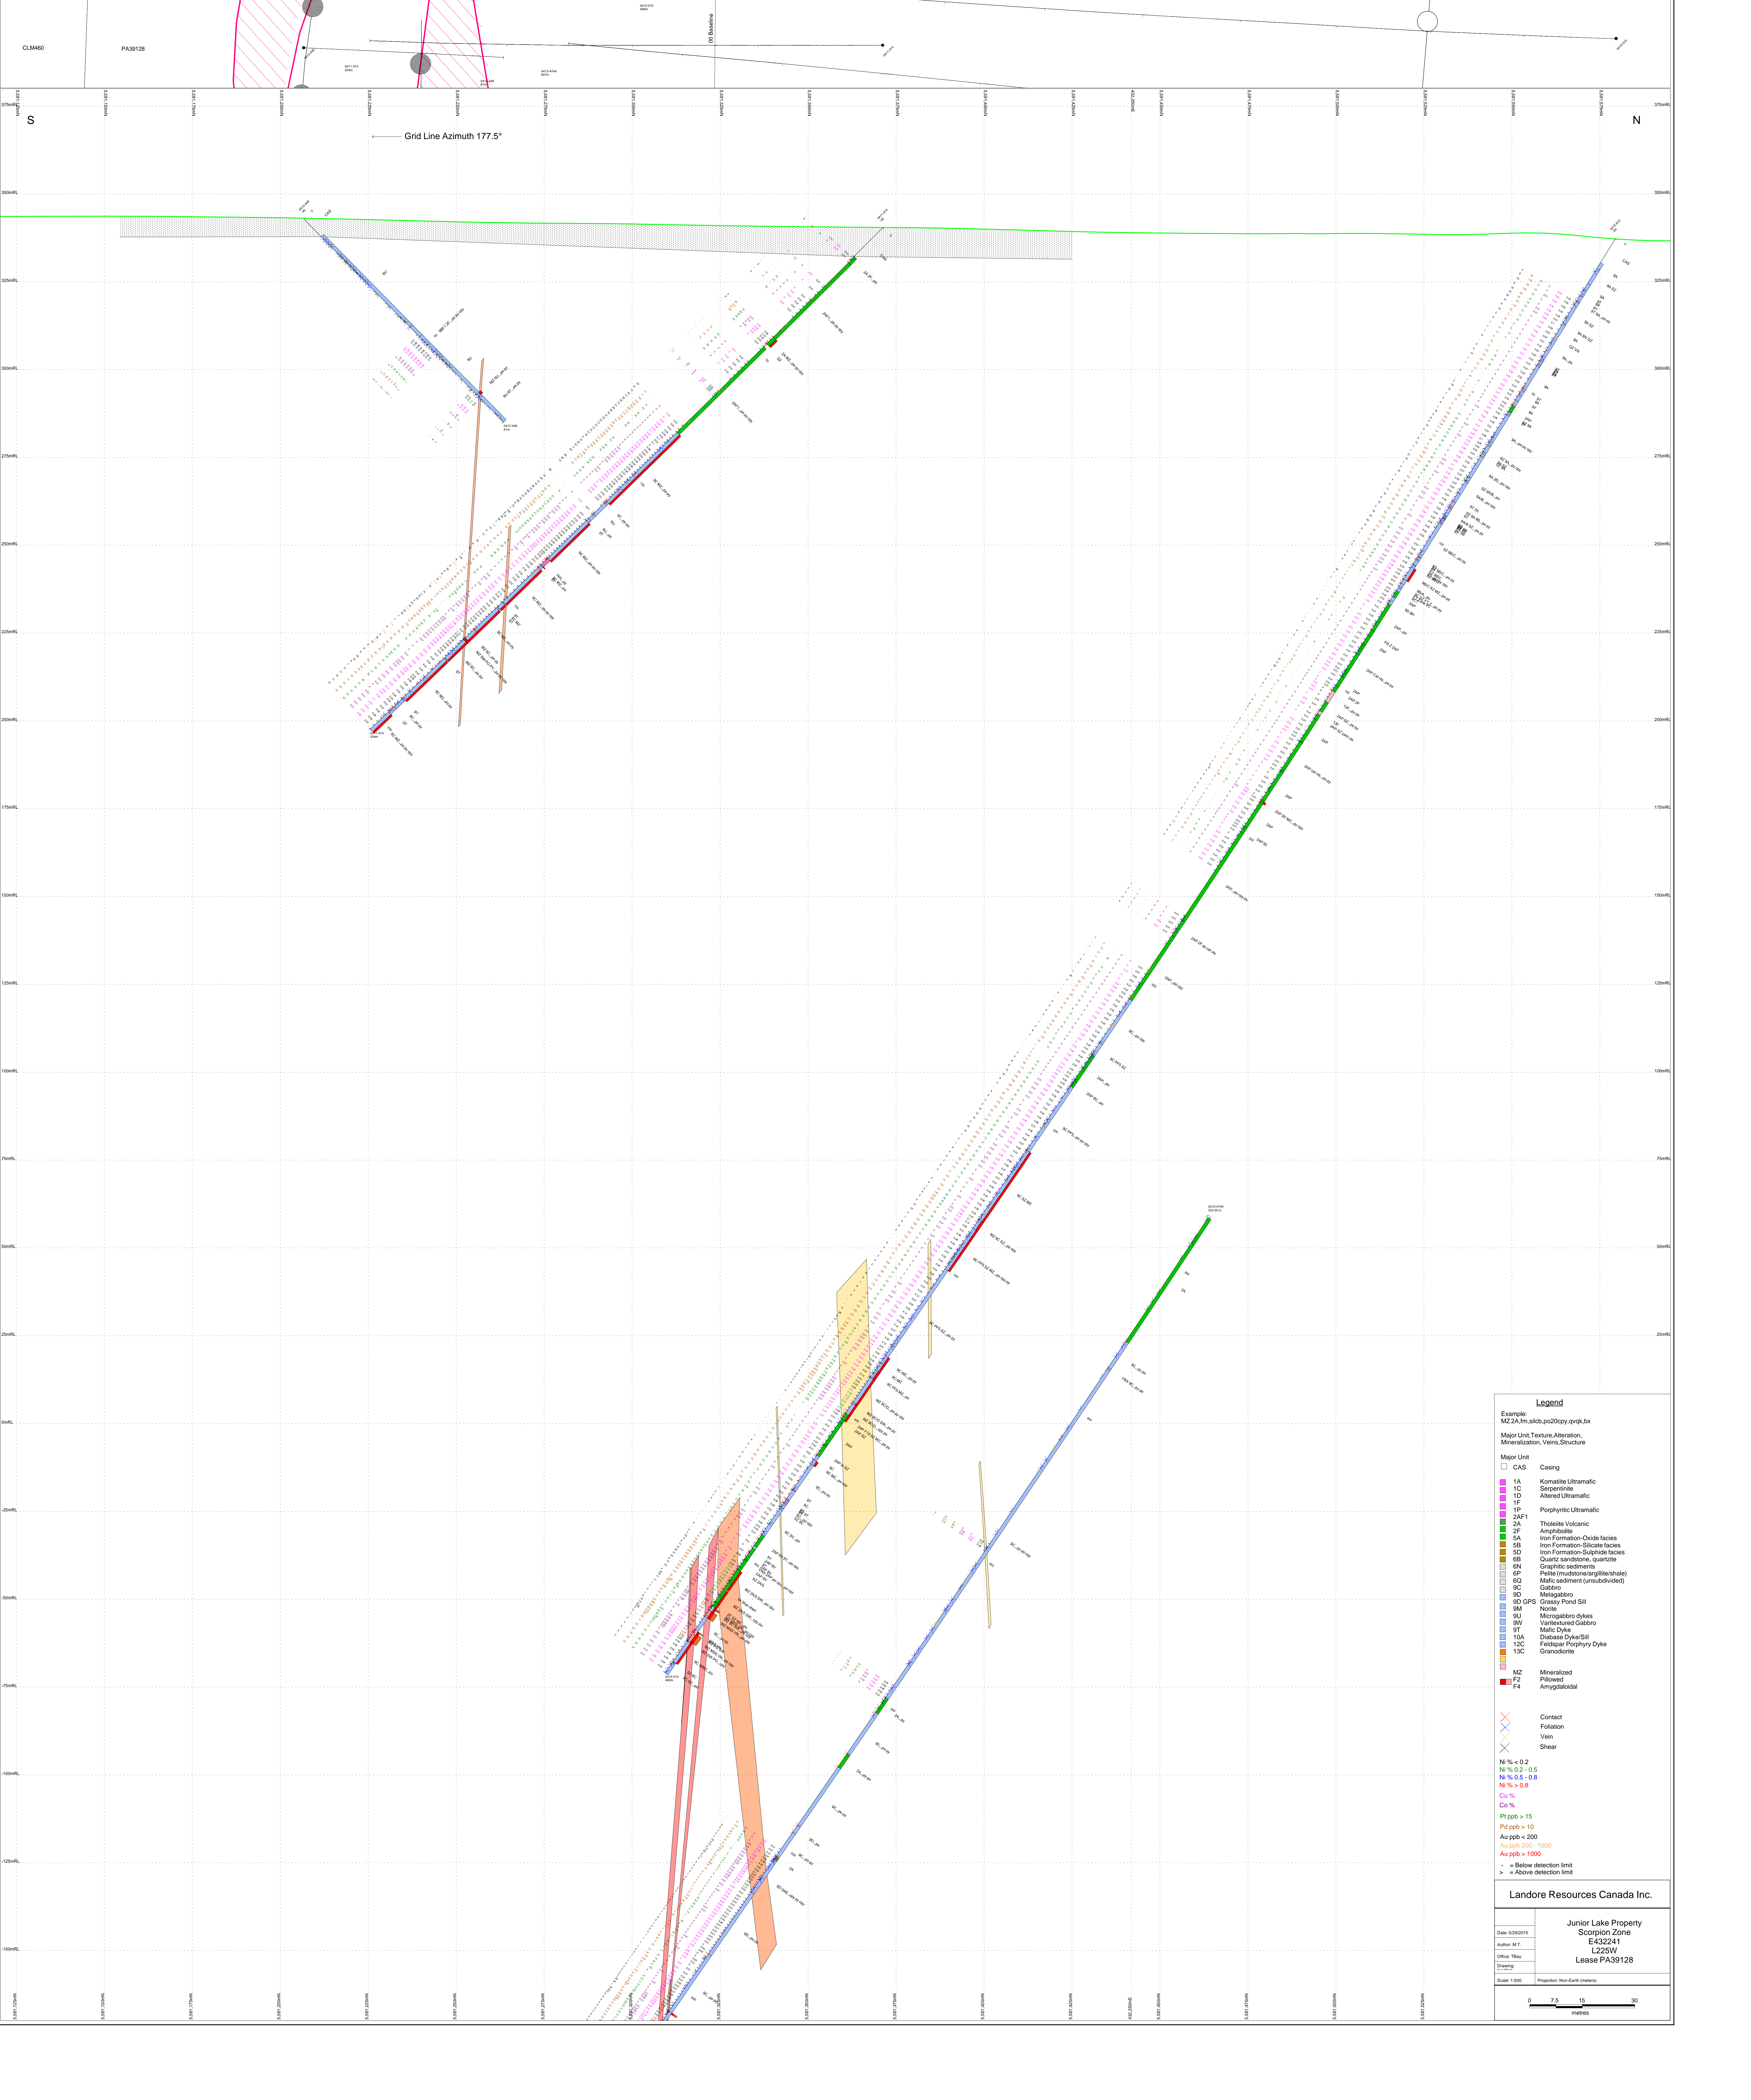

Legend

Example: MZ2A.fm.silcb.p020py.qvqk.bx

Major Unit, Texture, Alteration, Mineralization, Veins, Structure

Major Unit

- CAS Casing
- 1A Komatiite Ultramafic
- 1C Serpentine
- 1D Altered Ultramafic
- 1F Porphyritic Ultramafic
- 1P Porphyritic Ultramafic
- 2AF1 Tholeiite Volcanic
- 2A Amphibolite
- 2F Iron Formation-Oxide facies
- 5A Iron Formation-Silicate facies
- 5B Iron Formation-Sulphide facies
- 5D Quartz sandstone, quartzite
- 6N Graphitic sediments
- 6P Pelite (mudstone/siltstone/shale)
- 6Q Mafic sediment (unsubdivided)
- 9C Gabbro
- 9D Melagabbro
- 9D GPS Grassy Pond Sill
- 9W None
- 9U Microgabbro dykes
- 9V Unmineralized Gabbro
- 9T Mafic Dyke
- 10A Diabase Dyke/Sill
- 12C Feldspar Porphyry Dyke
- 13C Granodiorite
- MZ Mineralized
- P2 Pillowed
- F4 Amygdaloidal

Contact

Foliation

Vein

Shear

Ni % < 0.2

Ni % 0.2 - 0.5

Ni % 0.5 - 0.8

Ni % > 0.8

Cu %

Co %

Pt ppb > 15

Pd ppb > 10

Au ppb < 200

Au ppb 200 - 1000

Au ppb > 1000

- = Below detection limit

> = Above detection limit


Landore Resources Canada Inc.

Junior Lake Property
Scorpion Zone
E432241
L225W
Lease PA39128

Date: 05/09/15
Author: M.T.
Other: T.bay
Drawing

Scale: 1:500 Projection: Non Earth (metres)

0 7.5 15 30 metres

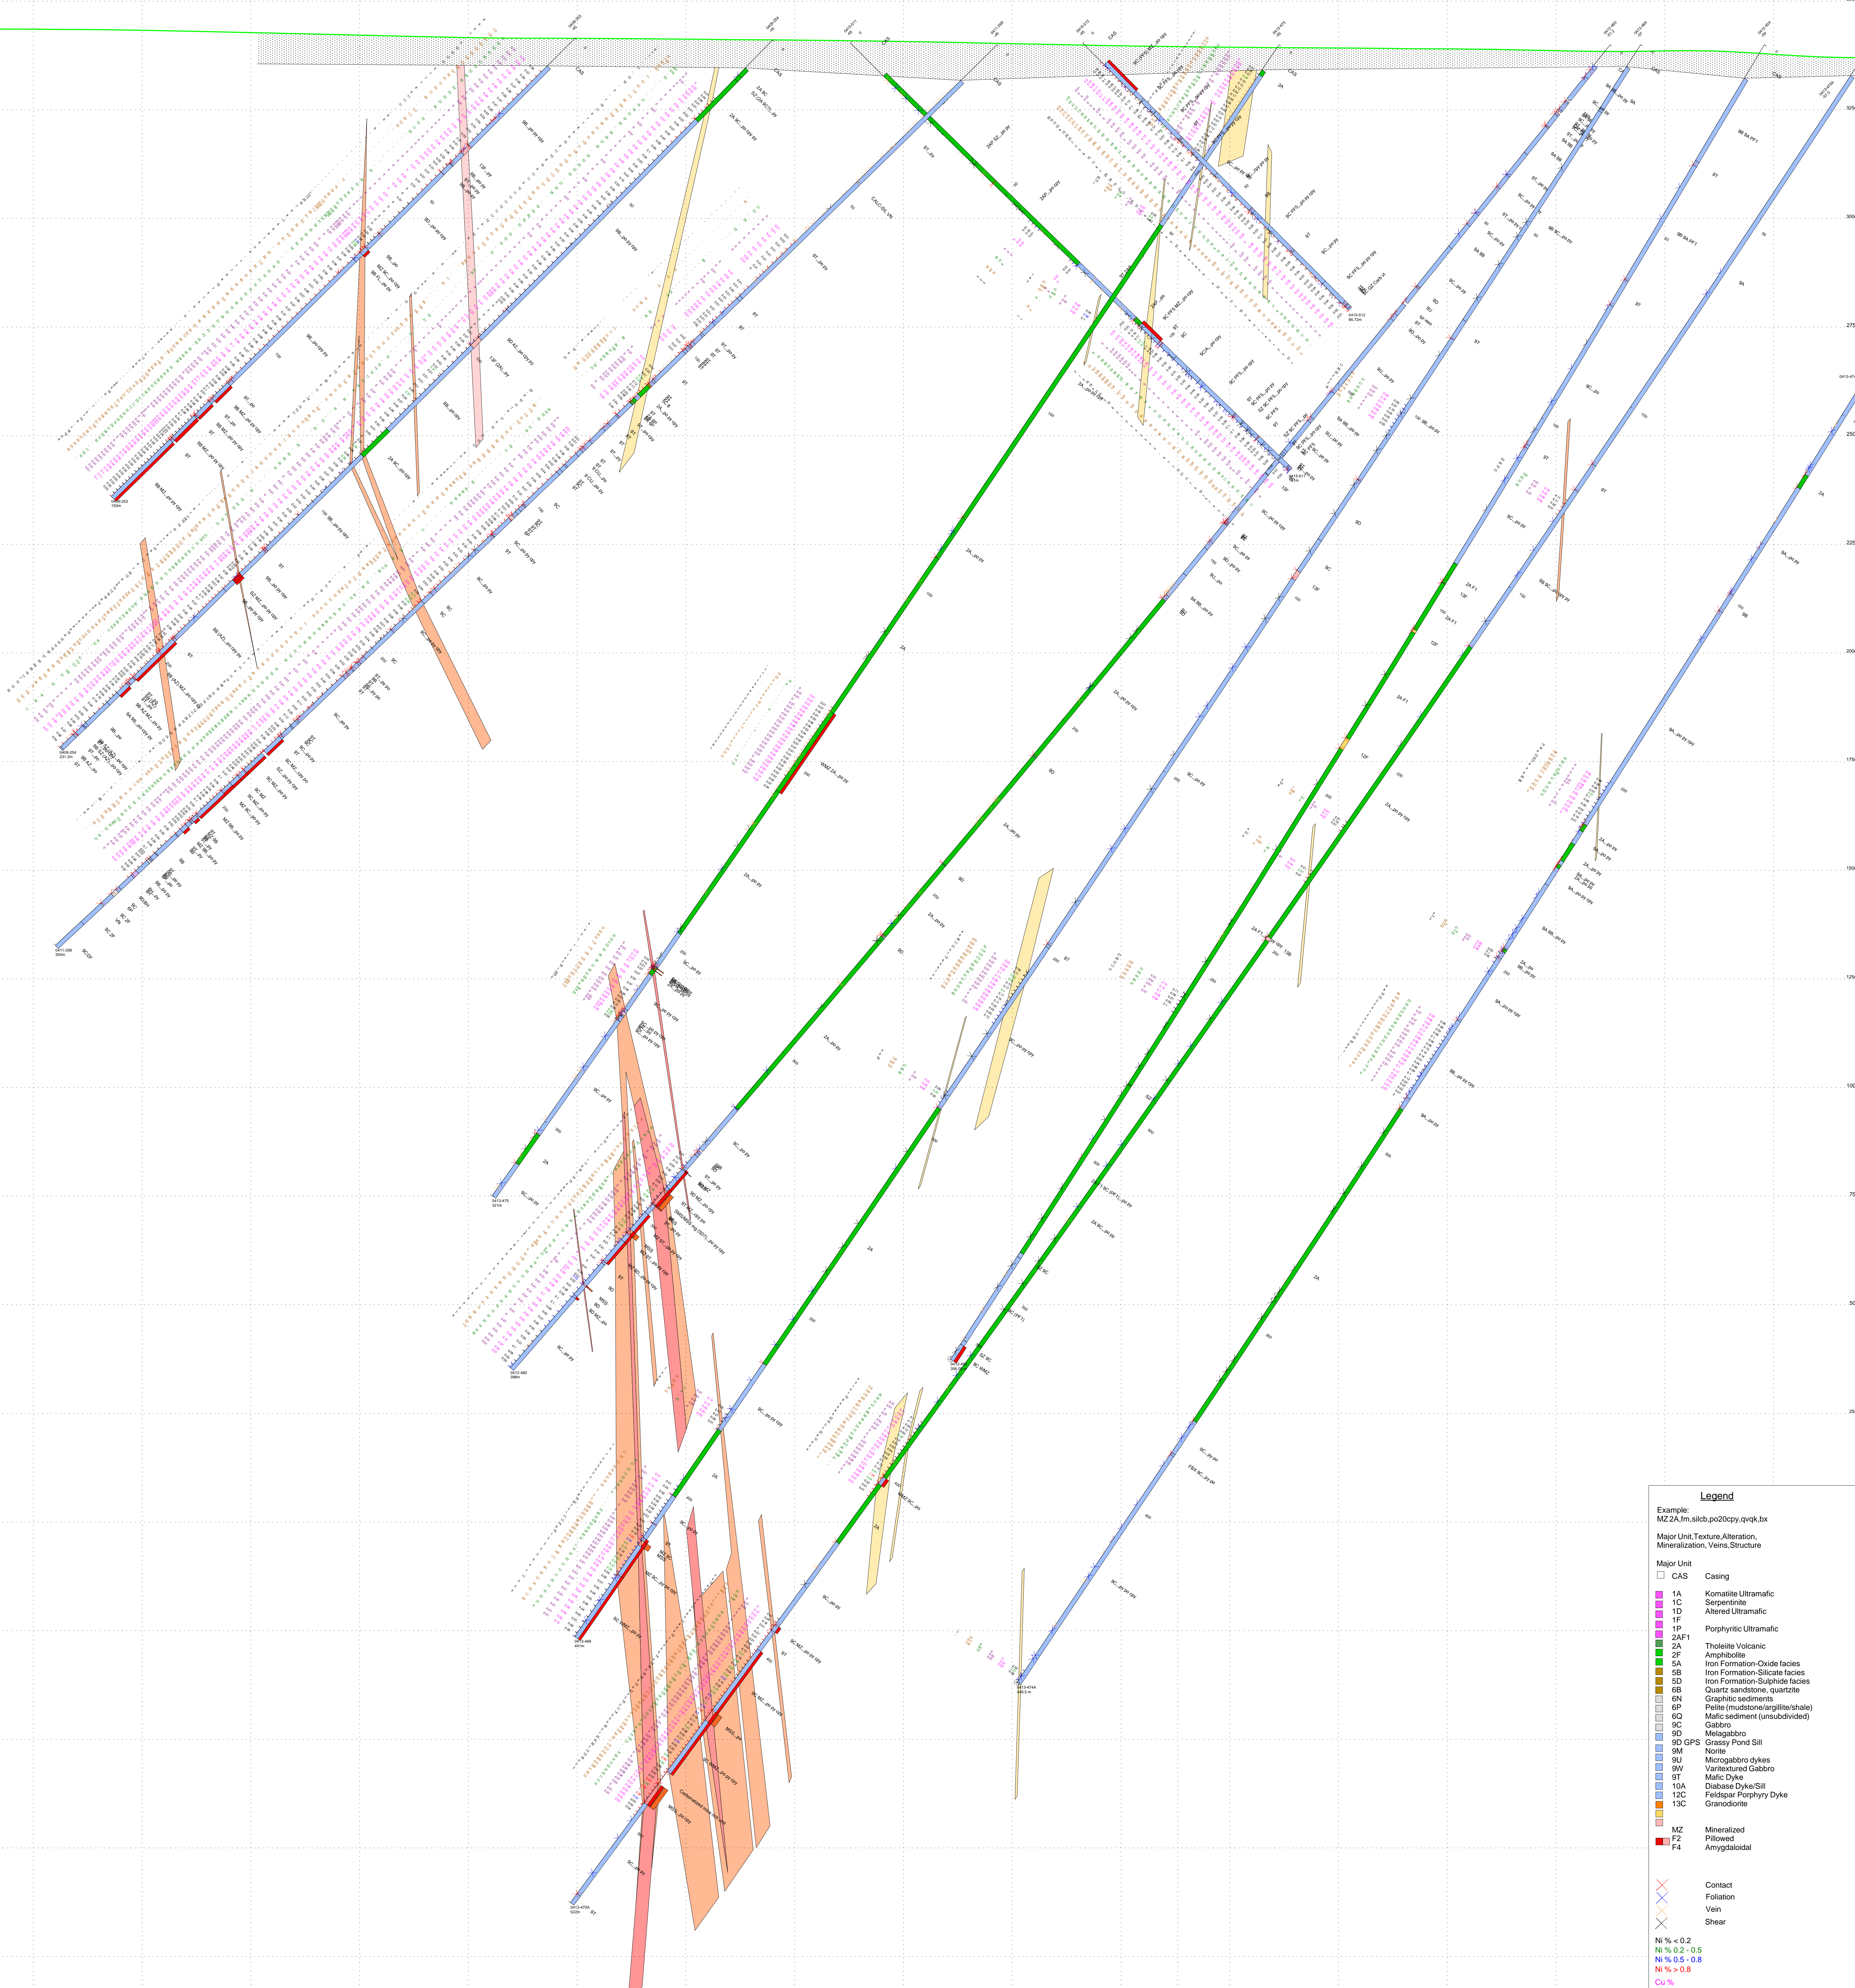

Legend

Example: MZ2A.fm.silic.p020py.qvqk.bx

Major Unit, Texture, Alteration, Mineralization, Veins, Structure

Major Unit

- CAS Casing
- 1A Komatiite Ultramafic
- 1C Serpentine
- 1D Altered Ultramafic
- 1F Porphyritic Ultramafic
- 1P Porphyritic Ultramafic
- 2AF1 Tholeiite Volcanic
- 2A Amphibolite
- 2F Iron Formation-Oxide facies
- 2K Iron Formation-Silicate facies
- 5B Iron Formation-Sulphide facies
- 5D Quartz sandstone, quartzite
- 6N Graphitic sediments
- 6P Pelite (mudstone/siltstone/shale)
- 6Q Mafic sediment (unsubdivided)
- 9C Gabbro
- 9D Melagabbro
- 9D GPS Grassy Pond Sill
- 9U Microgabbro dykes
- 9W Variscated Gabbro
- 9T Mafic Dyke
- 10A Diabase Dyke Sill
- 12C Feldspar Porphyry Dyke
- 13C Granodiorite
- MZ Mineralized
- F2 Pillowed
- F4 Amygdaloidal

Contact

Foliation

Vein

Shear

Ni % < 0.2

Ni % 0.2 - 0.5

Ni % 0.5 - 0.8

Ni % > 0.8

Cu %

Co %

Pt ppb > 15

Pd ppb > 10

Au ppb < 200

Au ppb 200 - 1000

Au ppb > 1000

- = Below detection limit


> = Above detection limit

Landore Resources Canada Inc.

Junior Lake Property
Scorpion Zone
E432265
L200W
Lease PA39128

Date: 09/09/15
Author: M.T.
Office: Tbay
Drawing:
Scale: 1:500 Projection: Non Earth (metres)

0 7.5 15 30 metres

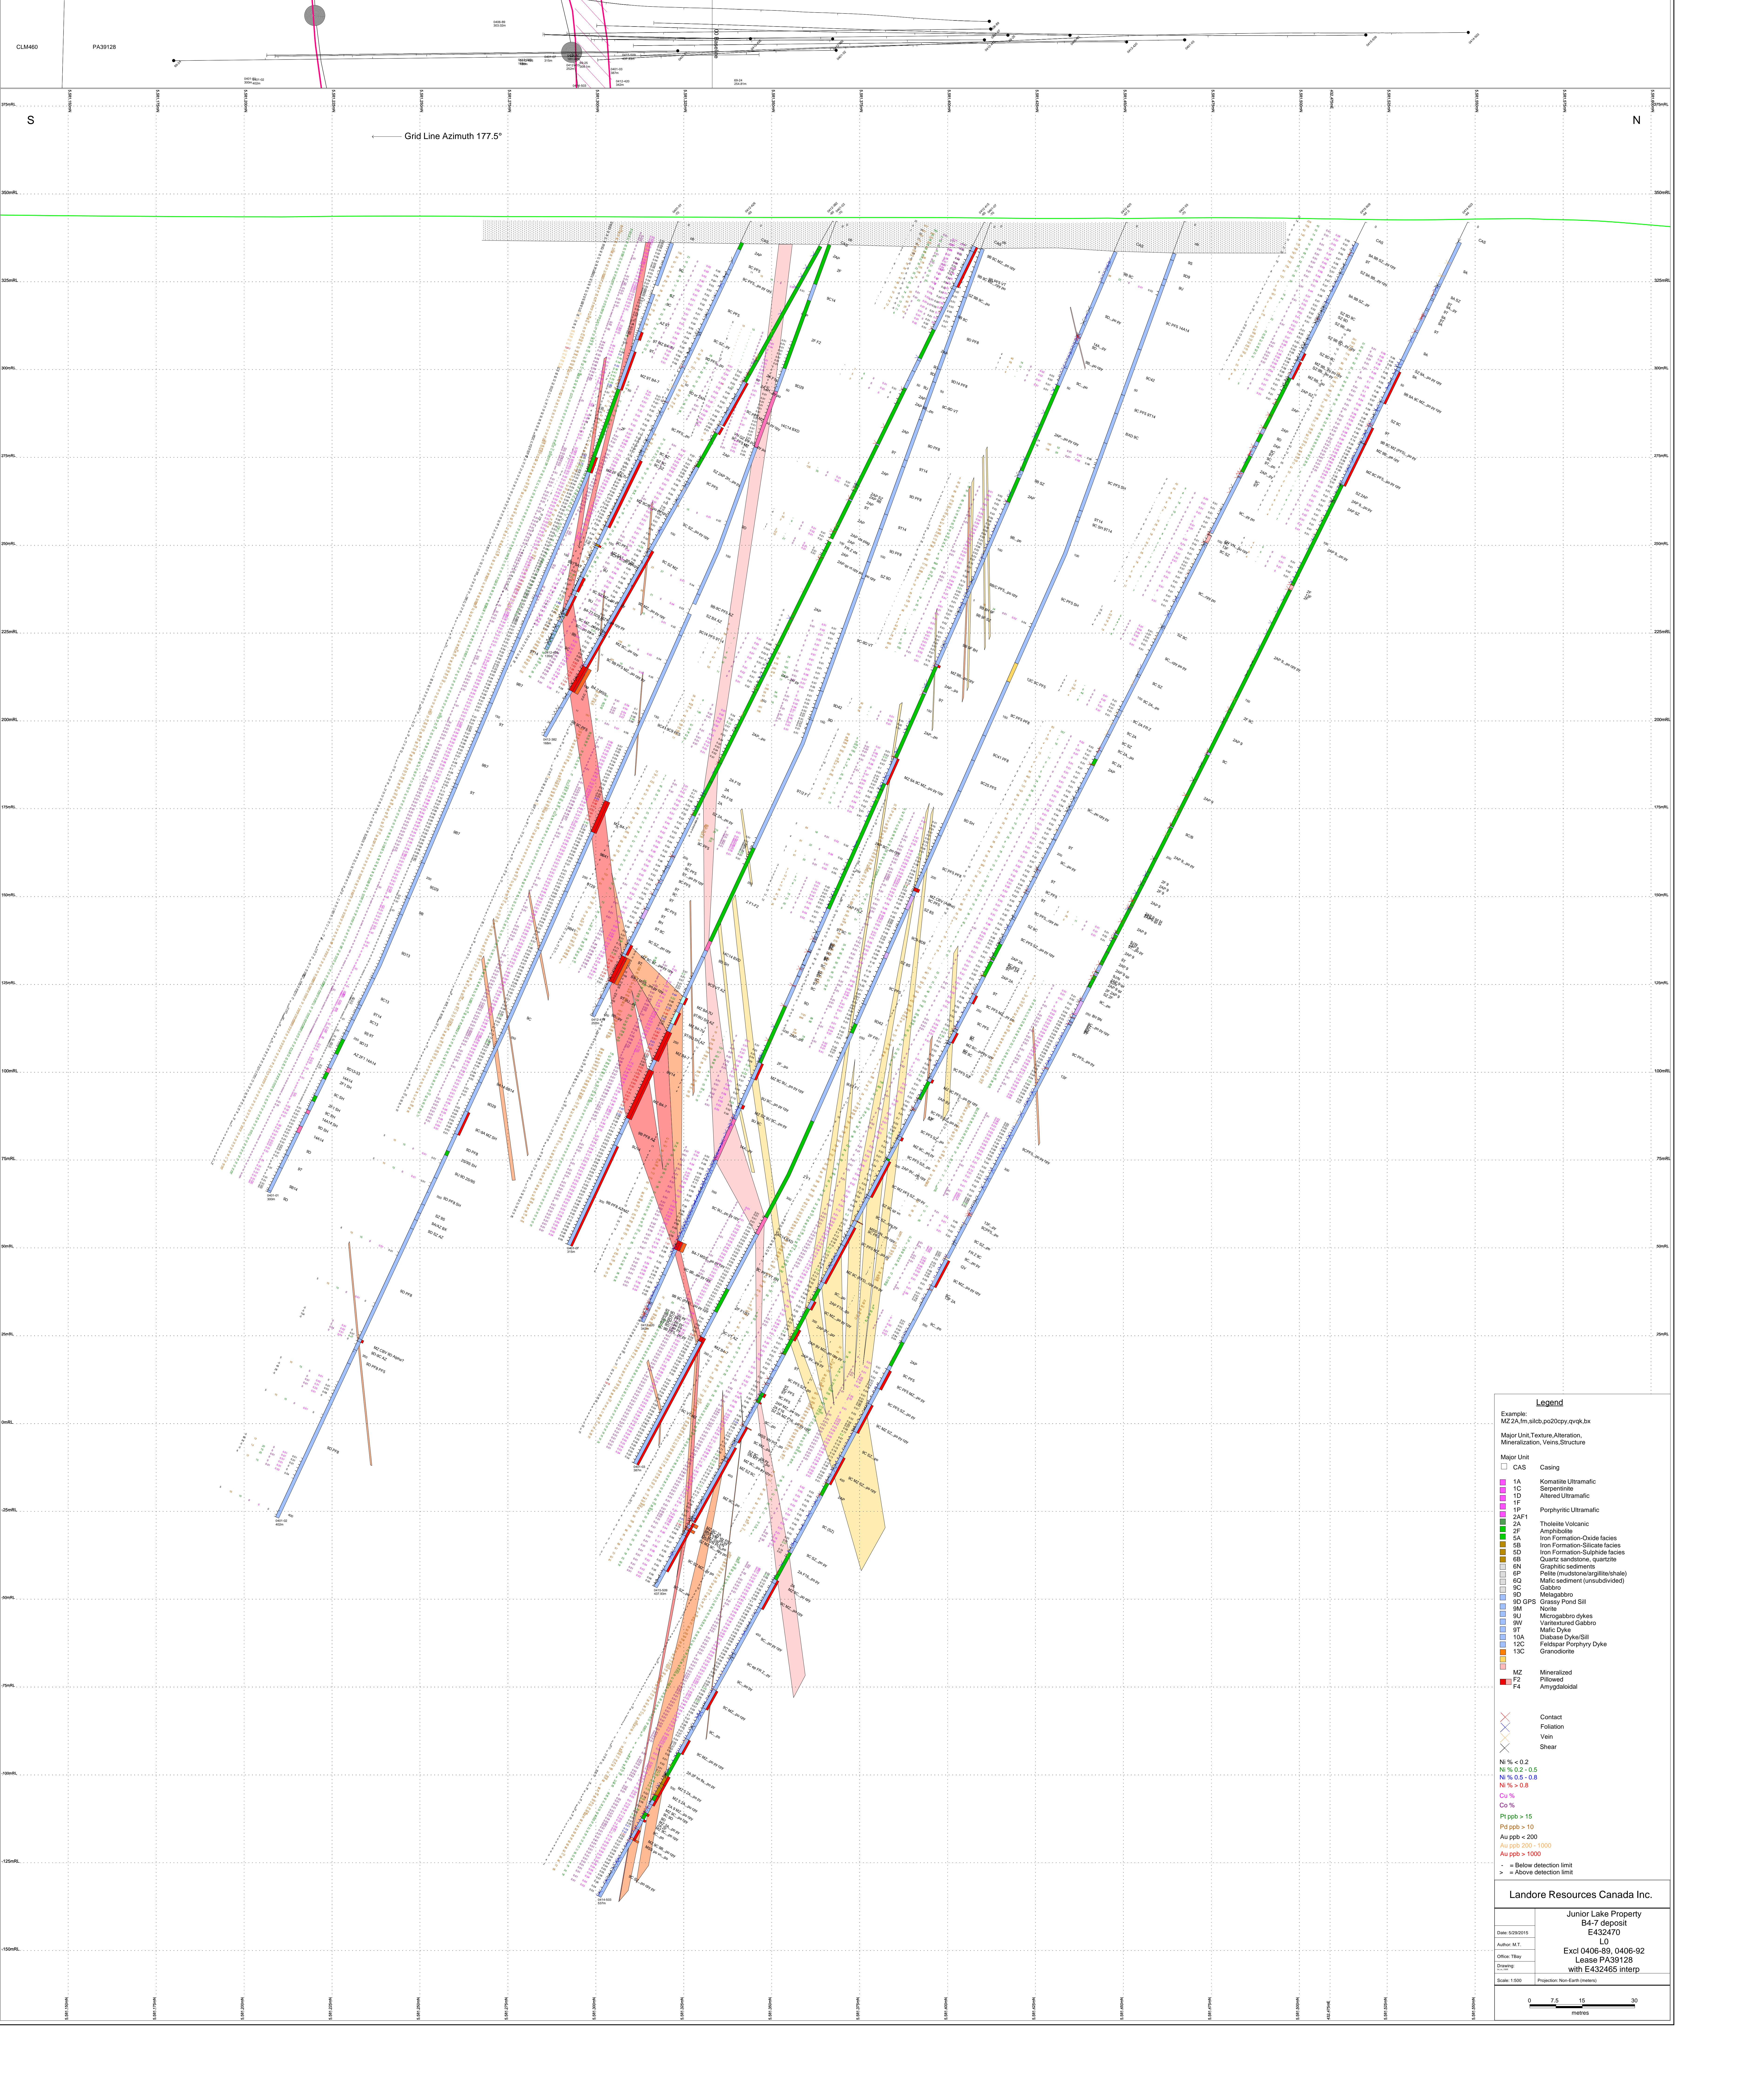

Legend

Example: MZ2A.fm.silcb.p020py.qvqk.br

Major Unit, Texture, Alteration, Mineralization, Veins, Structure

Major Unit

- CAS Casing
- 1A Komatiite Ultramafic
- 1C Serpentine
- 1D Altered Ultramafic
- 1F Porphyritic Ultramafic
- 1P Porphyritic Ultramafic
- 2AF1 Tholeiite Volcanic
- 2A Amphibolite
- 2F Iron Formation-Oxide facies
- 5A Iron Formation-Silicate facies
- 5B Iron Formation-Sulphide facies
- 5D Quartz sandstone, quartzite
- 6N Graphitic sediments
- 6P Pelite (mudstone/siltstone)
- 6Q Mafic sediment (unsubdivided)
- 9C Gabbro
- 9D Melagabbro
- 9D GPS Grassy Pond Sill
- 9U Microgabbro dykes
- 9V Vanasubid Gabbro
- 9T Mafic Dyke
- 10A Diabase Dyke Sill
- 12C Feldspar Porphyry Dyke
- 13C Granodiorite
- MZ Mineralized
- P2 Pillowed
- F4 Amygdaloidal

Contact

Foliation

Vein

Shear

N % < 0.2

N % 0.2 - 0.5

N % 0.5 - 0.8

N % > 0.8

Cu %

Co %

Pt ppb > 15

Pd ppb > 10

Au ppb < 200

Au ppb 200 - 1000

Au ppb > 1000

- = Below detection limit

> = Above detection limit

Landore Resources Canada Inc.


Junior Lake Property
B4-7 deposit
E432470
LO
Excl 0406-89, 0406-92
Lease PA39123
with E432465 Interp

Date: 05/02/15
Author: M.T.
Office: Tbay
Drawn:
Scale: 1:500 Projection: Non-Earth-Inverted

0 7.5 15 30 metres

CLM460

PA39128

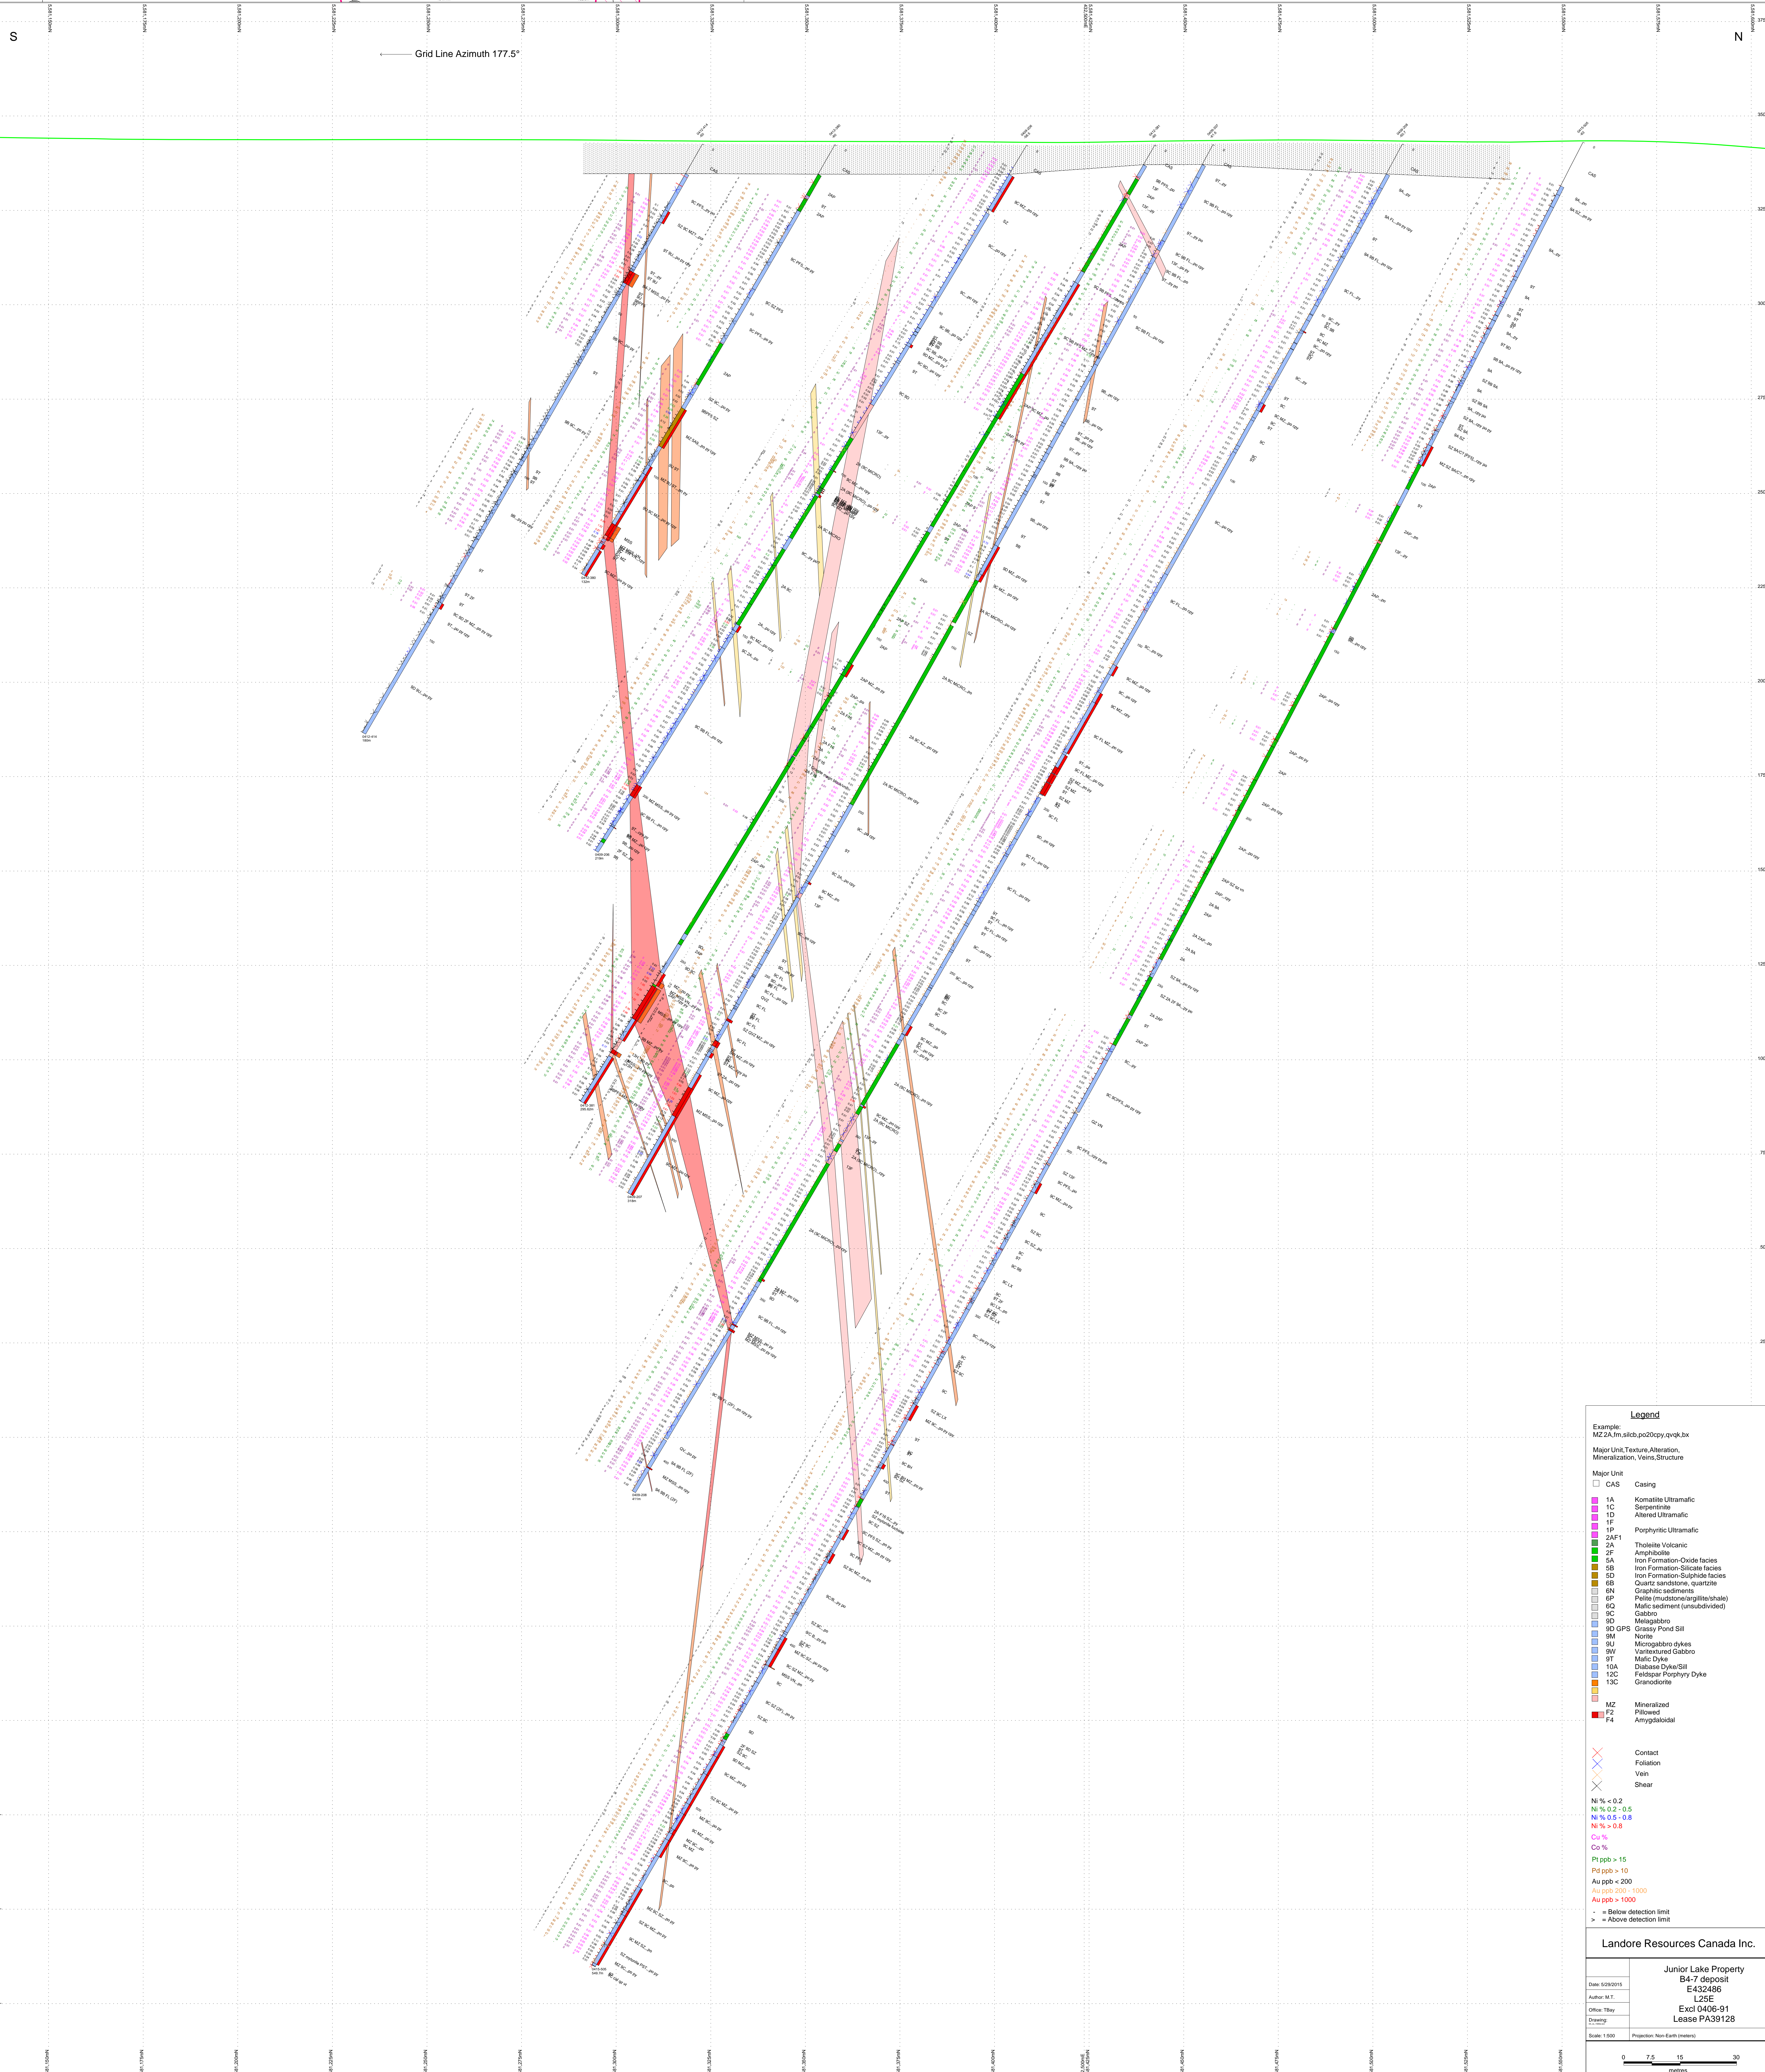

Grid Line Azimuth 177.5°

Legend

Example: MZ2A.fm.silcb.pc20py.qvqk.bx

Major Unit, Texture, Alteration, Mineralization, Veins, Structure

Major Unit

- CAS Casing
- 1A Komatiite Ultramafic
- 1C Serpentine
- 1D Altered Ultramafic
- 1F Porphyritic Ultramafic
- 2AF1 Tholeiite Volcanic
- 2A Amphibolite
- 2F Iron Formation-Oxide facies
- 5A Iron Formation-Silicate facies
- 5B Iron Formation-Sulphide facies
- 5D Quartz sandstone, quartzite
- 6N Graphitic sediments
- 6P Pelite (mudstone/siltstone/shale)
- 6Q Mafic sediment (unsubdivided)
- 9C Gabbro
- 9D Melagabbro
- 9D GPS Grassy Pond Sill
- 9W Microgabbro dykes
- 9W Vanasued Gabbro
- 9T Mafic Dyke
- 10A Diabase Dyke/Sill
- 12C Feldspar Porphyry Dyke
- 13C Granodiorite
- MZ Mineralized
- P2 Pillowed
- F4 Amygdaloidal

Contact

Foliation

Vein

Shear

Ni % < 0.2

Ni % 0.2 - 0.5

Ni % 0.5 - 0.8

Ni % > 0.8

Cu %

Co %

Pt ppb > 15

Pd ppb > 10

Au ppb < 200

Au ppb 200 - 1000

Au ppb > 1000

- = Below detection limit


> = Above detection limit

Landore Resources Canada Inc.

Junior Lake Property
B4-7 deposit
E432486
L25E
Excl 0406-91
Lease PA39128

Date: 05/02/15
Author: M.T.
Other: Tbay
Drawing:
Scale: 1:500 Projection: Non-Earth-Centered

0 7.5 15 30 metres

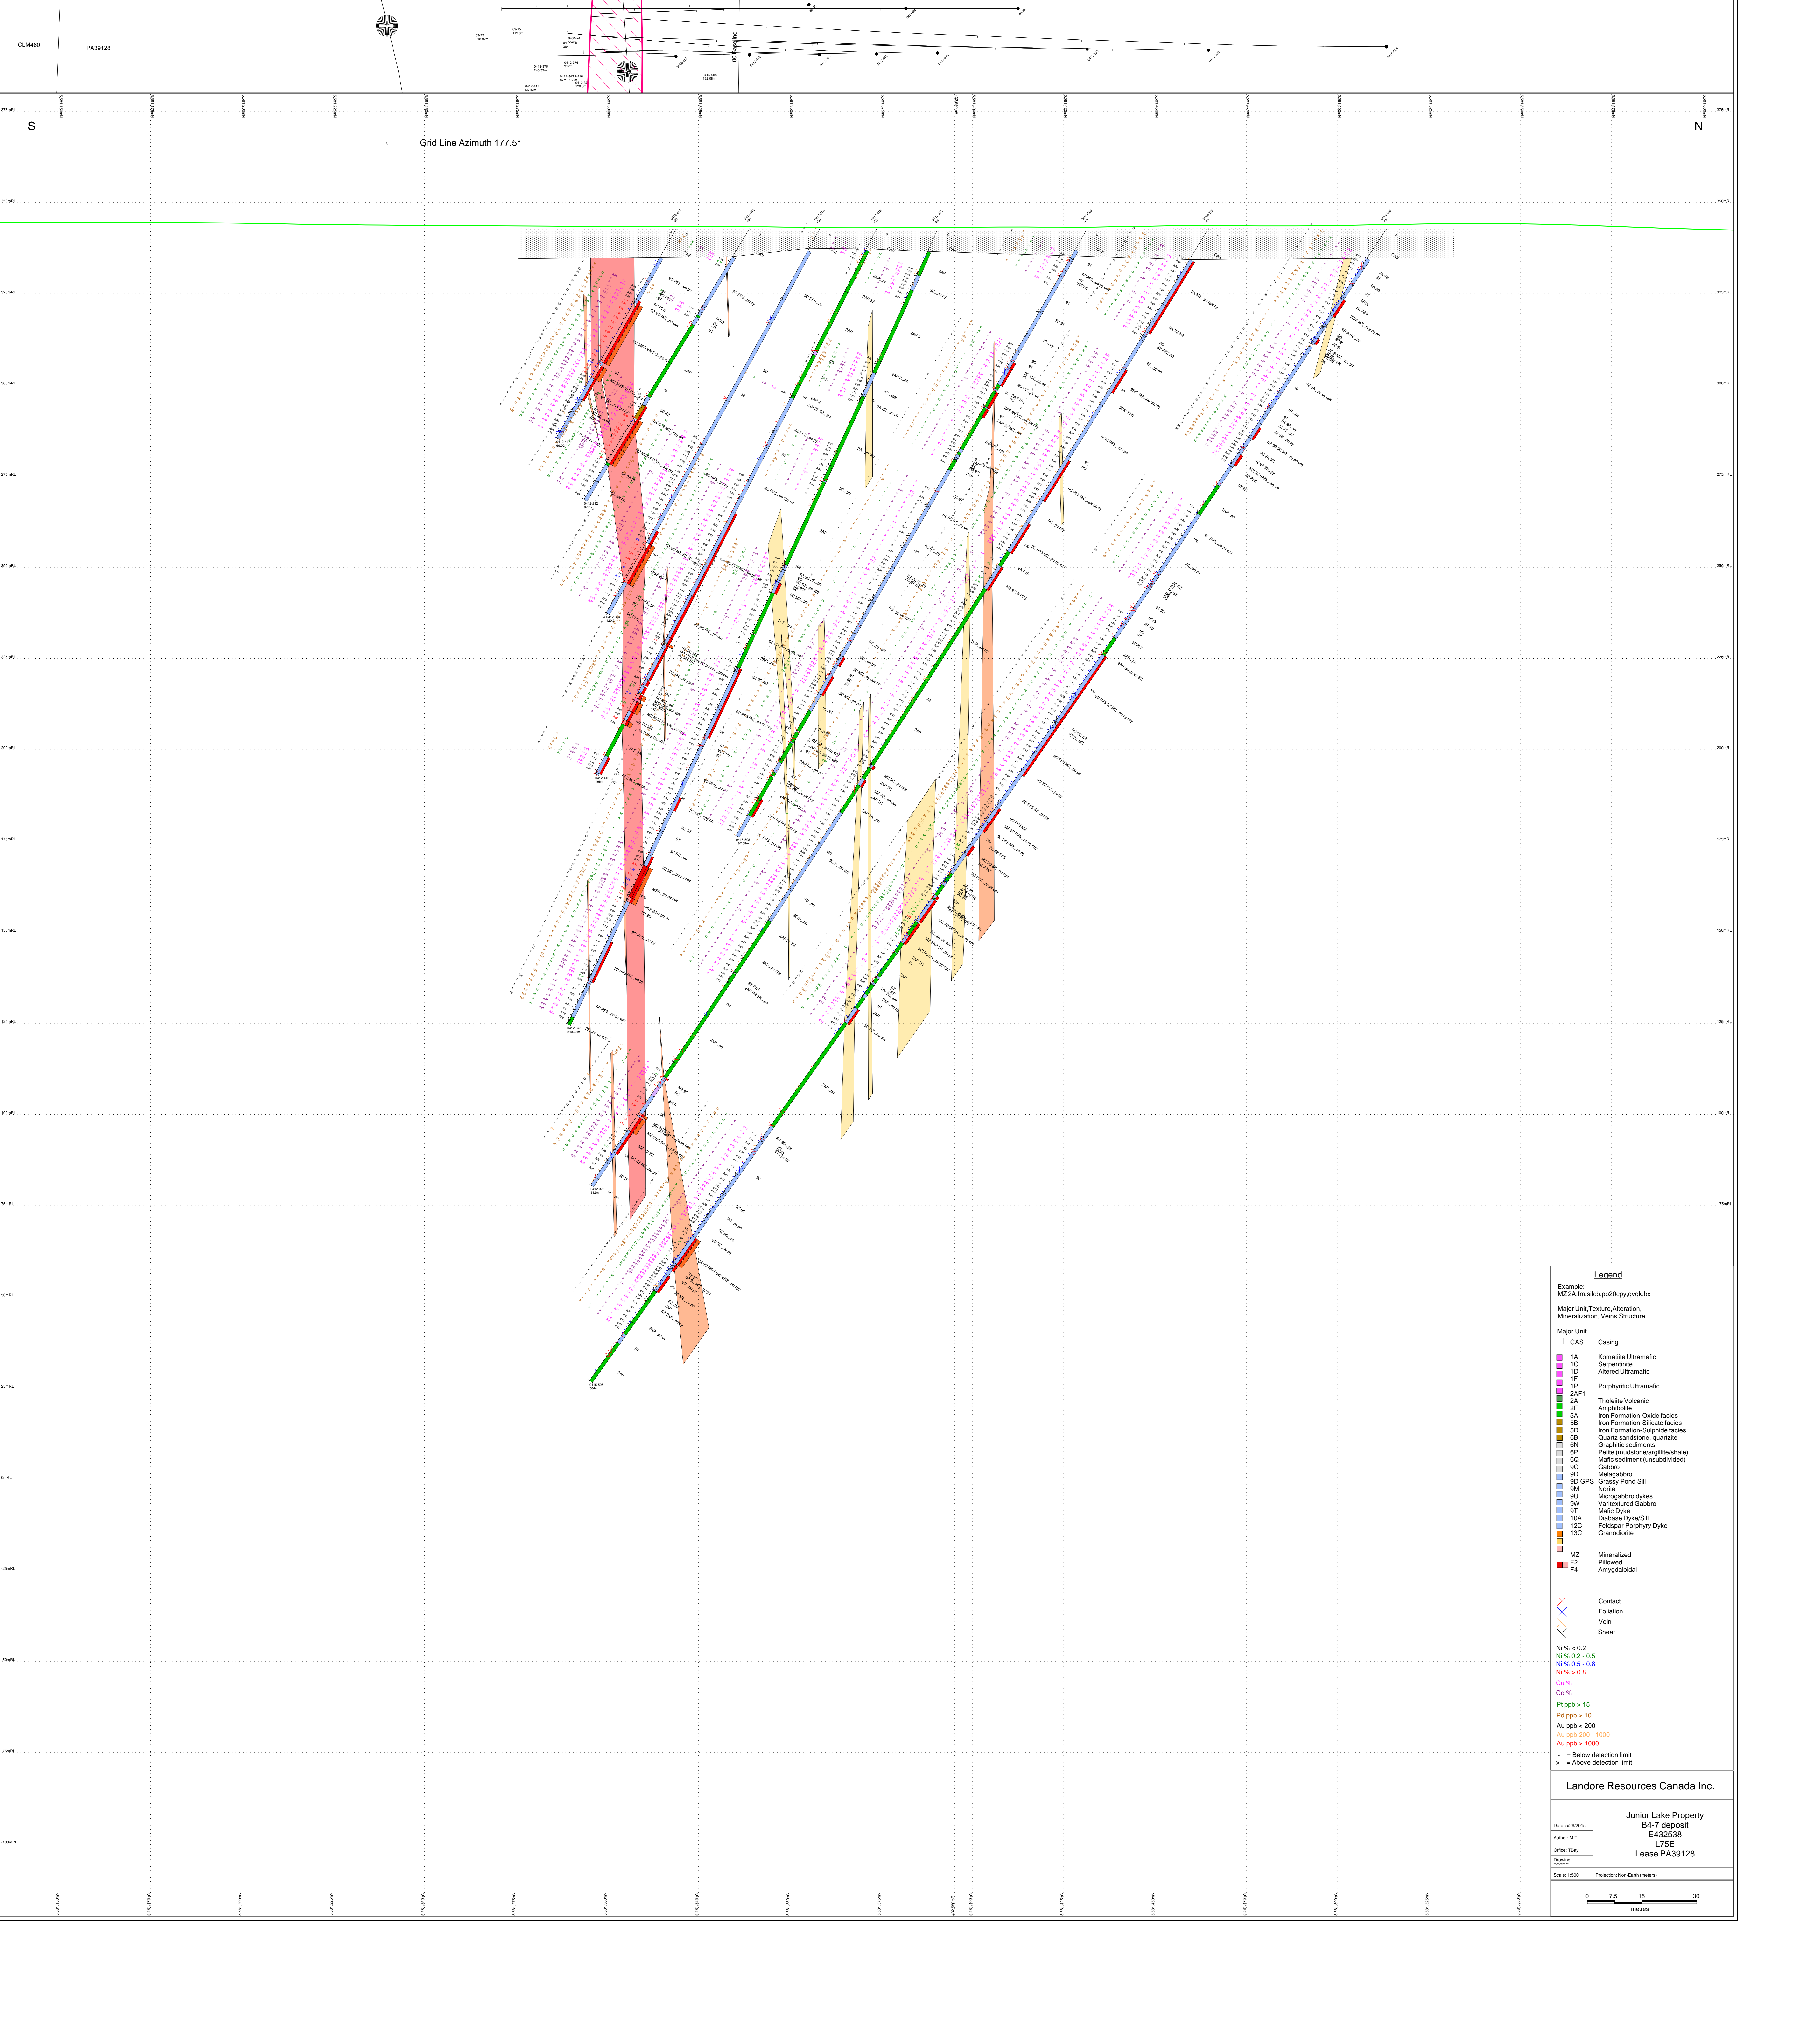

Grid Line Azimuth 177.5°

Legend

Example: MZ2A_fm_silicb_po20cpxy.qvw.kbx
 Major Unit, Texture, Alteration, Mineralization, Veins, Structure

Major Unit

- CAS Casing
- 1A Komatiite Ultramafic
- 1C Serpentine
- 1D Altered Ultramafic
- 1F Porphyritic Ultramafic
- 2AF1 Tholeiite Volcanic
- 2A Amphibolite
- 5A Iron Formation-Oxide facies
- 5B Iron Formation-Silicate facies
- 5D Iron Formation-Sulphide facies
- 6B Quartz sandstone, quartzite
- 6N Graphitic sediments
- 6P Pelite (mudstone/siltstone/shale)
- 6Q Metac sediment (unsubdivided)
- 9C Gabbro
- 9D Metagabbro
- 9D GPS Grassy Pond Sill
- 9M Norite
- 9U Microgabbro dykes
- 9W Vamotured Gabbro
- 9T Metic Dyke
- 10A Diabase Dyke/Sill
- 12C Feldspar Porphyry Dyke
- 13C Granodiorite
- MZ Mineralized
- F2 Pillowed
- F4 Amygdaloidal

Structures

- ✕ Contact
- ✕ Foliation
- ✕ Vein
- ✕ Shear

Mineralization


- Ni % < 0.2
- Ni % 0.2 - 0.5
- Ni % 0.5 - 0.8
- Ni % > 0.8
- Cu %
- Co %
- Pt ppb > 15
- Pd ppb > 10
- Au ppb < 200
- Au ppb 200 - 1000
- Au ppb > 1000
- = Below detection limit
- > = Above detection limit

Landore Resources Canada Inc.

| | |
|-----------------|----------------------|
| Date: 5/29/2015 | Junior Lake Property |
| Author: M.T. | B4-7 deposit |
| Office: T84w | E432538 |
| Drawing: | L75E |
| | Lease PA39128 |

Scale: 1:500 Projection: Non-Earth (meters)

0 7.5 15 30
metres

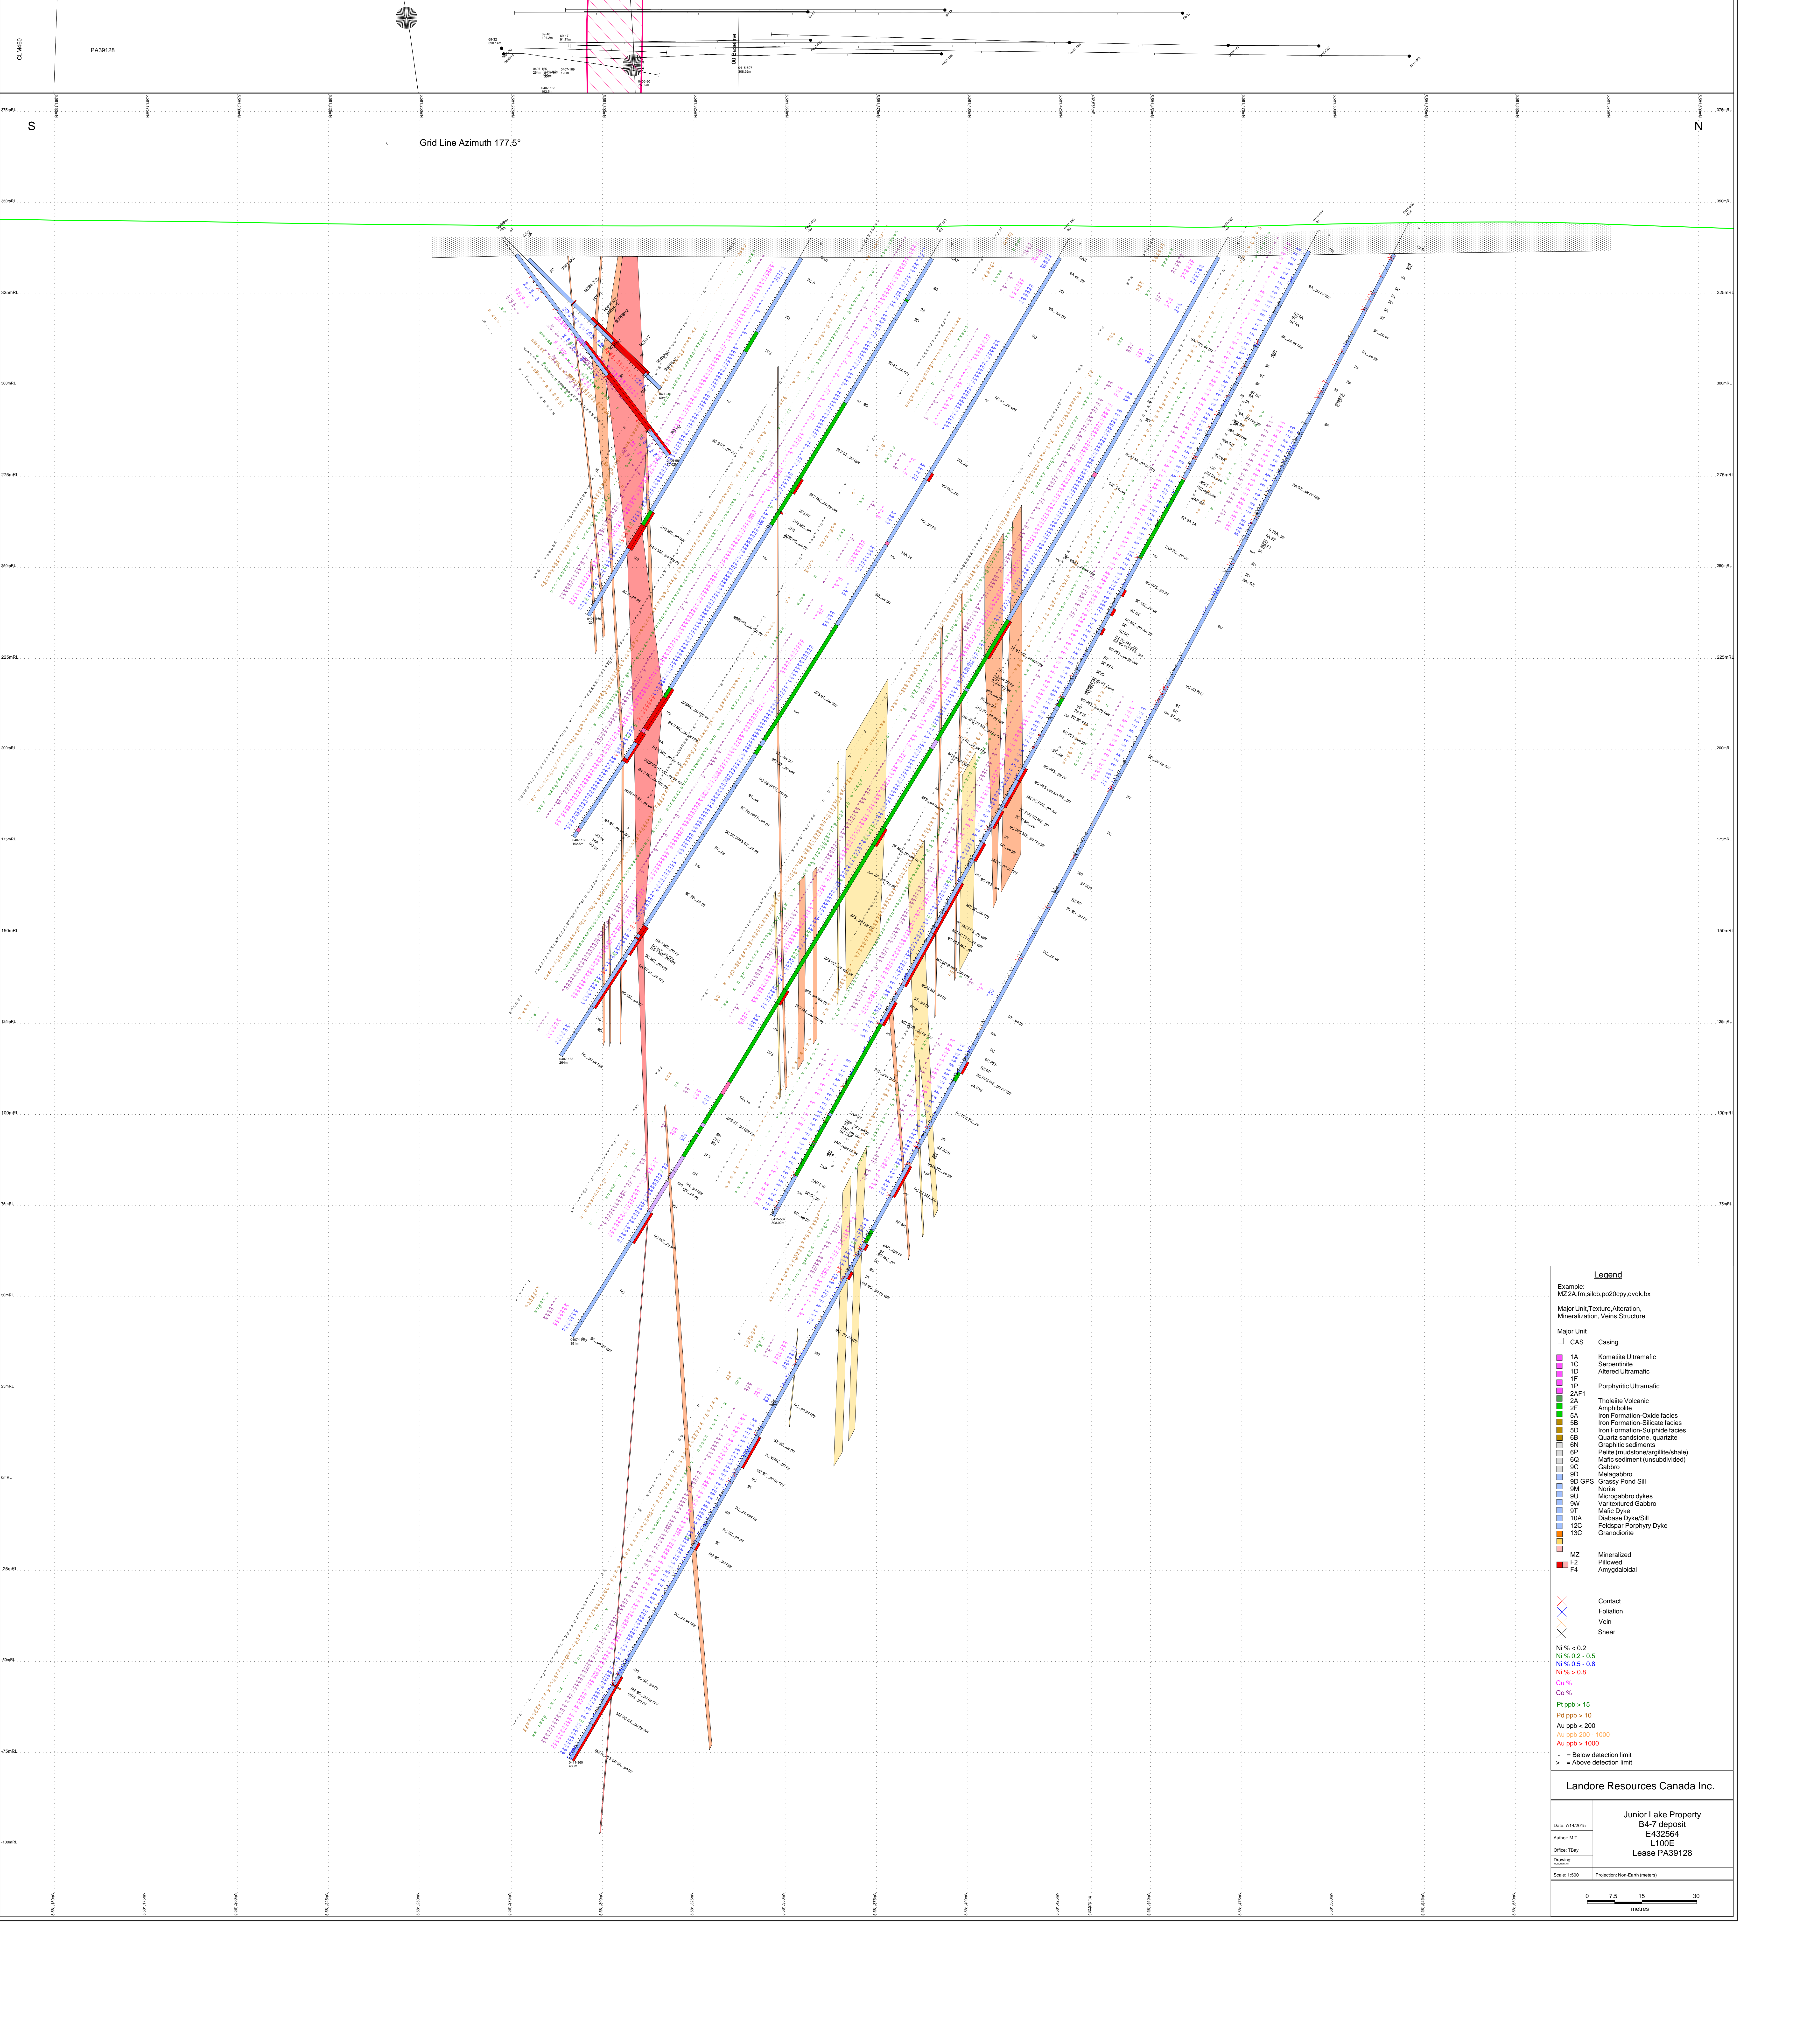

LANDORE RESOURCES INC. GEOLOGICAL LEGEND (ROCK CODES)

| 16 Code TECTONITES | | | | | | | | | | | | | | | |
|---|---|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| A | Phanoflora | | | | | | | | | | | | | | |
| B | Mylonite | | | | | | | | | | | | | | |
| C | Ultramylonite | | | | | | | | | | | | | | |
| D | Blasimonite | | | | | | | | | | | | | | |
| E | Phyllonite | | | | | | | | | | | | | | |
| F | Cataclastite | | | | | | | | | | | | | | |
| G | Tectonic breccia | | | | | | | | | | | | | | |
| 15 Code MEGACRYSTALLINE GRANULITES | | | | | | | | | | | | | | | |
| A | Unsubdivided Gneiss | | | | | | | | | | | | | | |
| B | Orthogneiss (igneous rock-derived) | | | | | | | | | | | | | | |
| C | Gneiss gneiss | | | | | | | | | | | | | | |
| D | Granodiorite gneiss | | | | | | | | | | | | | | |
| E | Tonalite gneiss | | | | | | | | | | | | | | |
| F | Plagiogneiss (diabase-derived) | | | | | | | | | | | | | | |
| G | Ortho-Plagiogneiss Composite | | | | | | | | | | | | | | |
| H | Mafic Gneiss (unsubdivided) | | | | | | | | | | | | | | |
| J | Intermediate gneiss (unsubdivided) | | | | | | | | | | | | | | |
| K | Quartz-feldspathic gneiss | | | | | | | | | | | | | | |
| L | Stratified (banded) gneiss | | | | | | | | | | | | | | |
| M | Injection gneiss | | | | | | | | | | | | | | |
| N | Augen gneiss | | | | | | | | | | | | | | |
| P | Amphibolite | | | | | | | | | | | | | | |
| Q | Amphibolite | | | | | | | | | | | | | | |
| R | Unsubdivided Migmatite | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| T | Unsubdivided Granulite | | | | | | | | | | | | | | |
| U | Granulite | | | | | | | | | | | | | | |
| V | Granulite gneiss | | | | | | | | | | | | | | |
| W | Leipenite Migmatite | | | | | | | | | | | | | | |
| 14 Code ALKALINE HYPABYSAL ROCKS | | | | | | | | | | | | | | | |
| A | Lamprophyre (undifferentiated) | | | | | | | | | | | | | | |
| B | Felsic lamprophyre | | | | | | | | | | | | | | |
| C | Intermediate lamprophyre | | | | | | | | | | | | | | |
| D | Mafic lamprophyre | | | | | | | | | | | | | | |
| E | Ultramafic lamprophyre | | | | | | | | | | | | | | |
| F | Lamprote (olivine-rich, phlogopite bearing) | | | | | | | | | | | | | | |
| 13 Code FELSIC INTERMEDIATE PLUTONIC ROCKS | | | | | | | | | | | | | | | |
| A | Alkali-feldspar granite | | | | | | | | | | | | | | |
| B | Granite | | | | | | | | | | | | | | |
| C | Granodiorite | | | | | | | | | | | | | | |
| D | Monzonite | | | | | | | | | | | | | | |
| E | Quartz Monzonite | | | | | | | | | | | | | | |
| F | Tonalite | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| H | Diorite | | | | | | | | | | | | | | |
| J | Quartz diorite | | | | | | | | | | | | | | |
| K | Granophyre | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| 12 Code FELSIC-INTERMEDIATE HYPABYSAL ROCKS | | | | | | | | | | | | | | | |
| A | Quartz-feldspar porphyry dykes | | | | | | | | | | | | | | |
| B | Quartz porphyry dykes | | | | | | | | | | | | | | |
| C | Feldspar porphyry dykes | | | | | | | | | | | | | | |
| D | Applite dykes | | | | | | | | | | | | | | |
| E | Porphyritic dykes | | | | | | | | | | | | | | |
| F | Felsic dykes (undifferentiated) | | | | | | | | | | | | | | |
| H | Intermediate dykes (undifferentiated) | | | | | | | | | | | | | | |
| 11 Code ALKALINE SILICATIC ROCKS | | | | | | | | | | | | | | | |
| A | Quartz syenite (non-marine, silic over-sat) | | | | | | | | | | | | | | |
| B | Syenite (Plutonic, silica saturated) | | | | | | | | | | | | | | |
| C | Neobasaltic syenite (Basalt, silic over-sat) | | | | | | | | | | | | | | |
| D | Akalic Gabbro (Eisessite) | | | | | | | | | | | | | | |
| E | Carbonate (undifferentiated) | | | | | | | | | | | | | | |
| F | Phoscorite (magnesian-syenite rock) | | | | | | | | | | | | | | |
| G | Felsite (contact akali mesosomatian) | | | | | | | | | | | | | | |
| H | Kambite | | | | | | | | | | | | | | |
| 10 Code DIABASE DYKES & SILLS | | | | | | | | | | | | | | | |
| A | Diabase (unsubdivided) | | | | | | | | | | | | | | |
| B | Quartz Diabase | | | | | | | | | | | | | | |
| C | Olivine Diabase | | | | | | | | | | | | | | |
| 9 Code MAFIC PLUTONIC ROCKS | | | | | | | | | | | | | | | |
| A | Anorthositic (50-100% plagi) | | | | | | | | | | | | | | |
| B | Leucogabbro (10-30% cpx) | | | | | | | | | | | | | | |
| C | Gabbro (35-65% cpx) | | | | | | | | | | | | | | |
| D | Melagabbro (65-90% cpx) | | | | | | | | | | | | | | |
| E | Troctolite (cpx cumulate) | | | | | | | | | | | | | | |
| F | Hornblende gabbro (35-65% hb) | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| H | Leucogabbroite (10-30% cpx-cpx) | | | | | | | | | | | | | | |
| J | Gabbroite (35-65% cpx-cpx) | | | | | | | | | | | | | | |
| K | Melagabbroite (65-90% cpx-cpx) | | | | | | | | | | | | | | |
| L | Leucocrone (10-30% opx) | | | | | | | | | | | | | | |
| M | Natite (35-60% opx) | | | | | | | | | | | | | | |
| N | Mesotaxite (65-90% opx) | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| T | Mafic dykes (undifferentiated) | | | | | | | | | | | | | | |
| U | Microgabbro dykes | | | | | | | | | | | | | | |
| V | Gabbro dykes | | | | | | | | | | | | | | |
| 8 Code ULTRAMAFIC PLUTONIC ROCKS | | | | | | | | | | | | | | | |
| A | Dunite | | | | | | | | | | | | | | |
| B | Serpentinite (unsubdivided) | | | | | | | | | | | | | | |
| C | Peridotite (unsubdivided) | | | | | | | | | | | | | | |
| D | Websterite | | | | | | | | | | | | | | |
| E | Harzburgite | | | | | | | | | | | | | | |
| F | Ultrazirconite | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| H | Pyroxenite (unsubdivided) | | | | | | | | | | | | | | |
| J | Chloropyroxenite | | | | | | | | | | | | | | |
| K | Orthopyroxenite | | | | | | | | | | | | | | |
| L | Websterite | | | | | | | | | | | | | | |
| M | Hornblende | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| T | Ultramafic dykes (undifferentiated) | | | | | | | | | | | | | | |
| 7 Code ALKALINE METAVOLCANIC ROCKS | | | | | | | | | | | | | | | |
| A | Trachyte | | | | | | | | | | | | | | |
| B | Rhyolite | | | | | | | | | | | | | | |
| C | Nephelinitic | | | | | | | | | | | | | | |
| D | Leucite (pyroxene-Haueite) | | | | | | | | | | | | | | |
| E | Trachyandesite (aegite) | | | | | | | | | | | | | | |
| F | Trachybasalt | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| T | Ultramafic dykes (undifferentiated) | | | | | | | | | | | | | | |
| 6 Code CLASTIC METASEDIMENTARY ROCKS | | | | | | | | | | | | | | | |
| A | Conglomerate | | | | | | | | | | | | | | |
| A1 | Orthoconglomerate | | | | | | | | | | | | | | |
| A2 | Paraconglomerate (lenses, matrix-rich) | | | | | | | | | | | | | | |
| B | Quartz sandstone, quartzite (quartz arenite) | | | | | | | | | | | | | | |
| C | Sandstone | | | | | | | | | | | | | | |
| D | Felsitic sandstone | | | | | | | | | | | | | | |
| E | Litic sandstone | | | | | | | | | | | | | | |
| F | Akose | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| H | Wacke (greywacke) | | | | | | | | | | | | | | |
| K | Argillite | | | | | | | | | | | | | | |
| L | Claystone | | | | | | | | | | | | | | |
| M | Shale | | | | | | | | | | | | | | |
| N | Graphitic sediments | | | | | | | | | | | | | | |
| P | Pelite (mudstone/siltstone/shale) | | | | | | | | | | | | | | |
| Q | Mafic sediment (unsubdivided) | | | | | | | | | | | | | | |
| R | Ultramafic sediment (unsubdivided) | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| 5 Code CHEMICAL METASEDIMENTARY ROCKS | | | | | | | | | | | | | | | |
| A | Iron Formation-Oxide facies | | | | | | | | | | | | | | |
| B | Iron Formation-Silicate facies | | | | | | | | | | | | | | |
| C | Iron Formation-Carbonate facies | | | | | | | | | | | | | | |
| D | Iron Formation-Sulphide facies | | | | | | | | | | | | | | |
| 4 Code FELSIC METAVOLCANIC ROCKS | | | | | | | | | | | | | | | |
| A1 | Tholeiitic rhyolite | | | | | | | | | | | | | | |
| A2 | High-silica rhyolite | | | | | | | | | | | | | | |
| A3 | Calc-alkalic rhyolite | | | | | | | | | | | | | | |
| A4 | Alkaline rhyolite | | | | | | | | | | | | | | |
| B1 | Tholeiitic andesite | | | | | | | | | | | | | | |
| B2 | Calc-alkalic andesite | | | | | | | | | | | | | | |
| C1 | Tholeiitic dacite | | | | | | | | | | | | | | |
| C2 | Calc-alkalic dacite | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| 3 Code INTERMEDIATE METAVOLCANIC ROCKS | | | | | | | | | | | | | | | |
| A | Andesite - Tholeiitic (<10% Al ₂ O ₃) | | | | | | | | | | | | | | |
| B | Andesite - Calc-alkalic | | | | | | | | | | | | | | |
| C | Isotaxite (<1% Na ₂ O, <0.2% F ₂ O ₃) | | | | | | | | | | | | | | |
| D | Shoshonite | | | | | | | | | | | | | | |
| E | Amphibolite (amphibole-plagioclase) | | | | | | | | | | | | | | |
| G | Gneiss | | | | | | | | | | | | | | |
| S | Schist | | | | | | | | | | | | | | |
| 2 Code MAFIC METAVOLCANIC ROCKS | | | | | | | | | | | | | | | |
| A | Tholeiite | | | | | | | | | | | | | | |
| B | Fe Tholeiite | | | | | | | | | | | | | | |
| C | Mg Tholeiite | | | | | | | | | | | | | | |
| E | Basalt | | | | | | | | | | | | | | |
| F | Amphibolite (amphibole-plagioclase) | | | | | | | | | | | | | | |