



31M04NE0031 12 SOUTH LORRAIN

010

Diamond Drilling

Township of So. Lorrain

Report NO: 12

Work performed by: Roy Silver Mines


Claim NO	Hole NO	Footage	Date	Note
T 26857	3	354'	Aug/49	
	4	125'	Sept/49	
		2/479		

Notes:

RECEIVED
OCT 31 1949
TEMISKAMING
MINEPOST DIVISION

No 4 POST

354 Ft
D₄ 125 Ft
D₃

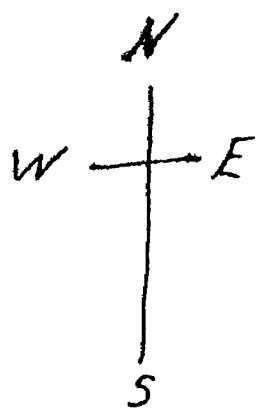

W.P.

CLAIM No T26854
South Lorrain
Dist. Temiskaming

TROUT
LAKE

No 3 POST

No 2 POST

SCALE: 1 INCH to 350 FEET

Diamond drilling done by Bradwell Drilling and
Exploration Ltd Kirkland Lake Ont, Aug & Sept. 1949
Core logged by Mr. Halstead M.E. and
stored at office Cobalt, Ont.

12-2-332
 PROPERTY ROY SILVER MINES LTD.

HOLE NUMBER 3

SHEET NUMBER

DIAMOND DRILL RECORD

SECTION FROM TO

LOCATION: T. 26857 South Lorrain
 DEP. Dist. Temiskaming
 ELEVATION OF COLLAR
 DATUM NORTH WEST
 DIRECTION AT START: BEARING
 DIP 70°

STARTED August 30th 1949
 COMPLETED August 28th "
 ULTIMATE DEPTH 354 Ft
 PROPOSED DEPTH

DEPTH FEET	FORMATION	SAMPLE No.	WIDTH OF SAMPLE	GOLD \$	SLUDGE GOLD \$
0 - 75	Hole started on bed rock. Medium grained Keweenaw				
75 - 100	Fine grained Keweenaw with Calcic stringers very few inches about 20° to the core slightly mineralized with arsenopyrite & sphalerite				
100 - 125	Medium grained Keweenaw with blue stain on the slips				
125 - 130	as above.				
130 - 144.6	Fine grained Keweenaw				
144.6 - 145	as above with calcic seams				
145 - 145.2	Calcic vein mineralized with galena.				
145.2 - 150	Fine grained Keweenaw				
150 - 200	as above with an occasional calcic seam				
200 - 225	Medium grained Keweenaw with some small seams mineralized with galena.				



DRILLED BY

SIGNED

M. C. H. ...

PROPERTY Roy Silver Mines Ltd

HOLE NUMBER 3

SHEET NUMBER

DIAMOND DRILL RECORD

SECTION FROM TO

LOCATION: LAT. T. 26857 South Lorrain
 DEP. Dist Temiskaming
 ELEVATION OF COLLAR
 DATUM NORTH WEST.
 DIRECTION AT START: BEARING
 DIP 10°

STARTED August 10th 1949
 COMPLETED Aug. 28 1949
 ULTIMATE DEPTH 354 Ft
 PROPOSED DEPTH

DEPTH FEET	FORMATION	SAMPLE NO	WIDTH OF SAMPLE	GOLD \$	SLUDGE GOLD \$
225-250	Fine grained Kewatin with spots of galena in small calcite seams.				
250-275	Very fine grained Kewatin with small calcite seams mineralized with sphalerite.				
275-300	As above with a few calcite seams mineralized with galena & sphalerite.				
300-325	Fine grained Kewatin with a few calcite seams slightly mineralized with pyrite & galena.				
325-354	Fine grained Kewatin End of Hole				

DRILLED BY

SIGNED M. C. MacLean

PROPERTY ROY SILVER MINES LTD.

HOLE NUMBER 4

SHEET NUMBER

DIAMOND DRILL RECORD

SECTION FROM TO

LOCATION: LAT. T. 26 857 South Lorrain
 DEP. Dist. Temiskaming
 ELEVATION OF COLLAR

STARTED September 1st 1949
 COMPLETED Sept. 15th 1949
 ULTIMATE DEPTH 125 Ft
 PROPOSED DEPTH

DATUM NORTH EAST
 DIRECTION AT START: BEARING

DIP -45°

DEPTH FEET	FORMATION	SAMPLE No	WIDTH OF SAMPLE	GOLD \$	SLUDGE GOLD \$
0-6	Casing				
6-25	Medium grained Kewatin				
25-50	Fine grained Kewatin with a few calcite seams. 1" calcite at 25.5'				
50-67	Fine grained Kewatin				
67-75	Kewatin slightly sheared				
75-100	Medium grained Kewatin slightly sheared from 88.5-95'				
100-125	Kewatin slightly sheared & with a number of calcite seams slightly mineralized with garnet & pyrite. Shearing 50°. The core ends at 125'				

DRILLED BY

SIGNED M.C. H. [Signature]