



31M13SE0118 22 INGRAM

010

DIAMOND DRILLING

TOWNSHIP: INGRAM

REPORT NO: 22


WORK PERFORMED FOR: TERRY LINK

RECORDED HOLDER: SAME AS ABOVE []

: OTHER []

<u>CLAIM NO.</u>	<u>HOLE NO.</u>	<u>FOOTAGE</u>	<u>DATE</u>	<u>NOTE</u>
1165659	ML-01	1,507'	AUG-SEPT/90	(1)

NOTES: (1) #W9108.00108, FILED JUNE/91

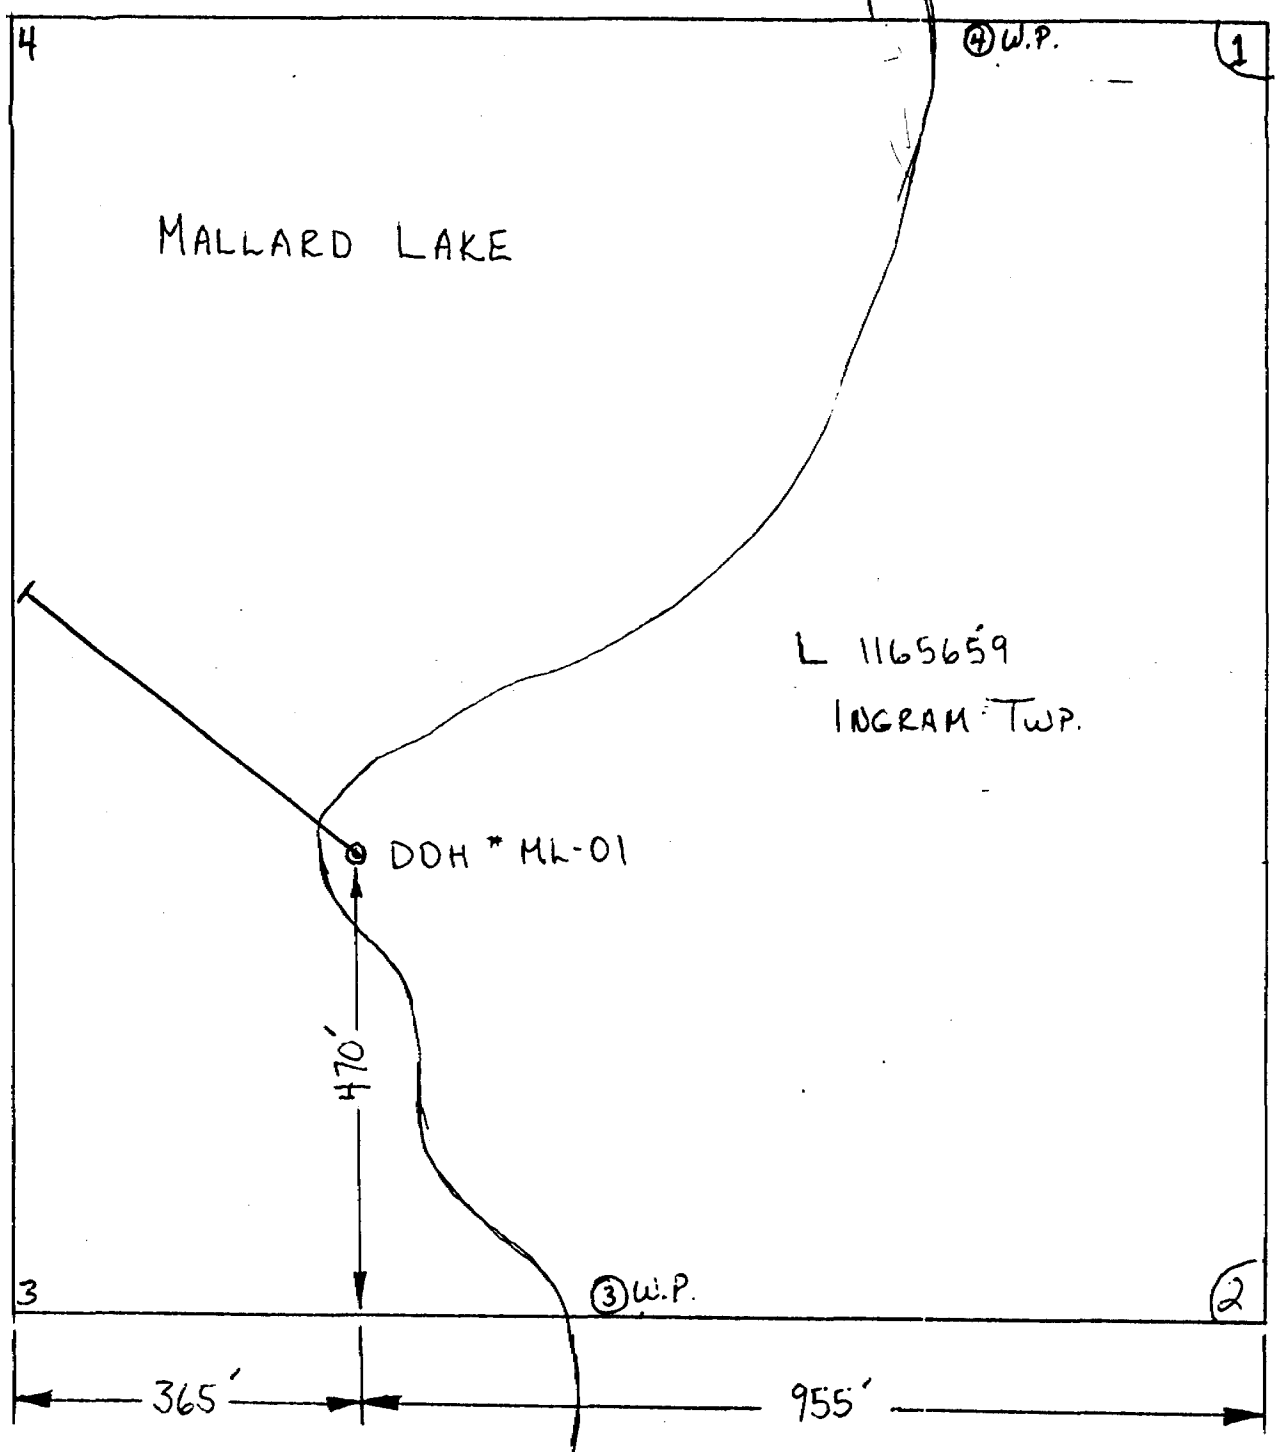

TERRY LINK
DDH * ML-01
LENGTH: 1507'
DIP: 70°
AZIMUTH: 306°
SCALE: 1" = 200'

MALLARD LAKE PROPERTY
DIAMOND DRILL LOG

Hole No: ML-01

Property: Mallard Lake Property
Owner: Terry Link
Azimuth: 306°
Logged By: S. Winter
Date Started: August 15, 1990
Core Size: BQ
Drill Company: Bill Link

NTS:
Claim #: 1165659
Dip: 70°
Casing: 130 feet
Date Completed: September 12, 1990
Core Location: W. Link, New Liskeard
Overburden: 130 feet


Township: Ingram
SE 1/4 N 1/2 Lot 10 Conc VI
Length: 1,507 feet
Elevation:
Date Logged: October 21/90
Checked: November 6, 1990

Acid Dip Tests

1. 1,057 feet - 76°

2. 1,177 feet - 74°

March 14/91
Terry Link

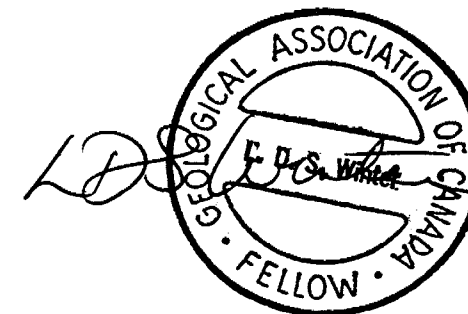

NORWIN GEOLOGICAL LIMITED

DIAMOND DRILL LOG

Hole No: ML-01

From (ft)	To (ft)	Description	Sample No.	From (ft)	To (ft)	Width (ft)	Au (ppb)
0	130.0	CASING					
		All units are part of the Coleman Member of the Gowganda Formation.					
130.0	296.0	GREYWACKE/ ARGILLITE					
		Dark grey, very fine grained, well-bedded, 60° to 70° T.C.A. Beds generally 2 to 3 mm to 1 cm thick. Occasionally minor pyrite along thin fractures 10° to 15° T.C.A. Occasional coarse grained sandy to silty layers, generally uniform appearance.					
296.0	403.0	CONGLO- MERATIC TO PEBBLY MUDSTONE					
		Dark grey, massive, very fine grained mud-rich matrix occasionally with 2 to 5 cm sections of sand to coarse sand-size. Grains of mafic and feldspar composition. Scattered 2 to 3 cm sections show soft sediment deformation (slumping). Random scattering (5%) of angular to rounded rock fragments, fragments mainly quartz-feldspar and granite, occasionally fine (<1%) disseminated pyrite.					
		305.0; 3" pegmatite cobble.					
		368.0 - 403.0; matrix is mainly sand-size of greywacke composition.					

	Sample No.	From (ft)	To (ft)	Width (ft)	Au (ppb)
cont'd	703.0	-	797.0		
		slight increase in number of pebbles and cobbles in greywacke.			
		771.0; two 10 cm intervals of sandy pink to olive green sediment showing soft sediment deformation.			
		789.0 - 793.0; granite probably a boulder.			
	797.0	-	889.0		
		typical argillite as above with occasional sections of sandy/silty material of greywacke composition.			
	889.0	-	993.0		
		short sections of 2-3 feet in length, have an olive green to beige colouration, generally are more sand-size material.			
		942.0; 2" beige, thinly bedded argillite.			
	993.0	-	1000.0		
		beige to olive green sand-size material.			
		998.0; 2" white quartz vein at 70° to core with smaller 1-2 mm veinlets throughout this section.			
	1000.0	-	1096.0		
		typical dark grey very fine grained argillite. Rhythmically bedded in 10 to 15 cm intervals, core axis 65°. Each section marked by a very fine black 5 mm layer.			

	Sample No.	From (ft)	To (ft)	Width (ft)	Au (ppb)
cont'd		1090.0;	1 foot of olive to salmon- pink alteration.		
		1095.0;	6" of intense salmon-pink alteration, also showing some silicification.		
	1096.0 - 1174.0;	argillite, rhythmically bedded as above. Occasional 2-3 foot sections of olive to beige coloured sand-size material.			
		1160.0;	6" salmon-pink to olive green alteration.		
		1164.0;	2" salmon-pink to olive green alteration.		
		1167.0;	6" salmon-pink to olive green alteration.		
	1174.0 - 1507.0;	alternating interbedded olive-brown sandstone/siltstone units with fine grained grey- green argillite. The olive brown sandstone/siltstone units occur at the following intervals;			
		1174.0 - 1177.0,	1188.0 - 1195.0,		
		1197.0 - 1200.0,	1209.0 - 1213.0,		
		1220.0 - 1227.0,	1229.0 - 1231.0,		
		1238.0 - 1240.0,	1246.0 - 1248.0,		
		1249.0 - 1250.0,	1257.0 - 1259.0,		
		1291.0 - 1292.0,	1301.0 - 1302.0,		
		1304.0 - 1315.0,	1318.0 - 1335.0,		
		1337.0 - 1345.0,	1351.0 - 1356.0,		

Sample No.	From (ft)	To (ft)	Width (ft)	Au (ppb)
------------	-----------	---------	------------	----------

cont'd

1360.0 - 1362.0, 1367.0 - 1370.0,
 1395.0 - 1410.0, 1418.0 - 1423.0,
 1428.0 - 1432.0, 1446.0 - 1452.0,
 1456.0 - 1457.0, 1467.0 - 1467.5.

1269.0; 3" of red-beige alteration.

1270.0; 3" of red-beige alteration.

1467.0 - 1507.0; rhythmical pattern of sandstone of reddish to beige colour interbedded with argillite in 1 to 2 foot intervals or cycles. Occasional dropstones of granitic composition within the units. Core angle gradually changes to 90° to core axis at bottom of hole.

1507.0

E.O.H.



Mining Act Report of Work 900

Name and Address of Recorded Holder
TERRY LINK K-19173
R.R.#2 NEW LISKEARD, ONT. POJ-1PO Telephone No. 647-4974

Summary of Distribution of Credits and Work Performance

Mining Division	Mining Claim			Mining Claim			Mining Claim		
	Prefix	Number	Work Days Cr.	Prefix	Number	Work Days Cr.	Prefix	Number	Work Days Cr.
LARDER LAKE Township or Area Barry INGRAM TWP.	L.	1165659	200	✓					
Total Assessment Credits Claimed 1200	L.	1165660	200	✓					
Type of Work Performed (Check one only)	L.	1165661	200	✓					
	L.	1165662	200	✓					
	L.	1165663	200	✓					
	L.	1165664	200	✓					
<input type="checkbox"/> Manual Work									
<input type="checkbox"/> Shaft Sinking Drifting or other Lateral Work									
<input type="checkbox"/> Mechanical equipment									
<input type="checkbox"/> Power Stripping other than Manual (maximum credit allowed - 100 days per claim)									
<input checked="" type="checkbox"/> Diamond or other Core drilling									
<input type="checkbox"/> Core Specimens									

Dates when work was performed
From: **AUG. 15/90** To: **SEPT. 22/90** Total No. of Days Performed **1507** Total No. of Days Claimed **1200** Total No. of Days to be Claimed at a Future Date **307**

All the work was performed on Mining Claim(s):
Indicate no. of days performed on each claim.
* (See note No. 1 on reverse side)

Mining Claim	No. of Days	Mining Claim	No. of Days	Mining Claim	No. of Days	Mining Claim	No. of Days	Mining Claim	No. of Days
		1165659	1507						

Required Information eg. type of equipment, Names, Addresses, etc. (See Table on reverse side)
If space below is insufficient, attach schedules with required information and location sketches

DIAMOND DRILL HOLE # ML-01
DRILL COMPANY: KITT ENTERPRISES (BILL LINK)
R.R.#3 NEW LISKEARD, ONT., POJ-1PO.

TOTAL LENGTH: 1,507 FEET
CORE SIZE: BQ
DIP: 70°
AZIMUTH: 306°
DATE STARTED: AUG. 15/90 ✓
DATE COMPLETED: SEPT. 12/90 ✓

ONTARIO GEOLOGICAL SURVEY
GIS - ASSESSMENT FILES
MAY 16 1991
RECEIVED

Certification of Beneficial Interest * (See Note No. 2 on reverse side)
I hereby certify that, at the time the work was performed, the claims covered in this report of work were recorded in the current recorded holder's name or held under a beneficial interest by the current recorded holder.
Date **MARCH 7/91** Recorded Holder or Agent (Signature) **Terry Link**

Certification Verifying Report of Work
I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Address of Person Certifying
TERRY LINK R.R.#2 NEW LISKEARD, ONT., POJ-1PO

Telephone No. **647-4974** Date **MARCH 7/91** Certified By (Signature) **Terry Link**

For Office Use Only

Work Assignments Terry Link	1000	3,000	Received Stamp RECEIVED 91 MAR 14 PM 12 28 MINING DIVISION LARDER LAKE
---------------------------------------	-------------	--------------	---

