



42A01NE0036 29 MAISONVILLE

010

DIAMOND DRILLING

TOWNSHIP: MAISONVILLE

REPORT NO:29

WORK PERFORMED FOR: Kerr Addison Mines Ltd.


RECORDED HOLDER: Same as Above [xx]
: Other []

<u>Claim No.</u>	<u>Hole No.</u>	<u>Footage</u>	<u>Date</u>	<u>Note</u>
L. 87325	65-1	389'	Nov/65	(1)
	66-1	400'	Feb/66	(1)
	67-1	417'	Feb/67	(1)
	67-2	382'	Feb/67	(1)
L. 87329	66-2	805'	June/66	(1)
L. 87328	66-3	233'	June/6	(1)

6 DSH

2626'

NOTES: (1) Cancelled claims, filed in June/88.

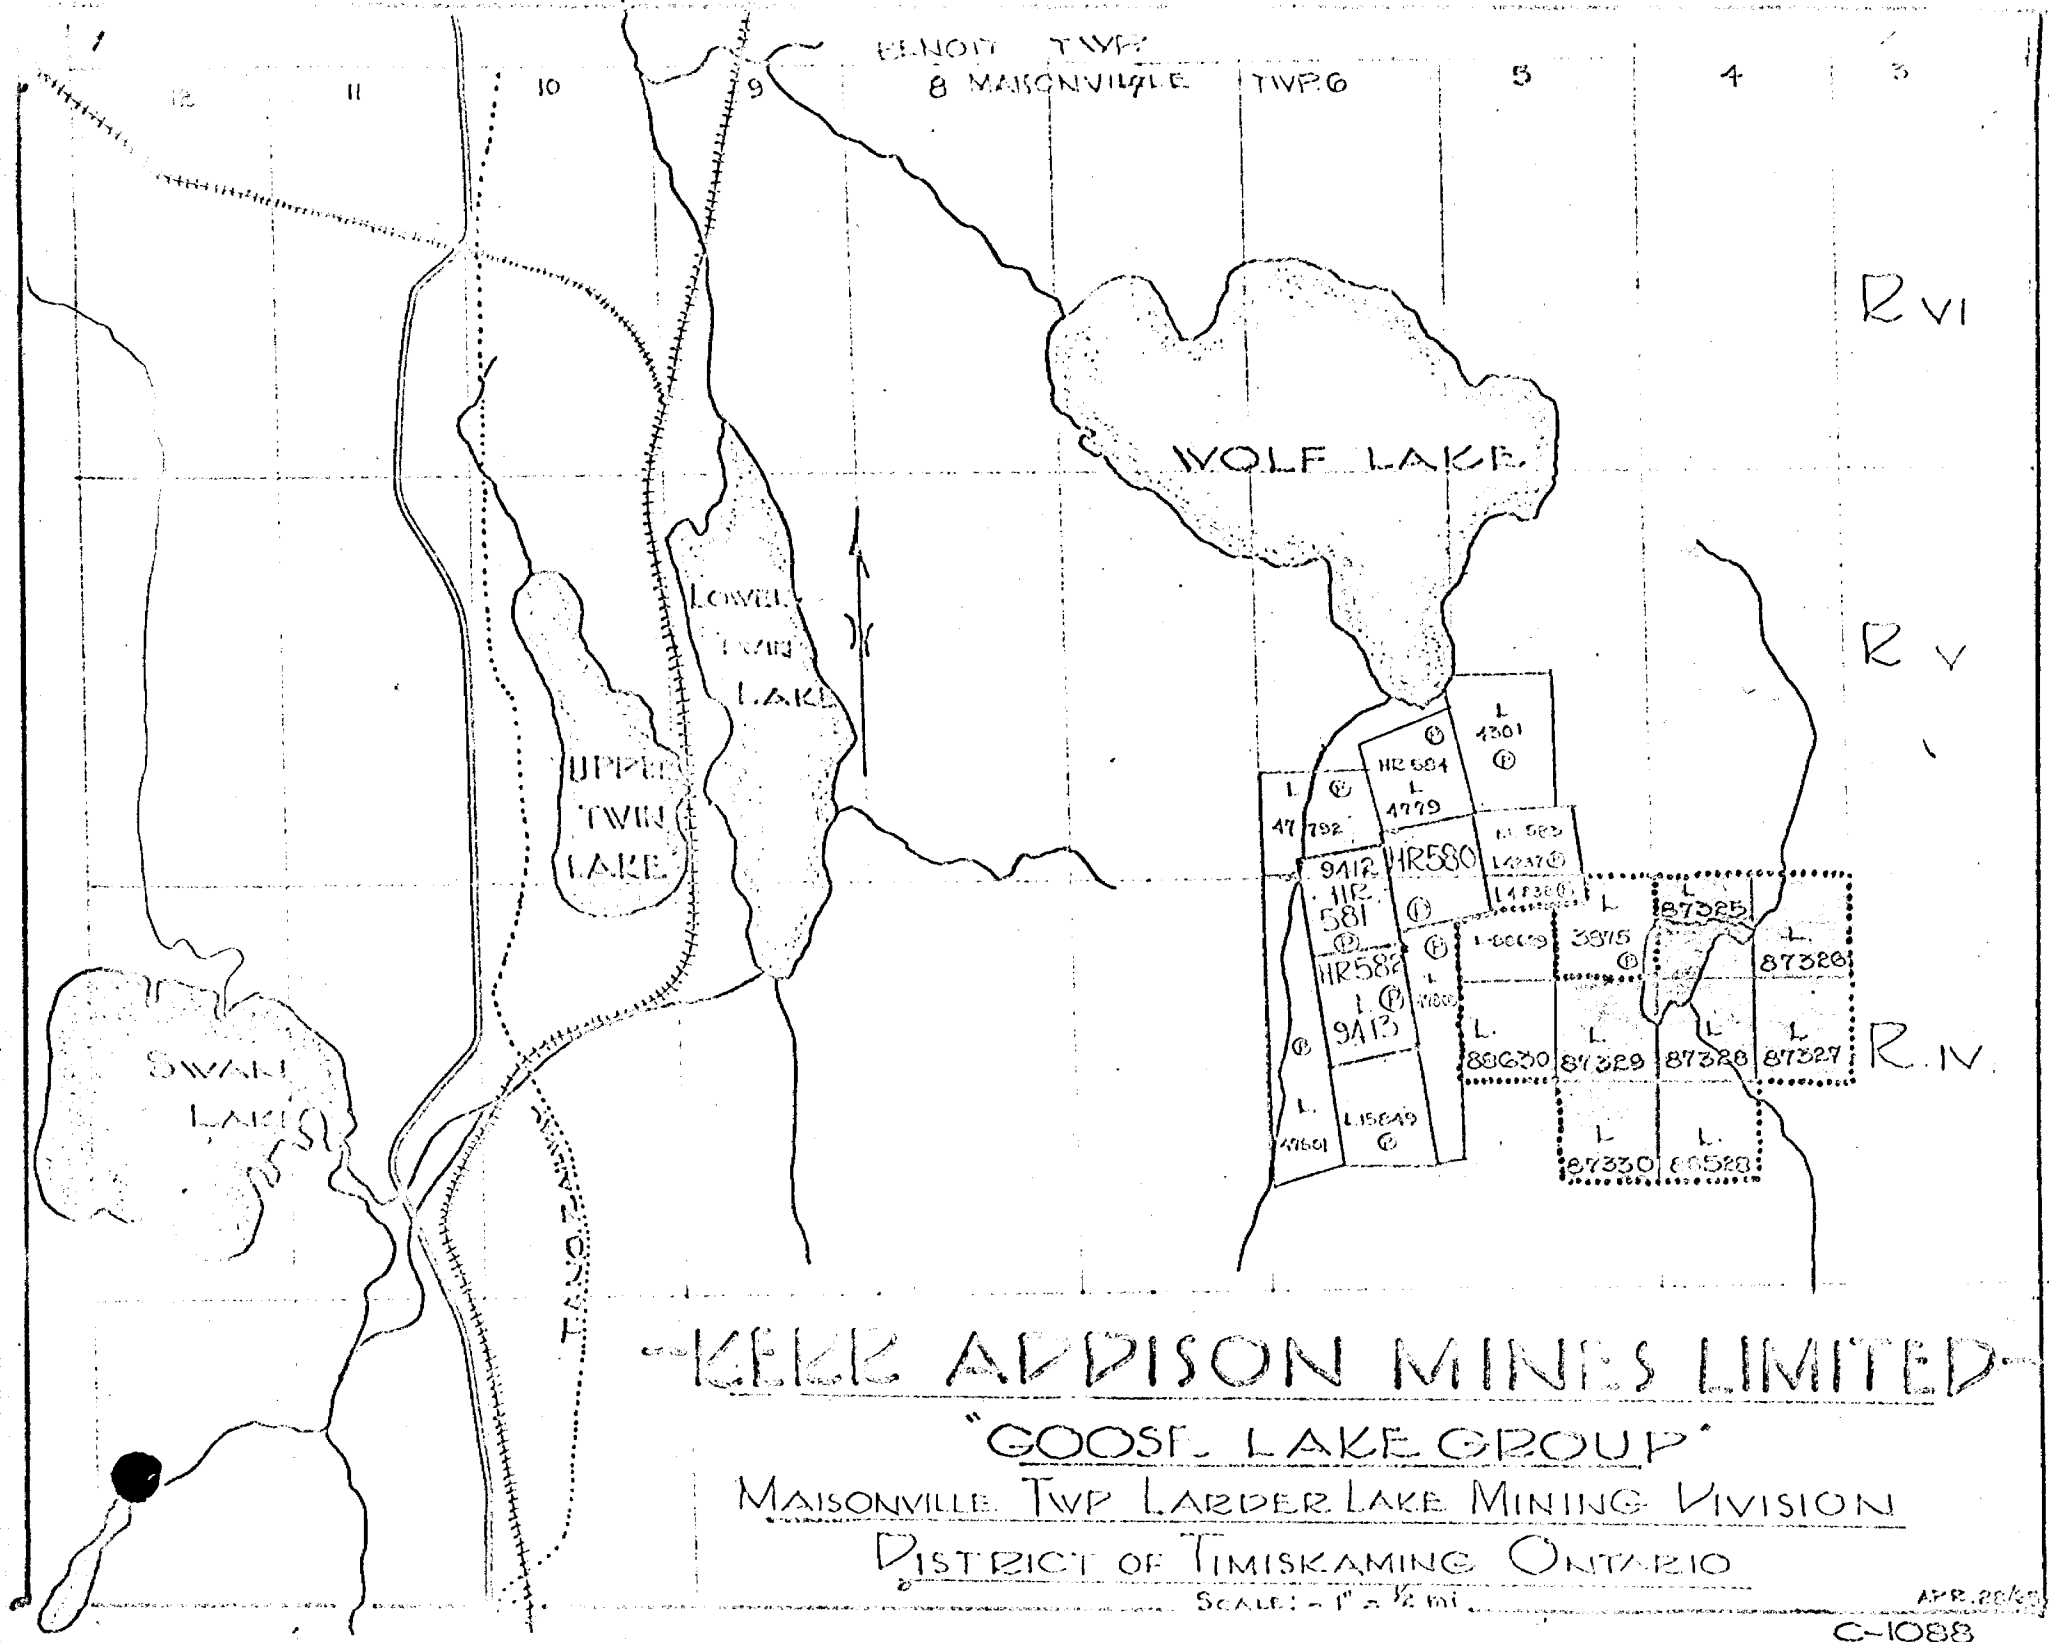

R VI

R V

R IV

KERR ADDISON MINES LIMITED

"GOOSE LAKE GROUP"


MAISONVILLE TWP LADDER LAKE MINING DIVISION

DISTRICT OF TIMISKAMING ONTARIO


SCALE: 1" = 1/2 MI

APR. 28/89

C-1088

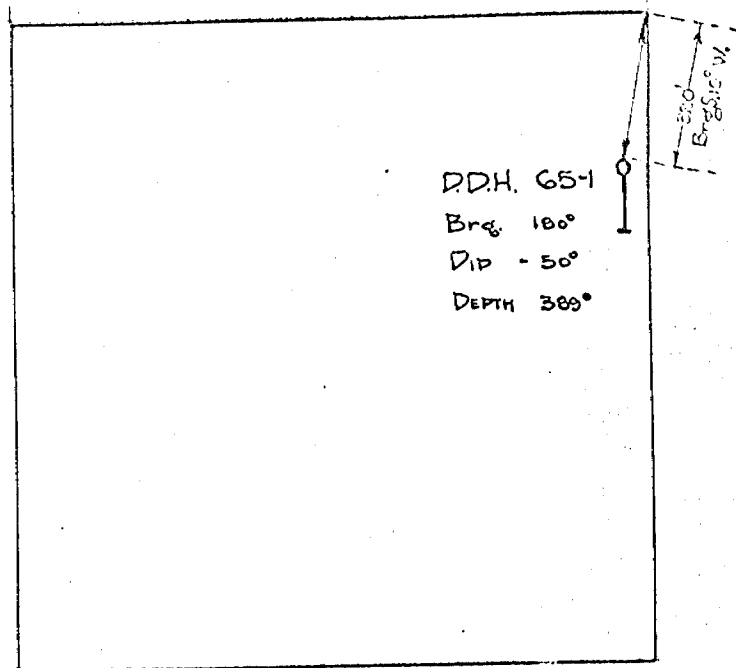

DDH. 65-1
Brg. 180°
DIP - 50°
DEPTH 389'



KERR ADDISON MINES LIMITED

"GOOSE LAKE GROUP"

LOCATION OF D.D.H. 65-1 ON CLAIM # 87325

MAISONVILLE TWP. LARDER LAKE MINING DIVISION

DISTRICT OF TIMISKAMING ONTARIO

SCALE: 1" = 400'

Nov 1935

10124 1127

DIAMOND DRILL RECORD


LOGGED BY F. P. Tagliamonte, P. Eng 15 November 1965

410 0-0 20/11/1965

PROPERTY GOOSE LAKE MAISONVILLE GROUP, Kerr Addison Mines Ltd.

D.D.H. No. 65-1 PAGE 1

LATITUDE 15+00N BEARING OF HOLE 180° STARTED 12 November 1965



CLAIM No. 37325

DEPARTURE 14+00E DIP OF HOLE -50° COMPLETED 15 Nov. a.m./65

DIRECTION AND DISTANCE FROM


ELEVATION Swamp level DIP TESTS None DEPTH 319

NE. CLAIM POST ✓

CONTRACTOR: Continental Diamond Drilling Company Ltd., Rouyn, Quebec CORE: Stored on site

CORE SIZE: AXT

FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY	
FROM	TO			FROM	TO			
0	46	CASING						
46	51.8	DACITE, Pale grey, Massive, siliceous Slips 45 - 50°, pyrite along some faces						○
51.8	60.8	GRAPHITIC ZONE, Massive, possibly a graphitic tuff, cut by occasional 1/8" qtz.-carbonate veinlets @ 45°. Numerous 1/32"± discontinuous seams pyrite @ 25° Occasional nodule of py. Lower contact @ 25° interbanded for 6"± at lower contact.						
60.8	103	DACITE, FLOW BRECCIA, Pale grey groundmass black graphitic matrix. Hard, somewhat sil. Numerous 1/8" qtz-carbonate veinlets @ 45 - 50°. Occasional dissem. py in matrix material. Slips @ 21° with minor shearing and pyrite. Lower 2' of contact very gradational.						
103	125.5	DACITE, Pale green, hard, vaguely flow brecciated in local zones, graphitic matrix, cut by 1/8 - 1/4" qtz-carbonate veinlets.						



DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____

LATITUDE _____

BEARING OF HOLE _____

STARTED _____

DEPARTURE _____

DIP OF HOLE _____

COMPLETED _____

ELEVATION _____

DIP TESTS _____

DEPTH _____


D.D.H. No. 65-1

PAGE 2


CLAIM No. _____

DIRECTION AND DISTANCE FROM

NE. CLAIM POST



FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY							
FROM	TO			FROM	TO									
125.5	182	DACITE, FLOW BRECCIA, generally as above. Cut by numerous barren 1/4" - 1/2" white qtz. stringers @ 50°												
182	195	PORPHYRY DIKE, Grey, white uniformly dimensioned feldspar phenocrysts. Fine dissem. pyrite throughout. Distinctly chilled upper and lower contacts												
195	232	DACITE, FLOW BRECCIA, pale green groundmass, black graphitic matrix. Cut by occasional barren white qtz-carbonate veinlets.												
232	254.5	GRAPHITIC ZONE, As above---possibly a graphitic tuff--- 264 - 265 Irregular white qtz. dissem. granular pyrite stringer zone. with dissem. granular pyrite Upper contact very gradational Lower contact distinct @ 40°												
254.5	267	PORPHYRY DIKE, Grey, white and pink altered feldspar phenocrysts Very fine dissem. pyrite throughout. 261.5 - 263 Graphite band @ 55°												



DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____

D.D.H. No. 65-1

PAGE 3

LATITUDE _____

BEARING OF HOLE _____

STARTED _____

CLAIM No. _____

DEPARTURE _____

DIP OF HOLE _____

COMPLETED _____


DIRECTION AND DISTANCE FROM

ELEVATION _____


DIP TESTS _____


DEPTH _____

NE. CLAIM POST



FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY							
FROM	TO			FROM	TO		HC	Ag	Cu	Zn				
267	292	<u>GRAPHITIC ZONE</u> , --Generally as above-- possibly a graphitic tuff--												
		289-291 Shear zone and qtz stringers @ 47°												
292	376	<u>META RHYOLITE</u> , grey and pearly grey semi rounded siliceous fragments	516	292	295	3'	Nil	0.08	0.02	Nil				
		dark grey matrix material mainly sulphides	517	295	300	5'	Nil	Nil	0.02	Nil				
		Cherty grey and pearly white ground mass.	518	300	305	5'	Nil	Nil	0.03					
		Patches, and dissem. pyrite and pyrrhotite throughout.	519	305	310	5'	Nil	Nil	0.03					
		5-10% sulphides - pyrite and pyrrhotite	520	315	320	5'	Nil	Nil	0.03					
		Slips from 45 - 50°	521	335	340	5'	Nil	Nil	0.02					
		Minor cpy along same slips	522	345	347	2.5'	Nil	Nil	0.03					
		Some zones up to 20% pyrite and pyrrhotite.	523				0.05							
		Pyrrhotite rich zones weakly magnetic.												
376	389	<u>DACITE, FLOW BRECCIA</u> , Grey groundmass,												
		Graphitic matrix												
		<u>END OF HOLE</u>												



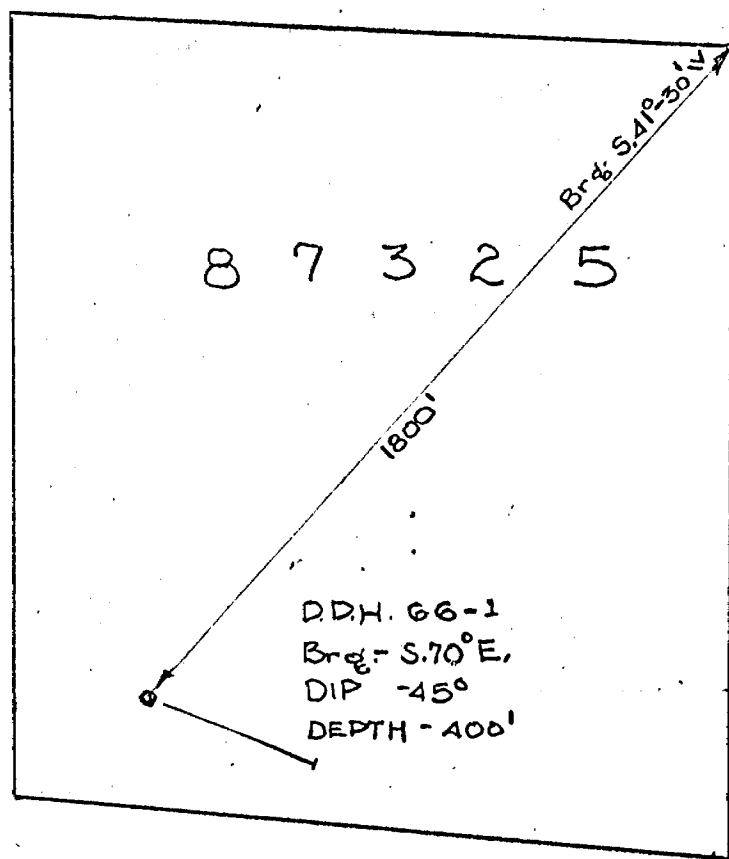

KERR ADDISON MINES LIMITED

- GOOSE LAKE GROUP -

LOCATION OF D.D.H. # 66-1 ON CLAIM # 87325

MAISONVILLE TWP. LARDER LAKE MINING DIVISION

DISTRICT OF TIMISKAMING ONT.

J. S. Hunter

J.E.S. FEB 22/66

SCALE: 1" = 400'

D.D.H. - 1142


DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____

D.D.H. No. 66-1 PAGE 3

LATITUDE _____ BEARING OF HOLE _____ STARTED _____



CLAIM No. _____

DEPARTURE _____ DIP OF HOLE _____ COMPLETED _____


← DIRECTION AND DISTANCE FROM

ELEVATION _____ DIP TESTS _____ DEPTH _____

NE. CLAIM POST

FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY				
FROM	TO			FROM	TO						
358.5	400.0	GABBRO: good chilled contact 25°.									
		fine to co grained - large blebs feldspar? up to 1"									
		with fuzzy edges - main groundmass grey prominently									
		flecked with hornblende ties - magnetic.									

G. Mather

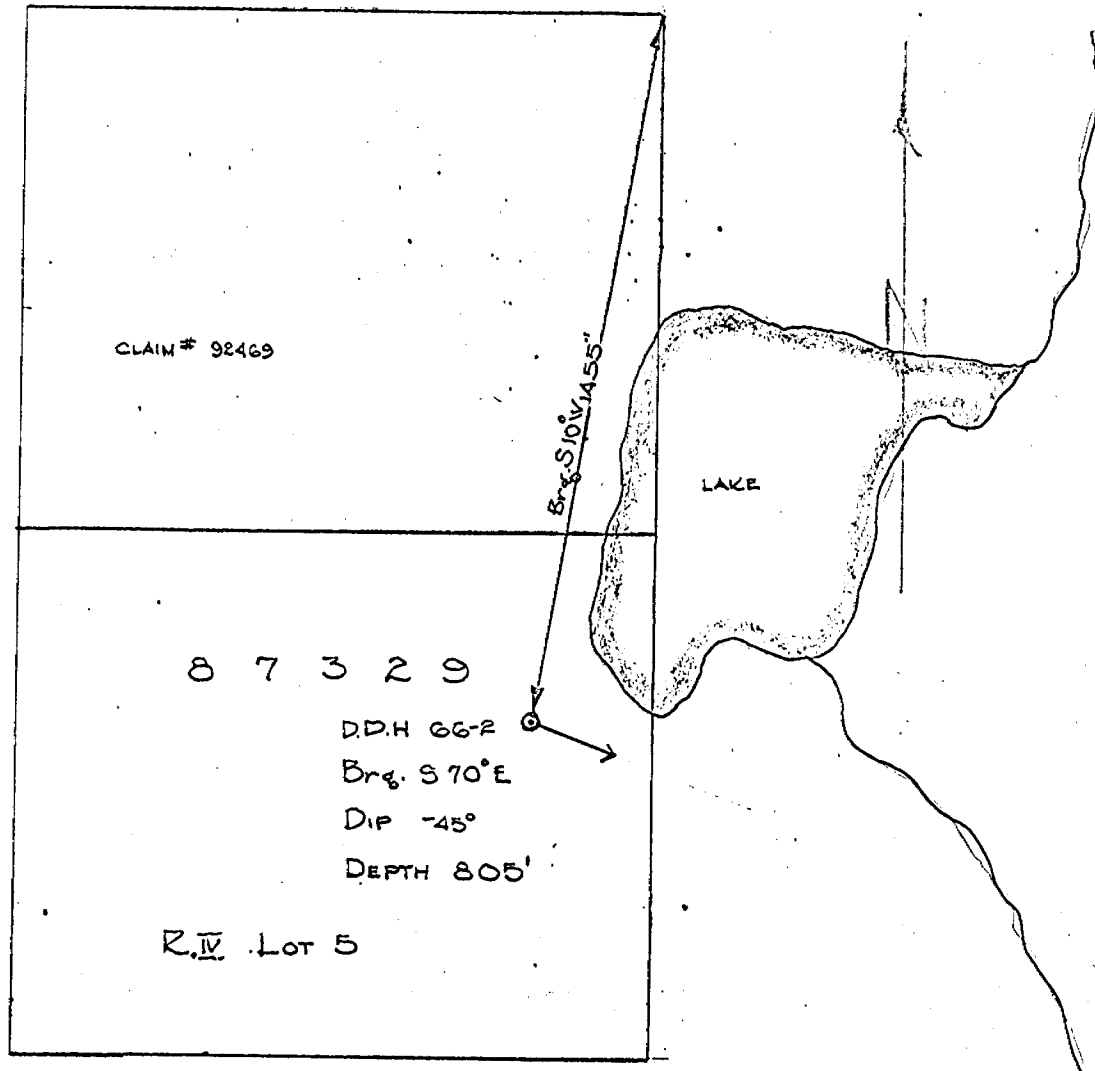

KERR ADRIAN MINES LIMITED

GOOSE LAKE GROUP

LOCATION - D.D.H. #66-2 CLAIM #87329

MAISONVILLE TWP. LARDER LAKE MINING DIVISION


DISTRICT OF TIMISKAMING ONTARIO

JULY 68

DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____
 LATITUDE _____ BEARING OF HOLE _____ STARTED _____
 DEPARTURE _____ DIP OF HOLE _____ COMPLETED _____
 ELEVATION _____ DIP TESTS _____ DEPTH _____



D.D.H. No. _____ PAGE 2
 CLAIM No. _____
 DIRECTION AND DISTANCE FROM
 NE. CLAIM POST




FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY			
FROM	TO			FROM	TO					
	177.0 - 191.0	- faulted shear zone, graphitic broken blocky 1% - 3% pyrite		182.5	184.0	Lost core				
				190.0	191.0	Lost core				
				422.0	423.0	Lost core				
	191.0 - 209.0	- graphite banded 45° to C.A. 1% - 3% pyrite		428.0	429.0	Lost core				
				461.0	462.0	Lost core				
	209.0 - 254.0	- light grey siliceous minor graphite banding contorted 10° - 20° to C.A. trace of pyrite		463.0	464.0	Lost core				
				485.0	486.0	Lost core				
				491.0	492.0	Lost core				
	254.0 - 302.0	- highly graphitic slightly sheared banded 30° - 40° to C.A. 1% - 3% pyrite. Occasional siliceous tuff sections.		494.0	495.0	Lost core				
				503.0	503.5	Lost core				
				507.0	508.0	Lost core				
				524.0	524.5	Lost core				
	302.0 - 324.0	- as above 209.0 - 254.0, banding 40° to C.A.		532.0	533.5	Lost core				
				606.0	607.0	Lost core				
	324.0 - 352.0	- graphitic 1% - 3% pyrite 40° - 45° to C.A.		608.0	609.0	Lost core				
				610.0	611.0	Lost core				

DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____
 LATITUDE _____ BEARING OF HOLE _____ STARTED _____
 DEPARTURE _____ DIP OF HOLE _____ COMPLETED _____
 ELEVATION _____ DIP TESTS _____ DEPTH _____




D.D.H. No. _____ PAGE 11
 CLAIM No. _____
 DIRECTION AND DISTANCE FROM
 NE. CLAIM POST



FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY			
FROM	TO			FROM	TO					
716.0	719.5	RHYOLITE - massive cherty brecciated, traces of pyrite, minor tuff material in fractures.								
719.5	739.0	FELDSPAR PORPHYRY - good chilled contact 63° to C.A. coarse feldspar laths - 1/4" fine siliceous groundmass with fine needles of tourmaline throughout 725'								
	739.0	- out contact 85° to core.								
739.0	806.0	RHYOLITE - blotchy hybrid appearance possibly granitized - grey & pink alteration, numerous siliceous & carbonate fractures - minor pyrrhotite								
	770.0 - 772.0	- brecciated, granitized								
	806.0	END OF HOLE.								

G. Matheson

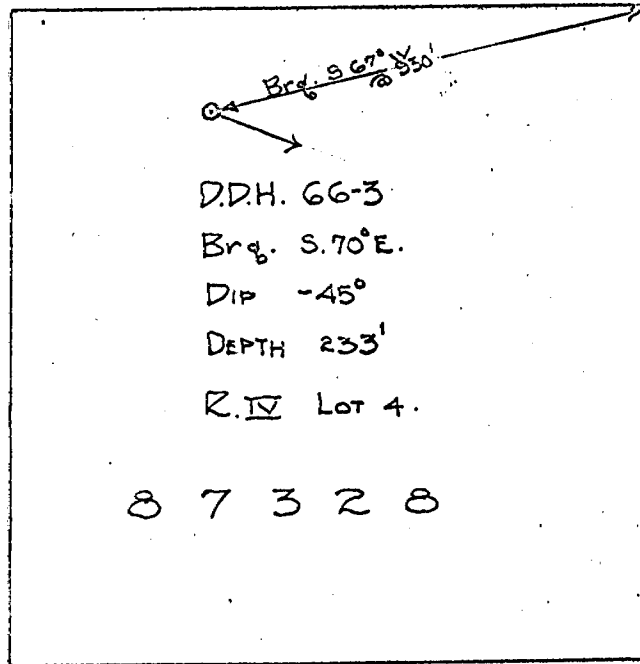

KEENE ADDISON MINES LIMITED

GOOSE LAKE GROUP

LOCATION - DDH # 66-3 on CLAIM # 87328

MAISONVILLE TWP. LARDEE LAKE MINING DIVISION

DISTRICT OF TIMISKAMING ONTARIO

1950 JULY 25

SCALE: 1" = 100'

1166-2

DIAMOND DRILL RECORD

LOGGED BY D.M. Hendrick

A. Wilson Diamond Drilling

PROPERTY GOOSE LAKE MAISONVILLE GROUP - Line 0+00 4+50 East 0+15 South

D.D.H. No. 66-3


PAGE 1

LATITUDE 0+15 S BEARING OF HOLE 110° STARTED June 27, 1966

DEPARTURE 4+55 E DIP OF HOLE -45° COMPLETED June 29, 1966

ELEVATION Swamp DIP TESTS Nil DEPTH 233'

(74' AX casing 2") (72' 3" pipe)



CLAIM No. 87328
 87328
 DIRECTION AND DISTANCE FROM
257°
 NE. CLAIM POST 930'


FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY													
FROM	TO			FROM	TO															
0.0	73.0	CASING																		
73.0	85.0	DIOBITE - trace of disseminated pyrite, massive fine to medium grain. Bottom contact broken blocky																		
85.0	93.0	FELDSPAR PORPHYRY - Cut contact 40° to C.A.																		
93.0	145.5	TUFFS - graphitic banded 40° to C.A. 1% erratic pyrite. Erratic light grey siliceous sections.																		
		at 93.5 - 2" feldspar porphyry dyke																		
		@ 127.0 - 3" " " " 30° to C.A.																		
		@ 137.5 - 12" " " "																		
145.5	152.0	FELDSPAR PORPHYRY - in contact broken and blocky out contact 45° to C.A.																		

W.S.E.
 R.S.
 ✓ P.K.
 ✓ O.V.
 R.C.
 C.W.
 J.S.
 G.R.
 H.P.
 (E.O.)


DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____
 LATITUDE _____ BEARING OF HOLE _____ STARTED _____
 DEPARTURE _____ DIP OF HOLE _____ COMPLETED _____
 ELEVATION _____ DIP TESTS _____ DEPTH _____




D.D.H. No. _____ PAGE 2
 CLAIM No. _____
 DIRECTION AND DISTANCE FROM
 NE. CLAIM POST



FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY						
FROM	TO			FROM	TO								
152.0	154.0	TUFFS - graphitic, slight banding, minor pyrite											
	154.5 - 156.5	- grey siliceous banded tuffs. Well banded 55° to C.A. trace of sphalerite in thread-like fractures											
	156.5 - 158.0	- graphitic sheared at 157.5, shear 50° to C.A. - 1/16" sphalerite, trace of cpy.											
	158.0 - 161.0	- siliceous banded grey tuff barren out contact 50° to C.A.											
161.0	233.0	PHYOLITE - massive grey, trace of pyrite, occasional buffaceous section.											
	183.0 - 233.0	- greenish grey chloritized, fractured, some brecciation fine pyrrhotite, 1% disseminated and as stringers along fractures, trace of chalcopyrite											
233.0		END OF HOLE.											

Matheson

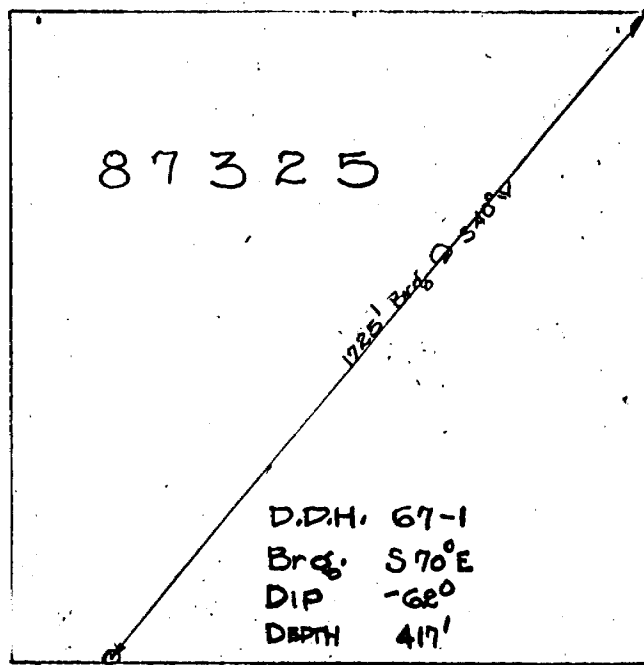

KERR ADDISON MINES LIMITED

GOOSE LAKE GROUP

LOCATION OF D.D.H.# 67-1 ON CLAIM# 87325

MAISONVILLE TWP. LARDER LAKE MINING DIVISION

DISTRICT OF TIMISKAMING ONTARIO

SCALE: 1" = 400'

J.E.S. FEB. 1967

D.D.H. - 1240

DIAMOND DRILL RECORD

LOGGED BY D.M. Hendrick

PROPERTY Kerr / Gibson - Goose Lake Madisonville Twp. Ont.

D.D.H. No. 47-2

PAGE 2

LATITUDE 45° 75' N BEARING OF HOLE 110° STARTED Feb. 3/67

DEPARTURE 2+65 E DIP OF HOLE -62° COMPLETED Feb. 6/67

ELEVATION Jake DIP TESTS @ 375' - 56° 30' DEPTH 417.0'



CLAIM No. 17875

DIRECTION AND DISTANCE FROM
South - 40° - West 1725'
NE. CLAIM POST


FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY							
FROM	TO			FROM	TO		Au.	Ag.	Cu.	Zn.	Pb.			
0.0	85.0	CASING												
85.0	91.5	FEISITE (GREY) TUFF - light grey, finely foliated or layered - fine graphite lamellae along layers 30° to C.A. - trace of pyrite												
91.5	123.0	GRAPHITE TUFF - black, slaty conductive, finely banded 30° to C.A. - numerous calcite, minor pyrite filled fractures - trace of sphalerite @ 124.0' 3" fracture zone - minor sphalerite with calcite	852	91.5	100.0	8.5'			.02	.03	Nil			
			853	100.0	110.0	10.0			.03	.25	Nil			
			854	110.0	123.5	13.5			.02	.30	Nil			
			838	123.5	125.0	1.5	.01	.14	.02	.27	Nil			
	133.0 - 146.0	- broken, blocky, lost core, soft amorphous graphite, abundant calcite, highly distorted shearing probable fault	855	125.0	135.0	10.0			.03	.42	.07			
		- Lost core 136.0 - 137.0, 137.5 - 138.0, 140.0 - 141.5 144.0 - 144.5	856	135.0	146.0	11.0			.02	.48	.07			

DIAMOND DRILL RECORD

LOGGED BY _____

D.D.H. No. 67-1

PAGE 3




CLAIM No. _____


DIRECTION AND DISTANCE FROM

NE. CLAIM POST

PROPERTY _____
 LATITUDE _____ BEARING OF HOLE _____ STARTED _____
 DEPARTMENT _____ DIP OF HOLE _____ COMPLETED _____
 ELEVATION _____ DIP TESTS _____ DEPTH _____



FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY							
FROM	TO			FROM	TO		Au.	Ag.	Cu.	Zn.	Pb.			
183.0	370.2													
		218.0 - 256.0 - massive, less brecciation, 1% pyrrhotite and pyrite as blebs, erratic fracturing												
		256.0 - 267.0 - less massive - becoming more fractured & brecciated 3% pyrrhotite & pyrite												
		267.0 - 279.0 1% sphalerite, 3% pyrrhotite & pyrite	860	267.0	279.0	12.0			Nil	.89	.17			
		279.0 - 315.5 - well developed brecciation 5% pyrite 3% pyrrhotite trace sphalerite	861	279.0	290.0	11.0			Nil	.17	.03			
			862	290.0	299.0	9.0			Nil	.06	Nil			
		315.5 - 331.0 1% sphalerite as fine veinlets in fractures	863	315.0	325.0	10.0			.01	.74	.20			
		5% pyrrhotite and pyrite	864	325.0	331.0	6.0			.02	.93	.43			
		331.0 - 344.0 - well developed brecciation, 3% sphalerite, trace of	849	331.0	335.0	4.0	Tr.	.10	.01	2.02	.50			

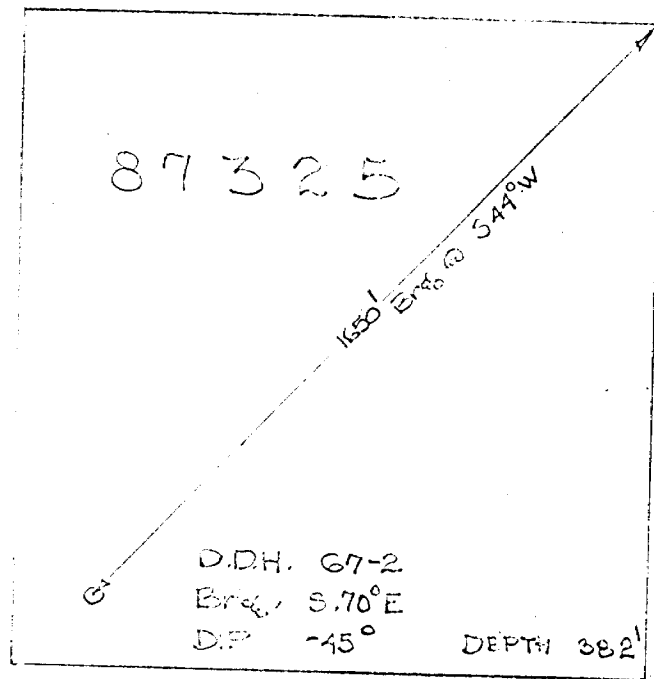

KERR ADDISON MINES LIMITED

GOOSE LAKE GROUP

LOCATION OF D.D.H.#67-2 ON CLAIM#87325

MAISEVILLE TWP LARDEK LAKE MINING DIVISION

DISTRICT OF TIMISKAMING ONTARIO

SCALE: 1" = 400'

DES. .67

D.H.-1237


DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____
 LATITUDE _____ BEARING OF HOLE _____ STARTED _____
 DEPARTURE _____ DIP OF HOLE _____ COMPLETED _____
 ELEVATION _____ DIP TESTS _____ DEPTH _____

D.D.H. No. 67-2 PAGE 2

CLAIM No. _____
 DIRECTION AND DISTANCE FROM
 NE. CLAIM POST




FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY			
FROM	TO			FROM	TO			Zn.	Pb.	
149.0	319.0									
	162.0 - 177.5	- finer brecciation, 10% pyrite, 3% sphalerite	866	162.0	165.0	3.0			1.79	.10
	@ 163.0' - 3/8" seam of sphalerite parallel		867	165.0	170.0	5.0			.93	.51
	to 1/2" vein of calcite in fracture 25° to core		868	170.0	177.5	7.5			2.35	.41
	@ 166.0' - 4" banding - pyrite, sphalerite									
	& calcite									
	@ 172.5' - 4" - 15% sphalerite seams									
	177.5 - 182.5	- coarse brecciation, 3% - 5% pyrite and pyrrhotite	869	177.0	185.0	8.0			.07	Nil
	182.5 - 214.0	- minor pyrite and pyrrhotite								
	214.0 - 228.0	- fractured 1% sphalerite in fractures 3% pyrite	870	214.0	220.0	6.0			1.59	.17
			871	220.0	228.0	8.0			1.13	.17

DIAMOND DRILL RECORD

LOGGED BY _____

PROPERTY _____
 LATITUDE _____ BEARING OF HOLE _____ STARTED _____
 DEPARTURE _____ DIP OF HOLE _____ COMPLETED _____
 ELEVATION _____ DIP TESTS _____ DEPTH _____



D.D.H. No. 67-2 PAGE 3
 CLAIM No. _____
 DIRECTION AND DISTANCE FROM
 NE. CLAIM POST

FOOTAGE		DESCRIPTION	SAMPLE No.	FOOTAGE		SAMPLE LENGTH	ASSAY		
FROM	TO			FROM	TO		Zn.	Pb.	
149.0	319.0								
	225.0 - 319.0'	- coarse breccia - minor pyrite and pyrrhotite erratic sphalerite veinlets							
	262.0 - 265.0	3% sphalerite	872	262.0	265.0	3.0		2.05	.27
	281.5 - 283.5	1% sphalerite	873	281.5	283.5	2.0		.60	.14
	296.5 - 299.5	1% sphalerite	874	296.5	299.5	3.0		.96	.20
319.0	325.5	DICRITE ? DYKE - fine grained chilled contacts 40° to core, massive, barren porphyritic - 1/8" feldspar phenos 322.0 - 324.0'							
325.5	348.5	PHYOLITE BRECCIA - 3% pyrite & pyrrhotite, coarse breccia							
348.5	382.0	ANDESITE - massive, altered - carbonatized - dark, softer than above - in contact - banded py. & po 3" 50° to C.A. - tuffaceous layering							



42A01NE0036 29 MAISONVILLE

ONTARIO

THE MINING ACT REPORT OF WORK

900 form is each type of work to be recorded.

To the Recorder of Larder Lake Mining Division

I, E. C. Jacka on behalf of P. J. Kearney K. 16730 name of Recorded Holder Miner's Licence

Suite 1600 - 44 King Street West, Toronto 1, Ontario Post Office Address

do hereby report the performance of 389 days of Diamond drilling (AXT Care) type of work

not before reported to be applied on the following contiguous claims

Table with 6 columns: Claim No., Days, Claim No., Days, Claim No., Days. Contains entries for claims 87325 through 87330, each with 64 days.

All the work was performed on Mining Claim (s) L. 87325 (In the case of geological and/or geophysical survey (s) where more than 18 claims are involved attach a schedule)

READ CAREFULLY: THE FOLLOWING INFORMATION IS REQUIRED BY THE MINING RECORDER.

For Manual Work, Stripping or Opening up of Mines, Sinking Shafts or Other Actual Mining Operations - Names and addresses of the men who performed the work and the dates and hours of their employment.

For Diamond and other Core Drilling - Footage, No. and angle of holes and diameter of core. Name and address of owner or operator of drill. Dates when drilling was done. Signed core log and sketch in duplicate.

For Compressed Air or Other Power Driven or Mechanical Equipment

Type of drill or equipment. Names and addresses of men engaged in operating equipment and the dates and hours of their employment.

For Power Stripping - Type of equipment. Name and address of owner or operator. Amount expended. Dates on which work was done. Proof of actual cost must be submitted within 30 days of recording.

With each of the above types of work sketches are required to show the location and extent of the work in relation to the nearest claim post. In the case of diamond or other core drilling the sketch must be submitted in duplicate.

For Geological and Geophysical Survey - The names and addresses of men employed as well as dates. Type of instrument used in the case of geophysical survey. Reports and maps in duplicate must be filed with the Minister within 60 days of recording.

For Land Survey - the name and address of Ontario Land surveyor.

The Required Information is as Follows: (Attach a list if this space is insufficient)

- Footage: 389 feet.
Core Diameter: AXT - 13/16"
No. of holes: 1 (65-1)
Bearing of Hole: Due South.
Dip of Hole: -50°
Drilling Dates: November 12th, 1965 - November 15th, 1965.
Contractor: Continental Diamond Drilling Co. Ltd., Rouyn, P.Q.

Date Nov 22 1965

Signature of Recorded Holder or Agent (Handwritten signature)

The Mining Act Certificate Verifying Report of Work

I, G. W. Matheson Senior Geologist

Suite 1600 - 44 King Street West, Toronto 1, Ontario (Post Office Address)

hereby certify:

- 1. That I have a personal and intimate knowledge of the facts set forth in the report of work annexed hereto, having performed the work or witnessed same during and/or after its completion.
2. That the annexed report is true.

Dated 22 Nov 65 19 Signature G. W. Matheson

RECORDED NOV 23 1965 REG. No.

THE PENALTY FOR MAKING A FALSE STATEMENT IN THIS REPORT AND/OR CERTIFICATE IS \$500. OR SIX MONTHS IMPRISONMENT OR BOTH



ONTARIO

THE MINING ACT REPORT OF WORK

A separate form is required for each type of work to be recorded.

To the Recorder of Larder Lake Mining Division
I, E. C. Jacka, on behalf of Kerr Addison Mines Limited A 35072
name of Recorded Holder Miner's Licence
Suite 1600- 44 King Street West, Toronto, Ontario.
Post Office Address

do hereby report the performance of 400 days of Diamond Drilling (AXT Core)
type of work
not before reported to be applied on the following contiguous claims

Table with 6 columns: Claim No., Days, Claim No., Days, Claim No., Days. Contains entries for claims L. 87325, L. 87326, L. 87327, L. 87328, L. 87329, L. 87330 with days 16, 16, 16, 16, 16, 16 and other claims L. 86528, L. 88629, L. 88630, L. 92469 with days 76, 76, 76, 76.

All the work was performed on Mining Claim (s) L. 87325
(In the case of geological and/or geophysical survey (s) where more than 18 claims are involved attach a schedule)

READ CAREFULLY: THE FOLLOWING INFORMATION IS REQUIRED BY THE MINING RECORDER.

- For Manual Work, Stripping or Opening up of Mines, Sinking Shafts or Other Actual Mining Operations - Names and addresses of the men who performed the work and the dates and hours of their employment.
For Diamond and other Core Drilling - Footage, No. and angle of holes and diameter of core. Name and address of owner or operator of drill. Dates when drilling was done. Signed core log and sketch in duplicate.
For Compressed Air or Other Power Driven or Mechanical Equipment
Type of drill or equipment. Names and addresses of men engaged in operating equipment and the dates and hours of their employment.
For Power Stripping - Type of equipment. Name and address of owner or operator. Amount expended. Dates on which work was done. Proof of actual cost must be submitted within 30 days of recording.
With each of the above types of work sketches are required to show the location and extent of the work in relation to the nearest claim post. In the case of diamond or other core drilling the sketch must be submitted in duplicate.
For Geological and Geophysical Survey - The names and addresses of men employed as well as dates. Type of instrument used in the case of geophysical survey. Reports and maps in duplicate must be filed with the Minister within 60 days of recording.
For Land Survey - the name and address of Ontario Land surveyor.

The Required Information is as Follows: (Attach a list if this space is insufficient)

Footage: 400 ft.
Core Diameter: AXT 1 3/16"
No. of Holes: 1 (66-1)
Bearing of Hole: 110° Azimuth
Dip of Hole: -45°
Drilling Dates: Feb. 12th, 1966, - Feb. 15th, 1966.
Contractor: Continental Diamond Drilling, Rouyn, P.Q.
Core Storage: At drilling site.

Date February 24th, 1966

Signature of E. C. Jacka
Signature of Recorded Holder or Agent

The Mining Act Certificate Verifying Report of Work

I, G. W. Matheson - Senior Geologist - Exploration.
Suite 1600 - 44 King Street West, Toronto.
(Post Office Address)

hereby certify:

- 1. That I have a personal and intimate knowledge of the facts set forth in the report of work annexed hereto, having performed the work or witnessed same during and/or after its completion.
2. That the annexed report is true.

Dated February 24th, 1966

Signature of G. W. Matheson

Signature

RECORDED MAR 2 1966
REC. No.

THE PENALTY FOR MAKING A FALSE STATEMENT IN THIS REPORT AND/OR CERTIFICATE IS \$500. OR SIX MONTHS IMPRISONMENT OR BOTH



ONTARIO

THE MINING ACT REPORT OF WORK

A separate form is required for each type of work to be recorded.

To the Recorder of Larder Lake Mining Division

I, E.C. Jacka, on behalf of Kerr Addison Mines Limited A. 35072
name of Recorded Holder Miner's Licence
Suite 1600 - 44 King Street West, Toronto.

Post Office Address

do hereby report the performance of 1038 days of Diamond Drilling (AXT Core) type of work

not before reported to be applied on the following contiguous claims

Table with 6 columns: Claim No., Days, Claim No., Days, Claim No., Days. Contains claim numbers L. 87325, 87326, 87327, 87328, 87329, 87330 and L. 86528, 88629, 88630, 92469, 97210, 97211.

All the work was performed on Mining Claim (s) L 87328 & L 87329
(In the case of geological and/or geophysical survey (s) where more than 18 claims are involved attach a schedule)

READ CAREFULLY: THE FOLLOWING INFORMATION IS REQUIRED BY THE MINING RECORDER.

- For Manual Work, Stripping or Opening up of Mines, Sinking Shafts or Other Actual Mining Operations - Names and addresses of the men who performed the work and the dates and hours of their employment.
For Diamond and other Core Drilling - Footage, No. and angle of holes and diameter of core. Name and address of owner or operator of drill. Dates when drilling was done. Signed core log and sketch in duplicate.
For Compressed Air or Other Power Driven or Mechanical Equipment
Type of drill or equipment. Names and addresses of men engaged in operating equipment and the dates and hours of their employment.
For Power Stripping - Type of equipment. Name and address of owner or operator. Amount expended. Dates on which work was done. Proof of actual cost must be submitted within 30 days of recording.
With each of the above types of work sketches are required to show the location and extent of the work in relation to the nearest claim post. In the case of diamond or other core drilling the sketch must be submitted in duplicate.
For Geological and Geophysical Survey - The names and addresses of men employed as well as dates. Type of instrument used in the case of geophysical survey. Reports and maps in duplicate must be filed with the Minister within 60 days of recording.
For Land Survey - the name and address of Ontario Land surveyor.

The Required Information is as Follows:

(Attach a list if this space is insufficient)

Footage: D.D.H. 66-2 = 805 ft; D.D.H. 66-3 = 233 ft; Total 1038 ft.
Core Diameter: AXT (1 3/16")
No. of Holes: 2 (66-2 & 66-3)
Dip of Holes: Both -45°
Drilling Dates: June 8th, 1966 - June 29th, 1966.
Contractor: Wilson Diamond Drilling, Noranda, P.Q.
Core Storage: At drill site.

Date July 8th, 1966

Signature of Recorded Holder Agent (E.C. Jacka)

The Mining Act Certificate Verifying Report of Work

I, G. W. Matheson - Senior Geologist - Exploration Suite 1600 - 44 King Street West, Toronto. (Post Office Address)

hereby certify:

- 1. That I have a personal and intimate knowledge of the facts set forth in the report of work annexed hereto, having performed the work or witnessed same during and/or after its completion.
2. That the annexed report is true.

Dated July 8th 1966 Signature (G.W. Matheson)

THE PENALTY FOR MAKING A FALSE STATEMENT IN THIS REPORT AND/OR CERTIFICATE IS \$500. OR SIX MONTHS IMPRISONMENT OR BOTH



ONTARIO

THE MINING ACT REPORT OF WORK

A separate form is required for each type of work to be recorded.

To the Recorder of Larder Lake Mining Division

I, E. C. Jacka, on behalf of Kerr Addison Mines Limited A 35072

Suite 1600 - 44 King Street West, Toronto. Miner's Licence

Post Office Address

do hereby report the performance of 417 days of Diamond Drilling type of work

not before reported to be applied on the following contiguous claims

Table with 6 columns: Claim No., Days, Claim No., Days, Claim No., Days. Contains entries for claims 87325, 87326, 87327, 87328, 87329, 87330, 86528, 88629, 88630, 92469, 97210, 97211.

All the work was performed on Mining Claim (s) L 87325 - Main mine, N.M. 44-C-4 (In the case of geological and/or geophysical survey (s) where more than 18 claims are involved attach a schedule)

READ CAREFULLY: THE FOLLOWING INFORMATION IS REQUIRED BY THE MINING RECORDER.

For Manual Work, Stripping or Opening up of Mines, Sinking Shafts or Other Actual Mining Operations - Names and addresses of the men who performed the work and the dates and hours of their employment.

For Diamond and other Core Drilling - Footage, No. and angle of holes and diameter of core. Name and address of owner or operator of drill. Dates when drilling was done. Signed core log and sketch in duplicate.

For Compressed Air or Other Power Driven or Mechanical Equipment

Type of drill or equipment. Names and addresses of men engaged in operating equipment and the dates and hours of their employment.

For Power Stripping - Type of equipment. Name and address of owner or operator. Amount expended. Dates on which work was done. Proof of actual cost must be submitted within 30 days of recording.

With each of the above types of work sketches are required to show the location and extent of the work in relation to the nearest claim post. In the case of diamond or other core drilling the sketch must be submitted in duplicate.

For Geological and Geophysical Survey - The names and addresses of men employed as well as dates. Type of instrument used in the case of geophysical survey. Reports and maps in duplicate must be filed with the Minister within 60 days of recording.

For Land Survey - the name and address of Ontario Land surveyor.

The Required Information is as Follows: (Attach a list if this space is insufficient)

- Core Storage: At drill site.
Footage: D.D.H. 67-1 417 ft.
Core Diameter: AXT 1 1/4"
Drilling Dates: February 3rd, 1967 - February 6th, 1967.
Contractor: A. Wilson, Contract Diamond Drilling, Noranda, P.Q.

Date February 23 1967

Signature of Recorded Holder or Agent

The Mining Act Certificate Verifying Report of Work

I, G. W. Matheson, Senior Geologist - Exploration,

Suite 1600 - 44 King Street West, Toronto 1. (Post Office Address)

hereby certify:

- 1. That I have a personal and intimate knowledge of the facts set forth in the report of work annexed hereto, having performed the work or witnessed same during and/or after its completion.
2. That the annexed report is true.

Dated Feb 23 1967

Signature

RECORDED FEB 27 1967 REC. No.

THE PENALTY FOR MAKING A FALSE STATEMENT IN THIS REPORT AND/OR CERTIFICATE IS \$500. OR SIX MONTHS IMPRISONMENT OR BOTH



ONTARIO

THE MINING ACT REPORT OF WORK

A separate form is required for each type of work to be recorded.

To the Recorder of Larder Lake Mining Division
I, E. C. Jacka, on behalf of Kerr Addison Mines Limited A 35072
name of Recorded Holder Miner's Licence
Suite 1600 - 44 King Street West, Toronto 1
Post Office Address

do hereby report the performance of 382 days of Diamond Drilling type of work

not before reported to be applied on the following contiguous claims

Table with 6 columns: Claim No., Days, Claim No., Days, Claim No., Days. Rows include L.87325, 87326, 87327, 87328, 87329, 87330 and L.86528, 88629, 88630, 92469, 97210, 97211.

All the work was performed on Mining Claim (s) L 87325 (In the case of geological and/or geophysical survey (s) where more than 18 claims are involved attach a schedule)

READ CAREFULLY: THE FOLLOWING INFORMATION IS REQUIRED BY THE MINING RECORDER.

For Manual Work, Stripping or Opening up of Mines, Sinking Shafts or Other Actual Mining Operations - Names and addresses of the men who performed the work and the dates and hours of their employment.
For Diamond and other Core Drilling - Footage, No. and angle of holes and diameter of core. Name and address of owner or operator of drill. Dates when drilling was done. Signed core log and sketch in duplicate.
For Compressed Air or Other Power Driven or Mechanical Equipment
Type of drill or equipment. Names and addresses of men engaged in operating equipment and the dates and hours of their employment.
For Power Stripping - Type of equipment. Name and address of owner or operator. Amount expended. Dates on which work was done. Proof of actual cost must be submitted within 30 days of recording.
With each of the above types of work sketches are required to show the location and extent of the work in relation to the nearest claim post. In the case of diamond or other core drilling the sketch must be submitted in duplicate.
For Geological and Geophysical Survey - The names and addresses of men employed as well as dates. Type of instrument used in the case of geophysical survey. Reports and maps in duplicate must be filed with the Minister within 60 days of recording.
For Land Survey - the name and address of Ontario Land surveyor.

The Required Information is as Follows: (Attach a list if this space is insufficient)

Core Storage: At drill site.
Footage: D.D.H. 67-2. 382 ft.
Core Diameter: AXT 1 1/4"
Drilling Dates: Febuary 8th, 1967 - February 11th, 1967.
Contractor: A. Wilson Contract Diamond Drilling, Noranda, P.Q.

Date February 15th 1967

Signature of Recorded Holder or Agent (Signature of E.C. Jacka)

The Mining Act Certificate Verifying Report of Work

I, G. W. Matheson, Senior Geologist - Exploration
Suite 1600 - 44 King Street West, Toronto 1.
(Post Office Address)

hereby certify:

- 1. That I have a personal and intimate knowledge of the facts set forth in the report of work annexed hereto, having performed the work or witnessed same during and/or after its completion.
2. That the annexed report is true.

Dated February 15th 1967

Signature (Signature of Gordon Matheson)

RECORDED FEB 20 1967
REC. No.

THE PENALTY FOR MAKING A FALSE STATEMENT IN THIS REPORT AND/OR CERTIFICATE IS \$500. OR SIX MONTHS IMPRISONMENT OR BOTH