



42A11SE2028

2.25957

WHITNEY

010

**GEOPHYSICAL REPORT
 FOR
 200442 ONTARIO
 ON THE
BOB'S LAKE JULY PROPERTY
WHITNEY TOWNSHIP
 PORCUPINE MINING DIVISION
 NORTHEASTERN, ONTARIO**

2.25957

Prepared by: J. C. Grant, CET, FGAC
 July, 2003

RECEIVED
 JUL 15 2003
 GEOSCIENCE ASSESSMENT
 OFFICE

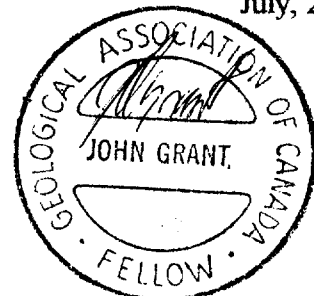


TABLE OF CONTENTS

INTRODUCTION	1
PROPERTY LOCATION AND ACCESS	1
CLAIM BLOCKS	2
PERSONNEL	2
GROUND PROGRAM	2,3
MAGNETIC SURVEY RESULTS	3
CONCLUSIONS AND RECOMMENDATIONS	4
CERTIFICATE	
LIST OF FIGURES:	FIGURE 1, LOCATION MAP FIGURE 2, PROPERTY LOCATION MAP FIGURE 3, CLAIM MAP
LIST OF APPENDICES:	A, SCINTREX ENVI MAG SYSTEM
POCKET MAPS:	CONTOURED TOTAL FIELD MAGNETIC COLOR PLAN MAP, SCALE 1:5000

INTRODUCTION:

The services of Exsics Exploration Limited were retained by M. Webster, on behalf of the company, 2004428 Ontario Inc., to complete a detailed ground geophysical program across a block of claims located in Whitney Township of the Porcupine Mining Division in Northeastern Ontario.

The purpose of the ground program was to keep the ground in good standing as well as to locate and outline the underlying geological features of the property in the event the property should host a favorable horizon for gold deposition. The property is situated on the Porcupine Destor Fault, a prolific structure that is host to most of the gold mines in the Timmins camp. The claim block is also situated to the immediate east of the Hallnor Gold mine and to the immediate west of the famous Pamour Gold Mine.


During the course of the survey, the field crew noted that there was a drilling crew operating to the immediate south of line 500 and 600ME. This drilling is being done by the Porcupine Joint Venture syndicate of Kinross and Dome.

Also, during the course of this survey, no surface rights were crossed nor were any backyards of houses covered by the magnetic survey.

PROPERTY LOCATION AND ACCESS:

The Property is located in the central north section of Whitney Township which is part of the Porcupine Mining Division of Northeastern Ontario. More specifically, the property represents the north quarter of Lot 5, the north half of Lot 6 and the eastern quarter of Lot 7, Concession IV of the Township. Highway 101 east cuts across the center of the claim block in a southwest to northeast direction. Refer to figures 1 and 2 of this report.

Access to the claim block during the survey period was ideal. As stated, Highway 101 east cuts across the claim block and provides excellent access to most of the grid lines. Traveling time from Timmins to the property is about 25 minutes.

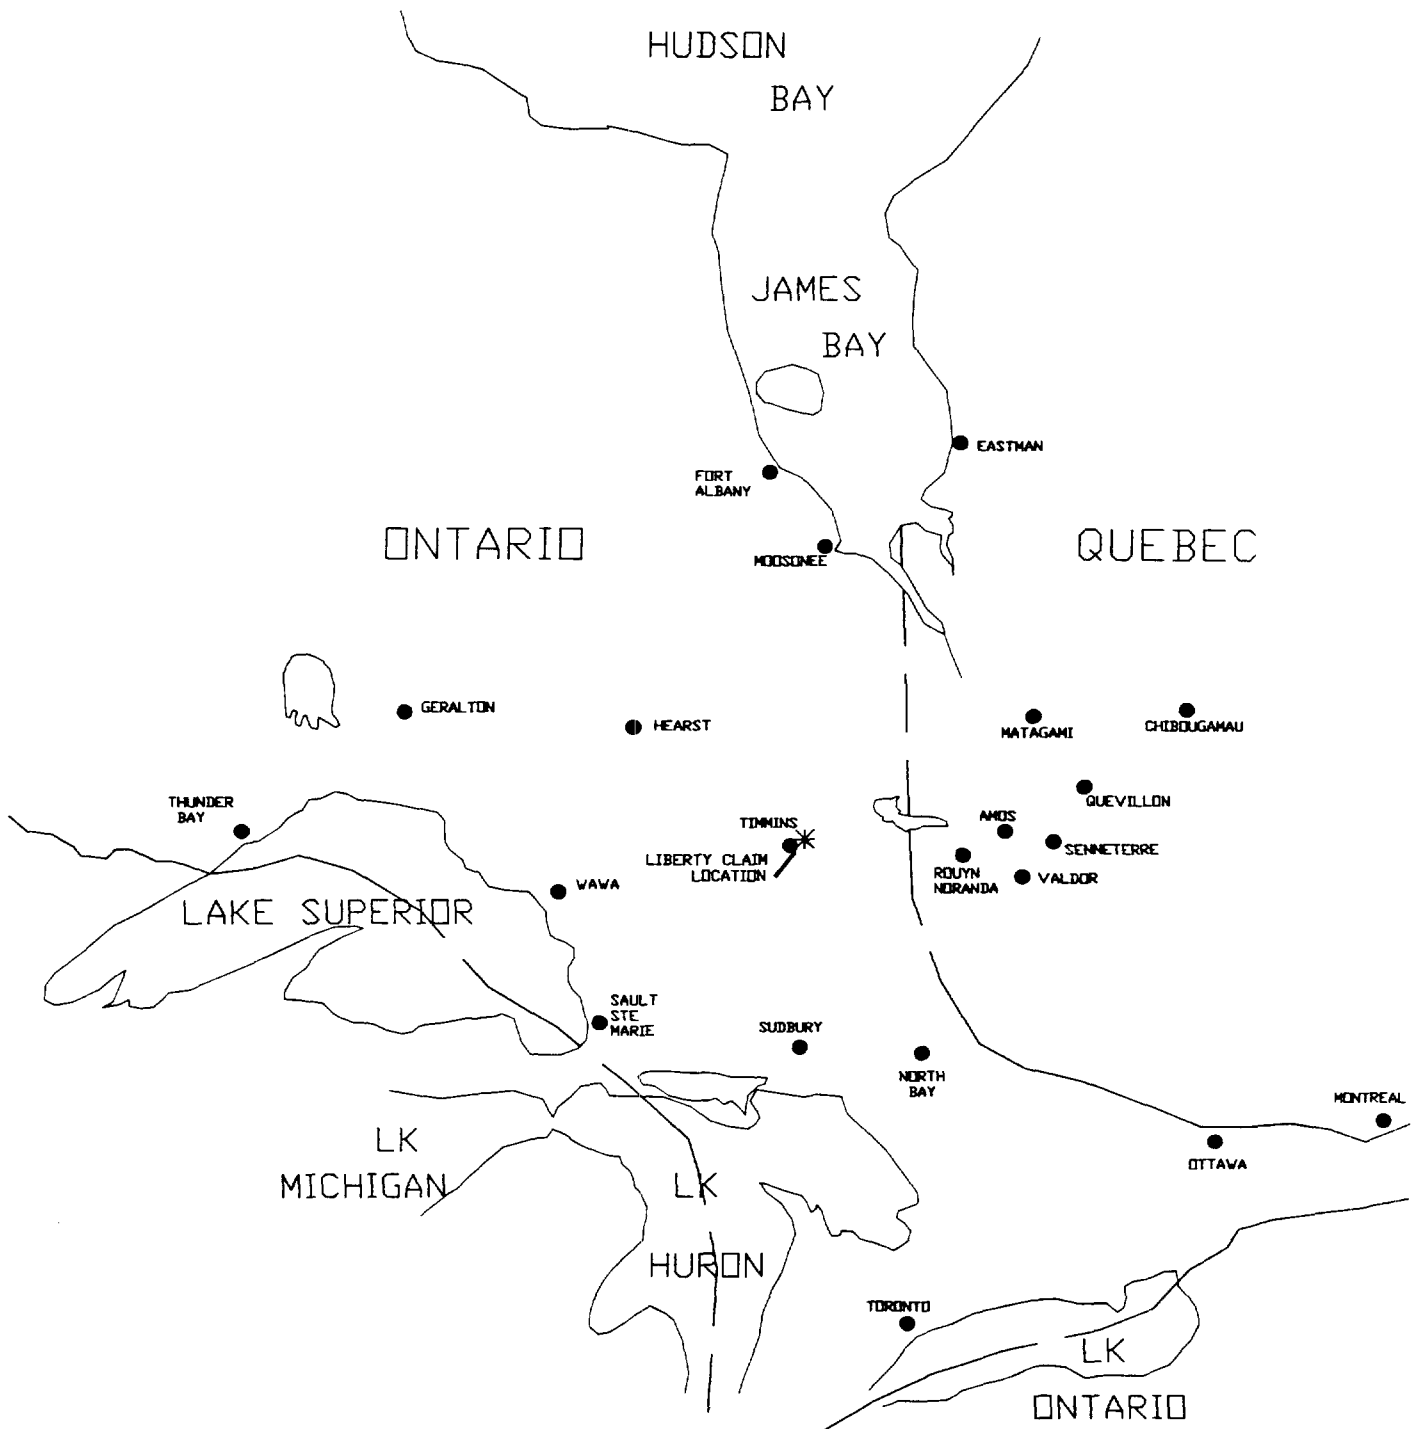


EXSICS EXPLORATION LTD.
 P.O. Box 1880, P4N-7X1
 Suite 13, Hollinger Bldg, Timmins Ont.
 Telephone: 705-267-4151, 267-2424

CLIENT: 2004428 ONTARIO INC
 PROPERTY: BOB'S LAKE JULY PROPERTY
 TITLE:

LOCATION MAP

Fig. 1

Date: July/03 Scale: 1"=125miles NTS:
 Drawn: J.C. Grant Interp: J.C. Grant Job No.: E-455

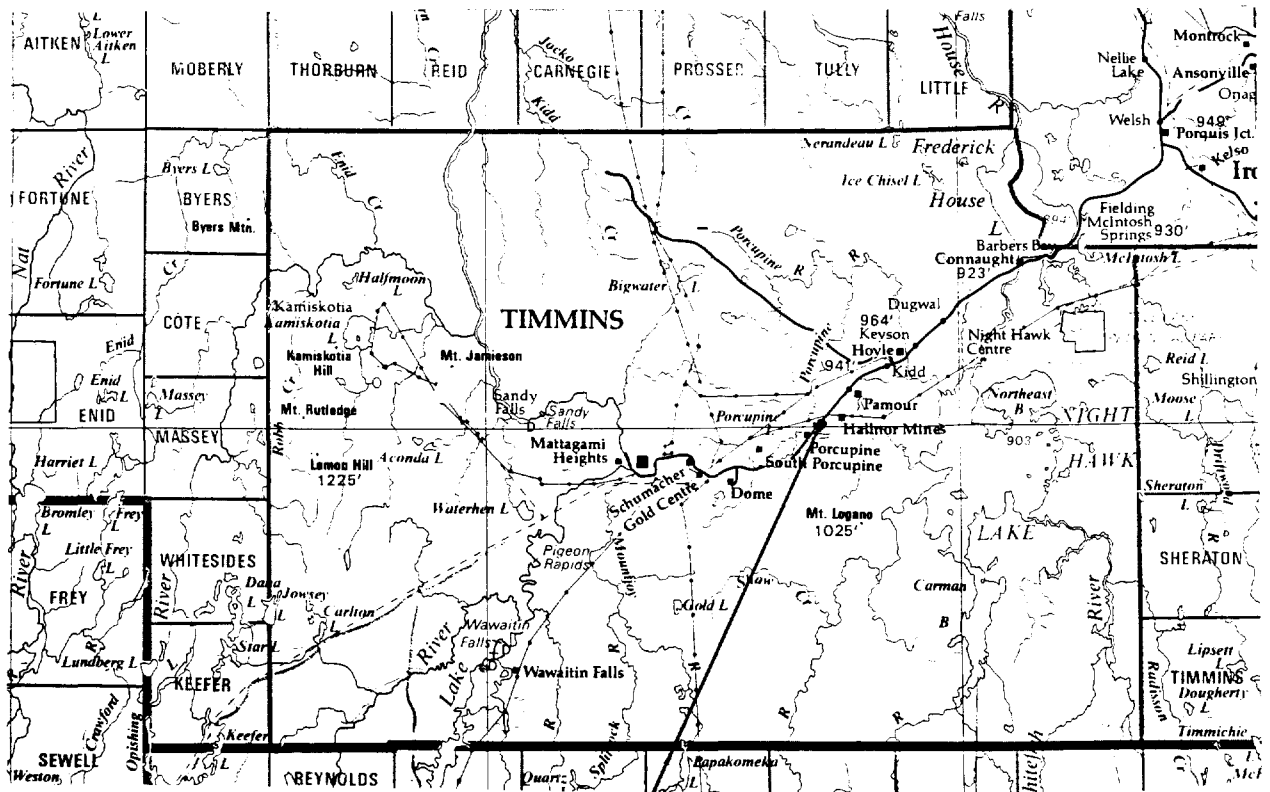

EXSICS EXPLORATION LTD.
 P.O. Box 1880, P4N-7X1
 Suite 13, Hollinger Bldg, Timmins Ont.
 Telephone: 705-267-4151, 267-2424

CLIENT: 2004428 ONTARIO INC

PROPERTY: BOB'S LAKE JULY PROPERTY

TITLE:

PROPERTY LOCATION MAP

Fig. 2

Date: July/03

Scale: 1:600,000

NTS:

Drawn: J.C. Grant

Interp: J.C. Grant

Job No.: E-455

CLAIM BLOCK:

The claim numbers that make up the Bob's Lake July Property are all situated in Whitney Township and are as follows.

P-1240835	3 UNITS	E1/2,N1/2, Lot 7 Con IV,SW1/4, N1/2, Lot 6, Con IV
P-1180818	1 UNIT	NW1/4,N1/2, Lot 6, Con IV
P-1236320	1 UNIT	NE1/4,N1/2, Lot 6, Con IV
P-1236319	1 UNIT	NW1/4, N1/2, Lot 5, Con IV
P-1236322	1 UNIT	NE1/4, N1/2, Lot 5, Con IV
P-1235958	1 UNIT	SE1/4, N1/2, Lot 6, Con IV

Refer to Figure 3, which was copied from the MNDM Plan Map G-3975, Whitney Township, for the positioning of the claim within the Township. This Township is subdivided.

PERSONNEL:

The field crew directly responsible for the collection of the survey data were as follows;

- J. DerWeduwen..... South Porcupine, Ontario
- E. Jaakkola.....Timmins, Ontario

The entire program was completed under the direct supervision of J.C. Grant and all of the plotting and compilation was completed by Exsics Exploration.


GROUND PROGRAM:

The ground program consisted of a detailed total field magnetic survey that was completed along an established compass and paced flagged grid. The grid lines were spaced 100 meters apart from line 800MW, which represented the western edge of the property, to line 1200ME, which represented the eastern edge of the property. All of the cross lines were flagged with 25 meter stations which also represented the reading intervals for the magnetic survey.

Lines 800MW to and including 400ME were compassed, paced and read with magnetics from 0+00 to and including 800MN and lines 500ME to 1200ME were read and flagged from 400MN to and including 800MN.

In all, a total of 13.6 kilometers of grid lines were established and covered by the magnetic survey.

WHITNEY TOWNSHIP

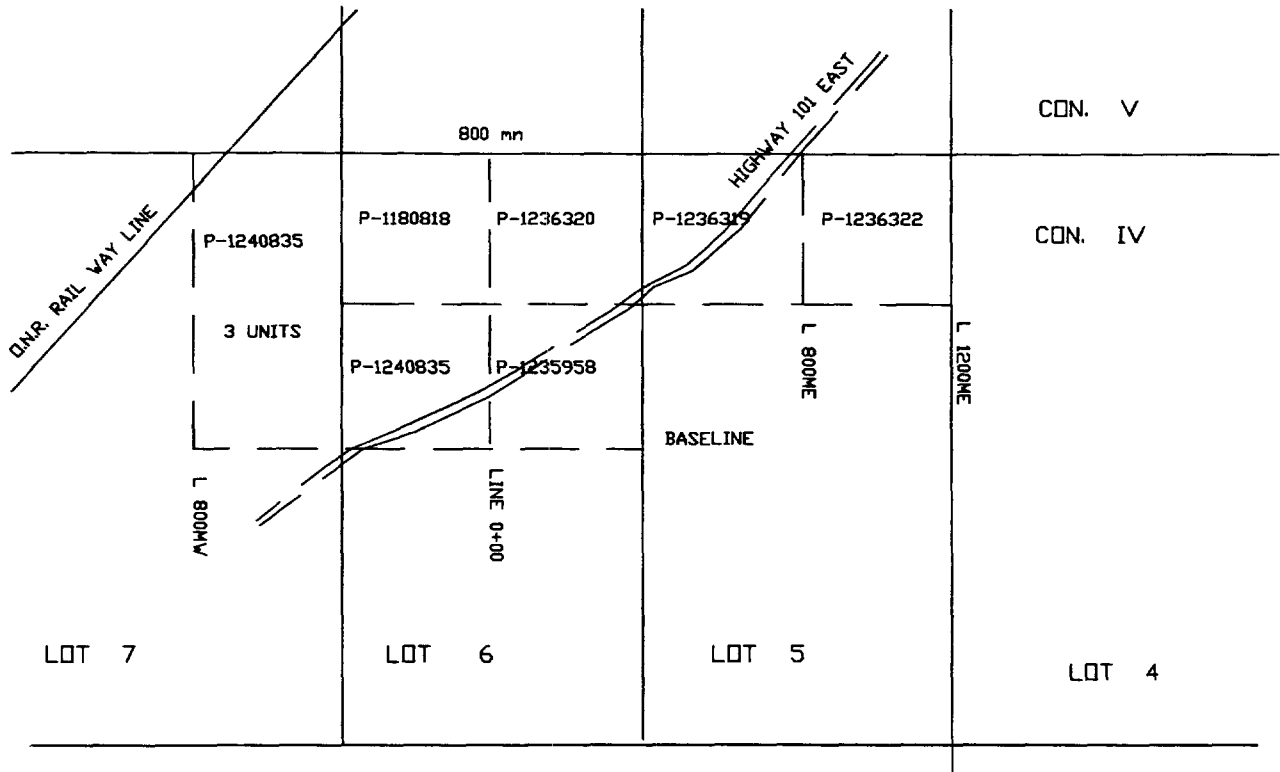

EXSICS EXPLORATION LTD.
 P.O. Box 1880, P4N-7X1
 Suite 13, Hollinger Bldg, Timmins Ont.
 Telephone: 705-267-4151, 267-2424

CLIENT: 2004428 ONTARIO INC.		
PROPERTY: BOB'S LAKE JULY PROPERTY		
TITLE:		
CLAIM SKETCH		
Fig. 3		
Date: July/03	Scale: 1:20,000	NTS:
Drawn: J.C. Grant	Interp: J.C. Grant	Job No.: E-455

The following parameters were kept constant throughout the survey procedure.

Line spacing	100 meters
Station spacing	25 meters
Reading intervals	25 meters
Reference field	57,500 nT
Datum Subtracted	57,500 nT
Diurnal corrections	Base line looping

Upon the completion of the survey and after leveling the data, the results were then plotted onto a base map at a scale of 1:5000 and contoured at 40 gamma intervals where ever possible. A copy of this colored contoured base map is included in the back pocket of this report.

The magnetic survey was completed using the Scintrex Envi Mag system. Specifications for this unit can be found as Appendix A of this report.

MAGNETIC SURVEY RESULTS:

The magnetic survey was successful in outlining the geological characteristics of the property. The most predominant magnetic structure is represented by a well defined magnetic high unit striking into the grid from the southwest and extending to line 300ME. The structure relates to a broad ultramafic intrusive unit that is bordered by sediments to the north and south. This unit has been faulted along its eastern extension by a cross structure generally striking north-northwest between lines 300 and 400ME.

A second much narrower magnetic high unit is observed striking into the grid from the east and extending as far as line 200ME and roughly paralleling the 400MN station interval. Again, the unit probably relates to a narrow ultramafic intrusive that lies along the contact between the sediments and metasedimentary units. This unit has also been faulted along its western extension by the same cross faulting that cut off the more predominant magnetic high unit. The magnetic high situated on the southern ends of lines 500, 600 700 and 800ME is an exaggeration of several magnetic high readings in the area that the geophysical software has tried to interpolate to. Generally, the high is associated with the narrower magnetic unit that comes in from the east and relates to the intrusive.

Both of these intrusive units are fault controlled along their north and south flanks. The magnetic lows to the north and south of these highs relate to the sediments.

CONCLUSIONS AND RECOMMENDATIONS:

The magnetic survey was successful in locating and outlining the suspected geological characteristics of the property, that being, a sedimentary host unit that has been intruded by two ultramafic units both of which are fault controlled .

The property itself is well situated in the Timmins Camp as it straddles the Porcupine Destor Fault which is the plumbing system for the gold horizons. The property also sits between the Hallnor Gold mine to the immediate west and the Pamour Mine to the immediate east.

The current drilling being carried out to the immediate south of lines 500, 600 and 700ME is being done by the Porcupine Joint Venture, (PJV), syndicate of Kinross and Dome mines on IP surveys that were carried out last winter on grid lines that generally continue east of this property and extend up to and including the Pamour Mine site property.

A follow up program of IP surveys should be considered for this property as well as it work very well on the PJV property to the east and to the fact that the claim block sits on the Porcupine Destor Fault.

A detailed line cutting program should accompany the IP surveys for maximum control of that survey. The specifications for the IP survey should be a Pole-Dipole array using a 50 meter electrode spacing and reading at least six electrodes. These specifications are the same ones used on the grids to the immediate east and would allow for good vertical penetration into the underlying geology.

Respectfully submitted

J.C.Grant, CET, FGAC
July, 2003




CERTIFICATION

I, John Charles Grant, of 108 Kay Crescent, in the City of Timmins, Province of Ontario, hereby certify that:

- 1). I am a graduate of Cambrian College of Applied Arts and Technology, 1975, Sudbury Ontario Campus, with an Honors Diploma in Geological and Geophysical Technology.
- 2). I have worked subsequently as an Exploration Geophysicist for Teck Exploration Limited, (5 years), and currently as Exploration Manager and Geophysicist for Exsics Exploration Limited, since 1980.
- 3). I am a member in good standing of the Certified Engineering Technologist Association, (CET), since 1984
- 4). I am a Fellow of the Geological Association of Canada, (FGAC), since 1986.
- 5). I have been actively engaged in my profession since the 15th of May of 1975, in all aspects of ground exploration programs, including the planning and execution of field programs, project supervision, data compilation, interpretations and reports.
- 6). I have no specific or special interest in the herein described property. I have been retained by the property holders and or their Agent as a Geophysical Consultant and Contract Manager.

John Charles Grant, CET., FGAC.

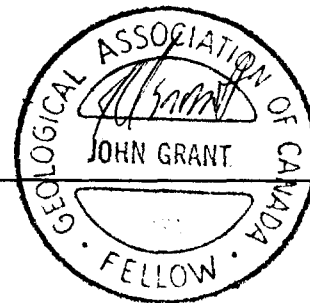

APPENDIX A

SCINTREX

ENVI-MAG Environmental Magnetometer/Gradiometer

Locating Buried Drums and Tanks?

The ENVI-MAG is the solution to this environmental problem. ENVI-MAG is an inexpensive, lightweight, portable "WALKMAG" which enables you to survey large areas quickly and accurately.

ENVI-MAG is a portable, proton precession magnetometer and/or gradiometer, for geotechnical, archaeological and environmental applications where high production, fast count rate and high sensitivity are required. It may also be used for other applications, such as mineral exploration, and may be configured as a total-field magnetometer, a vertical gradiometer or as a base station.

The ENVI-MAG

easily detects buried drums to depths of 10 feet or more

- more sensitive to the steel of a buried drum than EM or radar
- much less expensive than EM or radar
- survey productivity much higher than with EM or radar

Features and Benefits

"WALKMAG"

Magnetometer/Gradiometer

The "WALKMAG" mode of operation (sometimes known as "Walking Mag") is user-selectable from the keyboard. In this mode, data is acquired and recorded at the rate of 2 readings per second as the operator walks at a steady pace along a line. At desired intervals, the operator "triggers" an event marker by a single key stroke, assigning coordinates to the recorded data.

Use Simultaneous Gradiometer

An optional upgrade kit is available to configure ENVI-MAG as a gradiometer to make true, simultaneous gradiometer measurements. Gradiometry is useful for geotechnical and archaeological surveys where small near surface magnetic targets are the object of the survey.

Selectable Sampling Rates

5 second, 1 second and 2 second sampling rates user selectable from the keyboard.

Main features include:

- select sampling rates as fast as 2 times per second
- "WALKMAG" mode for rapid acquisition of data
- large internal, expandable memory
- easy to read, large LCD screen displays data both numerically and graphically
- ENVIMAP software for processing and mapping data

ENVI-MAG comprises several basic modules; a lightweight console with a large screen alphanumeric display and high capacity memory, a staff mounted sensor and sensor cable, rechargeable battery and battery charger, RS-232 cable and ENVIMAP processing and mapping software.

For gradiometry applications an upgrade kit is available, comprising an additional processor module for installation in the console, and a second sensor with a staff extender.




ENVI-MAG Proton Magnetometer in operation

For base station applications a Base Station Accessory Kit is available so that the sensor and staff may be converted into a base station sensor.

Large-Key Keypad

The large-key keypad allows easy access for gloved-hands in cold-weather operations. Each key has a multi-purpose function.

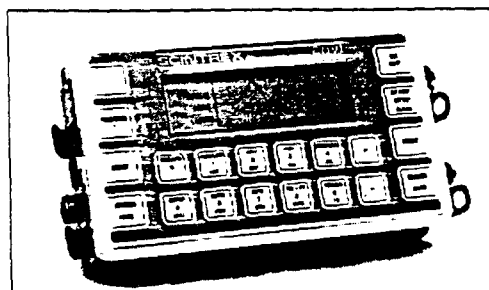

Front panel of ENVI-MAG showing a graphic profile of data and large-key keypad

Large Capacity Memory

ENVI-MAG with standard memory stores up to 28,000 readings of total field measurements, 21,000 readings of gradiometry data or 151,000 readings as a base station. An expanded memory option is available which increases this standard capacity by a factor of 5.

Easy Review of Data

For quality of data and for a rapid analysis of the magnetic characteristics of the survey line, several modes of review are possible. These include the measurements at the last four stations, the ability to scroll through any or all previous readings in memory, and a graphic display of the previous data as profiles, line by line. This feature is very useful for environmental and archaeological surveys.

Highly Productive

The "WALKMAG" mode of operation acquires data rapidly at close station intervals, ensuring high-definition results. This increases survey productivity by a factor of 5 when compared to a conventional magnetometer survey.


"Datacheck" Quality Control of Data

"Datacheck" provides a feature wherein at the end of each survey line, data may be reviewed as a profile on ENVI-MAG's screen. Datacheck confirms that the instrument is functioning correctly and

allows the user to note the magnetic relief (anomaly) on the line.

Large Screen Display


"Super-Twist" 64 x 240 dot (8 lines x 40 characters), LCD graphic screen provides good visibility in all light conditions. A display heater is optionally available for low-temperature operations below 0°C.

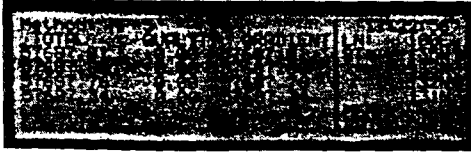

Close-up of the ENVI-MAG screen showing data presented after each reading

Interactive Menu

The set-up of ENVI-MAG is menu-driven, and minimizes the operator's learning time, and on-going tasks.

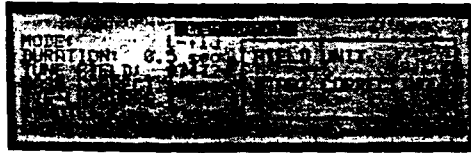

Close-up of display of ENVI-MAG showing interactive set-up menu

Specifications

Total Field Operating Range

20,000 to 100,000 nT (gammas)

Total Field Absolute Accuracy

+/- 1nT

Sensitivity

0.1 nT at 2 second sampling rate

Tuning

Fully solid state. Manual or automatic, keyboard selectable

Cycling (Reading) Rates

0.5, 1 or 2 seconds, up to 9999 seconds for base station applications, keyboard selectable

Gradiometer Option

Includes a second sensor, 20 inch (1/2m) staff extender and processor module

"WALKMAG" Mode

0.5 second for walking surveys, variable rates for hilly terrain

Digital Display

LCD "Super Twist", 240 x 64 dots graphics, 8 line x 40 characters alphanumeric

Display Heater

Thermostatically controlled, for cold weather operations

Keyboard Input

7 keys, dual function, membrane type

Notebook Function

2 characters, 5 user-defined MACRO's for quick entry

Rechargeable Battery and Battery Charger

An "off-the-shelf" lead-acid battery and charger are provided as standard. The low-cost "Camcorder" type battery is available from electronic parts distributors everywhere.

HELP-Line Available

Purchasers of ENVI-MAG are provided with a HELP-Line telephone number to call in the event assistance is needed with an application or instrumentation problem.

ENVIMAP Processing and Mapping Software

Supplied with ENVI-MAG, and custom designed for this purpose, is easy-to-use, very user-friendly, menu driven data processing and mapping software called ENVIMAP. This unique software appears to the user to be a single program, but is in fact a sequence of separate programs, each performing a specific task. Under the menu system, there are separate programs to do the following:

- read the ENVI-MAG data and reformat it into a standard compatible with the ENVIMAP software
- grid the data into a standard grid format
- create a vector file of posted values

with line and baseline identification that allows the user to add some title information and build a suitable surround

- contour the gridded data
- autoscale the combined results of the posting/surround step and the contouring step to fit on a standard 8.5 ins. wide dot-matrix printer
- rasterize and output the results of step e) to the printer

ENVIMAP is designed to be as simple as possible. The user is required to answer a few basic questions asked by ENVIMAP, and then simply toggles "GO" to let ENVIMAP provide default parameters for the making of the contour map. The user can modify certain characteristics of the output plot. ENVIMAP'S menu system is both keyboard and mouse operable. HELP screens are integrated with the menu system so that HELP is displayed whenever the user requests it.

Options Available

- True simultaneous gradiometer upgrade
- Base station upgrade
- Display heater for low temperature operations
- External battery pouch

Standard Memory

Total Field Measurements: 28,000 readings
Gradiometer Measurements: 21,000 readings
Base Station Measurements: 151,000 readings

Expanded Memory

Total Field Measurements: 140,000 readings
Gradiometer Measurements: 109,000 readings
Base Station Measurements: 750,000 readings

Real-Time Clock

Records full date, hours, minutes and seconds with 1 second resolution, +/- 1 second stability over 12 hours

Digital Data Output

RS-232C interface, 600 to 57,600 Baud, 7 or 8 data bits, 1 start, 1 stop bit, no parity format. Selectable carriage return delay (0-999 ms) to accommodate slow peripherals. Handshaking is done by X-on/X-off

Analog Output

0 - 999 mV full scale output voltage with keyboard selectable range of 1, 10, 100, 1,000 or 10,000 nT full scale

Power Supply

Rechargeable "Camcorder" type, 2.3 Ah, Lead-acid battery.

12 Volts at 0.65 Amp for magnetometer, 1.2 Amp for gradiometer,

Optional 12 Volt input for base station operations

Optional external battery pouch for cold weather operations

Battery Charger

110 Volt - 230 Volt, 50/60 Hz

Operating Temperature Range

Standard 0° to 60°C
Optional -40°C to 60°C

Dimensions

Console - 10 x 6 x 2.25 inches
(250 mm x 152 mm x 55 mm)

T.F. sensor - 2.75 inches dia. x 7 inches
(70 mm x 175 mm)

Grad. sensor and staff extender - 2.75 inches dia. x 26.5 inches (70 mm x 675 mm)

T.F. staff - 1 inch dia. x 76 inches (25 mm x 2 m)

Weight

Console - 5.4 lbs (2.45 kg)
with rechargeable battery

T. F. sensor - 2.2 lbs (1.15 kg)

Grad. sensor - 2.5 lbs (1.15 kg)

Staff - 1.75 lbs (0.8 kg)

SCINTREX

Head Office

222 Snidercroft Road
Concord, Ontario, Canada L4K 1B5
Telephone: (905) 669-2280
Fax: (905) 669-6403 or 669-5132
Telex: 06-964570

In the USA:

Scintrex Inc.
85 River Rock Drive
Unit 202
Buffalo, NY 14207
Telephone: (716) 298-1219
Fax: (716) 298-1317

Work Report Summary

Transaction No: W0360.01143 Status: APPROVED
 Recording Date: 2003-JUL-14 Work Done from: 2003-JUL-08
 Approval Date: 2003-JUL-15 to: 2003-JUL-13

Client(s):
 400214 2004428 ONTARIO INC.

Survey Type(s):
 MAG

Work Report Details:

Claim#	Perform	Perform Approve	Applied	Applied Approve	Assign	Assign Approve	Reserve	Reserve Approve	Due Date
P 1180818	\$0	\$0	\$400	\$400	\$0	0	\$0	\$0	2004-OCT-01
P 1235958	\$751	\$751	\$400	\$400	\$351	351	\$0	\$0	2004-APR-14
P 1236319	\$598	\$598	\$400	\$400	\$49	49	\$149	\$149	2004-APR-14
P 1236320	\$598	\$598	\$400	\$400	\$0	0	\$198	\$198	2004-APR-14
P 1236322	\$0	\$0	\$400	\$400	\$0	0	\$0	\$0	2004-APR-14
P 1240835	\$1,796	\$1,796	\$1,200	\$1,200	\$400	400	\$196	\$196	2004-JUL-25
	<u>\$3,743</u>	<u>\$3,743</u>	<u>\$3,200</u>	<u>\$3,200</u>	<u>\$800</u>	<u>\$800</u>	<u>\$543</u>	<u>\$543</u>	

External Credits: \$0

Reserve:
 \$543 Reserve of Work Report#: W0360.01143

 \$543 Total Remaining

Status of claim is based on information currently on record.



Ministry of
Northern Development
and Mines

Ministère du
Développement du Nord
et des Mines



Date: 2003-OCT-02

GEOSCIENCE ASSESSMENT OFFICE
933 RAMSEY LAKE ROAD, 6th FLOOR
SUDBURY, ONTARIO
P3E 6B5

2004428 ONTARIO INC.
12TH FLOOR-20 TORONTO ST
TORONTO, ONTARIO
M5C 2B8 CANADA

Tel: (888) 415-9845
Fax: (877) 670-1555

Submission Number: 2.25957
Transaction Number(s): W0360.01143

Dear Sir or Madam

Subject: Approval of Assessment Work

We have approved your Assessment Work Submission with the above noted Transaction Number(s). The attached Work Report Summary indicates the results of the approval.

At the discretion of the Ministry, the assessment work performed on the mining lands noted in this work report may be subject to inspection and/or investigation at any time.

If you have any question regarding this correspondence, please contact STEVEN BENETEAU by email at steve.beneteau@ndm.gov.on.ca or by phone at (705) 670-5855.

Yours Sincerely,

A handwritten signature in black ink that reads "Ron C Gashinski".

Ron C. Gashinski
Senior Manager, Mining Lands Section

Cc: Resident Geologist

John Charles Grant
(Agent)

2004428 Ontario Inc.
(Assessment Office)

Assessment File Library

2004428 Ontario Inc.
(Claim Holder)



42A11SE2028 2.25957 WHITNEY

200

ONTARIO CANADA

MINISTRY OF NORTHERN DEVELOPMENT AND MINES
PROVINCIAL MINING RECORDERS' OFFICE

Mining Land Tenure Map

Date / Time of Issue: Wed Jul 16 13:34:18 EDT 2003


TOWNSHIP / AREA
WHITNEY

PLAN
G-3975

ADMINISTRATIVE DISTRICTS / DIVISIONS

Mining Division
Land Titles/Registry Division
Ministry of Natural Resources District

Porcupine
COCHRANE
TIMMINS

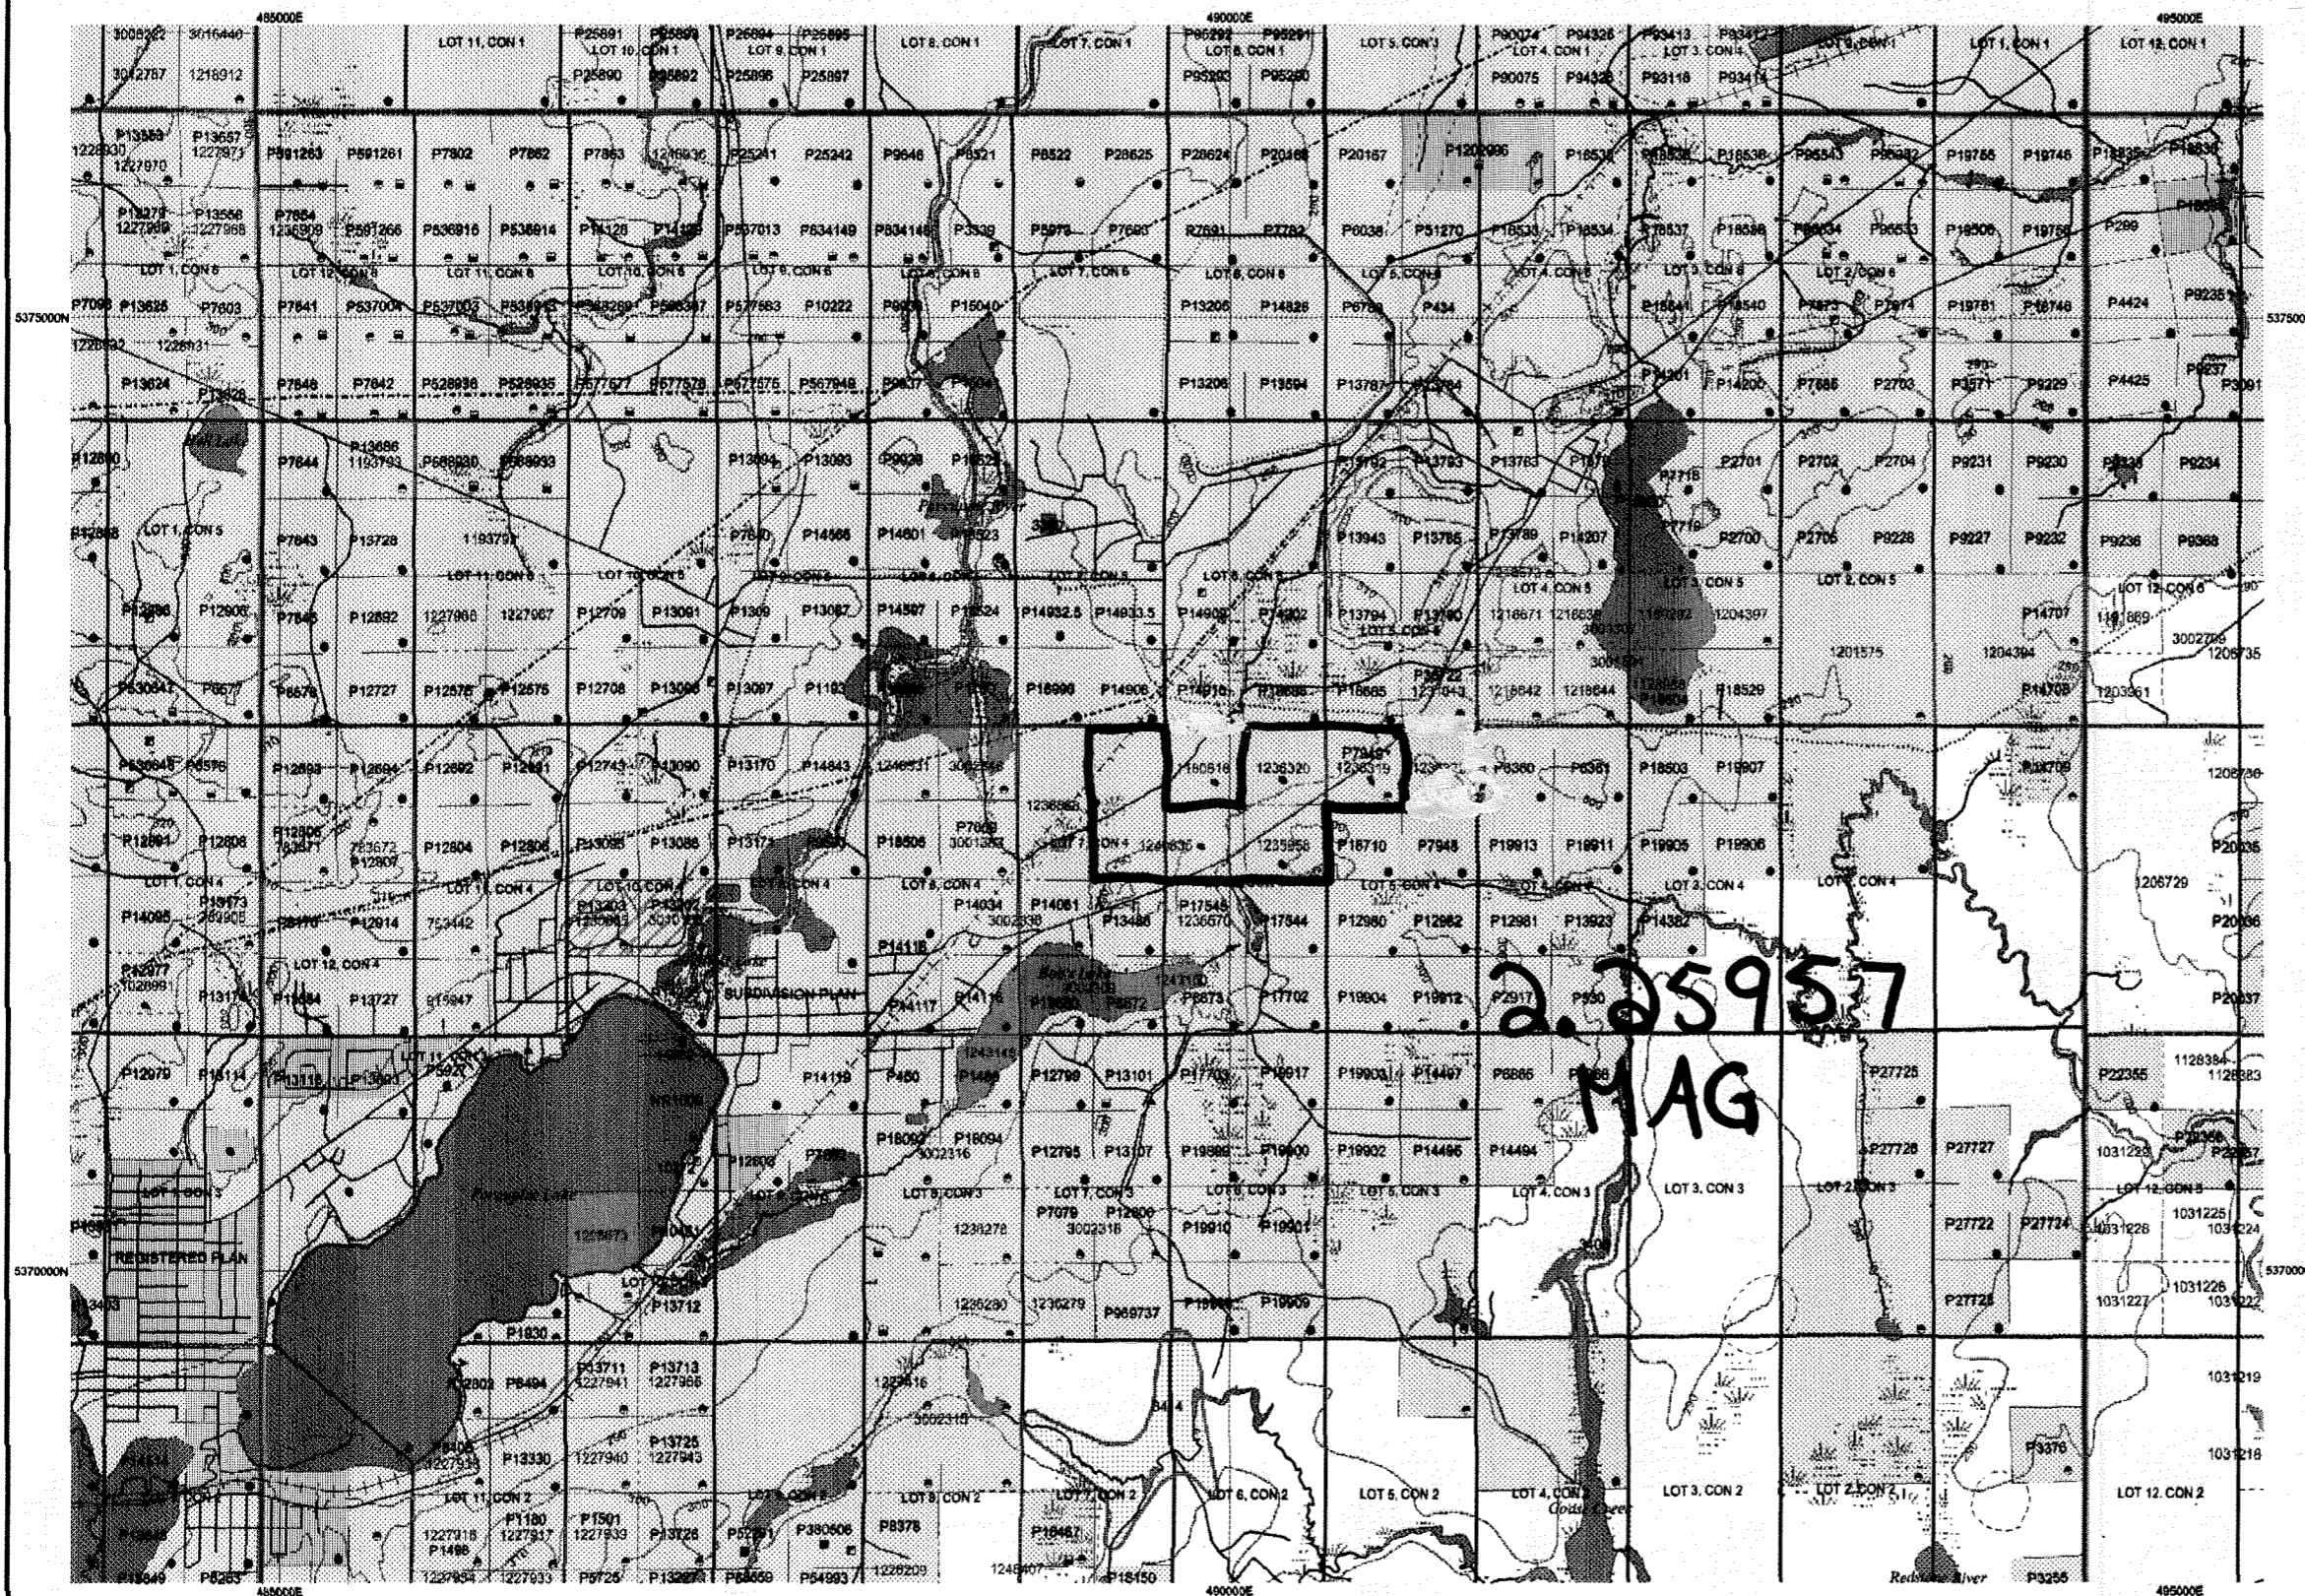

TOPOGRAPHIC

- Administrative Boundaries
- Township
- Concession, Lot
- Provincial Park
- Indian Reserve
- CRF, P/L & Pile
- Contour
- Mine Shafts
- Mine Headframe
- Railway
- Road
- Trail
- Natural Gas Pipeline
- Utilities
- Tower


Land Tenure

- Freehold Patent**
 - Surface And Mining Rights
 - Surface Rights Only
 - Mining Rights Only
- Leasehold Patent**
 - Surface And Mining Rights
 - Surface Rights Only
 - Mining Rights Only
- Licence of Occupation**
 - Uses Not Specified
 - Surface And Mining Rights
 - Surface Rights Only
 - Mining Rights Only
- Land Use Permit**
 - Order In Council (Not open for staking)
- Water Power Lease Agreement**
 - Mining Claim
 - Filled Only Mining Claims

LAND TENURE WITHDRAWALS

- Areas Withdrawn from Disposition
- Mining Acts Withdrawal Types**
 - Surface And Mining Rights Withdrawn
 - Surface Rights Only Withdrawn
 - Mining Rights Only Withdrawn
- Order In Council Withdrawal Types**
 - Surface And Mining Rights Withdrawn
 - Surface Rights Only Withdrawn
 - Mining Rights Only Withdrawn

IMPORTANT NOTICE



LAND TENURE WITHDRAWAL DESCRIPTIONS

Identifier	Type	Date	Description
3380	Wsm	Jan 1, 2001	RES
3408	Wsm	Jan 1, 2001	APPLICATION PENDING UNDER PUBLIC LANDS ACT SURFACE R
3414	Wsm	Jan 1, 2001	FLOODING RIGHTS RESERVED TO THE CROWN - DUCKS UNLIM
3446	Wsm	Jan 1, 2001	APPLICATION PENDING UNDER PUBLIC LANDS ACT SURFACE R
3463	Wsm	Jan 1, 2001	HOME MINES LIMITED SURFACE RIGHTS LEASE #103292

Those wishing to stake mining claims should consult with the Provincial Mining Recorders' Office of the Ministry of Northern Development and Mines for additional information on the status of the lands shown hereon. This map is not intended for navigational, survey, or land title determination purposes as the information shown on this map is compiled from various sources. Completeness and accuracy are not guaranteed. Additional information may also be obtained through the local Land Titles or Registry Office, or the Ministry of Natural Resources.

The information shown is derived from digital data available in the Provincial Mining Recorders' Office at the time of downloading from the Ministry of Northern Development and Mines web site.


General Information and Limitations

Contact Information:
Provincial Mining Recorders' Office
Wilket Green Miller Centre 933 Ramsey Lake Road
Sudbury ON P3E 6B6
Home Page: www.mndm.gov.on.ca/MNDMMINES/LANDS/mismpgpe.htm


Toll Free
Tel: 1 (888) 415-8845 ext 5772
Fax: 1 (877) 670-1444

Map Datum: NAD 83
Projection: UTM (6 degree)
Topographic Data Source: Land Information Ontario
Mining Land Tenure Source: Provincial Mining Recorders' Office

This map may not show unregistered land tenure and interests in land including certain patents, leases, easements, right of ways, flooding rights, licences, or other forms of disposition of rights and interest from the Crown. Also certain land tenure and land uses that restrict or prohibit free entry to stake mining claims may not be illustrated.

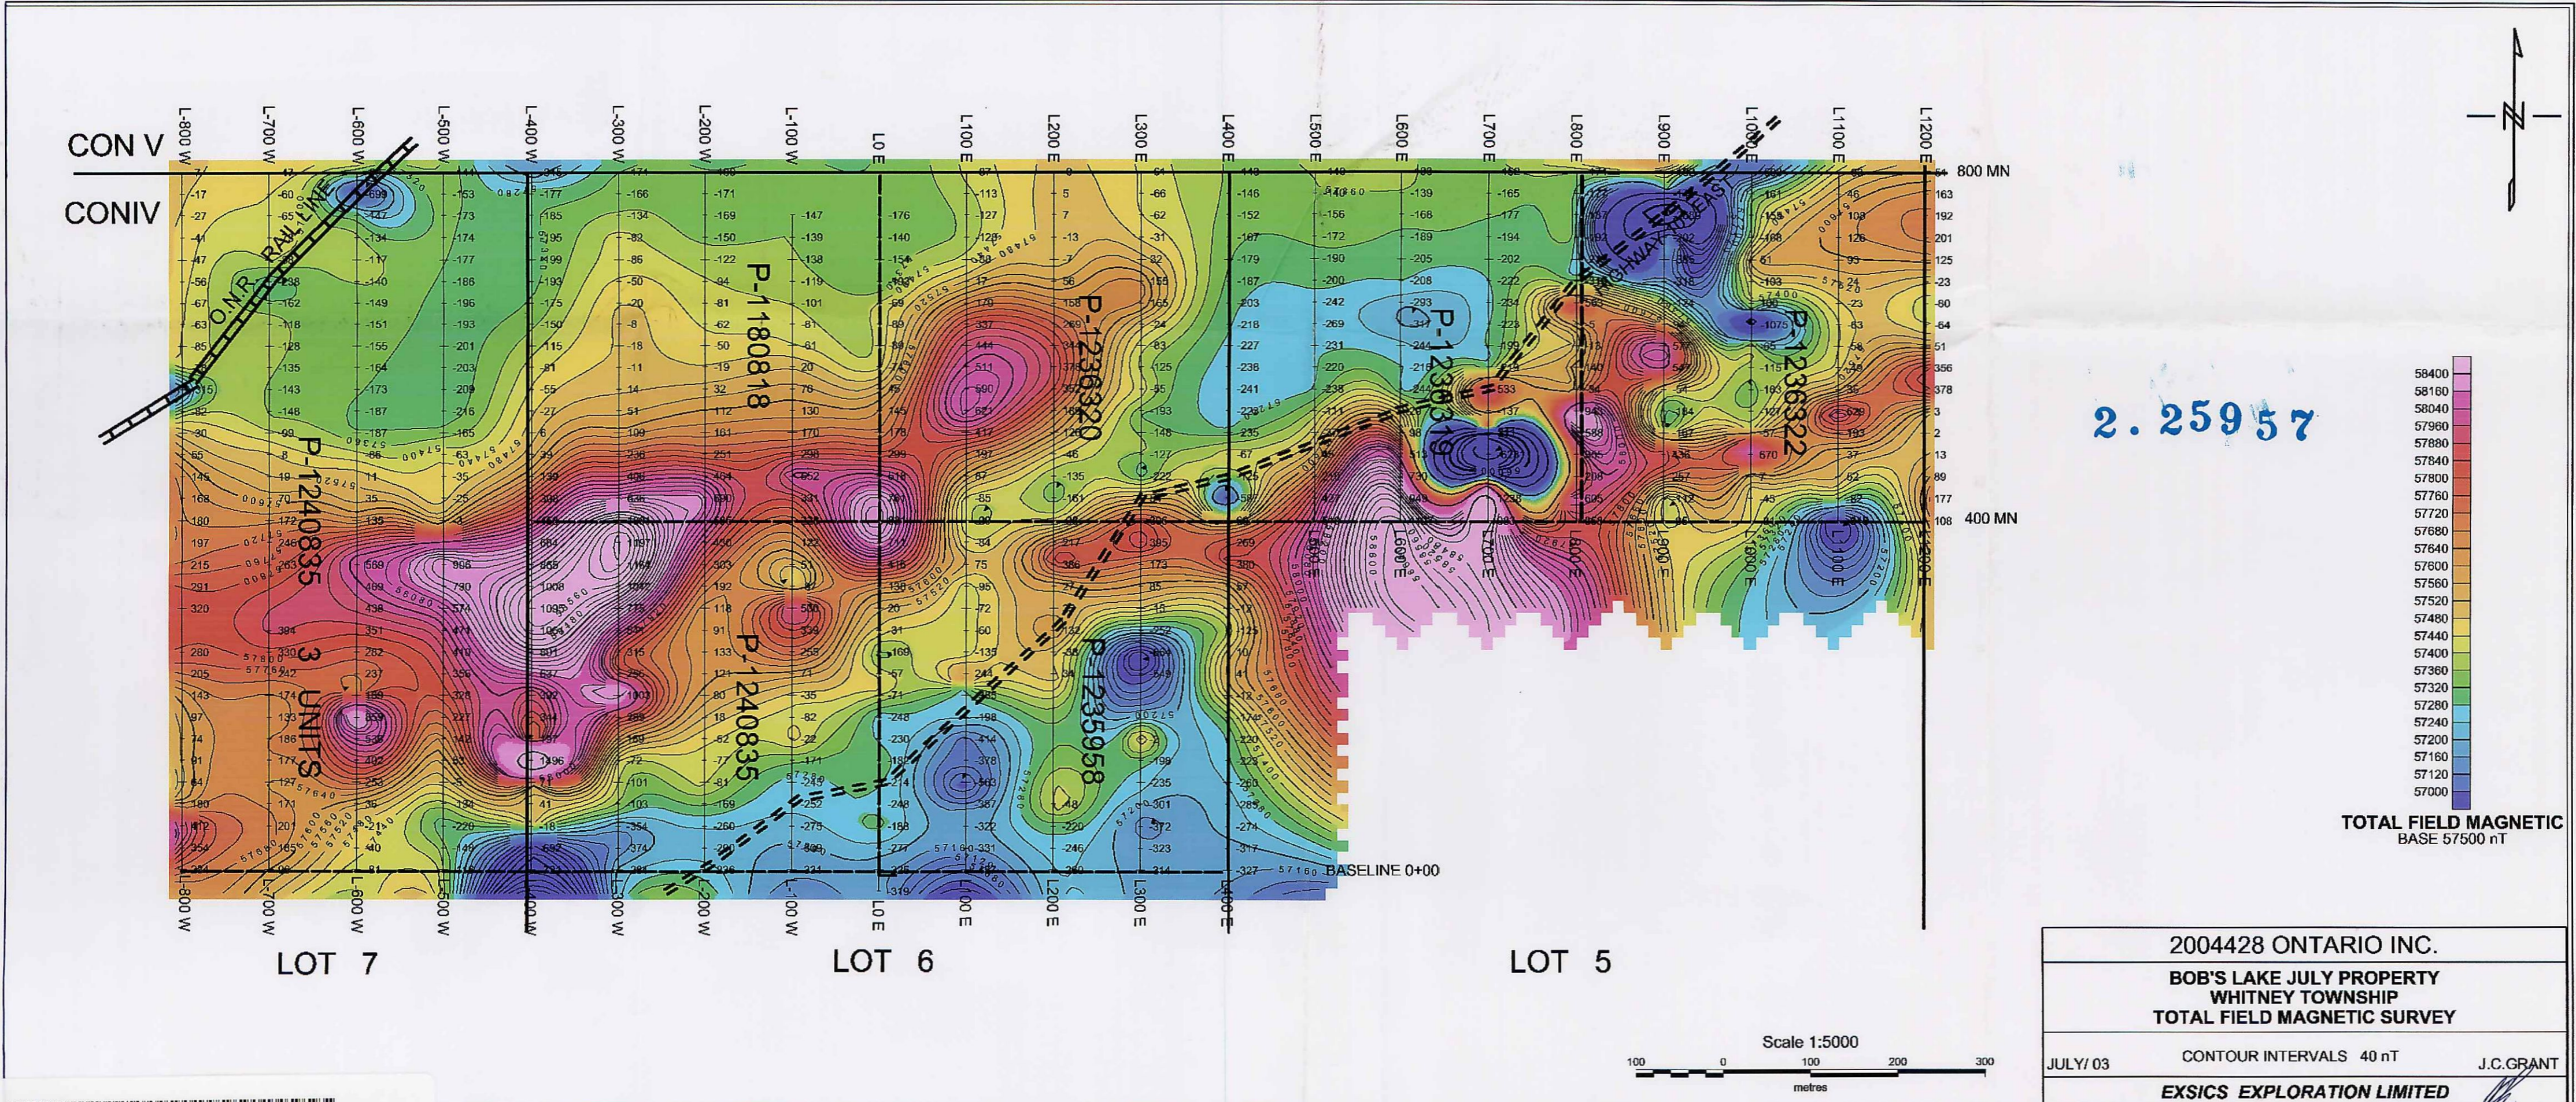

2.25957

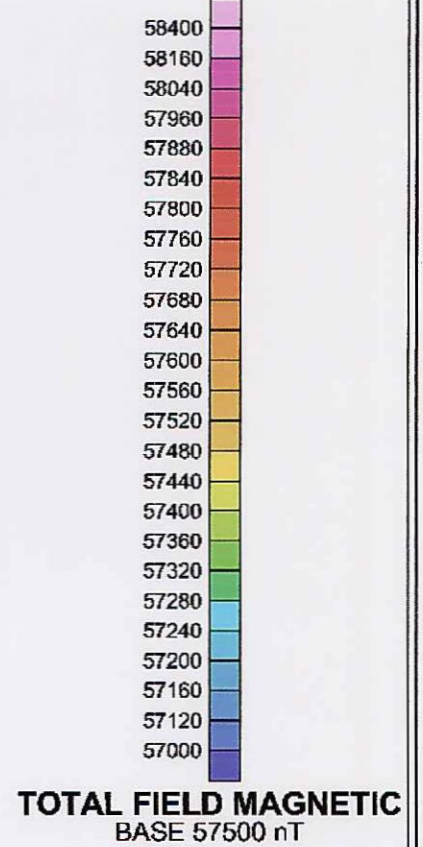

2004428 ONTARIO INC.		
BOB'S LAKE JULY PROPERTY WHITNEY TOWNSHIP TOTAL FIELD MAGNETIC SURVEY		
JULY/03	CONTOUR INTERVALS 40 nT	J.C. GRANT
EXSICS EXPLORATION LIMITED		

