




42A12NE2016 2.20581 LOVELAND

010

GEOPHYSICAL REPORT
FOR
EXPLORER'S ALLIANCE CORPORATION
ON THE
LOVELAND PROJECT
LOVELAND TOWNSHIP
PORCUPINE MINING DIVISION
NORTHEASTERN, ONTARIO

Prepared by: J.C. Grant, CET, FGAC
Sept., 2000

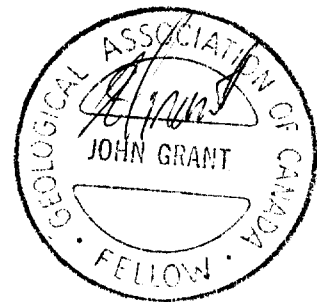



42A12NE2016 2.20581 LOVELAND

010C

TABLE OF CONTENTS

	PAGE
INTRODUCTION.....	1
PROPERTY LOCATION AND ACCESS.....	1
CLAIM BLOCK.....	1
PERSONNEL.....	2
GROUND PROGRAM.....	2
SURVEY RESULTS.....	3
CONCLUSIONS AND RECOMMENDATIONS.....	3
 CERTIFICATE	
LIST OF FIGURES:	
1. LOCATION MAP	
2. PROPERTY LOCATION MAP	
3. CLAIM MAP	
APPENDIX A:	
SCINTREX, ENVI MAG SYSTEM	
BRGM, OMNI IV SYSTEM	
POCKET MAPS:	
CONTOURED TOTAL FIELD MAGNETIC SURVEY	

INTRODUCTION:

The services of Exsics Exploration Limited were retained by Mr. Lionel Bonhomme, on behalf of the company, Explorer's Alliance Corporation, to complete a detailed total field magnetic survey across a 4 claim block located in the northeast corner of Loveland Township. Loveland Township is situated in the Porcupine Mining Division of Northeastern Ontario.

The purpose of this ground program was to map the underlying geological characteristics of the claims and to observe if the property hosts a favorable horizon which would lend itself to mineral deposition. This program commenced on the 19th of September and was completed on the 21st of September, 2000. In all, a total of 4.4 kilometers of magnetic surveys were completed across a grid that was first compassed and flagged across the property.

PROPERTY LOCATION AND ACCESS:


The claim group is located in the northeast section of Loveland Township such that the number one post of the claim block represents the four corner post of Loveland, Reid, Macdiarmid and Thorburn Townships. The claim block is represented on figure 3 of this report. The entire claim block is located about 38 kilometers north-northwest of the City of Timmins. Refer to Figures 1 and 2.


Access to the group was ideal. The junction of Highway 101 West and Highway 576 is situated approximately 6 kilometers west of the City of Timmins. Highway 576 services the Community of Kamiskotia Lake which is about 25 kilometers north of the afore mentioned road junction. A good gravel road, locally called the Abitibi access road, travels north off of Highway 576 immediately past Kamiskotia Lake and provides access to an old logging road that travels east off of this good gravel road and provides 4x4 access to within 600 meters of the claim group.


There are also a number of old over grown ingress roads that cross cut the grid that are probably old logging routes.. Traveling time from Timmins to the grid is about 65 minutes.


CLAIM BLOCK:


The claim number that makes up the 4 claim unit that was covered by this present survey is P-1222919. Refer to Figure 3 for the location of the claim within the Township. Figure 3 has been copied from MNDM Plan map, M-293, Loveland Township.

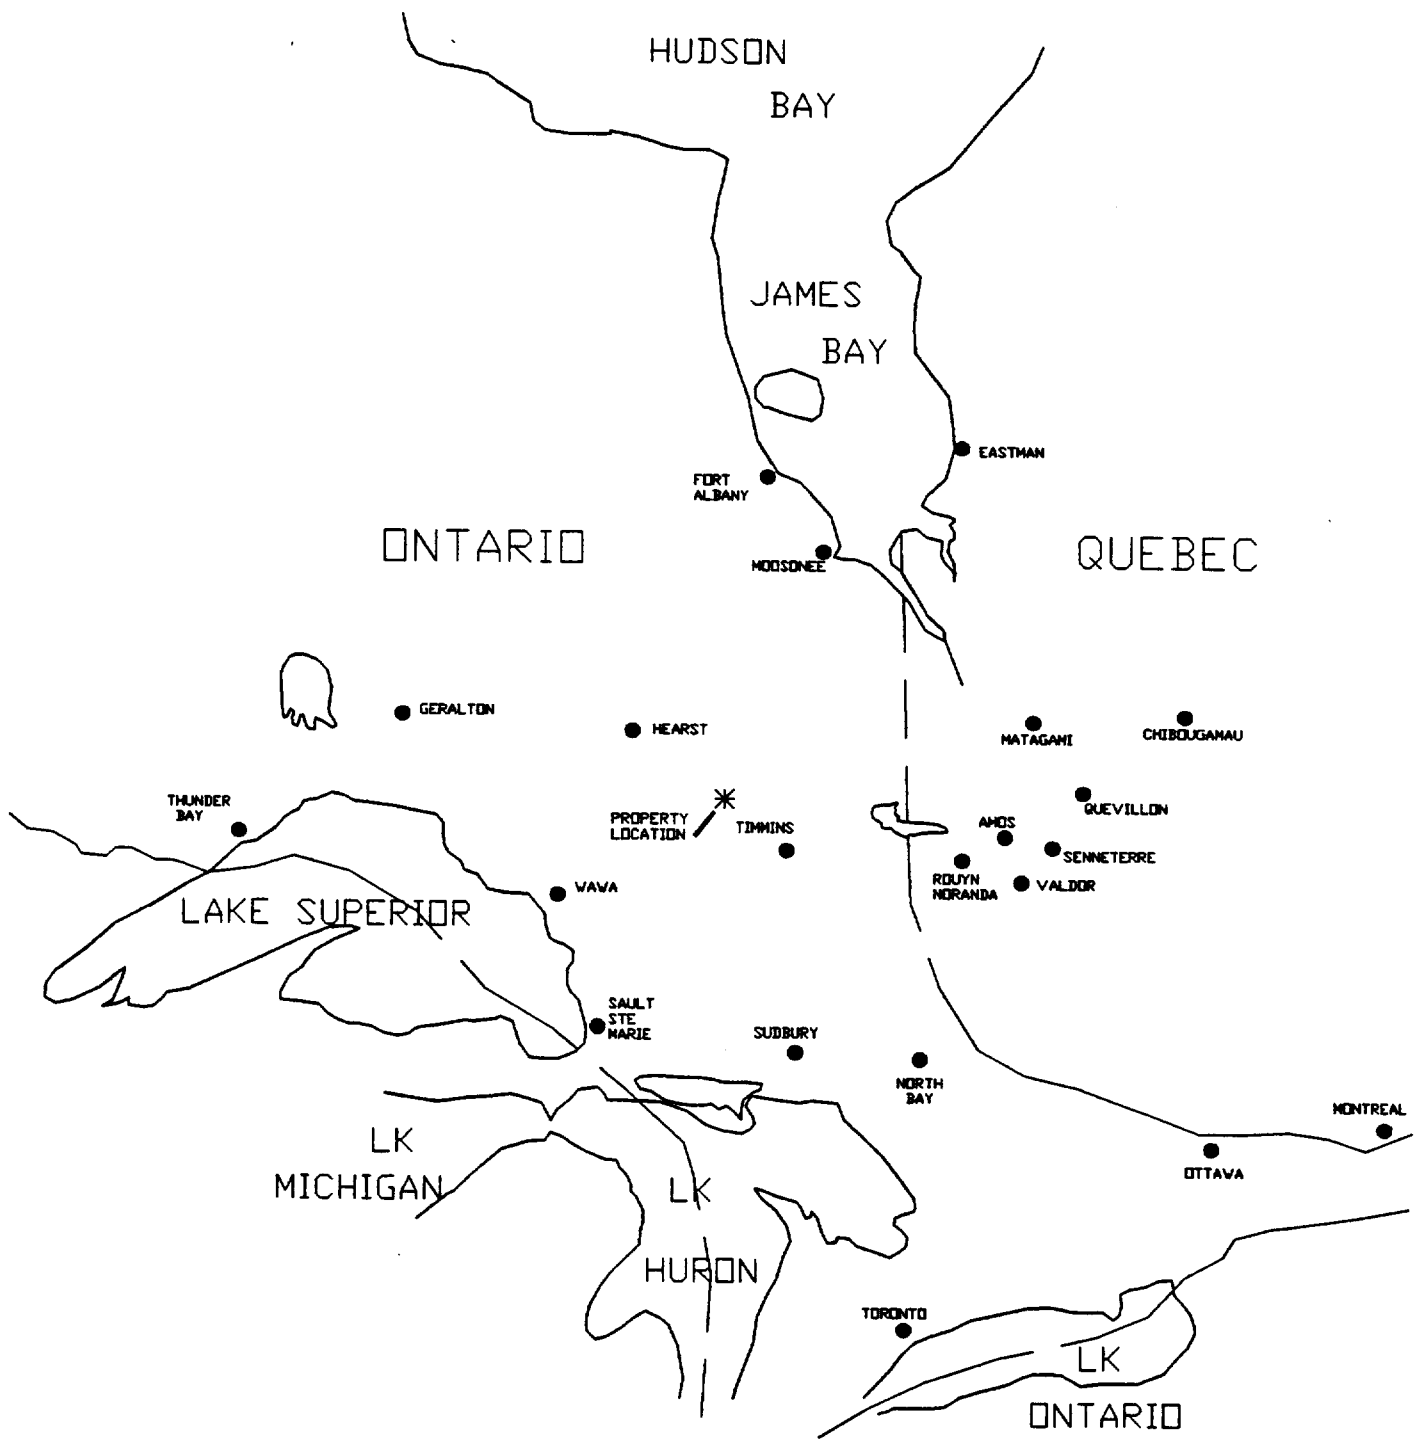


	EXSICS EXPLORATION LTD. P.O. Box 1880, P4N-7X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424	
	CLIENT: EXPLORER'S ALLIANCE CORP.	
PROPERTY: LOVELAND PROPERTY		
TITLE: LOVELAND TOWNSHIP		
LOCATION MAP		Fig. 1
Date: SEPT., 2000	Scale: 1" = 125 miles	NTS:
Drawn: J.C. GRANT	Intern: J.C. Grant Job No. E 200	

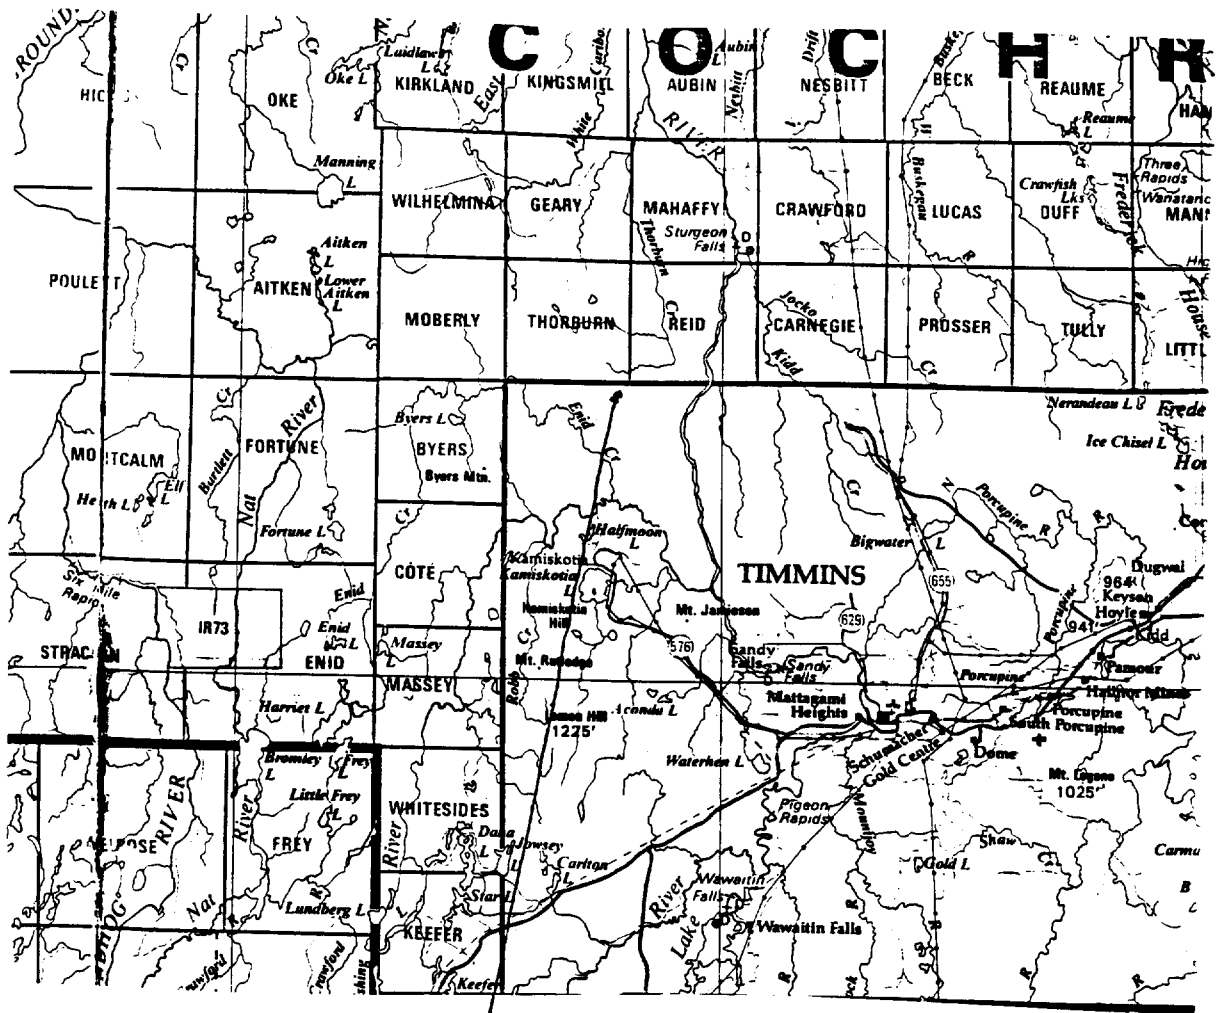

 EXSICS EXPLORATION LTD. P.O. Box 1880, P4N-7X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424		
CLIENT: EXPLORER'S ALLIANCE CORP.		
PROPERTY: LOVELAND PROPERTY		
TITLE: LOVELAND TOWNSHIP		
PROPERTY LOCATION MAP		
Fig. 2		
Date: SEPT. 2000	Scale: 1:20,000	NTS:
Drawn: J.G. GRANT	Interp: J.C. Grant	Job No.: E-390

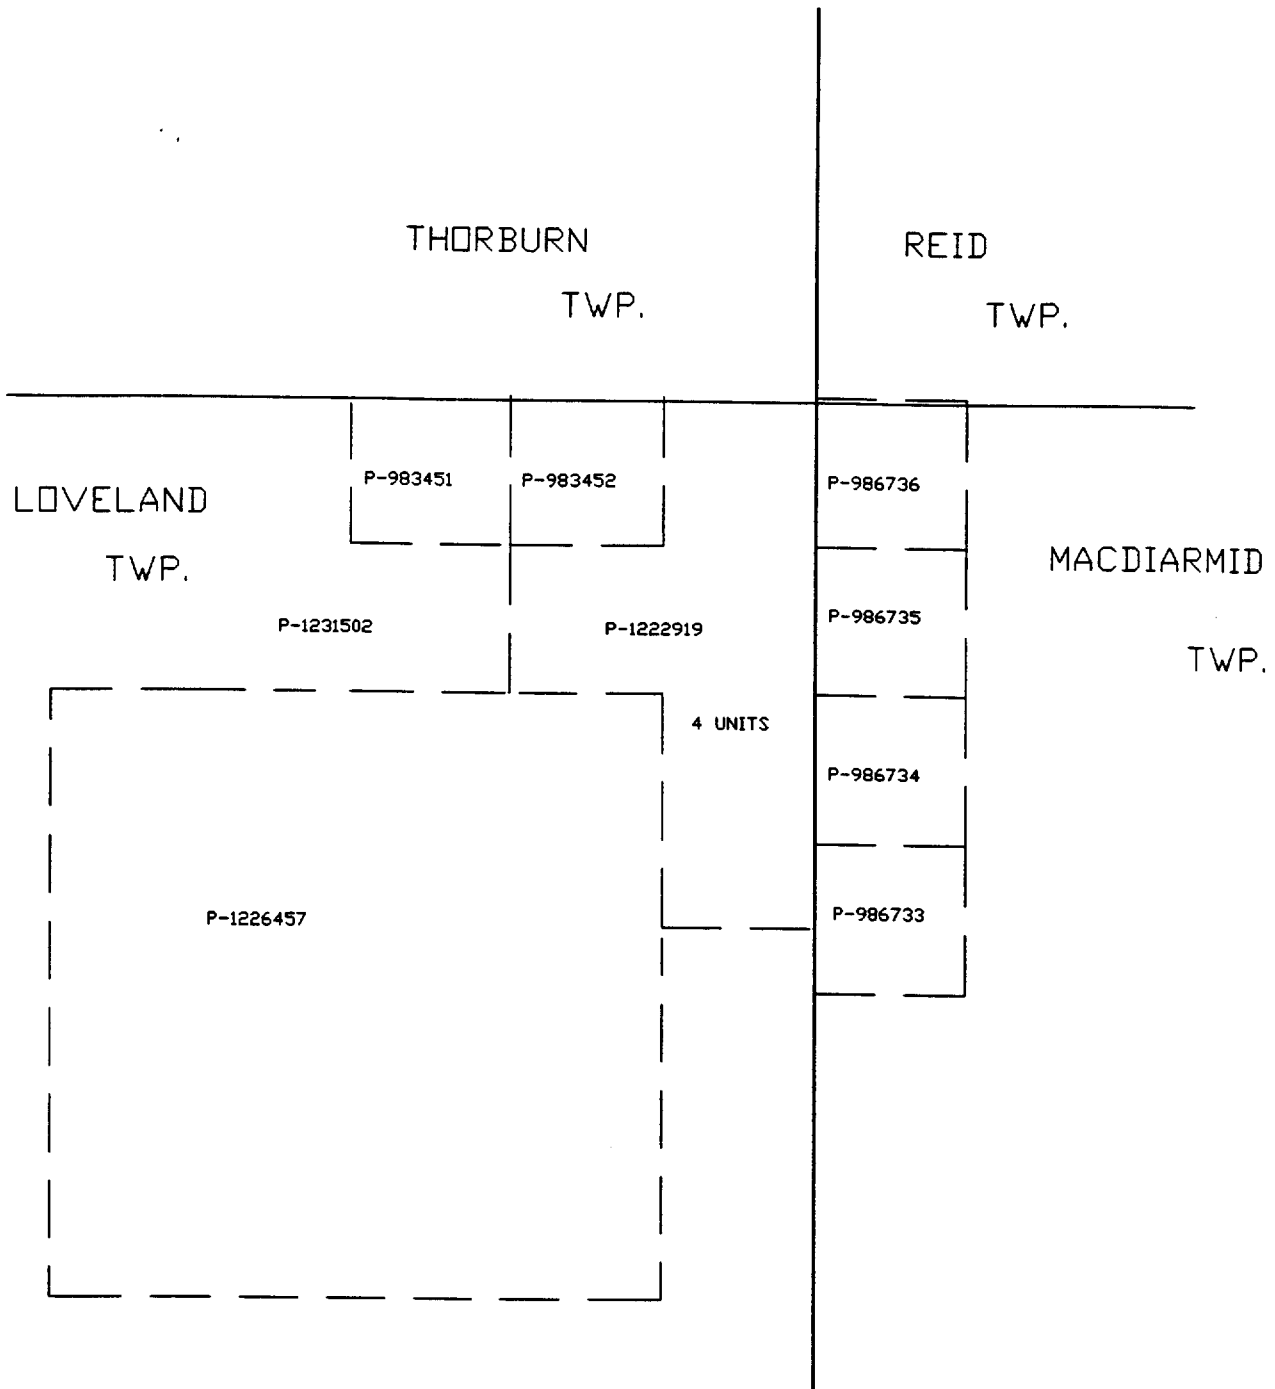

 EXSICS EXPLORATION LTD. P.O. Box 1880, P4N-7X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424		
CLIENT: EXPLORER'S ALLIANCE CORP.		
PROPERTY: LOVELAND PROPERTY		
TITLE: LOVELAND TOWNSHIP		
CLAIM SKETCH		
Fig. 3		
Date: SEPT., 2000	Scale: 1:20,000	NTS:
Drawn: J.G. GRANT	Interp: J.C. Grant	Job No.: E-390

PERSONNEL:

The field crew directly responsible for laying out the grid, flagging and the collection of all of the raw data were as follows.

Erik Jaakkola..... Timmins, Ontario
Aurel Chaumont..... Timmins, Ontario

The field work was completed under the direct supervision of J.C. Grant and all of the plotting was completed by in-house staff.

GROUND PROGRAM:

The ground program was completed over six grid lines that had been previously compassed paced and flagged across the entire claim block. The equipment used for the surveys was the Scintrex, Envi Mag System. Specifications for this system can be found as Appendix A of this report.

The following parameters were kept constant throughout the survey.

Line spacing.....	100 meters
Station spacing.....	25 meters
Reading interval.....	25 meters
Reference field.....	58,000 gammas
Datum subtracted.....	57,000 gammas
Unit accuracy.....	+/- 0.1 gamma

Upon the completion of the magnetic survey, the data was corrected, leveled and then plotted onto a base map at a scale of 1:2500. The plotted data was then contoured at 20 gamma intervals where ever possible. A copy of this contoured base map is included in the back pocket of this report.

SURVEY RESULTS:

The ground magnetic survey was successful in outlining the underlying geological characteristic of the property. The most predominant feature relates to what appears to be a dike like structure generally striking north-northeast and paralleling lines 600ME and 500ME. This dike like structure is represented by magnetic values approximately 250 to 300 gammas above the general magnetic background.

There also appears to be a minor cross structure striking at azimuth 305 degrees and can be followed from line 100ME /100MN to and including 300ME at 0+75MN. The eastern section of this zone is cross cut by the suspected dike like feature.

The magnetic high-low readings at the southern tip of line 400ME was not explained in the field at the time of this writing.

CONCLUSIONS AND RECOMMENDATIONS:


The magnetic suggest that there is at least two separate cross structures present of the claim block. The 1989 airborne survey which was also done across this Township was successful in locating several airborne electromagnetic targets. These targets should be followed up to their full extent.

A follow up program of detailed line cutting and HLEM surveys should be considered across the claims to define the airborne targets and to define their characteristics. A detailed geological survey should also be completed across the claims and correlated to any and all geophysical data.

Respectfully submitted

J. C. Grant

J.C. Grant, CET, FGAC
September, 2000

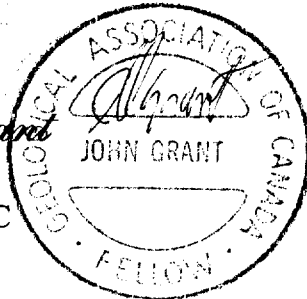


CERTIFICATE

I, John C. Grant, hereby certify that:

- 1) I am a graduate technologist, (1975) of the three year program in Geological Technology at Cambrian College of Applied Arts and Technology, Sudbury Campus. I have worked subsequently as an Exploration Geophysicist for Teck Exploration Limited, (5 years), North Bay office and currently as Exploration Manager and Geophysicist for Exsics Exploration Limited since 1980.
- 2) I am a member in good standing of the Certified Engineering Technologist Association, (CET), since 1984
- 3) I am a Fellow of the Geological Association of Canada, (FGAC), since 1986.
- 4) I have been actively engaged in my profession since May of 1975, including all aspects of exploration studies, surveys and interpretation.
- 5) I have no specific or special interest in the described property. I have been retained as a Consulting Geophysicist by the Property holders.

John Charles Grant, CET, FGAC.

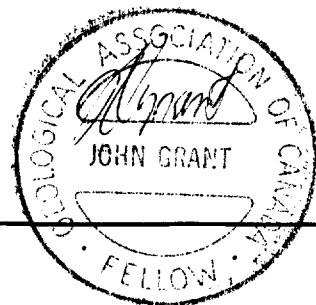

APPENDIX A

SCINTREX

ENVI-MAG Environmental Magnetometer/Gradiometer

Locating Buried Drums and Tanks?

The ENVI-MAG is the solution to this environmental problem. ENVI-MAG is an inexpensive, lightweight, portable "WALKMAG" which enables you to survey large areas quickly and accurately.

ENVI-MAG is a portable, proton precession magnetometer and/or gradiometer, for geotechnical, archaeological and environmental applications where high production, fast count rate and high sensitivity are required. It may also be used for other applications, such as mineral exploration, and may be configured as a total-field magnetometer, a vertical gradiometer or as a base station.

The ENVI-MAG

- easily detects buried drums to depths of 10 feet or more
- more sensitive to the steel of a buried drum than EM or radar
- much less expensive than EM or radar
- survey productivity much higher than with EM or radar

Features and Benefits

"WALKMAG"

Magnetometer/Gradiometer

The "WALKMAG" mode of operation (sometimes known as "Walking Mag") is user-selectable from the keyboard. In this mode, data is acquired and recorded at a rate of 2 readings per second as the operator walks at a steady pace along a line. At desired intervals, the operator "triggers" an event marker by a single key stroke, assigning coordinates to the recorded data.

Use Simultaneous Gradiometer

An optional upgrade kit is available to configure ENVI-MAG as a gradiometer to make true, simultaneous gradiometer measurements. Gradiometry is useful for geotechnical and archaeological surveys where small near surface magnetic targets are the object of the survey.

Selectable Sampling Rates

0.5 second, 1 second and 2 second sampling rates user selectable from the keyboard.

Main features include:

- select sampling rates as fast as 2 times per second
- "WALKMAG" mode for rapid acquisition of data
- large internal, expandable memory
- easy to read, large LCD screen displays data both numerically and graphically
- ENVIMAP software for processing and mapping data

ENVI-MAG comprises several basic modules; a lightweight console with a large screen alphanumeric display and high capacity memory, a staff mounted sensor and sensor cable, rechargeable battery and battery charger, RS-232 cable and ENVIMAP processing and mapping software.

For gradiometry applications an upgrade kit is available, comprising an additional processor module for installation in the console, and a second sensor with a staff extender.




ENVI-MAG Proton Magnetometer in operation

For base station applications a Base Station Accessory Kit is available so that the sensor and staff may be converted into a base station sensor.

Large-Key Keypad

The large-key keypad allows easy access for gloved-hands in cold-weather operations. Each key has a multi-purpose function.

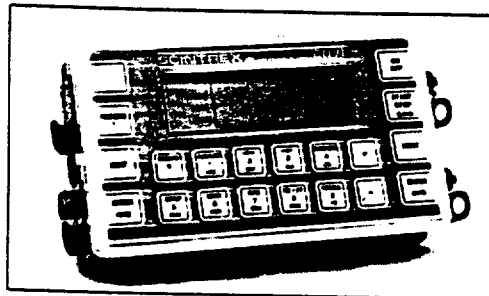

Front panel of ENVI-MAG showing a graphic profile of data and large-key keypad

Large Capacity Memory

ENVI-MAG with standard memory stores up to 28,000 readings of total field measurements, 21,000 readings of gradiometry data or 151,000 readings as a base station. An expanded memory option is available which increases this standard capacity by a factor of 5.

Easy Review of Data

For quality of data and for a rapid analysis of the magnetic characteristics of the survey line, several modes of review are possible. These include the measurements at the last four stations, the ability to scroll through any or all previous readings in memory, and a graphic display of the previous data as profiles, line by line. This feature is very useful for environmental and archaeological surveys.

Highly Productive

The "WALKMAG" mode of operation acquires data rapidly at close station intervals, ensuring high-definition results. This increases survey productivity by a factor of 5 when compared to a conventional magnetometer survey.

"Datacheck" Quality Control of Data

"Datacheck" provides a feature wherein at the end of each survey line, data may be reviewed as a profile on ENVI-MAG's screen. Datacheck confirms that the instrument is functioning correctly and

allows the user to note the magnetic relief (anomaly) on the line.

Large Screen Display

'Super-Twist' 64 x 240 dot (8 lines x 40 characters), LCD graphic screen provides good visibility in all light conditions. A display heater is optionally available for low-temperature operations below 0°C.



Close-up of the ENVI-MAG screen showing data presented after each reading

Interactive Menu

The set-up of ENVI-MAG is menu-driven, and minimizes the operator's learning time, and on-going tasks.



Close-up of display of ENVI-MAG showing interactive set-up menu

Rechargeable Battery and Battery Charger

An "off-the-shelf" lead-acid battery and charger are provided as standard. The low-cost "Camcorder" type battery is available from electronic parts distributors everywhere.

HELP-Line Available

Purchasers of ENVI-MAG are provided with a HELP-Line telephone number to call in the event assistance is needed with an application or instrumentation problem.

ENVIMAP Processing and Mapping Software

Supplied with ENVI-MAG, and custom designed for this purpose, is easy-to-use, very user-friendly, menu driven data processing and mapping software called ENVIMAP. This unique software appears to the user to be a single program, but is in fact a sequence of separate programs, each performing a specific task. Under the menu system, there are separate programs to do the following:

- read the ENVI-MAG data and reformat it into a standard compatible with the ENVIMAP software
- grid the data into a standard grid format
- create a vector file of posted values

with line and baseline identification that allows the user to add some title information and build a suitable surround

- contour the gridded data
- autoscale the combined results of the posting/surround step and the contouring step to fit on a standard 8.5 ins. wide dot-matrix printer
- rasterize and output the results of step e) to the printer

ENVIMAP is designed to be as simple as possible. The user is required to answer a few basic questions asked by ENVIMAP, and then simply toggles "GO" to let ENVIMAP provide default parameters for the making of the contour map. The user can modify certain characteristics of the output plot. ENVIMAP'S menu system is both keyboard and mouse operable. HELP screens are integrated with the menu system so that HELP is displayed whenever the user requests it.

Options Available

- True simultaneous gradiometer upgrade
- Base station upgrade
- Display heater for low temperature operations
- External battery pouch

Specifications

Total Field Operating Range

20,000 to 100,000 nT (gammas)

Total Field Absolute Accuracy

-/- 1nT

Sensitivity

1.1 nT at 2 second sampling rate

Tuning

Fully solid state. Manual or automatic, keyboard selectable

Cycling (Reading) Rates

0.5, 1 or 2 seconds, up to 9999 seconds for base station applications, keyboard selectable

Gradiometer Option

Includes a second sensor, 20 inch (1/2m) staff extender and processor module

WALKMAG™ Mode

0.5 second for walking surveys, variable rates for hilly terrain

Digital Display

CD "Super Twist", 240 x 64 dots graphics, 8 line x 40 characters alphanumeric

Display Heater

thermostatically controlled, for cold weather operations

Keyboard Input

7 keys, dual function, membrane type

Notebook Function

32 characters, 5 user-defined MACRO's for quick entry

Standard Memory

Total Field Measurements: 28,000 readings

Gradiometer Measurements: 21,000 readings

Base Station Measurements: 151,000 readings

Expanded Memory

Total Field Measurements: 140,000 readings

Gradiometer Measurements: 109,000 readings

Base Station Measurements: 750,000 readings

Real-Time Clock

Records full date, hours, minutes and seconds with 1 second resolution, +/- 1 second stability over 12 hours

Digital Data Output

RS-232C interface, 600 to 57,600 Baud, 7 or 8 data bits, 1 start, 1 stop bit, no parity format. Selectable carriage return delay (0-999 ms) to accommodate slow peripherals. Handshaking is done by X-on/X-off

Analog Output

0 - 999 mV full scale output voltage with keyboard selectable range of 1, 10, 100, 1,000 or 10,000 nT full scale

Power Supply

Rechargeable "Camcorder" type, 2.3 Ah, Lead-acid battery.

12 Volts at 0.65 Amp for magnetometer, 1.2 Amp for gradiometer,

External 12 Volt input for base station operations

Optional external battery pouch for cold weather operations

Battery Charger

110 Volt - 230 Volt, 50/60 Hz

Operating Temperature Range

Standard 0° to 60°C

Optional -40°C to 60°C

Dimensions

Console - 10 x 6 x 2.25 inches
(250 mm x 152 mm x 55 mm)

T.F. sensor - 2.75 inches dia. x 7 inches
(70 mm x 175 mm)

Grad. sensor and staff extender - 2.75 inches dia. x 26.5 inches (70 mm x 675 mm)

T.F. staff - 1 inch dia. x 76 inches (25 mm x 2 m)

Weight

Console - 5.4 lbs (2.45 kg)
with rechargeable battery

T. F. sensor - 2.2 lbs (1.15 kg)

Grad. sensor - 2.5 lbs (1.15 kg)

Staff - 1.75 lbs (0.8 kg)

SCINTREX

Head Office

222 Snidercroft Road
Concord, Ontario, Canada L4K 1B5

Telephone: (905) 689-2280

Fax: (905) 689-6403 or 689-5132

Telex: 06-964570

In the USA:


Scintrex Inc.
85 River Rock Drive
Unit 202

Buffalo, NY 14207

Telephone: (716) 298-1219

Fax: (716) 298-1317

OMNI IV "Tie-Line" Magnetometer

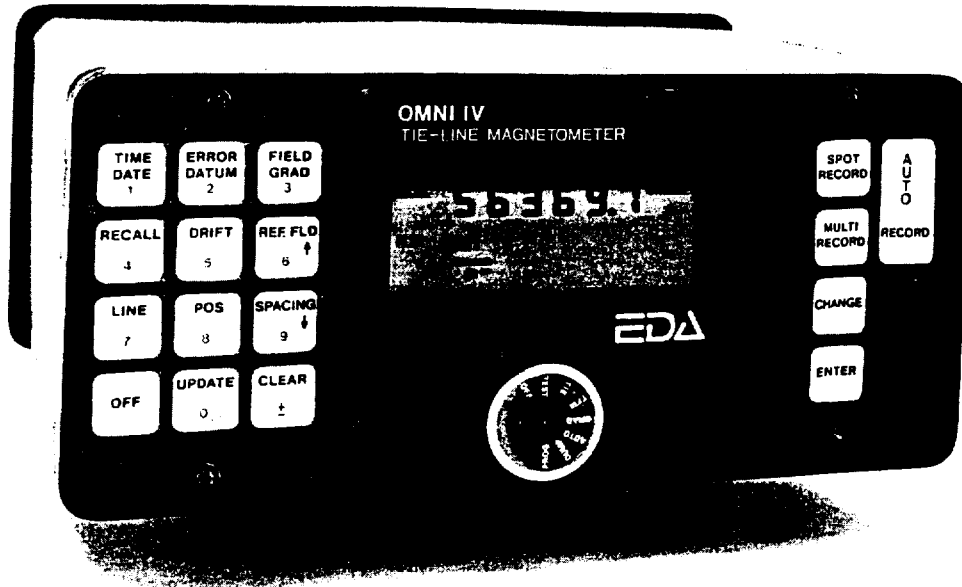

- Four Magnetometers in One
- Self Correcting for Diurnal Variations
- Reduced Instrumentation Requirements
- 25% Weight Reduction
- User Friendly Keypad Operation
- Universal Computer Interface
- Comprehensive Software Packages



Specifications

Dynamic Range	18,000 to 110,000 gammas. Roll-over display feature suppresses first significant digit upon exceeding 100,000 gammas.
Tuning Method	Tuning value is calculated accurately utilizing a specially developed tuning algorithm
Automatic Fine Tuning	$\pm 15\%$ relative to ambient field strength of last stored value
Display Resolution	0.1 gamma
Processing Sensitivity	± 0.02 gamma
Statistical Error Resolution	0.01 gamma
Absolute Accuracy	± 1 gamma at 50,000 gammas at 23°C ± 2 gamma over total temperature range
Standard Memory Capacity	
Total Field or Gradient	1,200 data blocks or sets of readings
Tie-Line Points	100 data blocks or sets of readings
Base Station	5,000 data blocks or sets of readings
Display	Custom-designed, ruggedized liquid crystal display with an operating temperature range from -40°C to $+55^{\circ}\text{C}$. The display contains six numeric digits, decimal point, battery status monitor, signal decay rate and signal amplitude monitor and function descriptors.
RS 32 Serial I/O Interface	2400 baud, 8 data bits, 2 stop bits, no parity
Gradient Tolerance	6,000 gammas per meter (field proven)
Test Mode	A. Diagnostic testing (data and programmable memory) B. Self Test (hardware)
Sensor	Optimized miniature design. Magnetic cleanliness is consistent with the specified absolute accuracy.
Gradient Sensors	0.5 meter sensor separation (standard), normalized to gammas/meter. Optional 1.0 meter sensor separation available. Horizontal sensors optional.
Sensor Cable	Remains flexible in temperature range specified, includes strain-relief connector
Cycling Time (Base Station Mode)	Programmable from 5 seconds up to 60 minutes in 1 second increments
Operating Environmental Range	-40°C to $+55^{\circ}\text{C}$; 0-100% relative humidity; weatherproof
Power Supply	Non-magnetic rechargeable sealed lead-acid battery cartridge or belt; rechargeable NiCad or Disposable battery cartridge or belt; or 12V DC power source option for base station operation.
Battery Cartridge/Belt Life	2,000 to 5,000 readings, for sealed lead acid power supply, depending upon ambient temperature and rate of readings
Weights and Dimensions	
Instrument Console Only	2.8 kg, 238 x 150 x 250mm
NiCad or Alkaline Battery Cartridge	1.2 kg, 235 x 105 x 90mm
NiCad or Alkaline Battery Belt	1.2 kg, 540 x 100 x 40mm
Lead-Acid Battery Cartridge	1.8 kg, 235 x 105 x 90mm
Lead-Acid Battery Belt	1.8 kg, 540 x 100 x 40mm
Sensor	1.2 kg, 56mm diameter x 200mm
Gradient Sensor (1.5 m separation - standard)	2.1 kg, 56mm diameter x 790mm
Gradient Sensor (1.0 m separation - optional)	2.2 kg, 56mm diameter x 1300mm
Standard System Complement	Instrument console; sensor; 3-meter cable, aluminum sectional sensor staff, power supply, harness assembly, operations manual.
Base Station Option	Standard system plus 30 meter cable
Calibrator Option	Standard system plus 0.5 meter sensor

EDA Instruments Inc.
4 Thornciffe Park Drive
Toronto, Ontario
Canada M4H 1H1
Telex: 06 23222 EDA TOR
Cable: Instruments Toronto
(416) 425 7800

In U.S.A.
EDA Instruments Inc.
5151 Ward Road
Wheat Ridge, Colorado
U.S.A. 80033
(303) 422 9112

Printed in Canada



Declaration of Assessment Work Performed on Mining Land

Mining Act, Subsection 65(2) and 66(3), R.S.O. 1990

Transaction Number (office use)
W0066-00381
Assessment Files Research Imaging



42A12NE2016 2.20581 LOVELAND 900

Sections 65(2) and 66(3) of the Mining Act. Under section 8 of the Mining Act, all assessment work and correspond with the mining land holder. Questions about this collection should be directed to the Ministry of Northern Development and Mines, 3rd Floor, 933 Ramsey Lake Road, Sudbury, Ontario, P3E 6B5.

Instructions: - For work performed on Crown Lands before recording a claim, use form 0240. - Please type or print in ink.

1. Recorded holder(s) (Attach a list if necessary)

Name	Explorers Alliance Corp.	Client Number	30.3065
Address	168 Algonquin Blvd East	Telephone Number	705 267-3511
	Timmins, Ontario P4N 1A9	Fax Number	705 267-3121
Name		Client Number	
Address		Telephone Number	
		Fax Number	


2. Type of work performed: Check (✓) and report on only ONE of the following groups for this declaration.

<input checked="" type="checkbox"/> Geotechnical: prospecting, surveys, assays and work under section 18 (regs)	<input type="checkbox"/> Physical: drilling stripping, trenching and associated assays	<input type="checkbox"/> Rehabilitation
Work Type	Office Use	
Linecutting MAG survey.	Commodity	
	Total \$ Value of Work Claimed \$ 1766	
Dates Work Performed From 19 09 2000 To 21 09 2000	NTS Reference	
Global Positioning System Data (if available)	Township/Area Lovelands	Mining Division Porcupine
	M or G-Plan Number M293	Resident Geologist District Timmins

Please remember to: - obtain a work permit from the Ministry of Natural Resources as required; - provide proper notice to surface rights holders before starting work; - complete and attach a Statement of Costs, form 0212; - provide a map showing contiguous mining lands that are linked for assigning work; - include two copies of your technical report.

3. Person or companies who prepared the technical report (Attach a list if necessary)

Name	Excis Exploration Limited	Telephone Number	705-267-4151
Address	P.O. Box 1880 Timmins P4N 7K1	Fax Number	705 264-5790
Name		Telephone Number	
Address		Fax Number	
Name		Telephone Number	
Address		Fax Number	

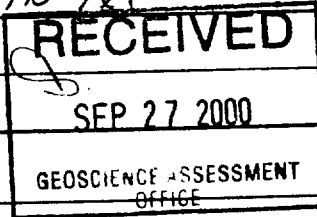


4. Certification by Recorded Holder or Agent

I, Leslie B. Lumsden (Print Name), do hereby certify that I have personal knowledge of the facts set forth in this Declaration of Assessment Work having caused the work to be performed or witnessed the same during or after its completion and, to the best of my knowledge, the annexed report is true.

Signature of Recorded Holder or Agent	Date	Sept 25 / 2000
Agent's Address	Telephone Number	Fax Number

Deemed December 24, 2000

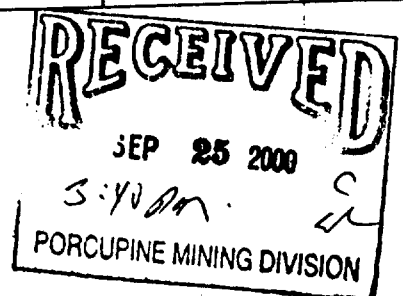

land where work was performed, at the time work was performed. A map showing the contiguous link must accompany this form.

W0060.00381

Mining Claim Number. Or if work was done on other eligible mining land, show in this column the location number indicated on the claim map.	Number of Claim Units. For other mining land, list hectares.	Value of work performed on this claim or other mining land.	Value of work applied to this claim.	Value of work assigned to other mining claims.	Bank. Value of work to be distributed at a future date
eg TB 7827	16 ha	\$26,825	N/A	\$24,000	\$2,825
eg 1234567	12	0	\$24,000	0	0
eg 1234568	2	\$ 8,892	\$ 4,000	0	\$4,892
1 1222919	4	1766	1600		166
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
Column Totals		1766	1600		166

I, Kim Blaine, do hereby certify that the above work credits are eligible under subsection 7 (1) of the Assessment Work Regulation 6/96 for assignment to contiguous claims or for application to the claim where the work was done.

Signature of Recorded Holder or Agent Authorized in Writing [Signature] Date Sept 25, 2000

6. Instructions for cutting back credits that are not approved.

Some of the credits claimed in this declaration may be cut back. Please check (✓) in the boxes below to show how you wish to prioritize the deletion of credits:


- 1. Credits are to be cut back from the Bank first, followed by option 2 or 3 or 4 as indicated.
- 2. Credits are to be cut back starting with the claims listed last, working backwards; or
- 3. Credits are to be cut back equally over all claims listed in this declaration; or
- 4. Credits are to be cut back as prioritized on the attached appendix or as follows (describe):

Note: If you have not indicated how your credits are to be deleted, credits will be cut back from the Bank first, followed by option number 2 if necessary.

For Office Use Only

Received Stamp	Deemed Approved Date	Date Notification Sent
	Date Approved	Total Value of Credit Approved
	Approved for Recording by Mining Recorder (Signature)	

0241 (03/97)

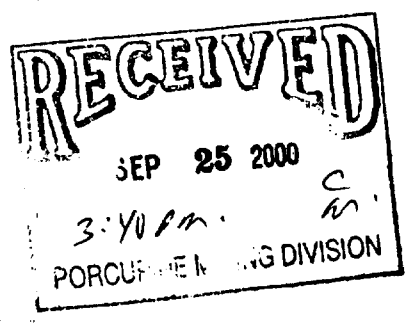

Geoscience Assessment Office
933 Ramsey Lake Road
6th Floor
Sudbury, Ontario
P3E 6B5

Telephone: (888) 415-9845
Fax: (877) 670-1555

October 20, 2000

Lionel Bonhomme
EXPLORERS ALLIANCE CORPORATION
168 ALGONQUIN BLVD. EAST
TIMMINS, ONTARIO
P4N-1A9

Visit our website at:
www.gov.on.ca/MNDM/MINES/LANDS/mlsmnpge.htm

Dear Sir or Madam:

Submission Number: 2.20581

Status

Subject: Transaction Number(s): W0060.00381 Approval


We have reviewed your Assessment Work submission with the above noted Transaction Number(s). The attached summary page(s) indicate the results of the review. **WE RECOMMEND YOU READ THIS SUMMARY FOR THE DETAILS PERTAINING TO YOUR ASSESSMENT WORK.**

If the status for a transaction is a 45 Day Notice, the summary will outline the reasons for the notice, and any steps you can take to remedy deficiencies. The 90-day deemed approval provision, subsection 6(7) of the Assessment Work Regulation, will no longer be in effect for assessment work which has received a 45 Day Notice. Allowable changes to your credit distribution can be made by contacting the Geoscience Assessment Office within this 45 Day period, otherwise assessment credit will be cut back and distributed as outlined in Section #6 of the Declaration of Assessment work form.

Please note any revisions must be submitted in DUPLICATE to the Geoscience Assessment Office, by the response date on the summary.

If you have any questions regarding this correspondence, please contact LUCILLE JEROME by e-mail at lucille.jerome@ndm.gov.on.ca or by telephone at (705) 670-5858.

Yours sincerely,



ORIGINAL SIGNED BY
Steve B. Beneteau
Acting Supervisor, Geoscience Assessment Office
Mining Lands Section

Work Report Assessment Results

Submission Number: 2.20581

Date Correspondence Sent: October 20, 2000

Assessor: LUCILLE JEROME

Transaction Number	First Claim Number	Township(s) / Area(s)	Status	Approval Date
W0060.00381	1222919	LOVELAND	Approval	October 19, 2000

Section:

14 Geophysical MAG

At the discretion of the Ministry, the assessment work performed on the mining lands noted in this work report may be subject to inspection and/or investigation at any time.

Correspondence to:

Resident Geologist
South Porcupine, ON

Assessment Files Library
Sudbury, ON

Recorded Holder(s) and/or Agent(s):

Lionel Bonhomme
EXPLORERS ALLIANCE CORPORATION
TIMMINS, ONTARIO

1232448 ONTARIO INC.
TIMMINS, ON

Thorburn Twp. (M.60I)

THE TOWNSHIP OF

LOVELAND

DISTRICT OF COCHRANE

PORCUPINE MINING DIVISION

SCALE: 1-INCH = 40 CHAINS

LEGEND

PATENTED LAND	Ⓟ
CROWN LAND SALE	C.S.
LEASES	Ⓞ
LOCATED LAND	L.C.
LICENSE OF OCCUPATION	L.O.
MINING RIGHTS ONLY	M.R.O.
SURFACE RIGHTS ONLY	S.R.O.
ROADS	—
IMPROVED ROADS	—
KING'S HIGHWAYS	—
RAILWAYS	—
POWER LINES	—
MARSH OR MUSKEG	—
MINES	Ⓧ
CANCELLED	Ⓞ

NOTES

400' Surface Rights Reservation along the shores of all lakes and rivers


PLAN NO. M-293

ONTARIO
MINISTRY OF NATURAL RESOURCES
SURVEYS AND MAPPING BRANCH

Byers Twp. (M.265)

Maccormid Twp. (M.294)

Robb Twp. (M.309)

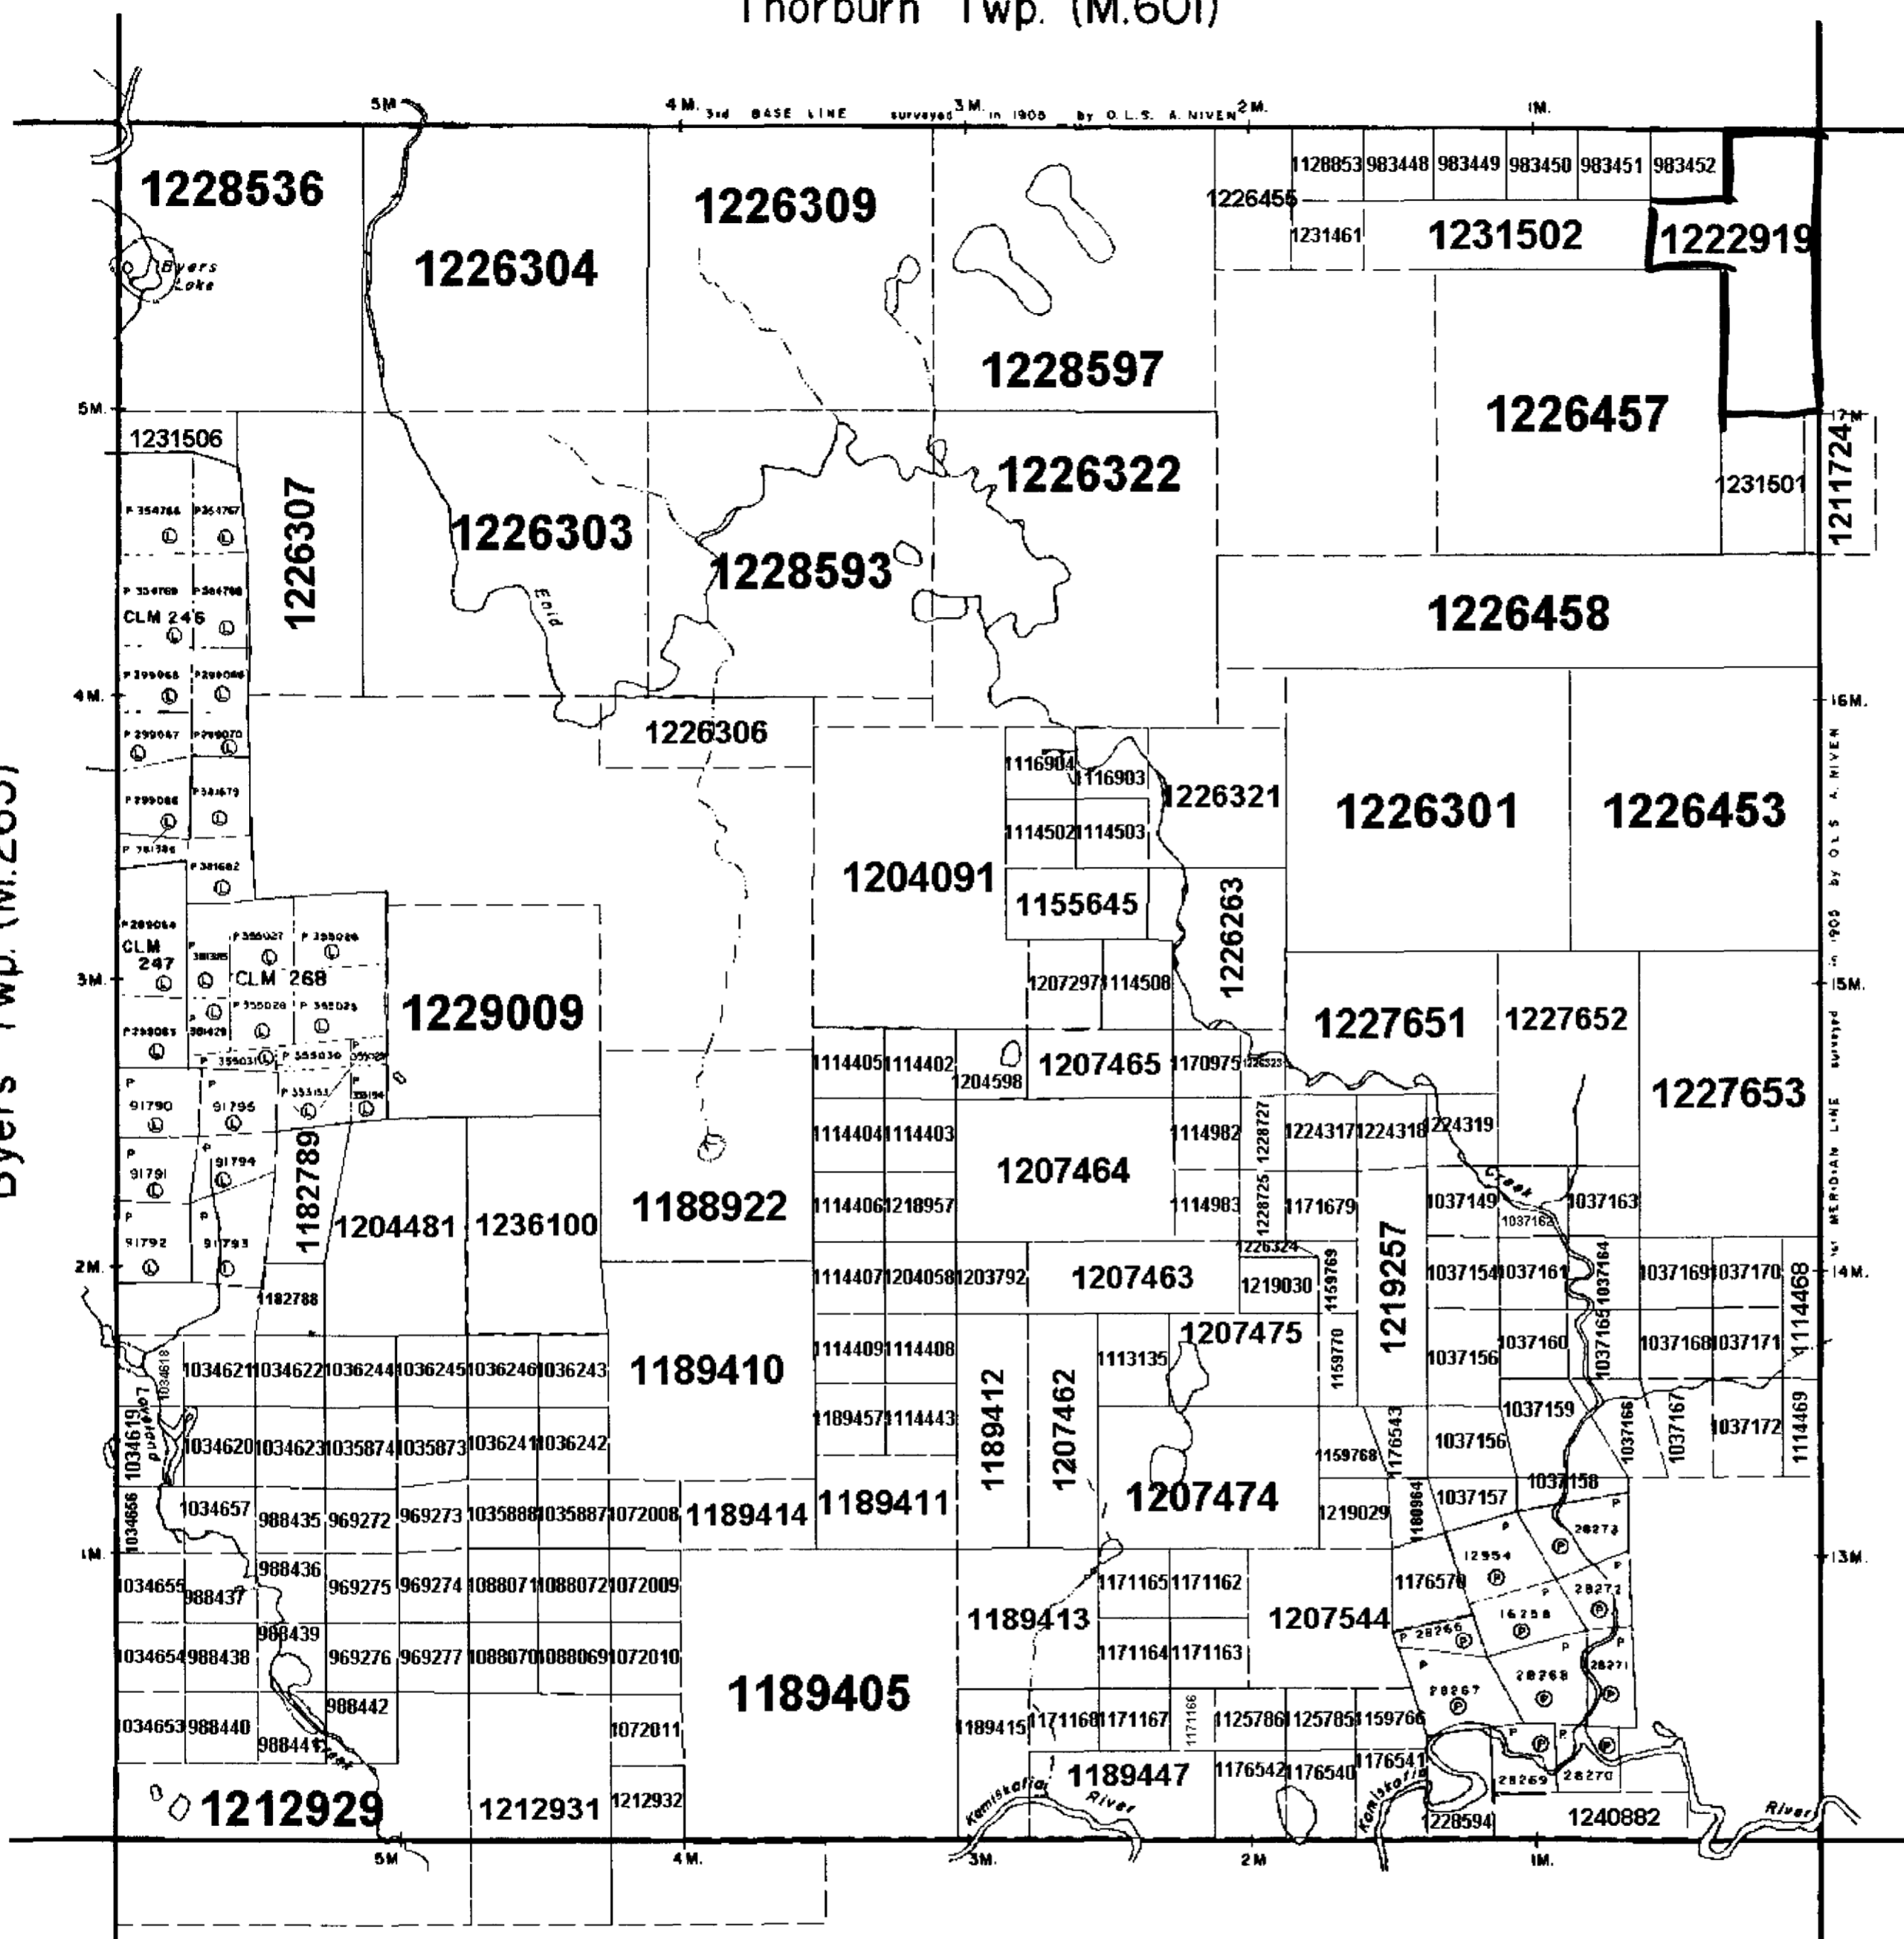

42A12NE2016 2.20581 LOVELAND

P-983452

P-1222919

4 UNITS

P-1231502

P-1226457

MACDIARMID
TWP.

LOVELAND
TWP.

LEGEND

Instrument: SCINTREX ENVI MAG, BRGM OMNI-IV
Parameters Measured: Earth's total magnetic field
Accuracy: +/- 0.1 nano-teslas
Diurnals: Corrected by base station recorder
Contour Interval: 0,20,40,60,80,.....
Reference Field: 58,000 gammas
Datum Subtracted: 57,000 gammas



EXSICS EXPLORATION LTD.

P.O. Box 1880, P4N-7X1
Suite 13, Hollinger Bldg, Timmins Ont.
Telephone: 705-267-4151, 267-2424

CLIENT: EXPLORER'S ALLIANCE CORP.

PROPERTY: LOVELAND PROPERTY

LOVELAND TOWNSHIP

TITLE: TOTAL FIELD MAGNETIC SURVEY


Date: SEPT., 2000

Scale: 1:2500


NTS:

Drawn: J.C. Grant

Interp: J.C. Grant Job No. E-390

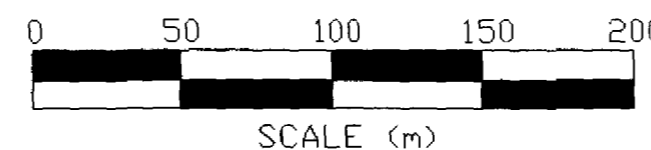

SCALE (m)

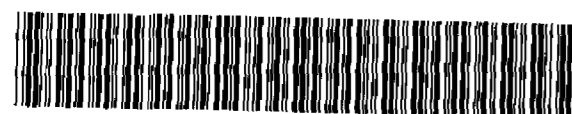

42A12NE2016 2.20581 LOVELAND