


2.27467

GEOPHYSICAL REPORT  
FOR  
**CANADIAN GOLDEN DRAGON RESOURCES LTD.  
AND MAPLE MINERALS CORPORATION**  
On The  
FOUR CORNERS PROPERTY  
KENOGAMING, PENHORWOOD, REEVES AND SEWELL TOWNSHIPS  
PORCUPINE MINING DIVISION  
NORTHEASTERN, ONTARIO

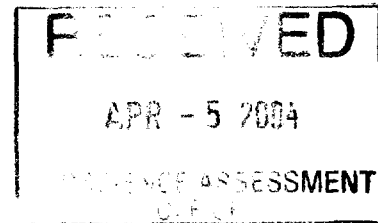

Prepared by: J.C. Grant, CET, FGAC  
March, 2004



**TABLE OF CONTENTS**

	PAGE
INTRODUCTION.....	1
PROPERTY LOCATION AND ACCESS.....	1
CLAIM BLOCK.....	2
PERSONNEL.....	2
GROUND PROGRAM.....	2,3
SURVEY RESULTS.....	3,4,5
CONCLUSIONS AND RECOMMENDATIONS.....	5,6
CERTIFICATE	
LIST OF FIGURES:	1.) LOCATION MAP 2.) PROPERTY LOCATION MAP 3.) CLAIM MAP
APPENDICES:	A.) SCINTREX ENVI MAG-VLF-EM SYSTEM
POCKET MAPS:	PROFILED BASE MAP, VLF-EM SURVEY COLOR CONTOURED TOTAL FIELD MAGNETIC SURVEY

**INTRODUCTION:**

The services of Exsics Exploration Limited were retained by Mr. R. Middleton, on behalf of the Companies, *Canadian Golden Dragon and Maple Minerals Corporation*, to complete a detailed ground program over a portion of their claims located in the Swayze Area of the Porcupine Mining Division, Northeastern, Ontario.

The purpose of this program was to locate and outline a series of airborne, electromagnetic targets that are scattered across the claim block as well as to define conductive horizons that may represent favorable areas for economical sulphide and or gold deposition.

The townships of Reeves and Penhorwood have a history of gold exploration mainly from surface showings in the southeast corner of Reeves and the northeast corner of Penhorwood. The Reeves showing was related to possible quartz floats whereas the Penhorwood area consisted of mineralized fracture zones in amphibolite. Quartz veins up to 1 inch wide filled fractures in the amphibolite.

The property, in general, is underlain by mafic metavolcanics which in turn have been cross cut by north-northwest trending diabase dikes.

The ground program commenced on the 16th of March, 2004 and was completed on the 2<sup>nd</sup> of April, 2004. A total of 43.80 kilometers of compass, paced, flagged and GPS grid lines were established across the claim block and then all of the lines were covered with a total field magnetic and VLF-EM survey.


**PROPERTY LOCATION AND ACCESS:**


The property, called the Four Corner Property, is situated in the North Swayze Belt of the Porcupine Mining Division and covers the southeast section of Reeves Township, the northeast section of Penhorwood Township, the northwest corner of Kenogaming Township and the southwest corner of Sewell Township. Figures 1 and 2.


More specifically the entire property is situated directly south of Highway 101 west just as it crosses the township line between Sewell and Reeves and a portion of Chubb Lake sits on the north sections of lines 0 to and including 600ME.

The entire property is approximately 55 kilometers southwest of the City of Timmins.

Access to the property during the survey period was relatively easy. Highway 101 west travels from Timmins to Chapleau and crosses just to the north of the northeast section of the grid. Access to the actual grid was then by skidoo along a series of overgrown ingress gravel roads that crisscross the claim block. However, unusually warm weather during the latter month of March made the skidoo access and survey work extremely slow. Refer to Figures 1 and 2.

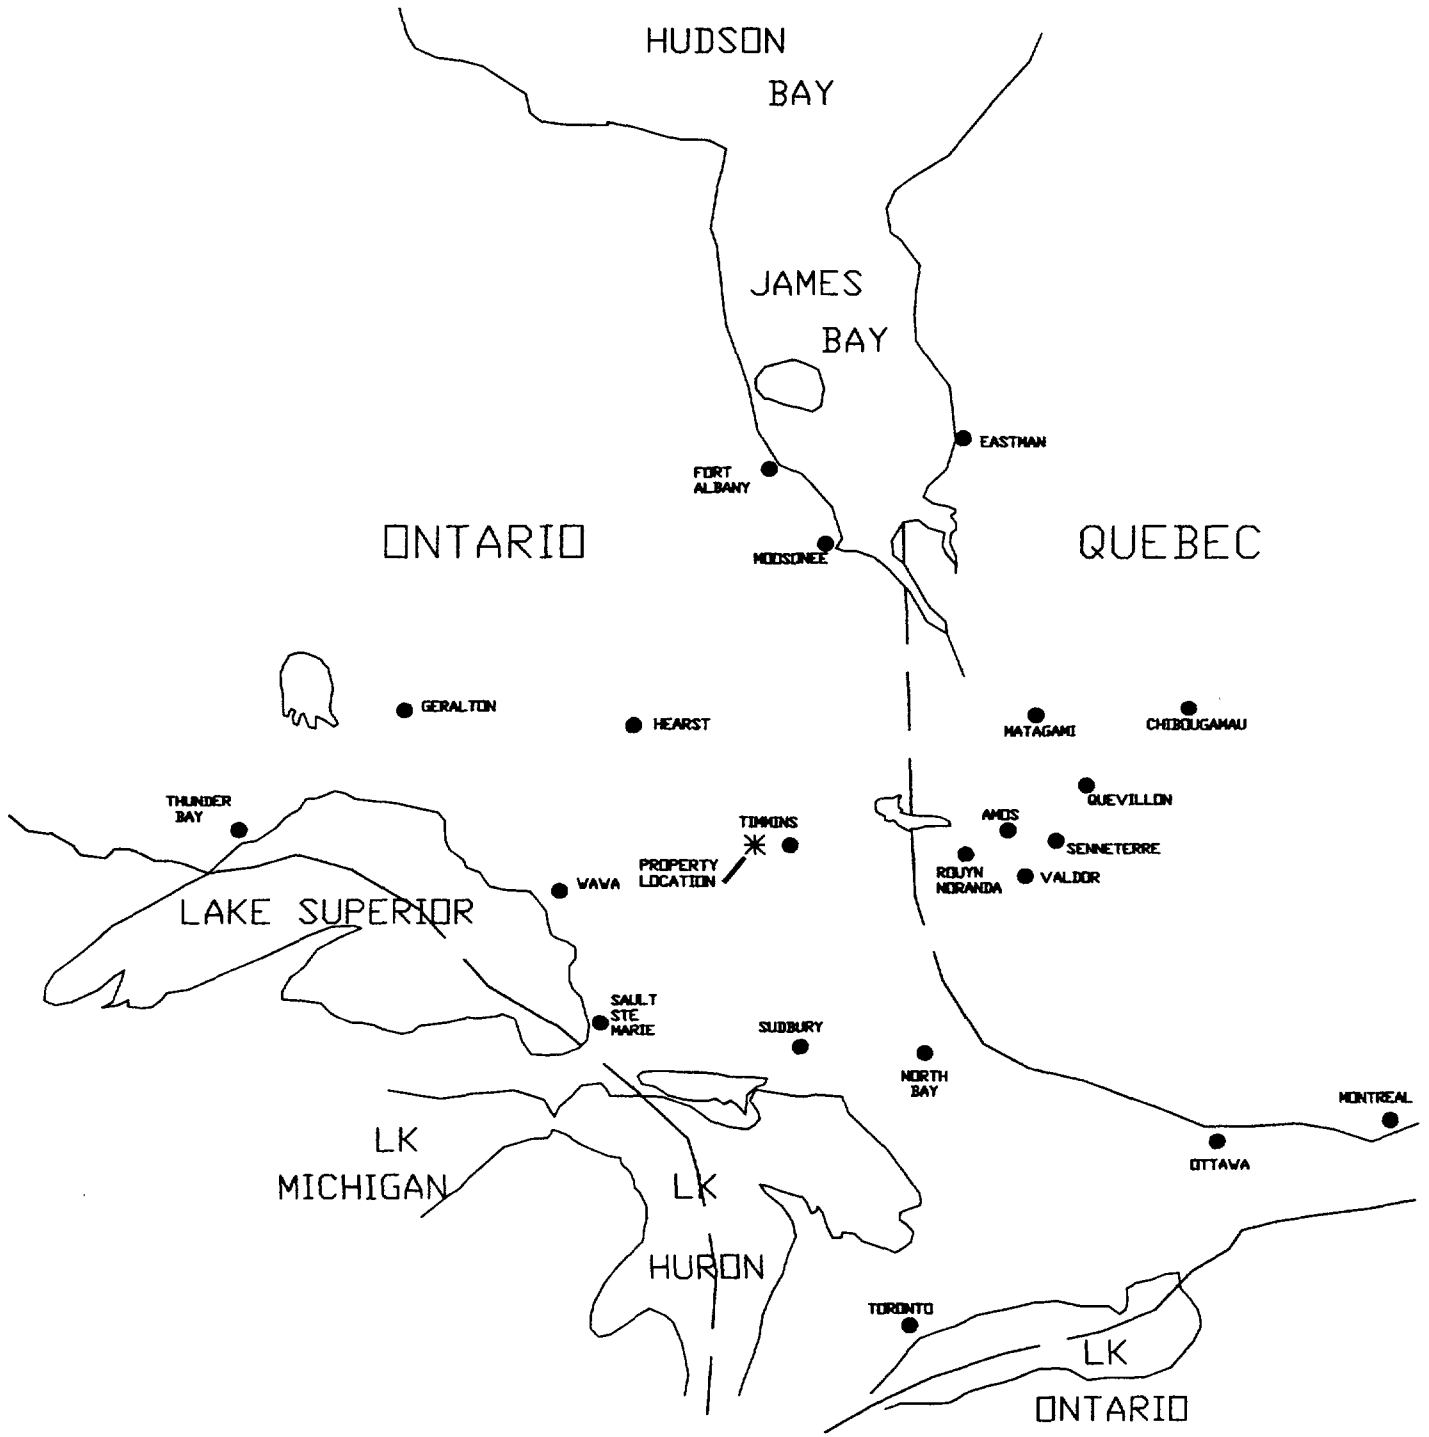

	<b>EXSICS EXPLORATION LTD.</b> P.O. Box 1880, P4N-7X1 Suite 13, Hollinger Bldg, Timmins Ont. Telephone: 705-267-4151, 267-2424	
	<b>CLIENT: CANADIAN GOLDEN DRAGON/MAPLE MINERALS</b> <b>PROPERTY: FOUR CORNER PROPERTY</b> <b>TITLE: REEVES-PENHORWOOD TOWNSHIPS</b>	
<h2 style="margin: 0;">LOCATION MAP</h2>		
Fig. 1		
Date: March/04 Drawn: J.C. Grant	Scale: 1" = 125 miles Interp: J.C. Grant	NTS: Job No.: E-463

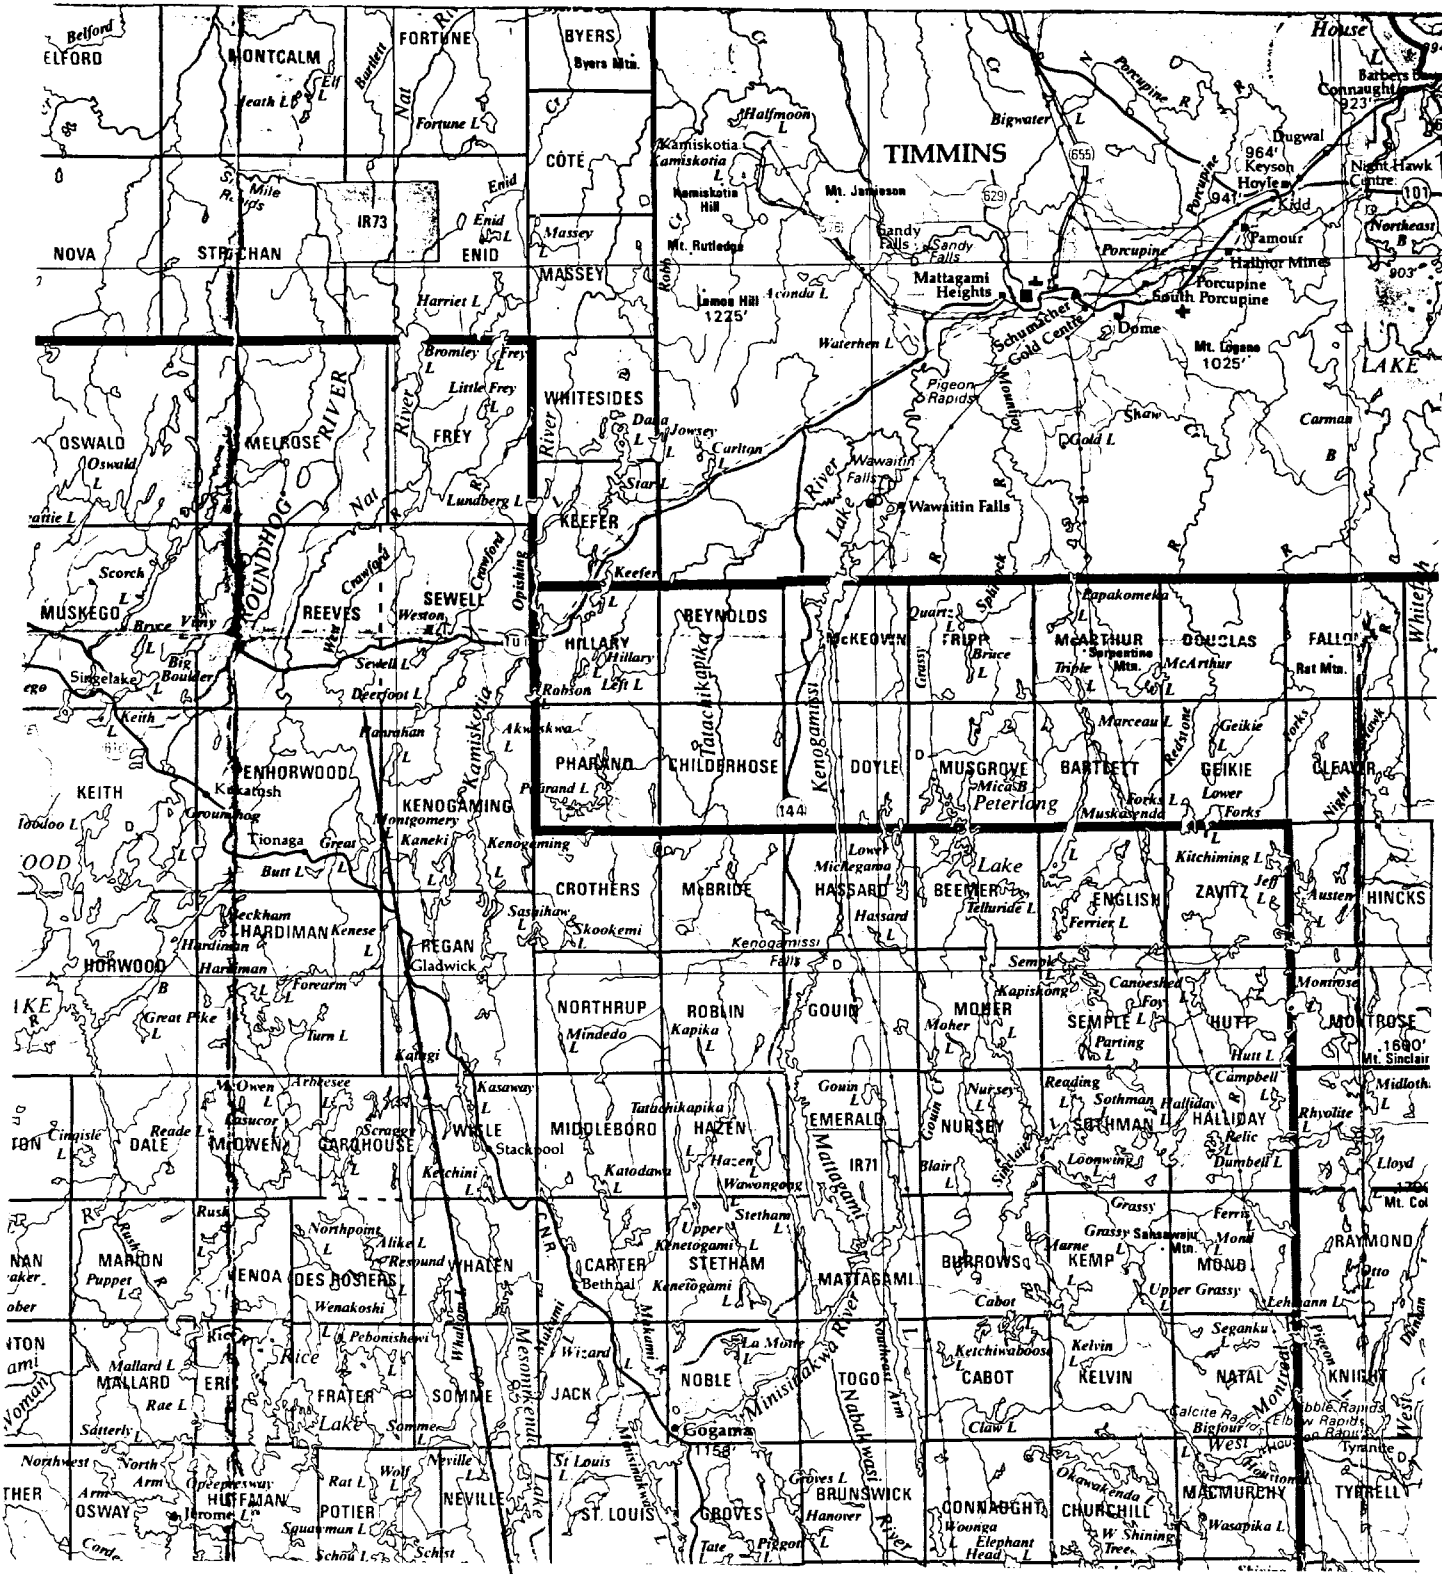

**EXSICS EXPLORATION LTD.**

P.O. Box 1880, P4N-7X1  
 Suite 13, Hollinger Bldg, Timmins Ont.  
 Telephone: 705-267-4151, 267-2424

**CLIENT: CANADIAN GOLDEN DRAGON/MAPLE MINERALS**

**PROPERTY: FOUR CORNER PROPERTY**

**TITLE: REEVES-PENHORWOOD TOWNSHIPS  
 PROPERTY LOCATION MAP**

Fig. 2

Date: March/04	Scale: 1:600,000	NTS:
Drawn: J.C. Grant	Interp: J.C. Grant	Job No.: E-463

**CLAIM BLOCK:**

The claim numbers that represent the Four Corner Property and that were covered by this ground program are as follows.

P-3000691 to P-3000693 inclusive  
P-929611, P-929612, P-932074,  
P-901327, P-932075, P-901333,  
P-901334, P-901335

Refer to figure 3 copied from MNDM Plan maps of Kenogaming, Penhorwood, Reeves and Sewell Townships for the positioning of the claims..

**PERSONNEL:**

The field crew directly responsible for the collection of all of the raw field data were as follows.


E. Jaakkola.....Timmins, Ontario  
R. Bradshaw.....Timmins, Ontario  
M. Cayen.....Timmins, Ontario  
L. Lemire.....Timmins, Ontario

The entire program was completed under the direct supervision of J.C. Grant and all of the plotting, compilation, interpretation and reports were completed by in-house staff.

**GROUND PROGRAM:**

The ground program consisted of a detailed compass, paced, flagged and GPS grid that was then covered with a total field magnetic and a VLF-EM survey. The grid consisted of a well established baseline along the township line between Reeves and Penhorwood which was done from a GPS point on the southwest corner of Chubb Lake. Once this baseline was brushed out and flagged with GPS controlled stations a detailed metric grid was started. Cross lines were turned off of this base line at 100 meter intervals and compassed, paced and flagged to various lengths, north and south of the baseline. All of the cross lines were flagged at 25 meter intervals and the north and south ends of the lines were given GPS points for later reference. In all, a total of 43.80 kilometers of cross lines and baselines were established across the property.

As the grid was being established off of the baseline, the lines were also being covered by a total field magnetic survey which was done in conjunction with a VLF-EM survey. This was done using the Scintrex Envi Magnetic and VLF-EM combination units. Specifications for this system can be found as Appendix A of this report.

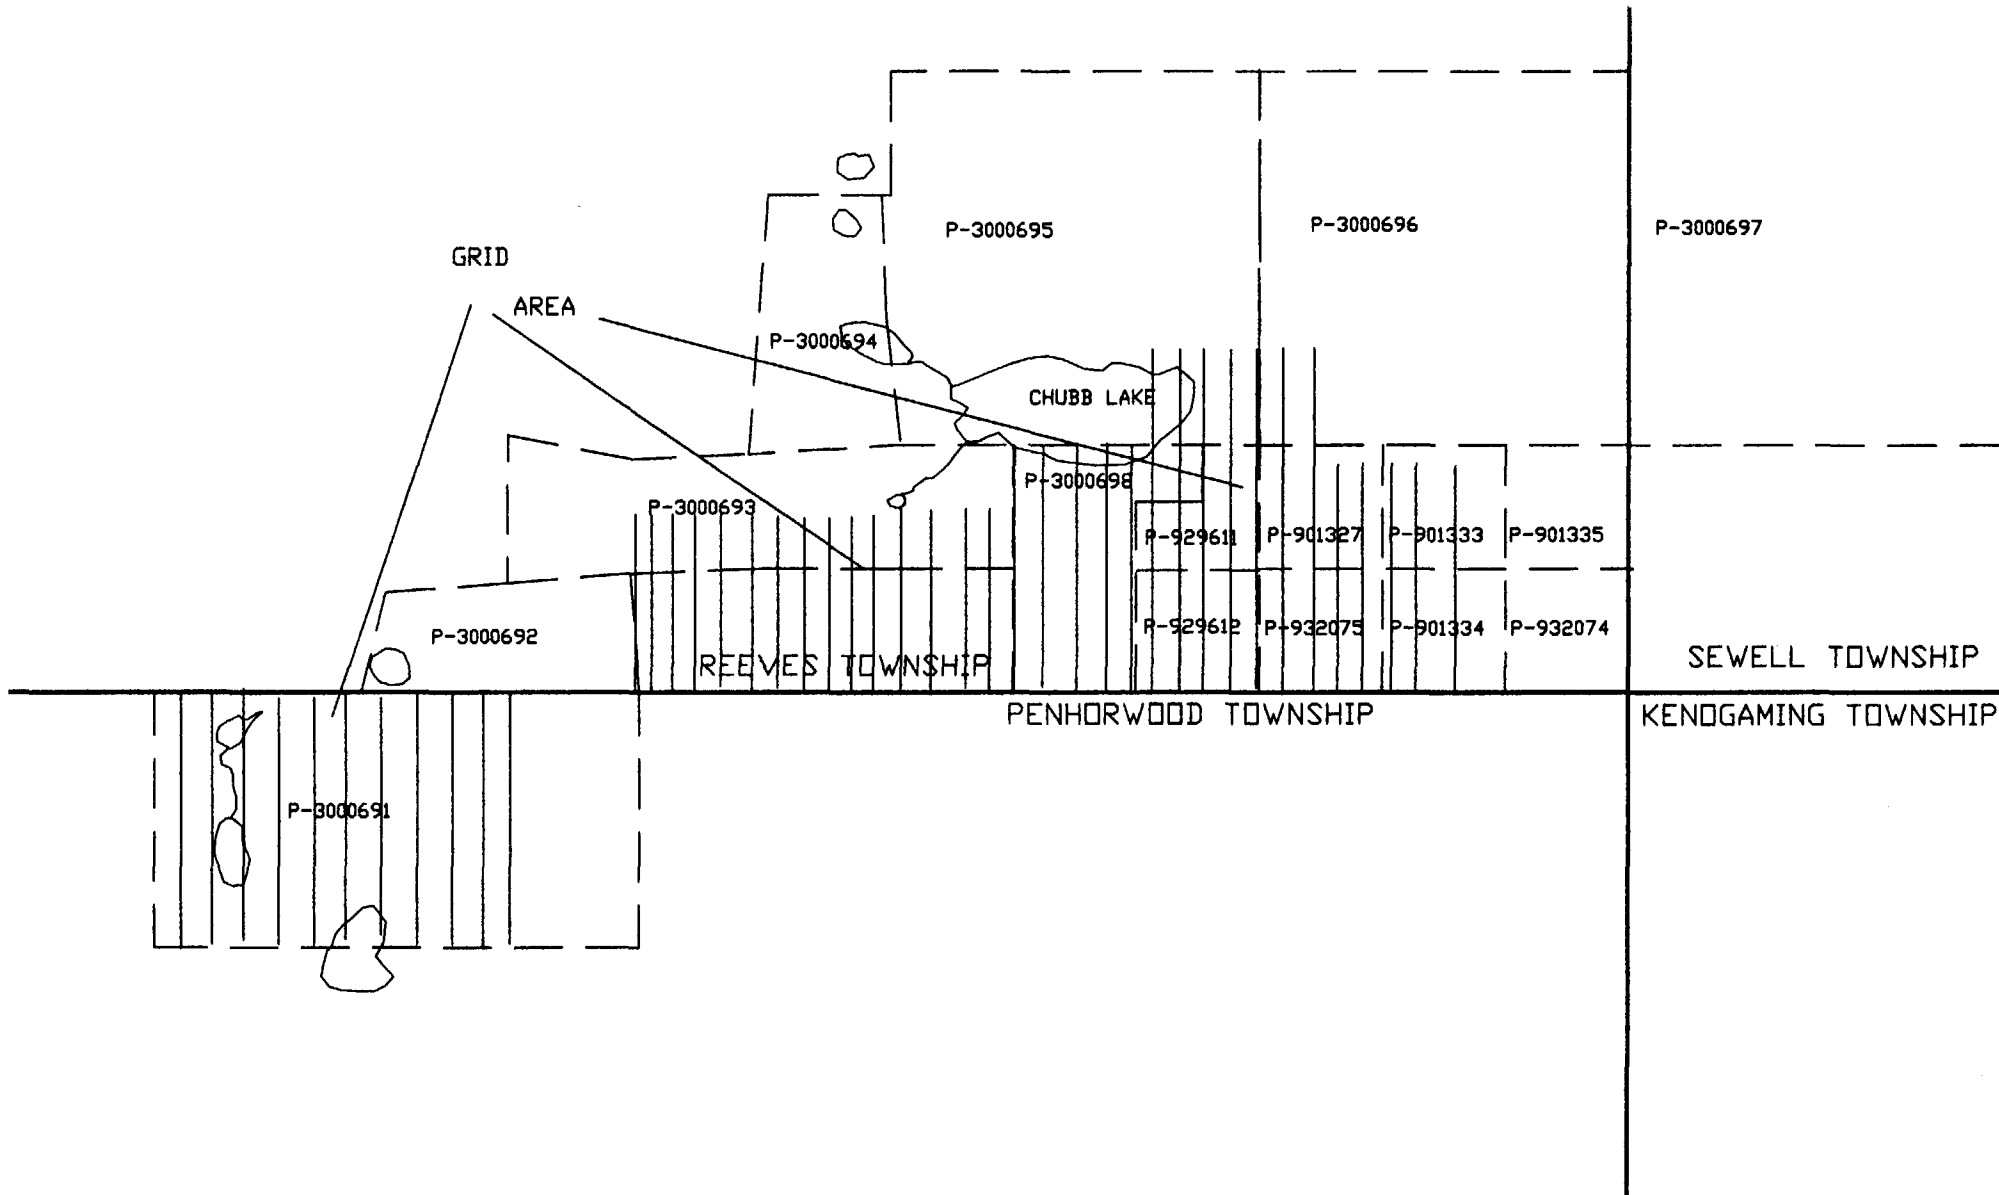

**EXSICS EXPLORATION LTD.**

P.O. Box 1880, P4N-7X1  
 Suite 13, Hollinger Bldg, Timmins Ont.  
 Telephone: 705-267-4151, 267-2424

**CLIENT: CANADIAN GOLDEN DRAGON, MAPLE MINERALS**

**PROPERTY: FOUR CORNERS PROPERTY**

**TITLE: REEVES-PENHORWOOD TOWNSHIPS**

**CLAIM SKETCH**

Fig. 3

Date: March/04

Scale: 1:20,000

NTS:

The following parameters were kept constant throughout the survey period.

**Magnetic Survey:**

Line spacing..... 100 meters  
Station spacing..... 25 meters  
Reading interval..... 25 meters  
Diurnal monitor..... Baseline looping  
Parameters measured..... Earth's total magnetic field

Upon the completion of the ground survey, the collected data was then corrected, leveled and then plotted onto a base map at a scale of 1:5,000. The data was then contoured at 40 gamma intervals where ever possible. A color copy of the contoured magnetic map is included in the back pocket of this report.

**VLF-EM Survey:**

Line spacing..... 100 meters  
Station spacing..... 25 meters  
Reading intervals..... 25 meters  
Transmitter station..... Seattle Washington, 24.8khz  
Transmitter reference angle... . Approximately azimuth 268 degrees  
Parameters measured..... In phase and quadrature components, field strength, tilt angle  
Parameters plotted..... In phase component.

Once this survey was completed, the collected In phase data was then plotted directly onto a base map at a scale of 1:5000 and then the data was profiled at 1cm to +/- 20 %. Any and all conductor axis were then placed on the base map and labeled for interpretation. A copy of this profiled base map is included in the back pocket of this report.

**SURVEY RESULTS:**

**Magnetic Survey:**

The magnetic survey was successful in outlining several northwest-southeast striking cross structures that most probably relate to diabase dike like features.



These dikes were noted paralleling line 2800MW of the grid, generally striking northwest across lines 700MW to and including the northern section of line 1100MW, again striking northwest across line 200ME to and including line 100MW, a parallel dike striking across line 500ME to line 400ME and lastly striking northwest from line 1700ME to and including line 1100ME. The dikes mainly show up as bulls eye type magnetic highs.

The magnetic high covering line 2800MW and protruding across the north ends of lines 2700MW to and including line 2000MW may in fact relate to an ultramafic intrusive.

#### **VLF-EM Survey:**

The VLF-EM survey was also successful in locating a number of conductive zones scattered across the grid. The more predominant features will be discussed separately and in detail along with any magnetic correlation.

The first EM zone can be traced from line 2800MW/175MS to line 2200MW/125MS where it appears to have been faulted and or shifted south where it continues across lines 2100MW/225MS to and including 800MW/135MS. This zone is a well defined VLF target that correlate to a magnetic high along it's western section and a magnetic low along its eastern section. There may be evidence of minor shearing and or faulting in the vicinity of line 2000MW that caused the southern shift in the zone.

This zone appear to continue off of the grid in both directions.

A second well defined VLF zone can be followed from line 2800MW to and including line 1600MW at about 600MS and it also appears to continue off of the grid in both directions. There does not appear to be any definite magnetic correlation with the zone except for a modest, narrow magnetic high just to the south of the western section.

A third VLF zone can be traced from line 2500MW to line 2200MW and lies along the northern edge of a magnetic high unit which may be indicative of the intrusive. The zone may represent a contact zone.

Another VLF zone can be followed, albeit somewhat distorted, from line 1400MW/325MN to and including line 100MW/350MN. There does not appear to be any definite magnetic correlation with the strike of the zone except for that portion that strikes across line 1000MW to and including 800MW. This portion of the zone has a good magnetic high association. The offset in the zone between lines 1100MW and 900MW is due to the cross cutting dike like feature striking northwest across the grid.

Another well defined and strong VLF zone can be traced from line 100ME/400MN to and including line 900ME/225MN at which point it appears to shift to the north and continue from line 1000ME/300MN to line 1500ME/225MN. This zone has a very good magnetic high associated with most of its strike length and the northern shift in the strike of the zone relates to another cross cutting dike in the vicinity of line 800ME or 900ME.

Another VLF zone strikes eastward out of Chubb Lake and strikes across lines 500ME to and including 1000ME/1025MN. There does not appear to be any direct magnetic association with this zone. The eastern edge of the zone appears to terminate at the northwest striking dike that cuts across this section of the grid.

A final zone of note is the short VLF target striking across lines 1000ME/975MN to 1200ME/1000MN that has direct magnetic high correlation that appears to emanate from the cross cutting dike. This is a well defined zone that continues off of the grid to the east.

There are several other short VLF zones that are scattered across the property but were not entirely discussed at this time. The above mentioned zones are the more predominant zones at this writing.

#### **CONCLUSIONS AND RECOMMENDATIONS:**

The magnetic and VLF-EM zones were successful in locating and outlining a number of conductive zones across the property. The majority of the VLF zones generally parallel the expected strikes of the underlying geology. The magnetics were able to locate and outline a number of the expected northwest-southeast striking dike like features that cross cut the grid and in some cases offset the strike of the VLF zones.


Both survey methods are good geological mapping tools as well and both surveys did enhance the viability of the airborne targets that had been detected. One must keep in mind that the VLF-EM survey is also susceptible to a number of responses, those being, conductive overburden layering, shorelines, swamp to outcrop contacts, geological contacts, shears, faults and of course electromagnetic conductive horizons. Therefore, one must be cautious when using just these surveys to describe the conductive zones as well as deciding on drill targets based on just these surveys.

The area has a history of gold showings and therefore all conductive zones should be followed up to their fullest potentials.

A follow up program of detailed line cutting, mapping and or soil sampling should be considered along with a detailed HLEM and or Induced Polarization survey to better define the potential of each of the VLF zones.

Respectfully submitted:

J. C. Grant, CET, FGAC  
March, 2004



---

---

**CERTIFICATION**

I, John Charles Grant, of 108 Kay Crescent, in the City of Timmins, Province of Ontario, hereby certify that:

- 1). I am a graduate of Cambrian College of Applied Arts and Technology, 1975, Sudbury Ontario Campus, with an Honors Diploma in Geological and Geophysical Technology.
- 2). I have worked subsequently as an Exploration Geophysicist for Teck Exploration Limited, (5 years), and currently as Exploration Manager and Geophysicist for Exsics Exploration Limited, since 1980.
- 3). I am a member in good standing of the Certified Engineering Technologist Association, (CET), since 1984
- 4). I am a Fellow of the Geological Association of Canada, (FGAC), since 1986.
- 5). I have been actively engaged in my profession since the 15<sup>th</sup> of May of 1975, in all aspects of ground exploration programs, including the planning and execution of field programs, project supervision, data compilation, interpretations and reports.
- 6). I have no specific or special interest in the herein described property. I have been retained by the property holders and or their Agent as a Geophysical Consultant and Contract Manager.

John Charles Grant, CET., FGAC.



APPENDIX A

# SCINTREX

## ENVI-MAG Environmental Magnetometer/Gradiometer

### Locating Buried Drums and Tanks?

The ENVI-MAG is the solution to this environmental problem. ENVI-MAG is an inexpensive, lightweight, portable "WALKMAG" which enables you to survey large areas quickly and accurately.

ENVI-MAG is a portable, proton precession magnetometer and/or gradiometer, for geotechnical, archaeological and environmental applications where high production, fast count rate and high sensitivity are required. It may also be used for other applications, such as mineral exploration, and may be configured as a total-field magnetometer, a vertical gradiometer or as a base station.

#### The ENVI-MAG

- easily detects buried drums to depths of 10 feet or more
- more sensitive to the steel of a buried drum than EM or radar
- much less expensive than EM or radar
- survey productivity much higher than with EM or radar

### Features and Benefits

#### "WALKMAG" Magnetometer/Gradiometer

The "WALKMAG" mode of operation (sometimes known as "Walking Mag") is user-selectable from the keyboard. In this mode, data is acquired and recorded at the rate of 2 readings per second as the operator walks at a steady pace along a line. At desired intervals, the operator "triggers" an event marker by a single key stroke, assigning coordinates to the recorded data.

#### True Simultaneous Gradiometer

An optional upgrade kit is available to configure ENVI-MAG as a gradiometer to make true, simultaneous gradiometer measurements. Gradiometry is useful for geotechnical and archaeological surveys where small near surface magnetic targets are the object of the survey.

#### Selectable Sampling Rates

.5 second, 1 second and 2 second reading rates user selectable from the keyboard.

#### Main features include:

- select sampling rates as fast as 2 times per second
- "WALKMAG" mode for rapid acquisition of data
- large internal, expandable memory
- easy to read, large LCD screen displays data both numerically and graphically
- ENVIMAP software for processing and mapping data

ENVI-MAG comprises several basic modules; a lightweight console with a large screen alphanumeric display and high capacity memory, a staff mounted sensor and sensor cable, rechargeable battery and battery charger, RS-232 cable and ENVIMAP processing and mapping software.

For gradiometry applications an upgrade kit is available, comprising an additional processor module for installation in the console, and a second sensor with a staff extender.




ENVI-MAG Proton Magnetometer in operation

For base station applications a Base Station Accessory Kit is available so that the sensor and staff may be converted into a base station sensor.

#### Large-Key Keypad

The large-key keypad allows easy access for gloved-hands in cold-weather operations. Each key has a multi-purpose function.

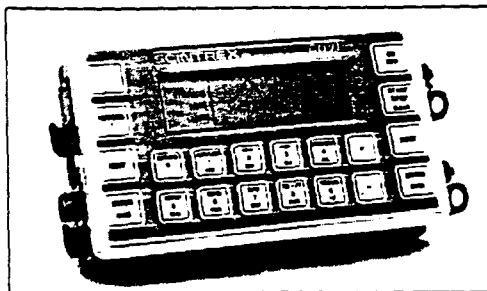

Front panel of ENVI-MAG showing a graphic profile of data and large-key keypad

#### Large Capacity Memory

ENVI-MAG with standard memory stores up to 28,000 readings of total field measurements, 21,000 readings of gradiometry data or 151,000 readings as a base station. An expanded memory option is available which increases this standard capacity by a factor of 5.

#### Easy Review of Data

For quality of data and for a rapid analysis of the magnetic characteristics of the survey line, several modes of review are possible. These include the measurements at the last four stations, the ability to scroll through any or all previous readings in memory, and a graphic display of the previous data as profiles, line by line. This feature is very useful for environmental and archaeological surveys.

#### Highly Productive

The "WALKMAG" mode of operation acquires data rapidly at close station intervals, ensuring high-definition results. This increases survey productivity by a factor of 5 when compared to a conventional magnetometer survey.


#### "Datacheck" Quality Control of Data

"Datacheck" provides a feature wherein at the end of each survey line, data may be reviewed as a profile on ENVI-MAG's screen. Datacheck confirms that the instrument is functioning correctly and

allows the user to note the magnetic relief (anomaly) on the line.

### Large Screen Display


"Super-Twist" 64 x 240 dot (8 lines x 40 characters), LCD graphic screen provides good visibility in all light conditions. A display heater is optionally available for low-temperature operations below 0°C.

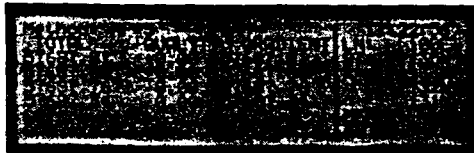

Close-up of the ENVI-MAG screen showing data presented after each reading

### Interactive Menus

The set-up of ENVI-MAG is menu-driven, and minimizes the operator's learning time, and on-going tasks.

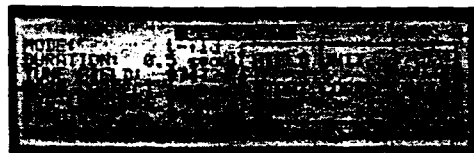

Close-up of display of ENVI-MAG showing interactive set-up menu

### Rechargeable Battery and Battery Charger

An "off-the-shelf" lead-acid battery and charger are provided as standard. The low-cost "Camcorder" type battery is available from electronic parts distributors everywhere.

### HELP-Line Available

Purchasers of ENVI-MAG are provided with a HELP-Line telephone number to call in the event assistance is needed with an application or instrumentation problem.

### ENVIMAP Processing and Mapping Software

Supplied with ENVI-MAG, and custom designed for this purpose, is easy-to-use, very user-friendly, menu driven data processing and mapping software called ENVIMAP. This unique software appears to the user to be a single program, but is in fact a sequence of separate programs, each performing a specific task. Under the menu system, there are separate programs to do the following:

- read the ENVI-MAG data and reformat it into a standard compatible with the ENVIMAP software
- grid the data into a standard grid format
- create a vector file of posted values

with line and baseline identification that allows the user to add some title information and build a suitable surround

- contour the gridded data
- autoscale the combined results of the posting/surround step and the contouring step to fit on a standard 8.5 ins. wide dot-matrix printer
- rasterize and output the results of step e) to the printer

ENVIMAP is designed to be as simple as possible. The user is required to answer a few basic questions asked by ENVIMAP, and then simply toggles "GO" to let ENVIMAP provide default parameters for the making of the contour map. The user can modify certain characteristics of the output plot. ENVIMAP'S menu system is both keyboard and mouse operable. HELP screens are integrated with the menu system so that HELP is displayed whenever the user requests it.

### Options Available

- True simultaneous gradiometer upgrade
- Base station upgrade
- Display heater for low temperature operations
- External battery pouch

## Specifications

### Total Field Operating Range

20,000 to 100,000 nT (gammas)

### Total Field Absolute Accuracy

+/- 1nT

### Sensitivity

0.1 nT at 2 second sampling rate

### Tuning

Fully solid state. Manual or automatic, keyboard selectable

### Cycling (Reading) Rates

0.5, 1 or 2 seconds, up to 9999 seconds for base station applications, keyboard selectable

### Gradiometer Option

Includes a second sensor, 20 inch (1/2m) staff extender and processor module

### "WALKMAG" Mode

0.5 second for walking surveys, variable rates for hilly terrain

### Digital Display

LCD "Super Twist", 240 x 64 dots graphics, 8 line x 40 characters alphanumeric

### Display Heater

Thermostatically controlled, for cold weather operations

### Keyboard Input

17 keys, dual function, membrane type

### Notebook Function

32 characters, 5 user-defined MACRO's for quick entry

### Standard Memory

Total Field Measurements: 28,000 readings  
Gradiometer Measurements: 21,000 readings  
Base Station Measurements: 151,000 readings

### Expanded Memory

Total Field Measurements: 140,000 readings  
Gradiometer Measurements: 109,000 readings  
Base Station Measurements: 750,000 readings

### Real-Time Clock

Records full date, hours, minutes and seconds with 1 second resolution, +/- 1 second stability over 12 hours

### Digital Data Output

RS-232C interface, 600 to 57,600 Baud, 7 or 8 data bits, 1 start, 1 stop bit, no parity format. Selectable carriage return delay (0-999 ms) to accommodate slow peripherals. Handshaking is done by X-on/X-off

### Analog Output

0 - 999 mV full scale output voltage with keyboard selectable range of 1, 10, 100, 1,000 or 10,000 nT full scale

### Power Supply

Rechargeable "Camcorder" type, 2.3 Ah, Lead-acid battery.

12 Volts at 0.65 Amp for magnetometer, 1.2 Amp for gradiometer,

External 12 Volt input for base station operations

Optional external battery pouch for cold weather operations

### Battery Charger

110 Volt - 230 Volt, 50/60 Hz

### Operating Temperature Range

Standard 0° to 60°C

Optional -40°C to 60°C

### Dimensions

Console - 10 x 6 x 2.25 inches  
(250 mm x 152 mm x 55 mm)

T.F. sensor - 2.75 inches dia. x 7 inches  
(70 mm x 175 mm)

Grad. sensor and staff extender - 2.75 inches dia. x 26.5 inches (70 mm x 675 mm)

T.F. staff - 1 inch dia. x 76 inches (25 mm x 2 m)

### Weight

Console - 5.4 lbs (2.45 kg)  
with rechargeable battery

T. F. sensor - 2.2 lbs (1.15 kg)

Grad. sensor - 2.5 lbs (1.15 kg)

Staff - 1.75 lbs (0.8 kg)

# SCINTREX

### Head Office

222 Snidercroft Road  
Concord, Ontario, Canada L4K 1B5  
Telephone: (905) 669-2280  
Fax: (905) 669-6403 or 669-5132  
Telex: 06-964570

### In the USA:

Scintrex Inc.  
85 River Rock Drive  
Unit 202  
Buffalo, NY 14207  
Telephone: (716) 298-1219  
Fax: (716) 298-1317

## Work Report Summary

Transaction No: W0460.00537 Status: APPROVED  
 Recording Date: 2004-APR-05 Work Done from: 2004-MAR-16  
 Approval Date: 2004-APR-16 to: 2004-APR-04

Client(s):  
 137052 MAPLE MINERALS CORP.  
 137526 CANADIAN GOLDEN DRAGON RESOURCES LTD.

Survey Type(s):  
 LC MAG VLF

**Work Report Details:**

Claim#	Perform	Perform Approve	Applied	Applied Approve	Assign	Assign Approve	Reserve	Reserve Approve	Due Date
P 901327	\$1,463	\$1,463	\$0	\$0	\$1,463	1,463	\$0	\$0	2004-AUG-15
P 901334	\$1,463	\$1,463	\$0	\$0	\$0	0	\$1,463	\$1,463	2004-AUG-15
P 901335	\$1,463	\$1,463	\$0	\$0	\$0	0	\$1,463	\$1,463	2004-AUG-15
P 929611	\$1,463	\$1,463	\$0	\$0	\$1,463	1,463	\$0	\$0	2004-AUG-19
P 929612	\$1,463	\$1,463	\$0	\$0	\$1,463	1,463	\$0	\$0	2004-AUG-19
P 932075	\$1,463	\$1,463	\$0	\$0	\$737	737	\$726	\$726	2004-JUN-24
P 3000691	\$6,804	\$6,804	\$3,200	\$3,200	\$3,604	3,604	\$0	\$0	2005-APR-10
P 3000692	\$848	\$848	\$800	\$800	\$48	48	\$0	\$0	2005-APR-10
P 3000693	\$2,230	\$2,230	\$1,600	\$1,600	\$630	630	\$0	\$0	2005-APR-10
P 3000694	\$0	\$0	\$800	\$800	\$0	0	\$0	\$0	2005-APR-10
P 3000695	\$1,062	\$1,062	\$3,600	\$3,600	\$0	0	\$0	\$0	2006-APR-10
P 3000696	\$530	\$530	\$3,600	\$3,600	\$0	0	\$0	\$0	2006-APR-10
P 3000697	\$0	\$0	\$4,800	\$4,800	\$0	0	\$0	\$0	2006-APR-10
P 3000698	\$3,000	\$3,000	\$1,200	\$1,200	\$1,800	1,800	\$0	\$0	2005-APR-10
	<b>\$23,252</b>	<b>\$23,252</b>	<b>\$19,600</b>	<b>\$19,600</b>	<b>\$11,208</b>	<b>\$11,208</b>	<b>\$3,652</b>	<b>\$3,652</b>	

External Credits: \$0

Reserve:  
 \$3,652 Reserve of Work Report#: W0460.00537  


---

 \$3,652 Total Remaining

Status of claim is based on information currently on record.





Date: 2004-APR-22

GEOSCIENCE ASSESSMENT OFFICE  
933 RAMSEY LAKE ROAD, 6th FLOOR  
SUDBURY, ONTARIO  
P3E 6B5

CANADIAN GOLDEN DRAGON RESOURCES LTD.  
500-20 MAUD ST.,  
TORONTO, ONTARIO  
M5V 2M5 CANADA

Tel: (888) 415-9845  
Fax: (877) 670-1555

**Submission Number:** 2.27467  
**Transaction Number(s):** W0460.00537

Dear Sir or Madam

**Subject: Approval of Assessment Work**

We have approved your Assessment Work Submission with the above noted Transaction Number(s). The attached Work Report Summary indicates the results of the approval.

At the discretion of the Ministry, the assessment work performed on the mining lands noted in this work report may be subject to inspection and/or investigation at any time.

If you have any question regarding this correspondence, please contact STEVEN BENETEAU by email at [steve.beneteau@ndm.gov.on.ca](mailto:steve.beneteau@ndm.gov.on.ca) or by phone at (705) 670-5855.

Yours Sincerely,



Ron C. Gashinski  
Senior Manager, Mining Lands Section

**Cc:** Resident Geologist


Maple Minerals Corp.  
(Claim Holder)

Canadian Golden Dragon Resources Ltd.  
(Assessment Office)

Assessment File Library

Canadian Golden Dragon Resources Ltd.  
(Claim Holder)

John Charles Grant  
(Agent)



42B01NE2016 2.27467 SEWELL

200

ONTARIO  
CANADA

MINISTRY OF NORTHERN  
DEVELOPMENT AND MINES  
PROVINCIAL MINING  
RECORDERS' OFFICE

Mining Land Tenure  
Map

Date / Time of Issue: Thu Apr 29 14:14:11 EDT 2004


TOWNSHIP / AREA  
REEVES

PLAN  
G-1206

ADMINISTRATIVE DISTRICTS / DIVISIONS

Mining Division  
Land Titles/Registry Division  
Ministry of Natural Resources District

Porcupine  
SUDBURY  
TIMMINS


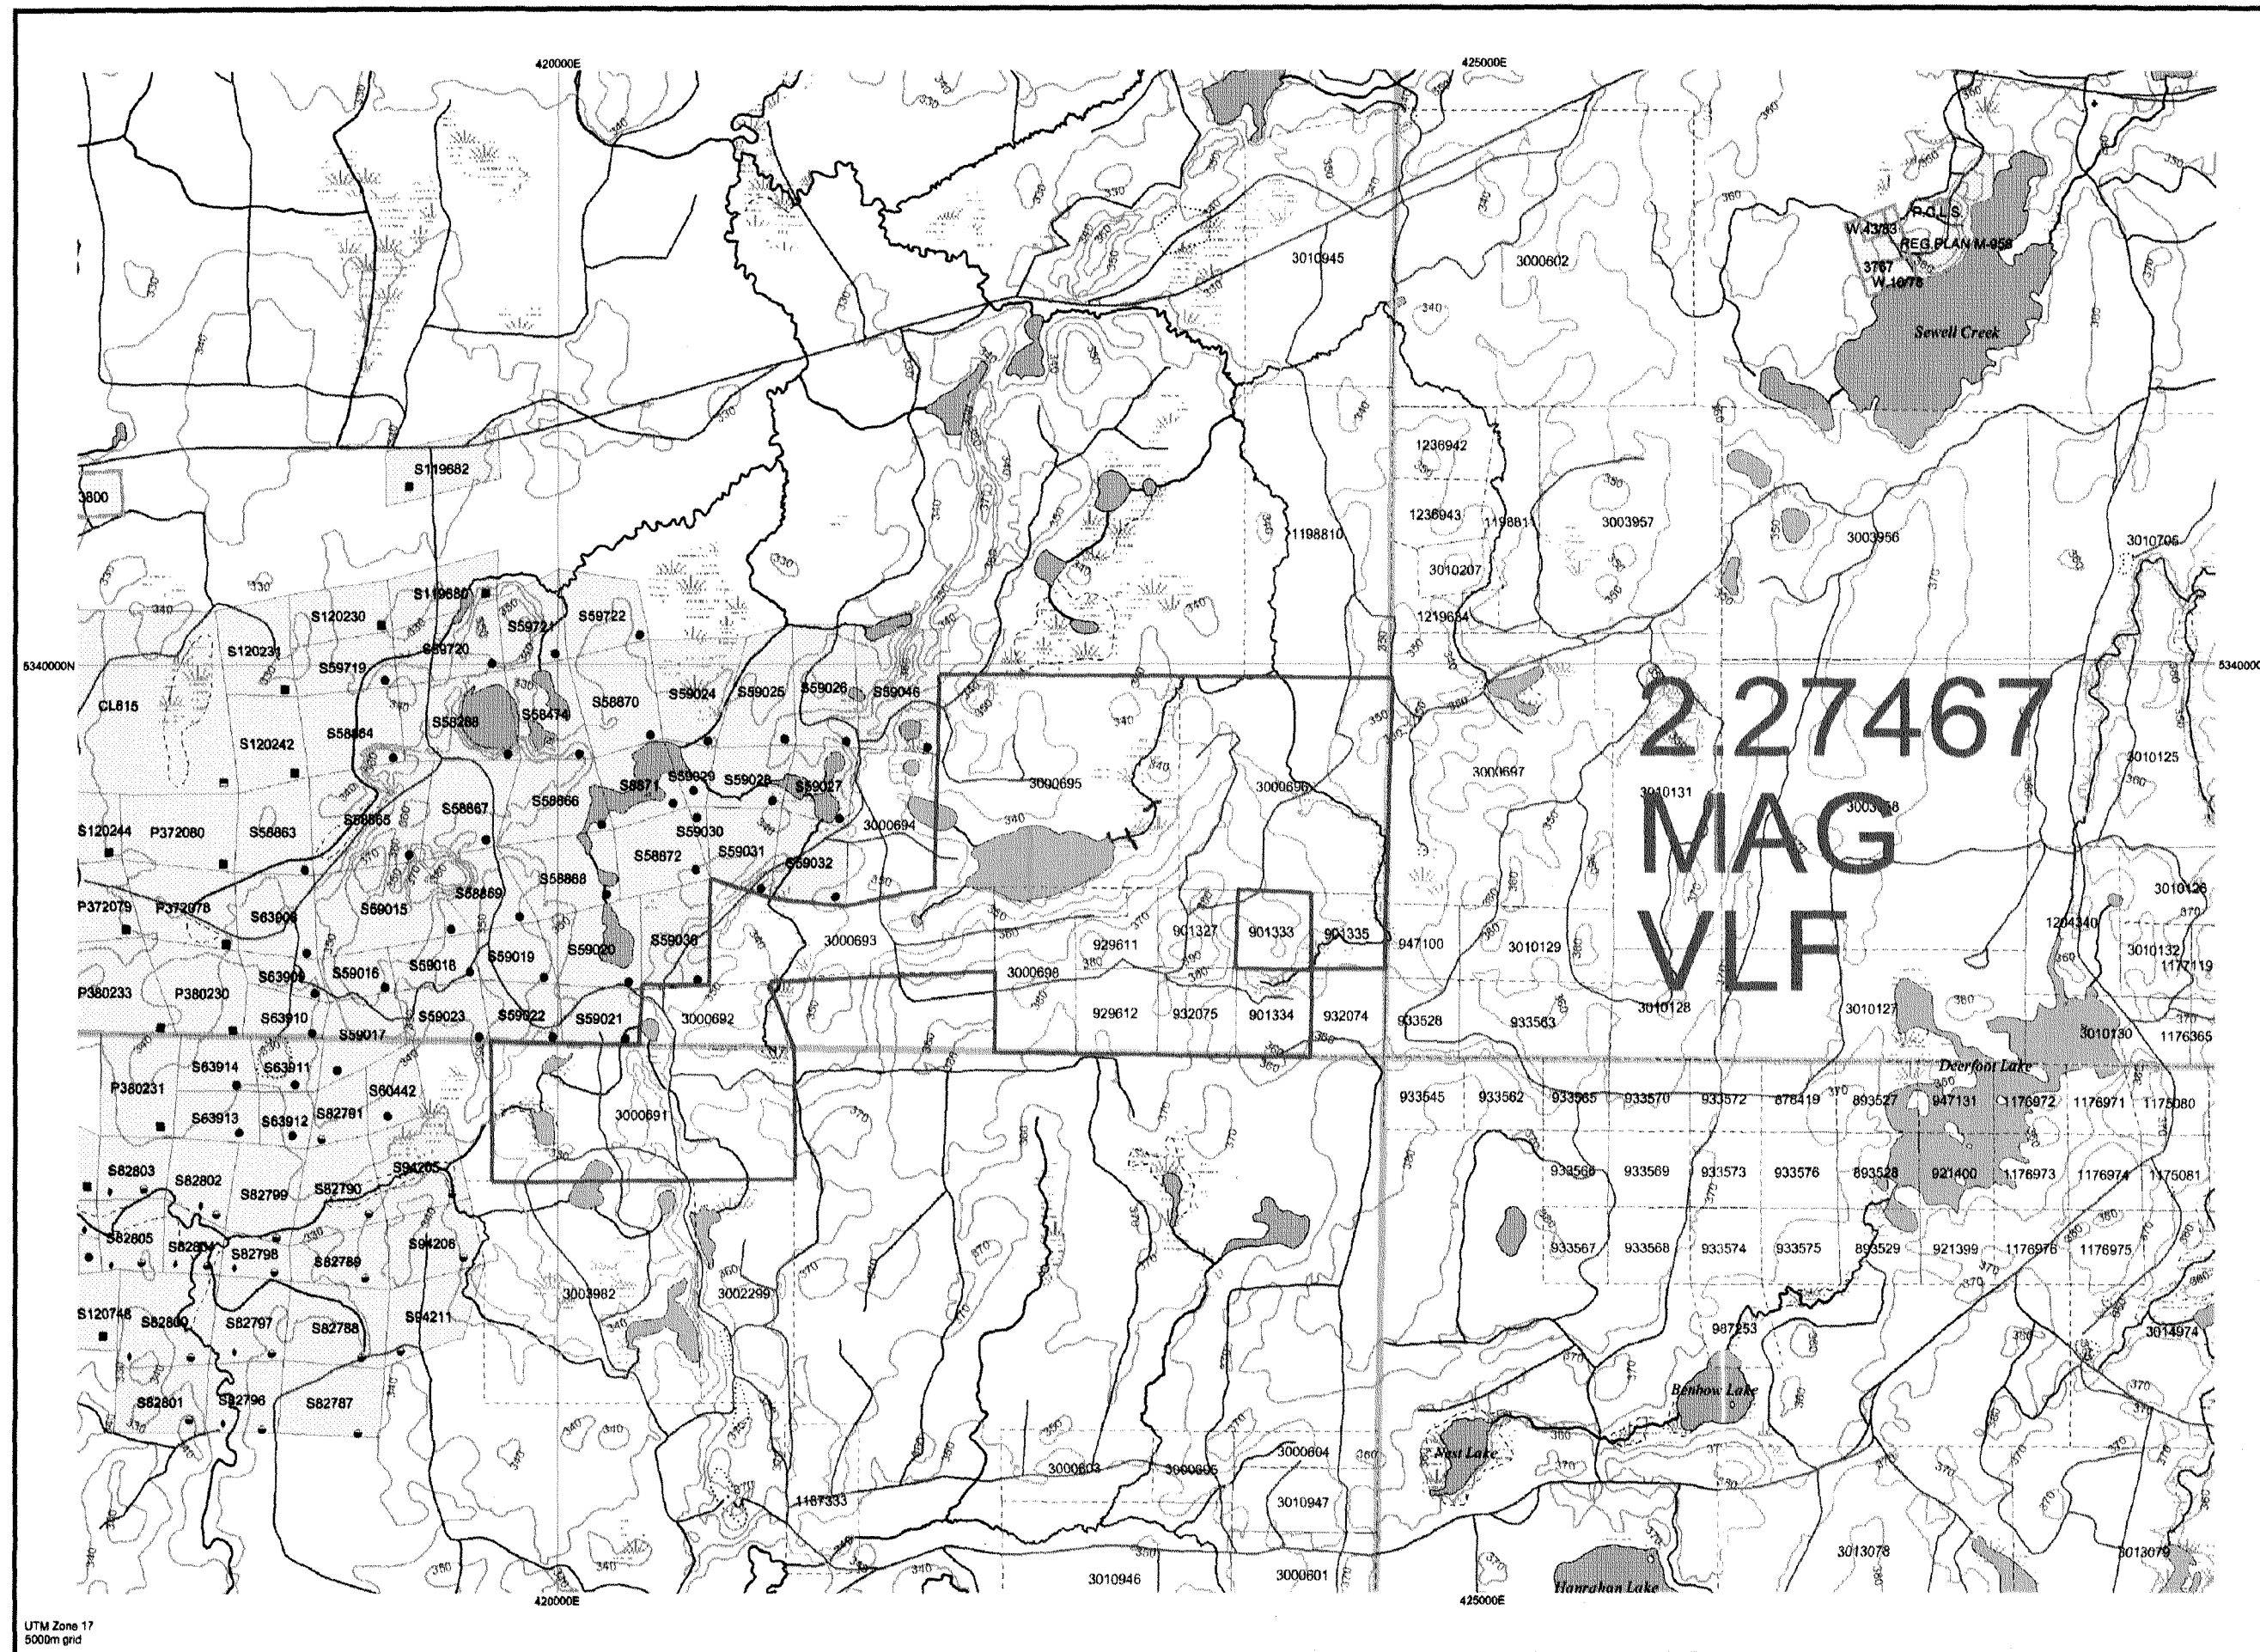


TOPOGRAPHIC

- Administrative Boundaries
- Township
- Concession Lot
- Provincial Park
- Indian Reserve
- Cliff, Pit & Pile
- Contour
- Mine Shafts
- Mine Headframe
- Railway
- Road
- Trail
- Natural Gas Pipeline
- Utilities
- Tower

Land Tenure

- Freehold Patent**
  - Surface And Mining Rights
  - Surface Rights Only
  - Mining Rights Only
- Leasehold Patent**
  - Surface And Mining Rights
  - Surface Rights Only
  - Mining Rights Only
- Licence of Occupation**
  - Uses Not Specified
  - Surface And Mining Rights
  - Surface Rights Only
  - Mining Rights Only
  - Land Use Permit
  - Order In Council (Not open for staking)
  - Water Power Lease Agreement
- Mining Claims**
  - Mining Claim
  - Fled Only Mining Claims
- LAND TENURE WITHDRAWALS**
  - Areas Withdrawn from Disposition
  - Mining Acts Withdrawal Types**
    - Surface And Mining Rights Withdrawn
    - Surface Rights Only Withdrawn
    - Mining Rights Only Withdrawn
    - Order In Council Withdrawal Types
      - Surface And Mining Rights Withdrawn
      - Surface Rights Only Withdrawn
      - Mining Rights Only Withdrawn
  - IMPORTANT NOTICES

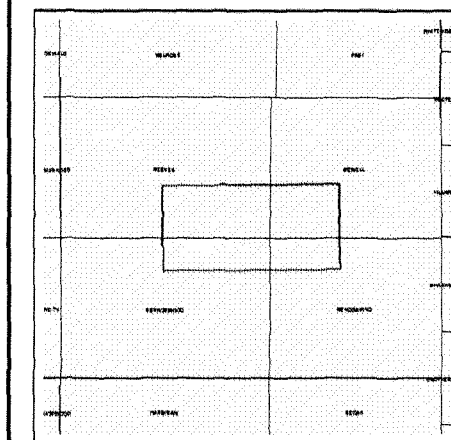

LAND TENURE WITHDRAWAL DESCRIPTIONS

Identifier	Type	Date	Description
3767	Wsm	Jan 1, 2001	DUMP ATTENUATION ZONE
3800	Wsm	Jan 1, 2001	W.48/72 JULY 27/72 S.R. + M.R. SEC. 43 OF THE MINING ACT R.S.O. (SEED ORCHARD) (#313)
W.10/78	Ws	Jan 1, 1980	SEC. 43/70 W.10/78 14/1/78 S.R.O. 135748
W.43/83	Wsm	Aug 14, 1983	SEC. 36/60 W.43/83 14/8/83 S.R. + M.R.
W-LL-P1569	Wsm	Aug 29, 2002	<a href="http://www.mndm.gov.on.ca/MNDM/MINES/LANDS/ll/weg/horaaet/2002orders/ollaug/wp1569.htm">http://www.mndm.gov.on.ca/MNDM/MINES/LANDS/ll/weg/horaaet/2002orders/ollaug/wp1569.htm</a> LL-P1569 ONT M&S withdrawal S.35 Mining Act RSO 1999, 29/08/02 Boundary generally depicts area withdrawn. Click to view actual area w/c/a/.

Those wishing to stake mining claims should consult with the Provincial Mining Recorders' Office of the Ministry of Northern Development and Mines for additional information on the status of the lands shown hereon. This map is not intended for navigational, survey, or land title determination purposes as the information shown on this map is compiled from various sources. Completeness and accuracy are not guaranteed. Additional information may also be obtained through the local Land Titles or Registry Office, or the Ministry of Natural Resources.

The information shown is derived from digital data available in the Provincial Mining Recorders' Office at the time of downloading from the Ministry of Northern Development and Mines web site.

General Information and Limitations



Contact Information:  
Provincial Mining Recorders' Office  
Wilket Green Miller Centre 933 Ramsey Lake Road  
Sudbury ON P3E 6B5  
Home Page: [www.mndm.gov.on.ca/MNDM/MINES/LANDS/mismnpgs.htm](http://www.mndm.gov.on.ca/MNDM/MINES/LANDS/mismnpgs.htm)

Toll Free  
Tel: 1 (888) 415-9845 ext 5782  
Fax: 1 (877) 670-1444

Map Datum: NAD 83  
Projection: UTM (6 degree)  
Topographic Data Source: Land Information Ontario  
Mining Land Tenure Source: Provincial Mining Recorders' Office


This map may not show unregistered land tenure and interests in land including certain patents, leases, easements, right of ways, flooding rights, licences, or other forms of disposition of rights and interest from the Crown. Also certain land tenure and land uses that restrict or prohibit free entry to stake mining claims may not be illustrated.



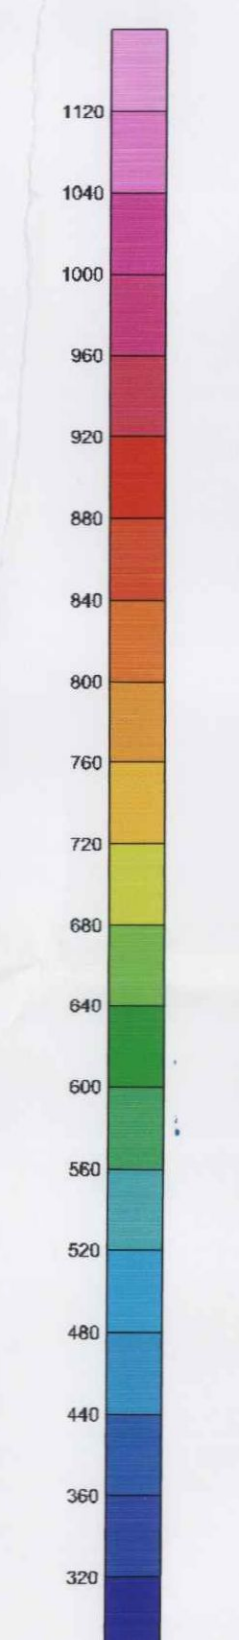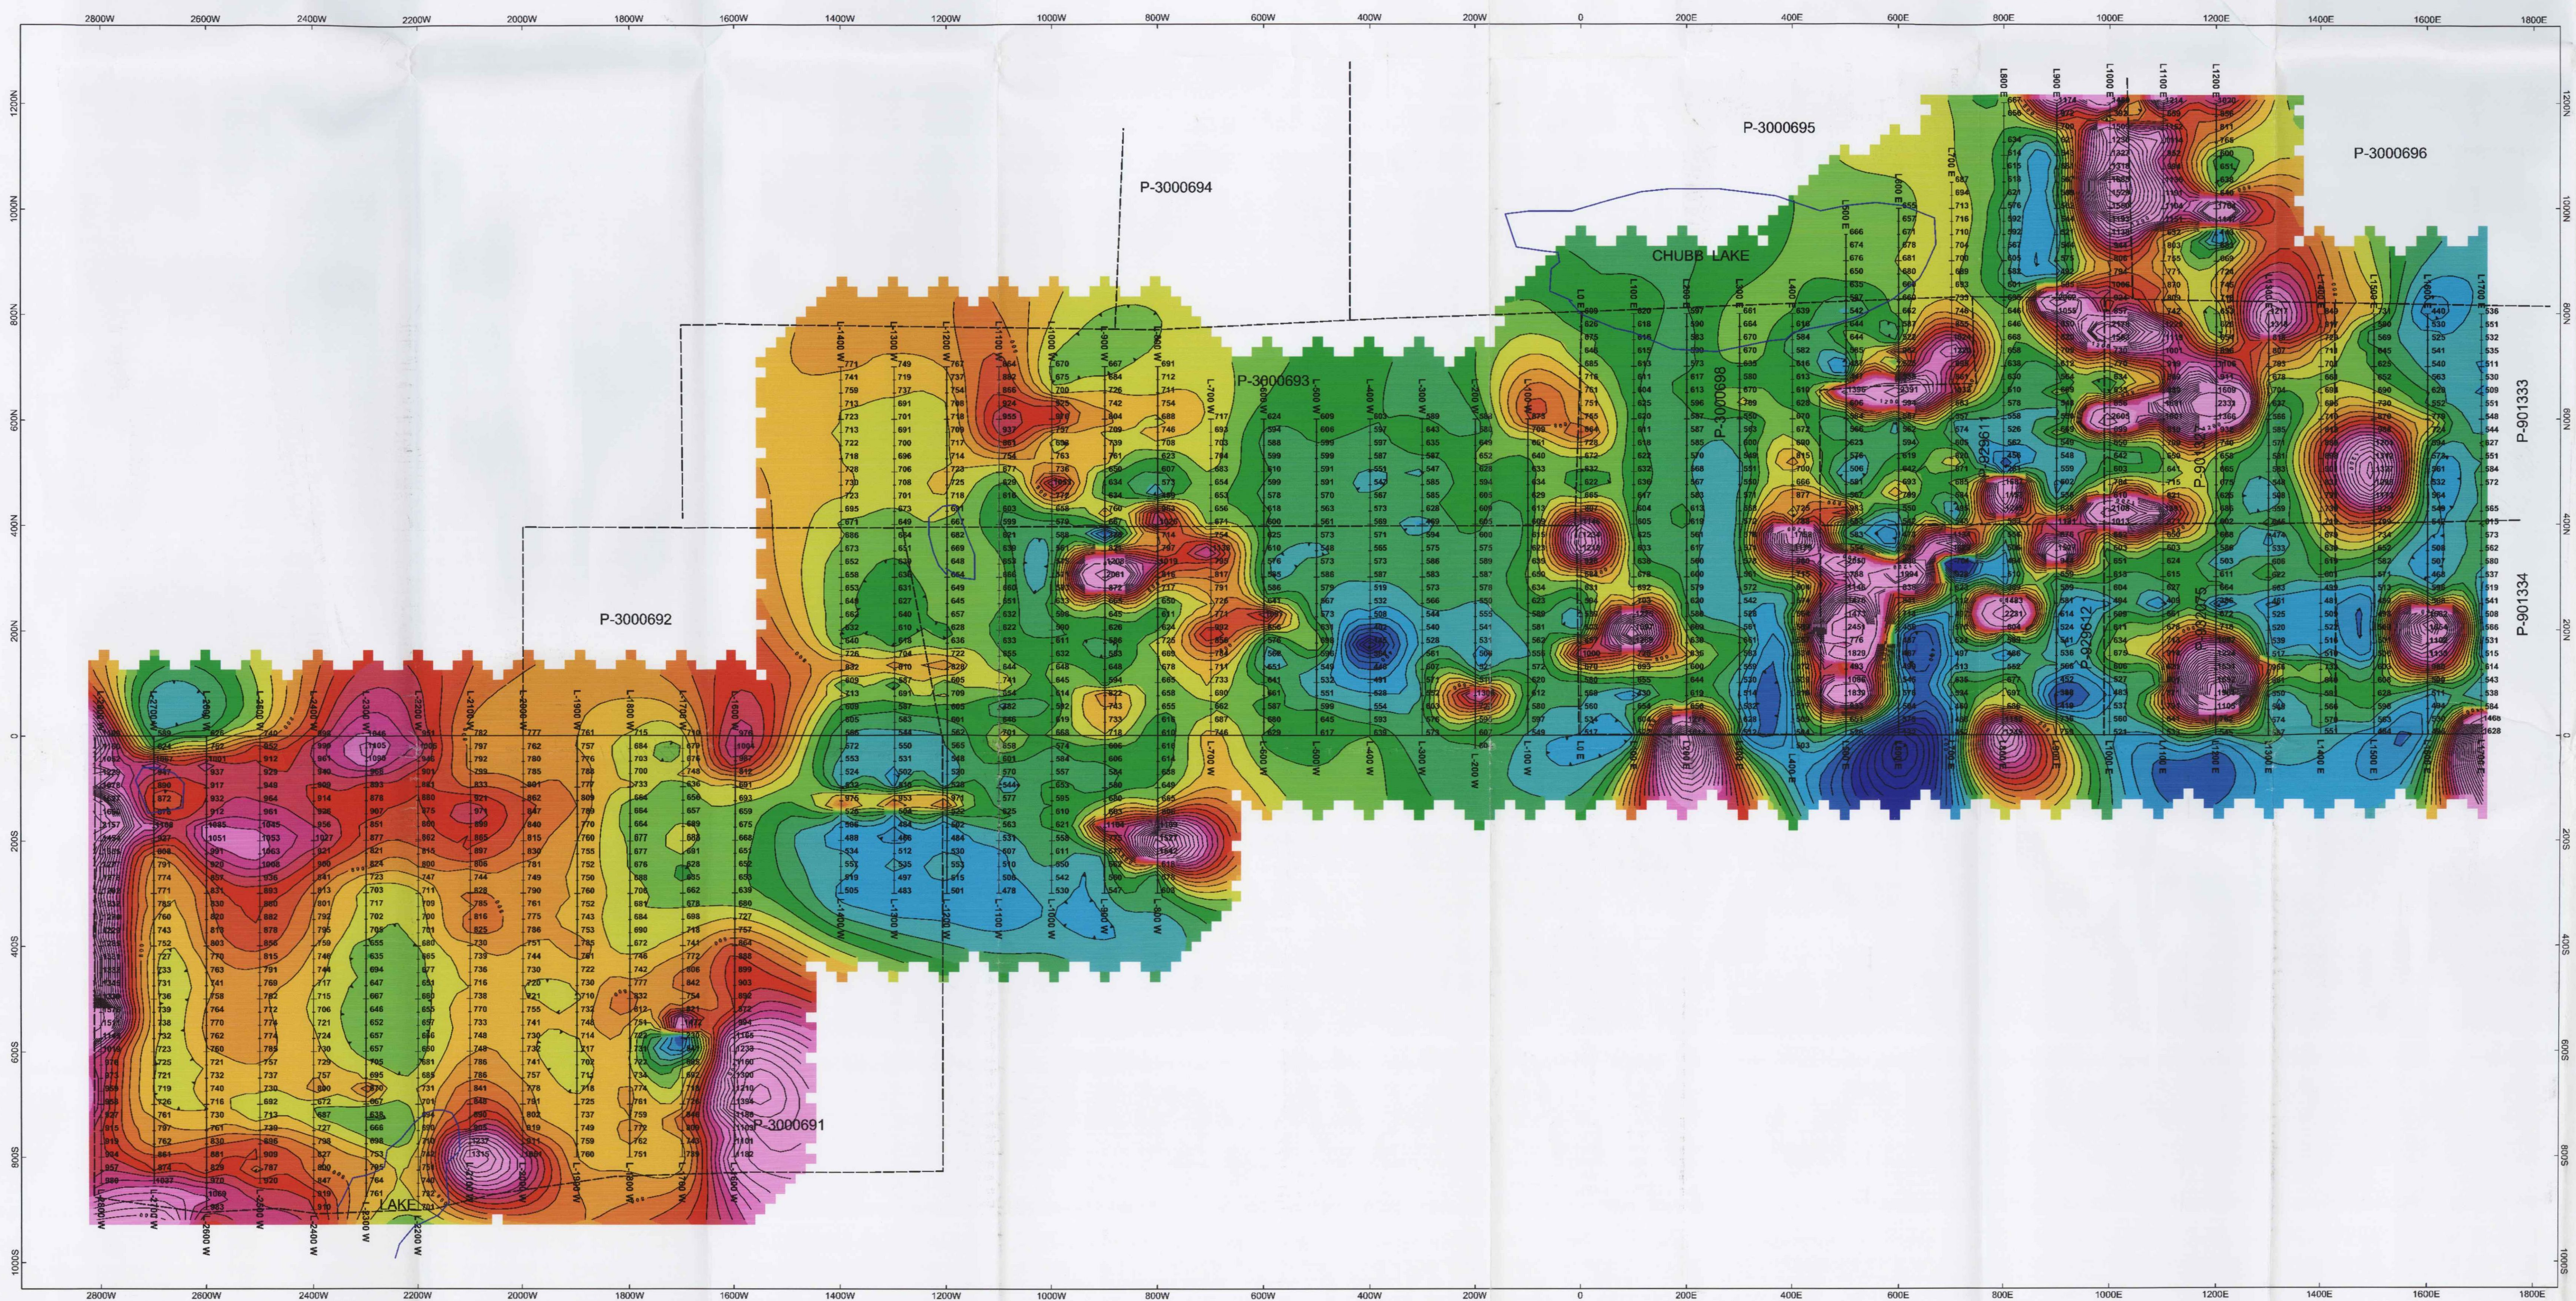


TOTAL FIELD MAGNETIC  
BASE 56500nT

2.27467  
2.27467



CANADIAN GOLDEN DRAGON/MAPLE MINERALS  
 FOUR CORNERS PROPERTY  
 REEVES, KENOGAMING, PENHORWOOD, SEWELL TWP.  
 TOTAL FIELD MAGNETIC SURVEY  
 CONTOUR INTERVAL: 40 nT UNIT: SCINTREX ENVI MAG SYSTEM  
 March04 EXSICS EXPLORATION LIMITED J.C. GRANT



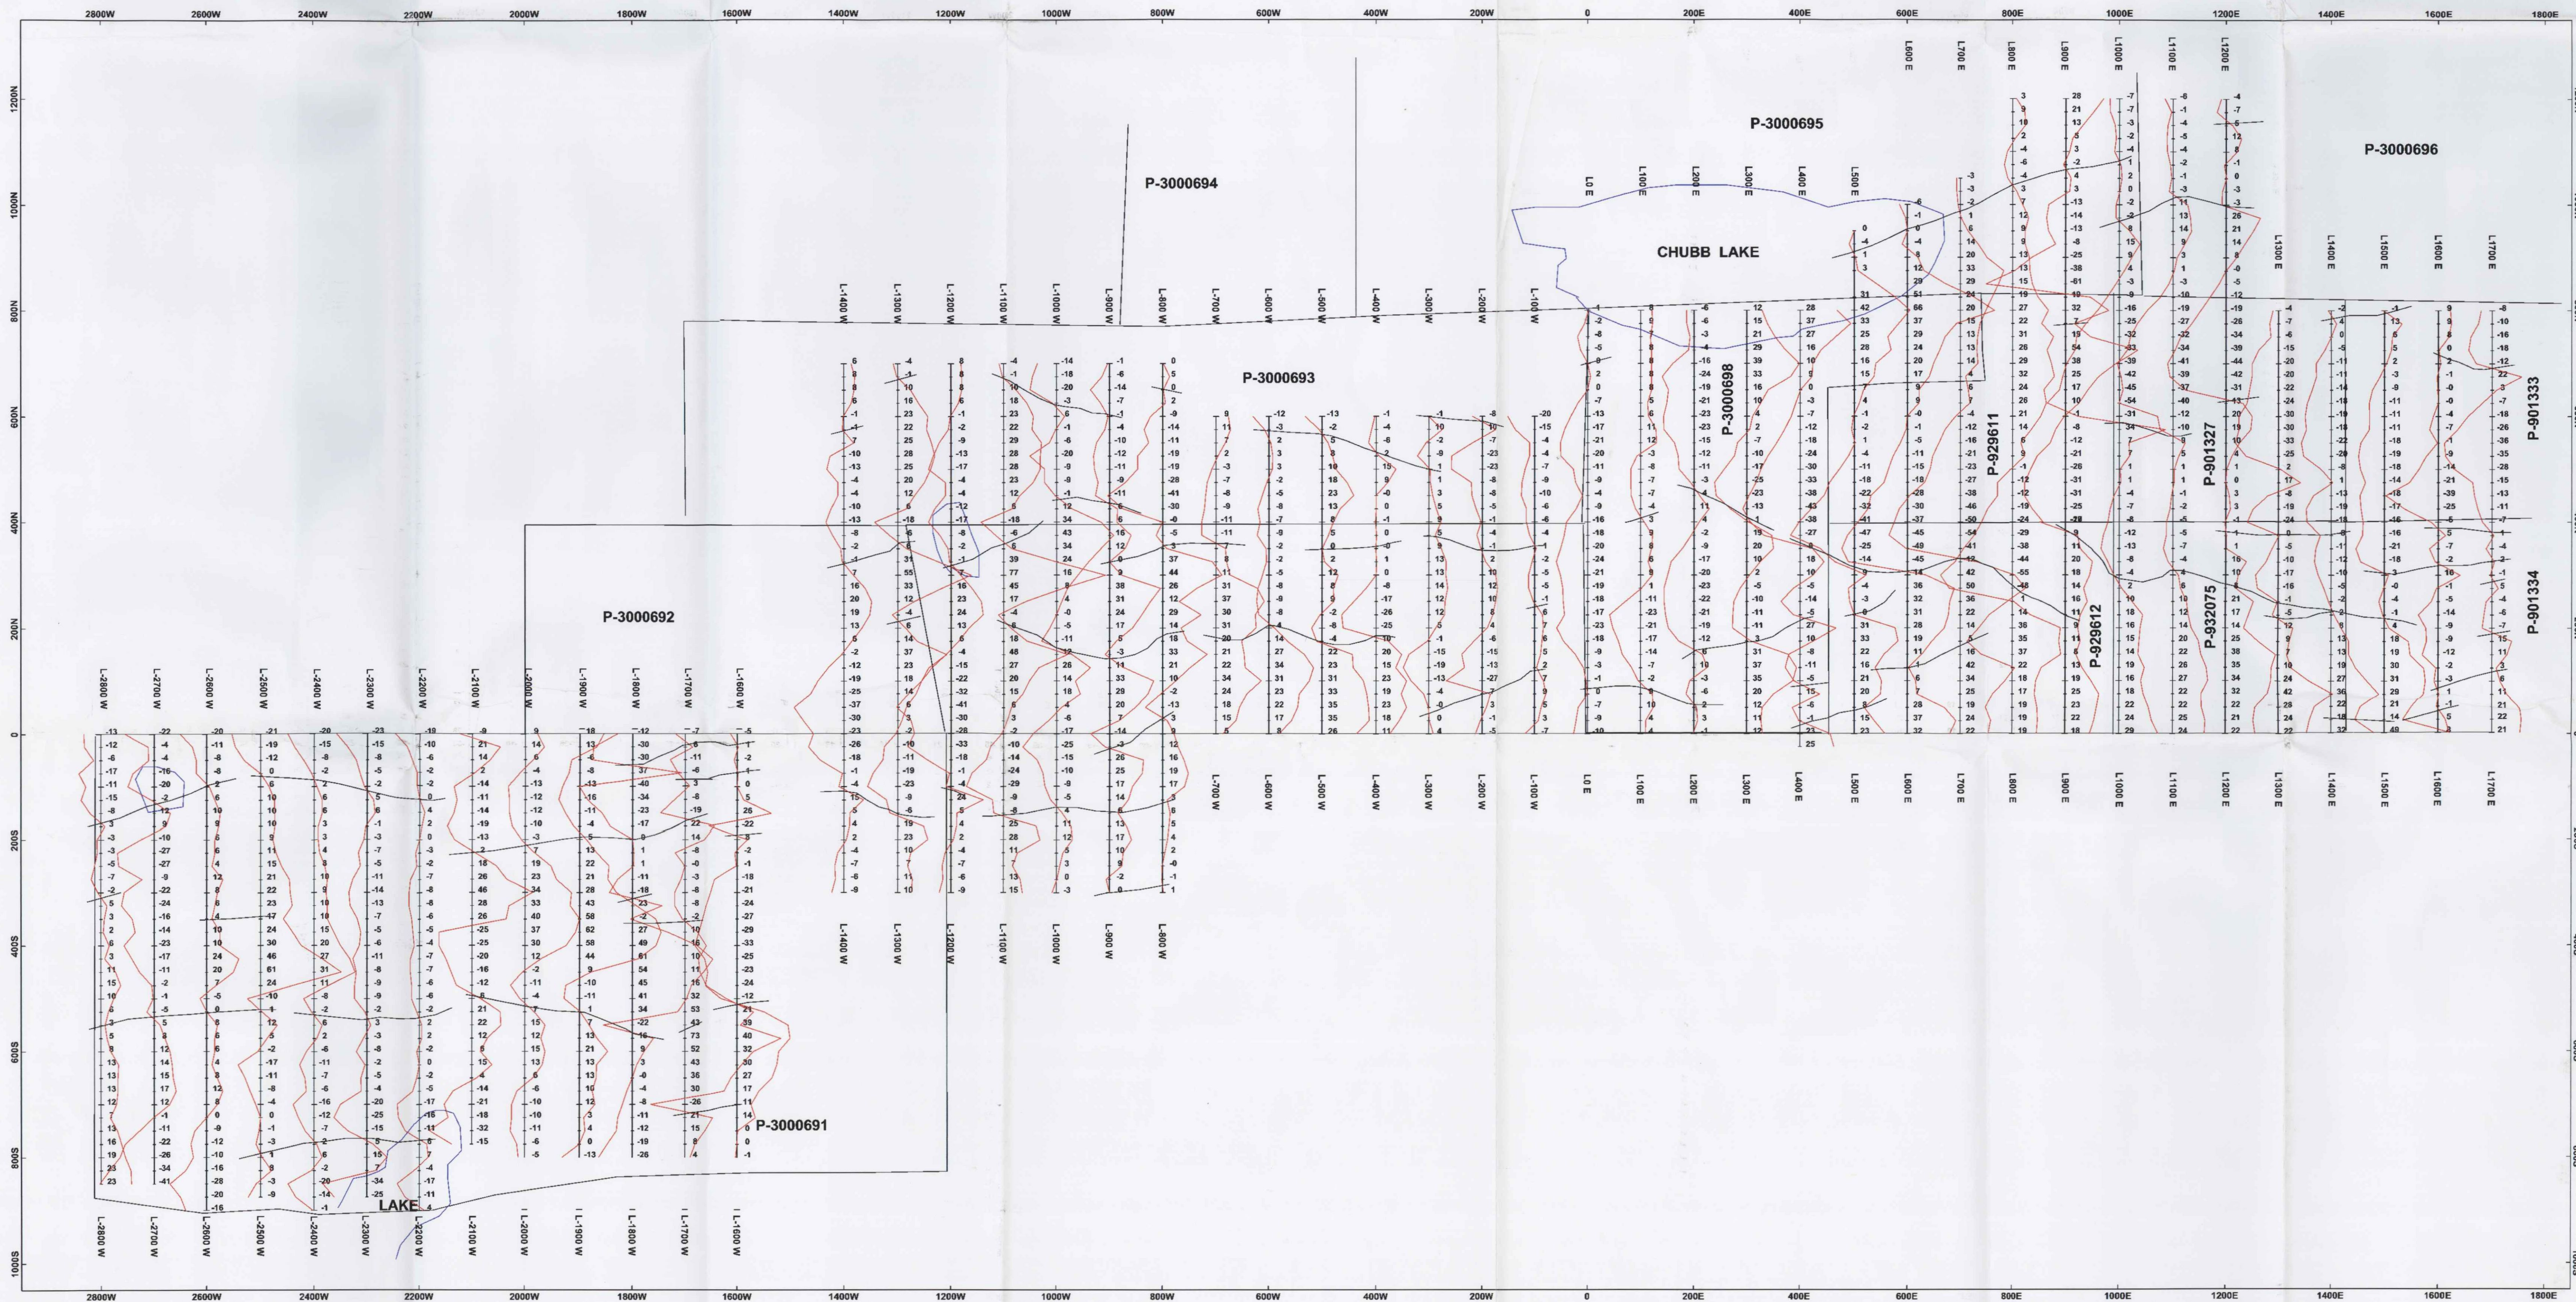

2.27467

CANADIAN GOLDEN DRAGON/MAPLE MINERALS  
 FOUR CORNERS PROPERTY  
 REEVES, KENOGAMING, PENHORWOOD, SEWELL TWP.  
 VLF-EM SURVEY, SEATTLE, WASHINGTON (24.8KHZ)  
 March/04 J.C. GRANT  
 ESXICS EXPLORATION LIMITED

