010

GEOLOGICAL & RADIOMETRIC SURVEY

PROJECTS UNIT.

BOTTLE BAY LAKE PROPERTY
TEMPLE TOWNSHIP.
KENORA MINING DIVISION
ONTARIO

F.O.B. MINING & EXPLORATION LIMITED

MAY 1976

by

M. KREMKO
PROTOSHIELD EXPLORATION SERVICES

Summary and Recomendations

F. O. B. Mining and Exploration Limited holds 69 unpatented mining claims within concessions 4, 5, and 6, lots 4 to 8 inclusive, Temple Township, Kenora Mining Division, Ontario. The claims are accessible by gravel road 3 miles east of Vermilion Bay off Highway 17 and 4 miles south.

A pace and compass geological and radiometric survey was run concurrently over about 40 of these claims in search of uranium mineralization. Traverses were run on claim lines and where outcrop was encountered, at various distances between claim lines or enough to establish coverage of the outcrops.

The host rock, an Algoman granite of white to pink colour intruded by red course grained biotite, hornblende pegmatite was encountered throughout the area surveyed.

Uraniferous readings on a McPhar TV 1 scintillometer were at consistent background readings of 10cpm except in areas of known mineralization (up to 2100 cpm U308) and four new localities. These anomalous results are not widespread but occur as local segregations within the pegmatites usually accompanied by yellow uranophane staining and green apatite crystals. It was hoped that this work would locate and possibly extend uraniferous mineralization to the point where surface diamond drilling would be justified.

Since the results of this survey were relatively negative it is recommended that no further work be carried out on this property with the exception of a radon gas survey within the claims where the outcrops carry some uranium. This survey should cover the areas of overburden within these claims (K350713 to K350719, K431546, K431551) on a regular 200 foot spaced grid. As well, a more sensitive radiometric survey could be carried out over the outcrop areas along the same lines.

It is also recommended that some of the claims be allowed to expire so that those claims that are most important may be held by the work carried out to date. The claims that should be kept in good standing are in one contiguous block of 31 claims as follows: K 350713 -K 350719 inclusive K431541 - K 431546 "

K 431551 K 431553 - K 431557 inclusive K 431575 - K431586 "

Respectfully submitted,

Myra Ille

Myron B. Kremko (Field Geologist)

PROTOSHIELD EXPLORATION SERVICES

May 6, 1976.

GEOLOGICAL & RADIOMETRIC SURVEY BOTTLE BAY LAKE PROPERTY TEMPLE TOWNSHIP F.O.B. MINING AND EXPLORATION LI, ITED

Introduction

During the period April 19 to May 1, 1976 a geological and radiometric survey (McPhar TV 1 Scintillometer) was run over all or part of 40 claims as follows:

K350713 - K350719 inc.

K405718 & K405719

K431537 - K431543 inc.

K431546

K431551 -

K431554 - K431557 inc.

K431569 - K431586

The claims are held in the name of F. O. B. Mining and Exploration Limited

The claims were traversed along claim lines in search of outcrop. The traverses were terminated along these claim lines if it was reasonably certain that no further outcrop was located along these lines or the property in the direction of the traverse. Where extensive outcrop was located along the claim lines, traverses were made in a sweeping effect between the claim lines so that effective coverage would be obtained. In effect the claims were prospected. The remaining 29 claims were not traversed either because they were underlain by sedimentary rocks or were covered by overburdem.

Location and Access

F. O. B. Mining and Exploration Limited holds 69 contiguous mining claims in Temple Township, Kenora Mining Division within concessions 4-6 and lots 4-8. These are numbered as follows: K350713 - 350719 inc. K406310 - 406315 inc K405718 - 405719 " K431537 - 431586 "

K406109 - 406110 Y K406286 - 406287 " The claim group is accessible by road 7 miles from Vermilion Bay, Ontario. The group is about 4 miles by gravel road to its centre, south and east of Highway 17.

Personnel Employed on the Survey

F. O. B. Mining and Exploration Limited contracted Protoshield Exploration Services of Thunder Bay, Ontario to carry out this work. M. Kremko was soley responsible for the field and office work.

Topography and Drainage

The topography of the claim group is typical of granitic areas of the shield in that the outcrops occur in either large masses of high terrain underlying several claims or spoadic areas within high ground. These all occur as islands within swamp areas. The entire area is covered by clay except in the larger outcrop areas and is generally treed by poplar, jackpine and spruce. Alders occupy the edges of the swamp areas which themselves are grass and spruce covered. About 20% of the area covered has been logged over in recent years.

Results of the Survey

The results of the survey are shown on the accompanying map at a scale of 1 inch to 400 feet.

Previous Work

No previous work has been recorded. The claims appear to have been staked several times. Trenching of outcrops where uranium was detected was carried out on claims K350713, K350714, K350716, K350717 and K350718 by F. O. B. Mining and Exploration Limited. These have been shown on the map as zones "F", "O", "B", "N", "I" & "G". Diamond drilling has commenced on claim K350714 on zone "N" and will be reported on separately. The area is included in a map and report by W. W. Moorehouse, Volume XLVIII, part 4, Ontario Department of Mines Annual Report, 1939, Map No. 48d.

General Geology

The consolidated rocks of the area consist of a massive grey to pink biotite, hornblende granite of Algoman age. This granite intruded arkosic sediments of Timiskaming age. The sediment occurs within the granite as unmappable lenses and blocks, giving the only strike and dip measurements available within the area mapped. According to Moorehouse the sediments surround the granite to the south east and west. The arkose is fairly siliceous and well baked at its contacts and is almost gneissic in character carrying biotite and hornblende and is medium to course grained. The perimeter of the granite was not observed, but near the supposed contact as mapped by Moorehouse the amount of sediment increases to whole outcrop proportions.

These rocks in turn have been intruded by masses and dikes of a red, pegmatitic, course grained granite. This unit consists of red potash feldspar, biotite and quartz up to 3 inches in diameter and is concentrated in the central part of the area covered. Wherever uranium mineralization has been uncovered it is always within these pegmatitic granites and is usually accompanied by yellow uraophane staining along fractures and clusters of fine to medium grained apatile crystals.

Table of Formations

Timiskaming - Arkosic sediment

Economic Geology

This property bears uraniferous pegmatitic granites as located by scintillometer prospecting and subsequent trenching. These localities bear quantities of up to 1 lb. per ton of U₃0₈ as read on the scintillometer (1 lb/ton U₃0₈ = 2500 cpm) but probably up to 4 lb / ton (assaying). These are economic values. But, the greatest extent of any of these showings appears to be about 40 feet with a 2 foot width. This amount of mineralization cannot reasonably be expected at greater depths than 40 feet. As such the present showings cannot be expected to "blossum into ore bodies". Diamond drilling on these zones would be futile as the mineralization cannot be reasonably expected at depth.

Radiometric Survey and Results

The radiometric survey encountered only 4 additional localities of above background radiation due to Uranium. None of these localities was exceptional in amounts of U₃0₈ and in extent of mineralization covering only about 10 square feet.

The mileage covered in this survey cannot be given as the measurements were on a random sampling of favouable rock accompanying the geological survey. Only positive results were recorded and located. This work was carried out in this way to give the best results with a minimum of work and maximum coverage.

The survey failed to locate any commercial quantities of uranium.

Respectfully submitted,

Alpa 12la

Myron B. Kremko (Field Geologist) PROTOSHIELD EXPLORATION SERVICES

Ministry of Natural Resources



OFFICE USE ONLY

GEOPHYSICAL – GEO TECHNICAL



TO BE ATTACHED AS AN A FACTS SHOWN HERE NEE.

52F14NE0002 2.2109 TEMPLE

900

TECHNICAL REPORT MUST CONTAIN INTERPRETATION, CONCLUSIONS ETC. ROJECTS UNIT.

Type of Survey(s) Radiometric and Geological
Township or Area Temple Township
Claim Holder(s) F. O. B. Mining and Exploration Ltd.
p. o. Box 2717, Thunder Bay P, Ont
Survey Company Protoshield Exploration Services
Author of Report Myron Kremko
Address of Author F. O. Box 1237, Thunder Bay F, Ont
Covering Dates of Survey April 19 to May 7, 1976
(linecutting to office) Total Miles of Line Cut_Nil
SPECIAL PROVISIONS CREDITS REQUESTED Geophysical DAYS per claim
-Electromagnetic
ENTER 40 days (includes -Magnetometer -Magnetometer
line cutting) for first survey. -Magnetometer -Radiometric 25 5
ENTER 20 days for each —Other
additional survey using Geological 20/10
same grid. Geochemical
AIRBORNE CREDITS (Special provision credits do not apply to airborne surveys)
MagnetometerElectromagnetic Radiometric
DATE: May 7, 1976 SIGNATURE: Author of Report or Agent
Augior of Report of Agent
L. P
Res. Geol. Qualifications 63.2467.
Previous Surveys
File No. Type Date Claim Holder
no previous survey
· · · · · · · · · · · · · · · · · · ·

MINING CLAIMS TRAVERSED List numerically		
К350713	к431 556	
(prefix) K350714	(number) K431 557	
K350715	к431 569	
к350716	к431 570	
К350717	K431 571	
к350718	K431 572	
K350719	к431 573	
K405718	K431 574	
к405719	к431 57 5	
к431537	к4 31 576	
к431538	K431 577	
K431539	K4 3 1 578	
K431540	к431579	
K431541	к431 580	
K431542	к4 31 581	
K431543	K431582	
K431546	K431 583	
K43 1 551	K431 584	
K4 31 554	к431 585	
K431.555	к431 586	

40

TOTAL CLAIMS.

GEOPHYSICAL TECHNICAL DATA

GROUND SURVEYS If more than one survey, specify data for each type of survey

Number of Stations.	unrecorded	Number of	Readings <u>unre</u>	corded
Station interval	intermittent	Line spacin	ng random	
Profile scaleth	e area was prospedte	d with a scinti	llometer and	mapped and
Contour interval or	ly anomalous areas w	ere recorded as	on the acco	mpanying plan
				14
Instrument				
Accuracy - Scale	constant			
Diurnal correction	method			
Base Station check	k-in interval (hours)			
Base Station locat	ion and value			
Instrument		1		
Coil configuration				
Coil separation				
•			*	
	☐ Fixed transmitter		☐ In line	☐ Parallel line
Frequency		(specify V.L.F. station)		
	red			
Instrument				
Scale constant				
Corrections made				
Base station value	and location			
		-		
Elevation accuracy	у			
	e Domain		equency Domain	
	time		•	
	time		nge	
	y time			
	gration time			
•	<u> </u>			
·				
Type of electrode				

INDUCED POLARIZATION

SELF POTENTIAL	na na ara-kan kan kata kata da
Instrument	Pommo
Survey Method	Range
Corrections made	
	2.
RADIOMETRIC	
Instrument McPhar TV 1 scintillometer ser	ial no. 175-10
Values measured counts per minute U308	
Energy windows (levels) (3) at 2.5, 1.6 & 0.2 MEV	
Height of instrument at bedrock (anomalous) & 31	ai a fara
Size of detector Sodium iodide crystal 1" diame	ter, 1,25" thick
Overburden clay, sand and water - depth un	
(type, depth — include outco	
OTHERS (SEISMIC, DRILL WELL LOGGING ETC.)	 Section 1997 (Appendix and Conference of the Conferen
Type of survey	
Instrument	
Accuracy	
Parameters measured	
Additional information (for understanding results)	The state of the s
<u>AIRBORNE SURVEYS</u>	
Type of survey(s)	
Instrument(s) (specify for each type of sur	
Accuracy(specify for each type of sur	
Aircraft used	
Sensor altitude	
Navigation and flight path recovery method	
Aircraft altitude	
Miles flown over total area	Over claims only

GEOCHEMICAL SURVEY - PROCEDURE RECORD

Numbers of claims from which samples taken				
Total Number of Samples Type of Sample(Nature of Material) Average Sample Weight	Values expressed in: per cent			
Method of Collection	Cu, Pb, Zn, Ni, Co, Ag, Mo, As,-(circle)			
Soil Horizon Sampled Horizon Development Sample Depth Terrain	Field Analysis (tests) Extraction Method			
Drainage Development Estimated Range of Overburden Thickness	Field Laboratory Analysis No. (tests Extraction Method			
SAMPLE PREPARATION (Includes drying, screening, crushing, ashing) Mesh size of fraction used for analysis	Commercial Laboratory (tests			
General	General ————————————————————————————————————			

NOTES

400' surface rights reservation along the shores of all lakes and rivers

This Township lies within the Corporation of the Township of MACHIN


RESERVES

- surface rights withdrawn from staking under Sect 39(d) of Mining Act (R.S.O'50) 18 July 55 Fite. 8651
- reserved for public use ,29Sept 52 File. 53817
- reserved for reforestation File 18131
- (%) Crown reserve. File. 163473

SAND & GRAVEL

G Gravel File: 80843

DATE OF ISSUE MAY 1 2 1976

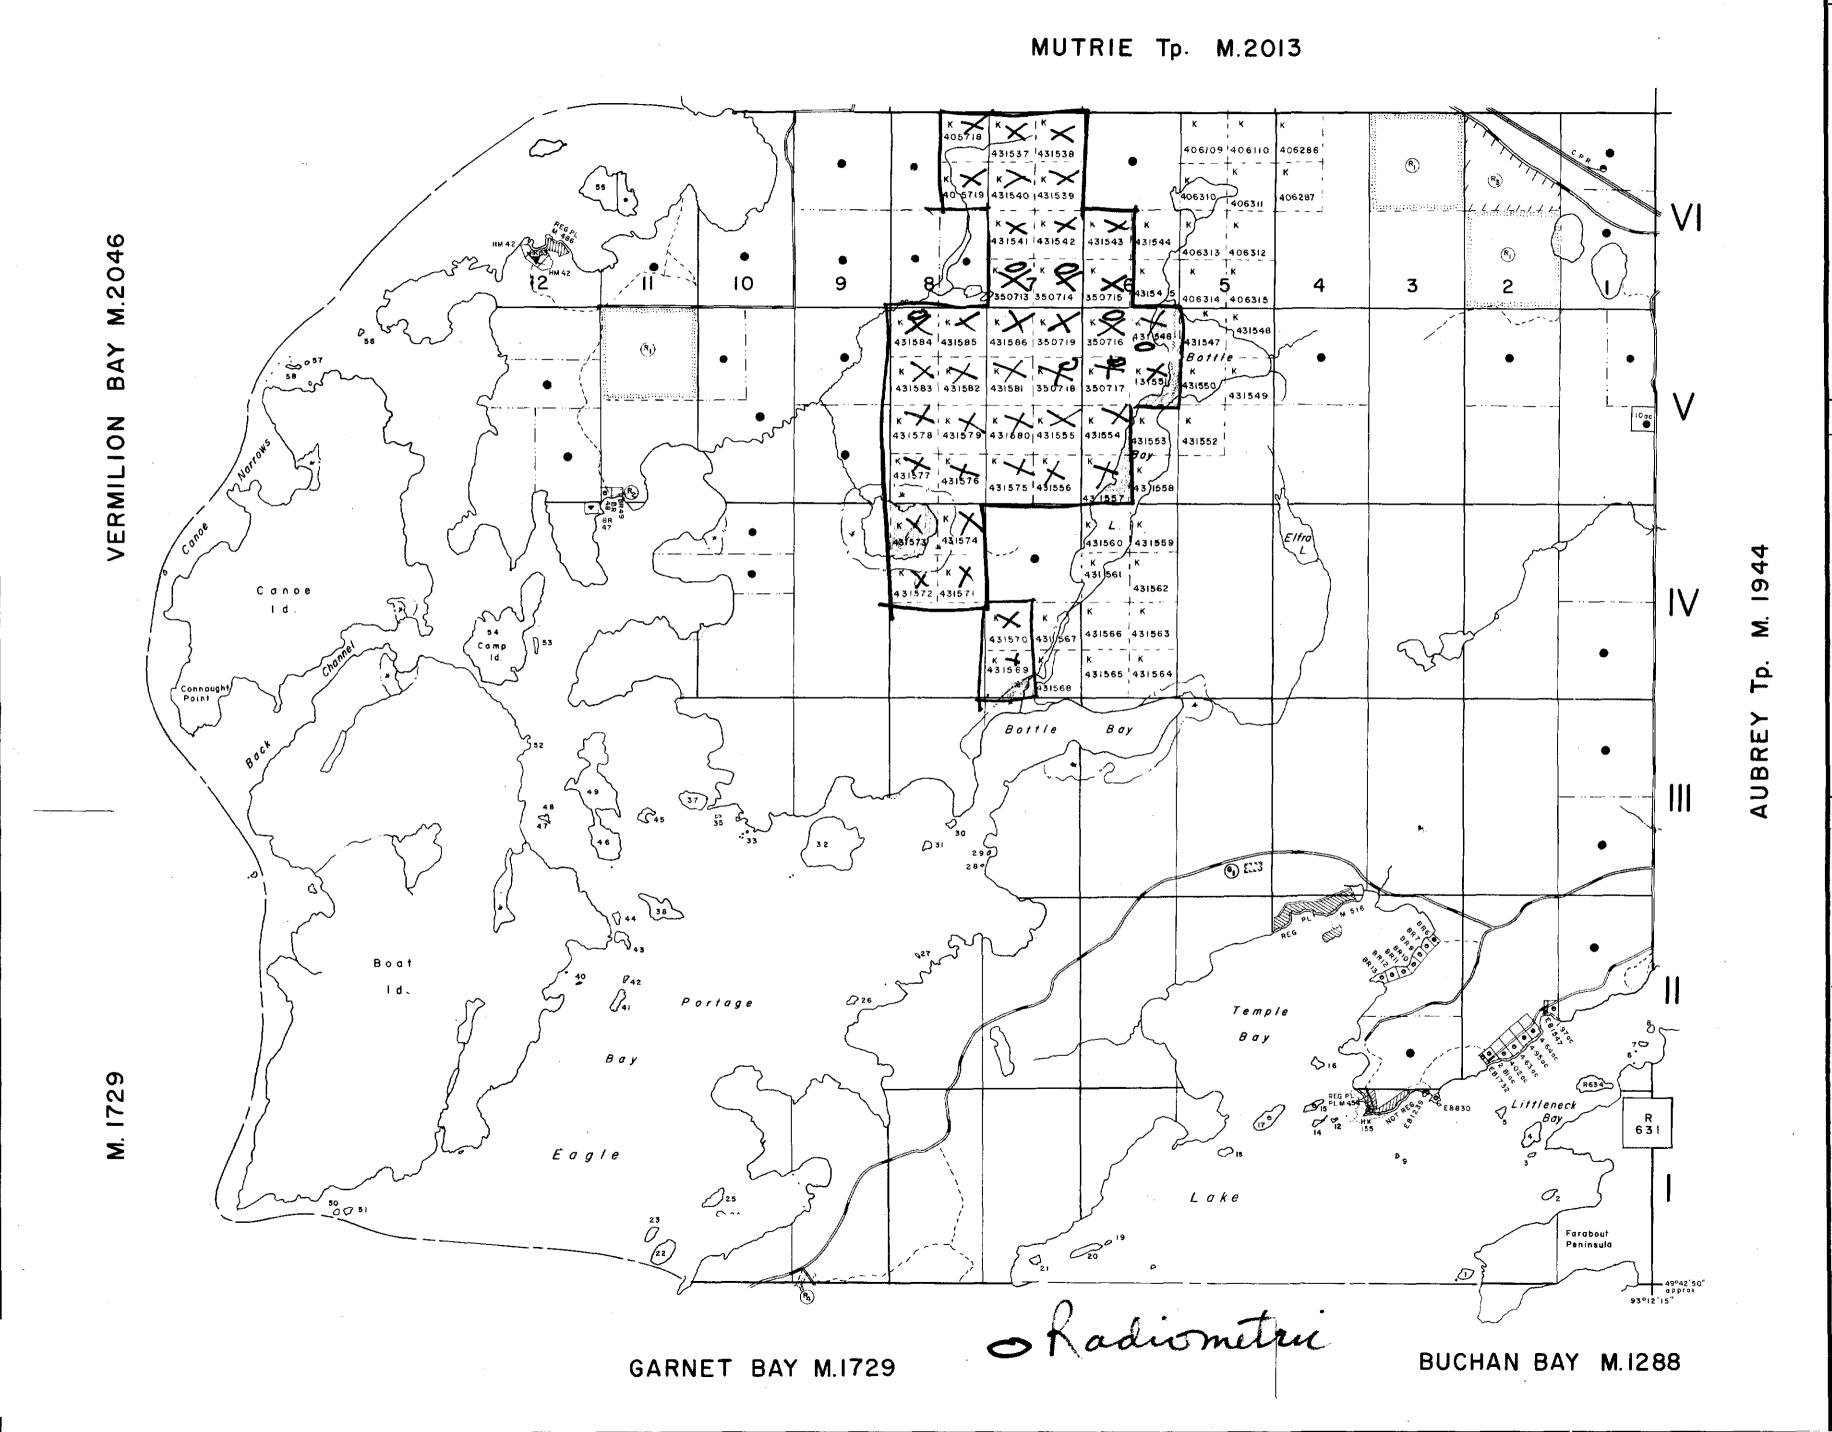

LEGEND

HIGHWAY AND ROUTE No. OTHER ROADS TRAILS SURVEYED LINES: TOWNSHIPS, BASE LINES, ETC. LOTS, MINING CLAIMS, PARCELS, ETC. UNSURVEYED LINES: LOT LINES PARCEL BOUNDARY MINING CLAIMS ETC. RAILWAY AND RIGHT OF WAY UTILITY LINES NON-PERENNIAL STREAM FLOODING OR FLOODING RIGHTS SUBDIVISION ORIGINAL SHORELINE THE STATE OF THE S MARSH OR MUSKEG

DISPOSITION OF CROWN LANDS

TYPE OF DOCUMENT	SYMBOL
PATENT, SURFACE & MINING RIGHT	rs 🌓
" SURFACE RIGHTS ONLY	
" MINING RIGHTS ONLY	i
LEASE, SURFACE & MINING RIGHT	rs 🔳
" SURFACE RIGHTS ONLY	e e e
" MINING RIGHTS ONLY	
LICENCE OF OCCUPATION	· · · · · · · · · · · · · · · · · · ·
CROWN LAND SALE	C.S.
ORDER-IN-COUNCIL	ос
RESERVATION	
CANCELLED	
SAND & GRAVEL	©

SCALE: 1 INCH - 40 CHAINS **HECTARES** ACRES

DISTRICT

KENORA

MINING DIVISION

KENORA



Ministry of Natural Resources

Surveys and Mapping Branch
Plan No. Ontario

M.2047

200

