



52J02NE0451 38 BECKINGTON LAKE

010

DIAMOND DRILLING

AREA: BECKINGTON LAKE

REPORT NO: 38

WORK PERFORMED FOR: Mine Lake Minerals Inc.,
Archon Minerals Inc.

RECORDED HOLDER: Same as Above [xx]
: Other []

<u>Claim No.</u>	<u>Hole No.</u>	<u>Footage</u>	<u>Date</u>	<u>Note</u>
911403	87-1	638'	Nov-Dec/87	(1)
611995	87-2	248'	Nov-Dec/87	(1)
	87-3	208'	Nov-Dec/87	(1)
	87-4	208'	Nov-Dec/87	(1)
	87-5	308'	Nov-Dec/87	(1)

1610'

NOTES: (1) #W8803.045, filed in July/88

MINE LAKE MINERALS INC.

DRILL LOGS FOR 1987 DIAMOND DRILLING PROGRAM

INTRODUCTION


Mine Lake Minerals Inc., Suite 402, 15 Toronto Street, Toronto, Ontario, M5C 2E3, holds through option agreements and staking on its own behalf a total of sixty-seven (67) claims North of Ouillette Lake in the Beckington Lake Area, Patricia Mining Division, Ontario. In the summer of 1987, a field exploration program was conducted on the Claim Group consisting of geological mapping, a surface geophysical program, a geochemical survey, and a surface trenching program.

ACCESS AND LOCATION OF THE PROPERTY

The Claim Group can be described as situated in the Beckington Lake Area which is regionally North of the Northeast Arm of Sturgeon Lake. Ouillette Lake, a long, narrow lake with a North-South orientation, encompasses part of the Southern boundary of the Claim Group. The Northern boundary lies to the North of Mine Lake. Access to the property is good. An all-weather forest road (No. 700) runs East from Highway #599 approximately one mile South of the Village of Savant Lake, transversing the Northern part of the Claim Group.

The general topographic relief is one of low rolling hills with much of the lower ground covered with extensive swamps.

The whole area is well forested; the higher ground covered with spruce, jack pine and poplar, while the lower ground is covered with predominantly black spruce and cedar.

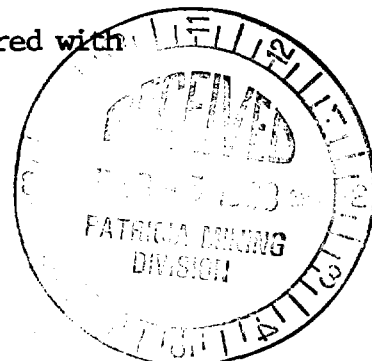

LINE CUTTING

There are two control grids on the property. In the Southern part of the property around Mine Lake, Mid-North Engineering laid out a North-South base line (Mine Lake Grid) starting at the Northeast end of Ouillette Lake; pickets were placed at 25 meter intervals; offsetting lines were cut at 100 meter intervals with pickets placed at 25 meter intervals. Tie lines were cut on both the Eastern and Western property boundaries. All claim posts were identified and located relative to the grid.

In the Northern part of the property a grid was laid out with a Northwest-Southeast base line (Thomas Lake Grid) starting on the West side of Thomas Lake; pickets were placed at 100 foot intervals; offsetting lines were cut at 400 foot intervals.

THE CLAIMS

The Thomas Lake Claim Group was staked in the summer and fall of 1986. Previous work on this Claim Group consisted of some trenching on the East side of Thomas Lake in the 1930's and the reported drilling of two diamond drill holes by Ouillette Mines Limited in 1947. Several other companies since this date have undertaken reconnaissance ground and airborne geophysical surveys, the data of which are in the assessment files as public records.

No detailed mapping or surface sampling appears to have been undertaken in recent years.

The claims encompassing the Thomas Lake Claim Group and covered in this survey are as follows:

Pa 911403	Pa 911425
Pa 911404	Pa 911426
Pa 911405	Pa 911427
Pa 911406	Pa 911428
Pa 911407	Pa 911429
Pa 911408	Pa 911430
Pa 911409	Pa 911561
Pa 911410	Pa 911562
Pa 911413	Pa 911563
Pa 911414	Pa 911564
Pa 911415	Pa 911565
Pa 911416	Pa 911566
Pa 911419	Pa 911567
Pa 911420	Pa 911568
Pa 911421	Pa 911569
Pa 911422	Pa 911570
Pa 911423	Pa 911572
Pa 911424	Pa 911573
Pa 911425	Pa 911574

Therefore, the Thomas Lake Claim Group comprises a total of thirty-eight (38) Claims.

The Mine Lake Claim Group was staked between 1983 and 1986. Previous work on the property consisted of extensive trenching and the sinking of several shafts in the 1930's. It is also reported that several drill holes were drilled in the 1940's, the location of which have not been identified. Selco is reported to have drilled three (3) drill holes in the early 1960's South and East of the old shaft. Again, the exact location cannot be identified as they were drilling an airborne VLF conductor and no surface grid was cut. In 1984, Mid-North Engineering undertook a VLF, magnetic and radiometric survey on the major portion of the Mine Lake Claim Group. A geological survey was also undertaken on the scale of 1 cm. to 250 meters.

During the summer of 1987, a humus geochemical survey was undertaken by Mine Lake Minerals on both the Thomas Lake and Mine Lake Claim Groups. A description and results of this survey have been presented under a separate report.

The claims comprising the Mine Lake Claim Group and covered in this survey are as follows:

Pa 611973	Pa 611988
Pa 611974	Pa 611989
Pa 611975	Pa 611990
Pa 611976	Pa 611993
Pa 611977	Pa 611994
Pa 611978	Pa 611995
Pa 611979	Pa 611996
Pa 611980	Pa 611997
Pa 611981	Pa 911401
Pa 611982	Pa 911402
Pa 611983	Pa 911411
Pa 611984	Pa 911412
Pa 611985	Pa 911417
Pa 611986	Pa 911418
Pa 611987	

The Mine Lake Group therefore comprises a group of twenty-nine (29) claims.

THE GEOLOGICAL FIELD PROGRAM


As a result of the 1987 Field Program on both the Thomas Lake and Mine Lake Claim Groups, several interesting drilling targets became apparent.

On the Thomas Lake Claim Group a previous drill hole was located at Grid 592 S + 1300 E. A tag on the steel collar for this hole indicated that this was Hole #1 drilled in 1947 by Ouillette Mines. It was reported in The Northern Miner (April 17, 1947) that this hole intersected 5 feet of \$10.50 gold at 570 feet. It is possible that this hole intersected a VLF conducted outcropping at Grid 54+00 350 E.

There is also associated anomalous gold humus values at this location. Hole #87-1 was therefore drilled 10' East of Hole #1(1947) at 60° West.

On the Mine Lake Grid, a VLF conductor can be identified as outcropping 25 meters East of the old shaft at Grid 140 m. S + 325 m. E. The

conductor can be identified to be associated with a large sulfide/quartz zone outcropping a Southeasterly direction to 300 m. S + 280 E. There are extensive pits and small shafts which were dug in the 1930's along the outcrop of this conductor. Old reports indicated that anomalous gold values were obtained from these workings. The 1987 field program suggested that there was also anomalous values in the humus sampling in this area. Holes #87-2, #87-3, #87-4, and #87-5 were located to test this conductor.

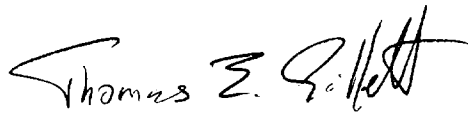A handwritten signature in black ink, reading "Thomas E. Gillett". The signature is written in a cursive style with a large, sweeping initial 'T'.

Thomas E. Gillett, B.Sc (Honors)
Geologist

January 10, 1988
Marmora, Ontario

HOLE #87-1

Location: 592' S + 1300' E (Thomas Lake Grid)

Dip: 60° - surface; 56° - 300'; 50° - 638'

Azimuth: 270° (West)

Core Size: BQ

<u>Depth</u>	<u>Description</u>	<u>Au</u>	<u>Assay Value</u>	<u>Ag</u>
0' - 56'	Dark green speckled andesite. Occasional carbonate bands.			
56' - 58'	Green banded andesite with occasional carbonate bands parallel to banding.			
58' - 66'	Dark green with contorted banding of chocolate brown bands. Occasional carbonate and quartz veinlets.			
66' - 70'	Similar to above but with less contortions.			
70' - 79'	Dark greenish grey andesite extensively replaced by calcite and quartz.			
80' - 122'	Fine-grained greenish-grey andesite with coarser bands of light apple green and chocolate brown material. Occasional quartz and calcite veining.			
122' - 128'	Coarser grained andesitic material with well defined bands of dark green and chocolate material exhibiting possible residual bedding--possible reworked volcanic.			
128' - 150'	Dark grey fine-grained quartz porphyry.			
150' - 240'	Light green coarser andesite. Coarser bands have characteristics of a tuff. Occasional quartz and calcite veinlets parallel to schistosity.			

HOLE #87-1 (Continued):

<u>Depth</u>	<u>Description</u>	<u>Assay Value</u>	
		<u>Au</u>	<u>Ag</u>
240' - 240.5'	6" white quartz vein in the dark green inclusions of amphibole, possibly actinolite.		
240.5' - 247'	Light green tuff with occasional bands of apple green and brown micaceous material.		
247' - 258'	Fine-grained dark green andesitic rocks with occasional pyrite, greater than 10% of rock.		
258' - 283'	Fine-grained dark green andesite with occasional quartz veining, occasional pyrite, greater than 1% of rock.		
285' - 287'	Light Buff green to chocolate banded tuff highly altered to biotite mlca.		
287' - 318'	Dark green in places, banded andesite with occasional quartz and calcite veining up to 2" in width parallel to foliation. Occasional sulfides greater than 1%.		
318' - 337'	Light buff colored tuff with green bands. Rock has a fragmental character.		
337' - 359'	Light buff colored tuff less fragmental character than above. Rock shows development of epidotization.		
359' - 368'	Darker green, coarser grained andesite.		
368' - 378'	Dark to apple green spotted fragmental andesite with occasional quartz veining.		
378' - 438'	Dark, fine-grained andesite with occasional quartz veining, occasional pyrite greater than 1% of rock.		
438' - 488'	Dark to apple green spotted andesite with occasional light buff colored bands of tuff-like material, occasional bands spotted.		

HOLE 87-1 (Continued):

<u>Depth</u>	<u>Description</u>	<u>Assay Value</u>	
		<u>Au</u>	<u>Ag</u>
488' - 490'	2" white quartz vein with blotches of green chlorite. Pyrite and pyrrhotite greater than 2% of rock.		
490' - 523'	Light green andesite, coarse grained with occasional buff bands.		
523' - 568'	Buff colored quartz porphyry--highly foliated.		
568' - 593'	Dark green fine-grained andesite, greater than 1% pyrite.		
593' - 595'	2' white quartz vein with blotches of chlorite--dark calcite and dark grey quartz, 2-3% sulfides, pyrite and pyrrhotite.		
595' - 596'	Dark green fine-grained andesite heavily altered to chlorite.		
596' - 601'	Quartz vein with blotches of chlorite--dark black quartz, 3-5% sulfides--pyrite, chalcopyrite, pyrrhotite.		
601' - 638'	Dark green spotted andesite with occasional quartz veining, greater than 1% sulfides.		

HOLE #87-2

Location: 175' S + 295' E (Mine Lake Grid)

Dip: 55°

Azimuth: 90° East

Core Size: BQ

<u>Depth</u>	<u>Description</u>	<u>Assay Value</u>
		<u>Au</u> <u>Ag</u>
0' - 42'	Light green andesite with abundant quartz veining both parallel and discordant to bedding planes.	
42' - 54'	Altered light green andesite, abundant amphiboles quartz and calcite veining parallel to bedding with fine-grained pyrite, chalcopyrite and pyrrhotite.	
54' - 79'	Dark green fine-grained andesite, increasing development of amphiboles (actinolite) toward the lower part of this section. Occasional quartz veining with no apparent orientation.	
79' - 83'	Alteration zone. Light green in color with abundant quartz, epidote, amphiboles (actinolite), micas (phlogopite-biotite) and sulfides--pyrite, chalcopyrite and pyrrhotite greater than 5% of rock.	
83' - 118'	Silicified alteration. Highly altered zone. Rock consists of 50% quartz, 5%-20% sulfide (pyrite, pyrrhotite). Zone highly contorted.	
118' - 127'	Highly altered quartz porphyry--foliated silicified. 5%-10% pyrites.	
127' - 158'	Altered quartz diorite, foliation parallel to core. 5%-10% pyrite. Occasional pyrrhotite.	
158' - 159'	Broken ground. Possible fault, highly foliated with development of talcose minerals. Pyrite on foliated surfaces.	

HOLE #87-2 (Continued) :

<u>Depth</u>	<u>Description</u>	<u>Assay Value</u>
		<u>Au</u> <u>Ag</u>
159' - 164'	Coarse grained amphibole altered andesite with occasional quartz veining.	
164' - 169'	Quartz veining with bands of green amphiboles. sulfides--parallel to foliation approximately 60° to core.	5%-8%
169' - 174'	Altered mafic zone, quartz carbonate veining, pyrite 5%-10%.	
178' - 198'	Dark green mafics (andesites), fine grained, occasional quartz veining 60° to core.	
198' - 248'	Dark green coarse grained mafics (andesites), occasional quartz veining.	

HOLE #87-3

Location: 210' S + 320' E (Mine Lake Grid)

Dip: 60°

Azimuth: 260° West

Core Size: BQ

<u>Depth</u>	<u>Description</u>	<u>Assay Values</u>
		<u>Au</u> <u>Ag</u>
0' - 3'	Silicified felsic zone, possible rhyolite; 3%-5% sulfides.	
3' - 16'	Dark green spotted andesite. Occasional quartz vein and sulfides.	
16' - 33'	Silicified felsic zone, sugary texture, occasional dark spots; possible 2 generations of quartz, occasional tourmaline. 3%-6% sulfides. Pyrite, chalcopyrite, pyrrhotite. Sulfides tend to follow relic foliation.	
33' - 40'	Quartz--greyish white in color. Occasional blotches of chlorite. Sulfides--pyrite and chalcopyrite--5%-6% of rock; occasional euhedral tourmaline.	
40' - 62'	Silicified felsic, strong relic foliation. Sulfides (pyrite and chalcopyrite) 10%-20% of rock. Distribution controlled by foliation. Some bands highly micaceous--suggesting possibly original pyroclastic rock.	
62' - 63'	Broken ground--rock broken, slicken slides developed on rock surfaces--lost circulation in drilling.	

HOLE #87-3 (Continued):

<u>Depth</u>	<u>Description</u>	<u>Assay Value</u>	
		<u>Au</u>	<u>Ag</u>
63' - 126'	Fine-grained foliated rhyolite rock with micaceous bands. Sulfides (pyrite, chalcopyrite and pyrrhotite) in places forming heavy bands representing 10%-20% of rock.		
126' - 132'	Fine-grained green-buff banded mafic rock with bands and blotches of pyrrhotite. 5%-6% of rock.		
132' - 208'	Fine-grained green andesite with occasional quartz and carbonate stringers following foliation.		

HOLE #87-4

Location: 290 m. S + 295 E

Dip: 60°

Azimuth: 270° West

Core Size: BQ

<u>Depth</u>	<u>Description</u>	<u>Assay Values</u>	
		<u>Au</u>	<u>Ag</u>
0' - 9'	Quartz-sericite schist with greater than 2% sulfides (pyrite).		
9' - 28.5'	Dark green altered andesite, occasional pyrite. Abundant amphiboles and sericite. Pyrite less than 2% of rock.		
28.5' - 41'	Quartz sericite rhyolite rock. Abundant pyrite, between 10%-15% of rock. Occasional chalcopyrite and pyrrhotites. Mineralization tends to follow foliation. Appears to be two generations of pyrite. First generation finer grained and fractured, and second predominantly euhedral and coarser.		
41' - 48'	Fine-grained quartz, sericite, rhyolite. Pyrite less than 5% of rock. Light grey in color.		
48' - 57'	Fine-grained quartz sericite rhyolite rock in places well foliated. Pyrite 2%-5%.		
57' - 64'	Quartz sericite rhyolite. Light grey in color. Pyrite 10%-15% of rock.		
64' - 72'	Quartz sericite rhyolite darker grey in color. Pyrite greater than 10% of rock.		

HOLE #87-4 (Continued) :

<u>Depth</u>	<u>Description</u>	<u>Au</u>	<u>Assay Values</u>	<u>Ag</u>
72' - 84'	Quartz sericite rhyolite, light grey in color. Pyrite approximately equal to 5% of rock.			
84' - 87'	Quartz sericite rhyolite, light grey in color. Pyrite 15%-20% of rock.			
87' - 113'	Quartz sericite rhyolite, darker grey in color. Pyrite 10%-15% of rock.			
113' - 117'	Brecciated contact zone. 10%-15% pyrite. Brecciation cemented with grey quartz and euhedral fine black tourmaline. 10%-15% pyrite.			
117' - 123'	Purple andesite, well developed flow banding.			
123' - 124'	Brecciated zone rock cemented with grey quartz. 10%-15% sulfides.			
124' - 130'	Purple green andesite, well developed flow banding. Occasional bands of quartz.			
130' - 208'	Light green coarse andesite. Occasional bands of quartz parallel to foliation.			

HOLE #87-5

Location: 300 + 380 E

Dip: 60°

Azimuth: 270° West

Core Size: BQ

<u>Depth</u>	<u>Description</u>	<u>Assay Values</u>
		<u>Au</u> <u>Ag</u>
0' - 23'	Light Green altered andesite with occasional quartz stringers. Rock soft and very friable.	
23' - 24'	Contact zone. Highly altered soft andesite/quartz. Tuffaceous contact. Lost circulation in drilling.	
24' - 52'	Light grey rhyolite. Heavily quartz, flooded with string of grey quartz. Fine-grained pyrite greater than 5% of rock.	
52' - 53'	Iron-stained alteration zone. Rock broken--possible fault zone.	
53' - 77'	Dark grey rhyolite. Heavily quartz flooded. Rock has approximately 5% sulfides finely disseminated. Occasional bands 20% rounded and brecciated pyrite fragments. Rock shows relic bedding ?	
77' - 118'	Dark greyish rhyolite. Heavily quartz flooded with occasional bands of grey quartz. Greater than 5% sulfides.	
118' - 138'	Dark greyish buff colored foliated quartz porphyry. Abundant dark fragments of chlorite and/or biotite. Sulfides greater than 5% of rock. Rock shows relic flow banding--sulfides tend to follow foliation.	
138' - 155'	Light greyish fine-grained quartz porphyry. Rocks well foliated. Sulfides occurring in seams and fine blebs orientated with foliation.	

HOLE #87-5 (Continued) :

<u>Depth</u>	<u>Description</u>	<u>Assay Values</u>	
		<u>Au</u>	<u>Ag</u>
155' - 175'	Light greyish quartz porphyry. Rock well foliated. Suggestion of a brecciated character recemented with fine greyish and bluish quartz. Sulfides 5%-10% of rock. Appears also to be brecciated with two generations of pyrite; one very fine and the other coarser and more euhedral. Much of the pyrite is surrounded by a bluish quartz containing occasional fine-grained black tourmaline.		
175' - 248'	Light buff colored rhyolite rock well foliated. 3%-5% sulfides. Occasional blotches of biotite mica.		
248' - 258'	Light buff colored rhyolite. 3%-5% sulfides.		
258' - 308'	Dark green andesite. Occasional quartz and calcite veining parallel to foliation.		

Pa 486133 Pa 486132

Pa 486128 Pa 486127 Pa 486126

Pa 486119 Pa 486118 Pa 486117 Pa 486116 Pa 486115

Pa 486110 Pa 486109 Pa 486108 Pa 486107 Pa 486106 Pa 486105

Pa 486102 Pa 486101 Pa 486100 Pa 486099 Pa 486098 Pa 486053

Pa 486094 Pa 486093 Pa 486092 Pa 486091 Pa 486056

Pa 437430 Pa 437429 Pa 437428 Pa 486059 Pa 486060

Pa 437424 Pa 437423 Pa 486062 Pa 486063 Pa 486064

Pa 486023 Pa 486024 Pa 486025 Pa 486026 Pa 486047 Pa 486048

Pa 486030 Pa 486031 Pa 486032 Pa 486033 Pa 486049 Pa 486050

Pa 486038 Pa 486039 Pa 486040 Pa 486051 Pa 486052 Pa 486315

Pa 612003 Pa 612004 Pa 486065 Pa 486066 Pa 486067

Pa 612007 Pa 612008 Pa 486068 Pa 486069 Pa 436823

Pa 612012 Pa 436824 Pa 436825 Pa 436826

Pa 611975 Pa 611976 Pa 611977 Pa 611978 Pa 611993 Pa 612014

Pa 611981 Pa 611980 Pa 611979 Pa 611994 Pa 612016 Pa 612017 Pa 436830 Pa 436831 Pa 487064

Pa 611982 Pa 611983 Pa 611984 Pa 611995 Pa 612018 Pa 612019 Pa 436832 Pa 436833 Pa 487065

Pa 611987 Pa 611986 Pa 611985 Pa 611996 Pa 611973

Pa 611988 Pa 611989 Pa 611990 Pa 611997 Pa 611974

Pa 436837 Pa 436838 Pa 486288 Pa 486308 Pa 486309 Pa 486310 Pa 487068

Pa 911619 Pa 911620 Pa 911622 Pa 911623 Pa 911624 Pa 911625 Pa 911626 Pa 911627 Pa 911628 Pa 911629 Pa 911630

Pa 902134 Pa 902135 Pa 19530 Pa 902127 Pa 902111 Pa 911621 Pa 902154 Pa 902139 Pa 902138

Pa 902133 Pa 902132 Pa 19532 Pa 19531 Pa 1353 Pa 836257 Pa 902110 Pa 902109 Pa 902140 Pa 902137

Pa 676976 Pa 676974 Pa 19533 Pa 19534 Pa 1352 Pa 773 Pa 436994 Pa 911628 Pa 911629



52J02NE0451 38 BECKINGTON LAKE

900

Beckington Lake
G 2532

Beckington

LAKE

600435
Pa 600150
Pa 600137
Pa 600134
Pa 600133
Pa 600132
Pa 600131
Pa 600130
Pa 600129
Pa 600128
Pa 600127
Pa 600126
Pa 600125
Pa 600124
Pa 600123
Pa 600122
Pa 600121
Pa 600120
Pa 600119
Pa 600118
Pa 600117
Pa 600116
Pa 600115
Pa 600114
Pa 600113
Pa 600112
Pa 600111
Pa 600110
Pa 600109
Pa 600108
Pa 600107
Pa 600106
Pa 600105
Pa 600104
Pa 600103
Pa 600102
Pa 600101
Pa 600100
Pa 600099
Pa 600098
Pa 600097
Pa 600096
Pa 600095
Pa 600094
Pa 600093
Pa 600092
Pa 600091
Pa 600090
Pa 600089
Pa 600088
Pa 600087
Pa 600086
Pa 600085
Pa 600084
Pa 600083
Pa 600082
Pa 600081
Pa 600080
Pa 600079
Pa 600078
Pa 600077
Pa 600076
Pa 600075
Pa 600074
Pa 600073
Pa 600072
Pa 600071
Pa 600070
Pa 600069
Pa 600068
Pa 600067
Pa 600066
Pa 600065
Pa 600064
Pa 600063
Pa 600062
Pa 600061
Pa 600060
Pa 600059
Pa 600058
Pa 600057
Pa 600056
Pa 600055
Pa 600054
Pa 600053
Pa 600052
Pa 600051
Pa 600050
Pa 600049
Pa 600048
Pa 600047
Pa 600046
Pa 600045
Pa 600044
Pa 600043
Pa 600042
Pa 600041
Pa 600040
Pa 600039
Pa 600038
Pa 600037
Pa 600036
Pa 600035
Pa 600034
Pa 600033
Pa 600032
Pa 600031
Pa 600030
Pa 600029
Pa 600028
Pa 600027
Pa 600026
Pa 600025
Pa 600024
Pa 600023
Pa 600022
Pa 600021
Pa 600020
Pa 600019
Pa 600018
Pa 600017
Pa 600016
Pa 600015
Pa 600014
Pa 600013
Pa 600012
Pa 600011
Pa 600010
Pa 600009
Pa 600008
Pa 600007
Pa 600006
Pa 600005
Pa 600004
Pa 600003
Pa 600002
Pa 600001
Pa 600000

863840
863841
863842
863843

Pa 676976 Pa 676974



Ministry of
Natural
Resources

Report
of Work

DOCUMENT No.

W8803-045

Instructions - Supply required data on a separate form for each type of work to be recorded (see table below).
- For Geo-technical work use form no. 1362 "Report of Work (Geological, Geophysical, Geochemical and Expenditures)".

The Mining Act

Name and Postal Address of Recorded Holder
MINE LAKE MINERALS INC., ARCHON MINERALS INC.


Prospector's Licence No.
T-4962, T-~~4788~~ 4963

Suite 402-15 Toronto Street, Toronto, Ontario M5C 2E3

Beckington Lake

Summary of Work Performance and Distribution of Credits

Total Work Days Cr. claimed 1610	Mining Claim		Work Days Cr.	Mining Claim		Work Days Cr.	Mining Claim		Work Days Cr.
	Prefix	Number		Prefix	Number		Prefix	Number	
for Performance of the following work. (Check one only)									
SEE ATTACHED SCHEDULE									
<input type="checkbox"/> Manual Work <input type="checkbox"/> Shaft Sinking Drifting or other Lateral Work. <input type="checkbox"/> Compressed Air, other Power driven or mechanical equip. <input type="checkbox"/> Power Stripping <input checked="" type="checkbox"/> Diamond or other Core drilling <input type="checkbox"/> Land Survey									

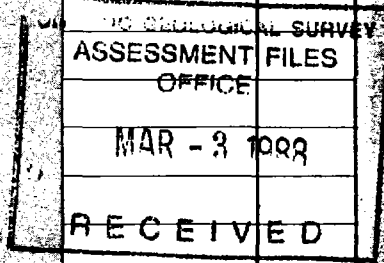

All the work was performed on Mining Claim(s): 911403, 611995


Required Information eg: type of equipment, Names, Addresses, etc. (See Table Below)

Drilling Done by: Trans-Arctic Explorations Ltd.
Suite 815-850 West Hastings Street
Vancouver, B.C.
V6C 1E2

- all core was B.Q. size
- drilling from November 15 to December 20, 1987.

Performed 1610
Using this report 1293
In Reserve 317 days

Handwritten signature
Recorded

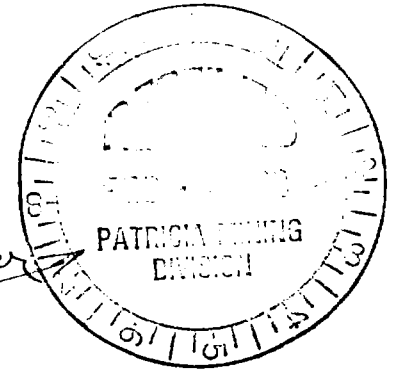

Date of Report: January 12, 1988
Recorded Holder or Agent (Signature): *[Signature]*

Certification Verifying Report of Work

I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Postal Address of Person Certifying
Thomas E. Gillett, R.R. #3, Marmora, Ontario K0K 2M0

Date Certified: January 12 1988
Certified by (Signature): *Thomas E. Gillett*

Table of Information/Attachments Required by the Mining Recorder


Type of Work	Specific information per type	Other information (Common to 2 or more types)	Attachments
Manual Work	Nil	Names and addresses of men who performed manual work /operated equipment, together with dates and hours of employment.	Work Sketch: these are required to show the location and extent of work in relation to the nearest claim post.
Shaft Sinking, Drifting or other Lateral Work			
Compressed air, other power driven or mechanical equip.	Type of equipment	Names and addresses of owner or operator together with dates when drilling/stripping done.	Work Sketch (as above) in duplicate
Power Stripping	Type of equipment and amount expended. Note: Proof of actual cost must be submitted within 30 days of recording.		
Diamond or other core drilling	Signed core log showing; footage, diameter of core, number and angles of holes.	Nil	Nil
Land Survey	Name and address of Ontario land surveyer.		

CLAIM NUMBER

WORK DAYS CREDIT

Pa611973	60
611974	40
611975	60
611976	60
611977	60
611979	30
611980	40
611981	60
611982	35
611983	60
611984	35
611985	40
611986	15
611987	60
611988	40
611989	38
611994	20
611995	5
611996	40
611997	40
911401	30
911402	30
911403	97
911404	107
911406	97
911407	5
911408	122
911409	27
911410	197
911411	20
911420	20
911422	20

1293

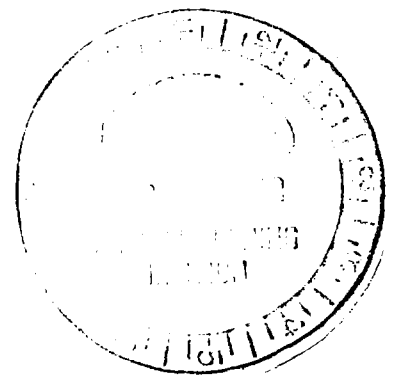

A handwritten signature or scribble is located at the bottom center of the page. It consists of several overlapping, curved lines that form an abstract shape, possibly representing a name or initials.

THOMAS LAKE

911404

L 56+00

911410

911403

638 ft

DDH #1

BASE
LINE

MINE LAKE MINERALS INC.

LOCATION OF DRILL HOLES


LEGEND

- CLAIM POST
- 911430 CLAIM NUMBER
- DDH #1 DIAMOND DRILL HOLE c/w no. & depth

250'



SCALE
1 inch = 200 feet

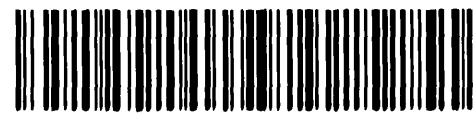

52J02NE0451 38 BECKINGTON LAKE

200

F. E. Gillett 1/10/88

BASE LINE

611994

911979

MINE LAKE

611995

911401

611984

DDH #2 77.75 m

200S

63.75 m DDH #3

300S

63.75 m DDH #4 DDH #5
59.2 m

400S

611985

611996



MINE LAKE MINERALS INC

LOCATION OF DRILL HOLES

LEGEND

- CLAIM POST
- 611995 CLAIM NUMBER
- SHAFT
- DUMP
- OLD TRENCH
- DDH #2 DIAMOND DRILL HOLE %w no & depth

N



SCALE

1 cm = 250m



52J02NE0451 38 BECKINGTON LAKE

210

S. S. 11/10/88