

## THESE TERMS GOVERN YOUR USE OF THIS DOCUMENT

***Your use of this Ontario Geological Survey document (the “Content”) is governed by the terms set out on this page (“Terms of Use”). By downloading this Content, you (the “User”) have accepted, and have agreed to be bound by, the Terms of Use.***

**Content:** This Content is offered by the Province of Ontario’s *Ministry of Northern Development and Mines* (MNDM) as a public service, on an “as-is” basis. Recommendations and statements of opinion expressed in the Content are those of the author or authors and are not to be construed as statement of government policy. You are solely responsible for your use of the Content. You should not rely on the Content for legal advice nor as authoritative in your particular circumstances. Users should verify the accuracy and applicability of any Content before acting on it. MNDM does not guarantee, or make any warranty express or implied, that the Content is current, accurate, complete or reliable. MNDM is not responsible for any damage however caused, which results, directly or indirectly, from your use of the Content. MNDM assumes no legal liability or responsibility for the Content whatsoever.

**Links to Other Web Sites:** This Content may contain links, to Web sites that are not operated by MNDM. Linked Web sites may not be available in French. MNDM neither endorses nor assumes any responsibility for the safety, accuracy or availability of linked Web sites or the information contained on them. The linked Web sites, their operation and content are the responsibility of the person or entity for which they were created or maintained (the “Owner”). Both your use of a linked Web site, and your right to use or reproduce information or materials from a linked Web site, are subject to the terms of use governing that particular Web site. Any comments or inquiries regarding a linked Web site must be directed to its Owner.

**Copyright:** Canadian and international intellectual property laws protect the Content. Unless otherwise indicated, copyright is held by the Queen’s Printer for Ontario.

It is recommended that reference to the Content be made in the following form:

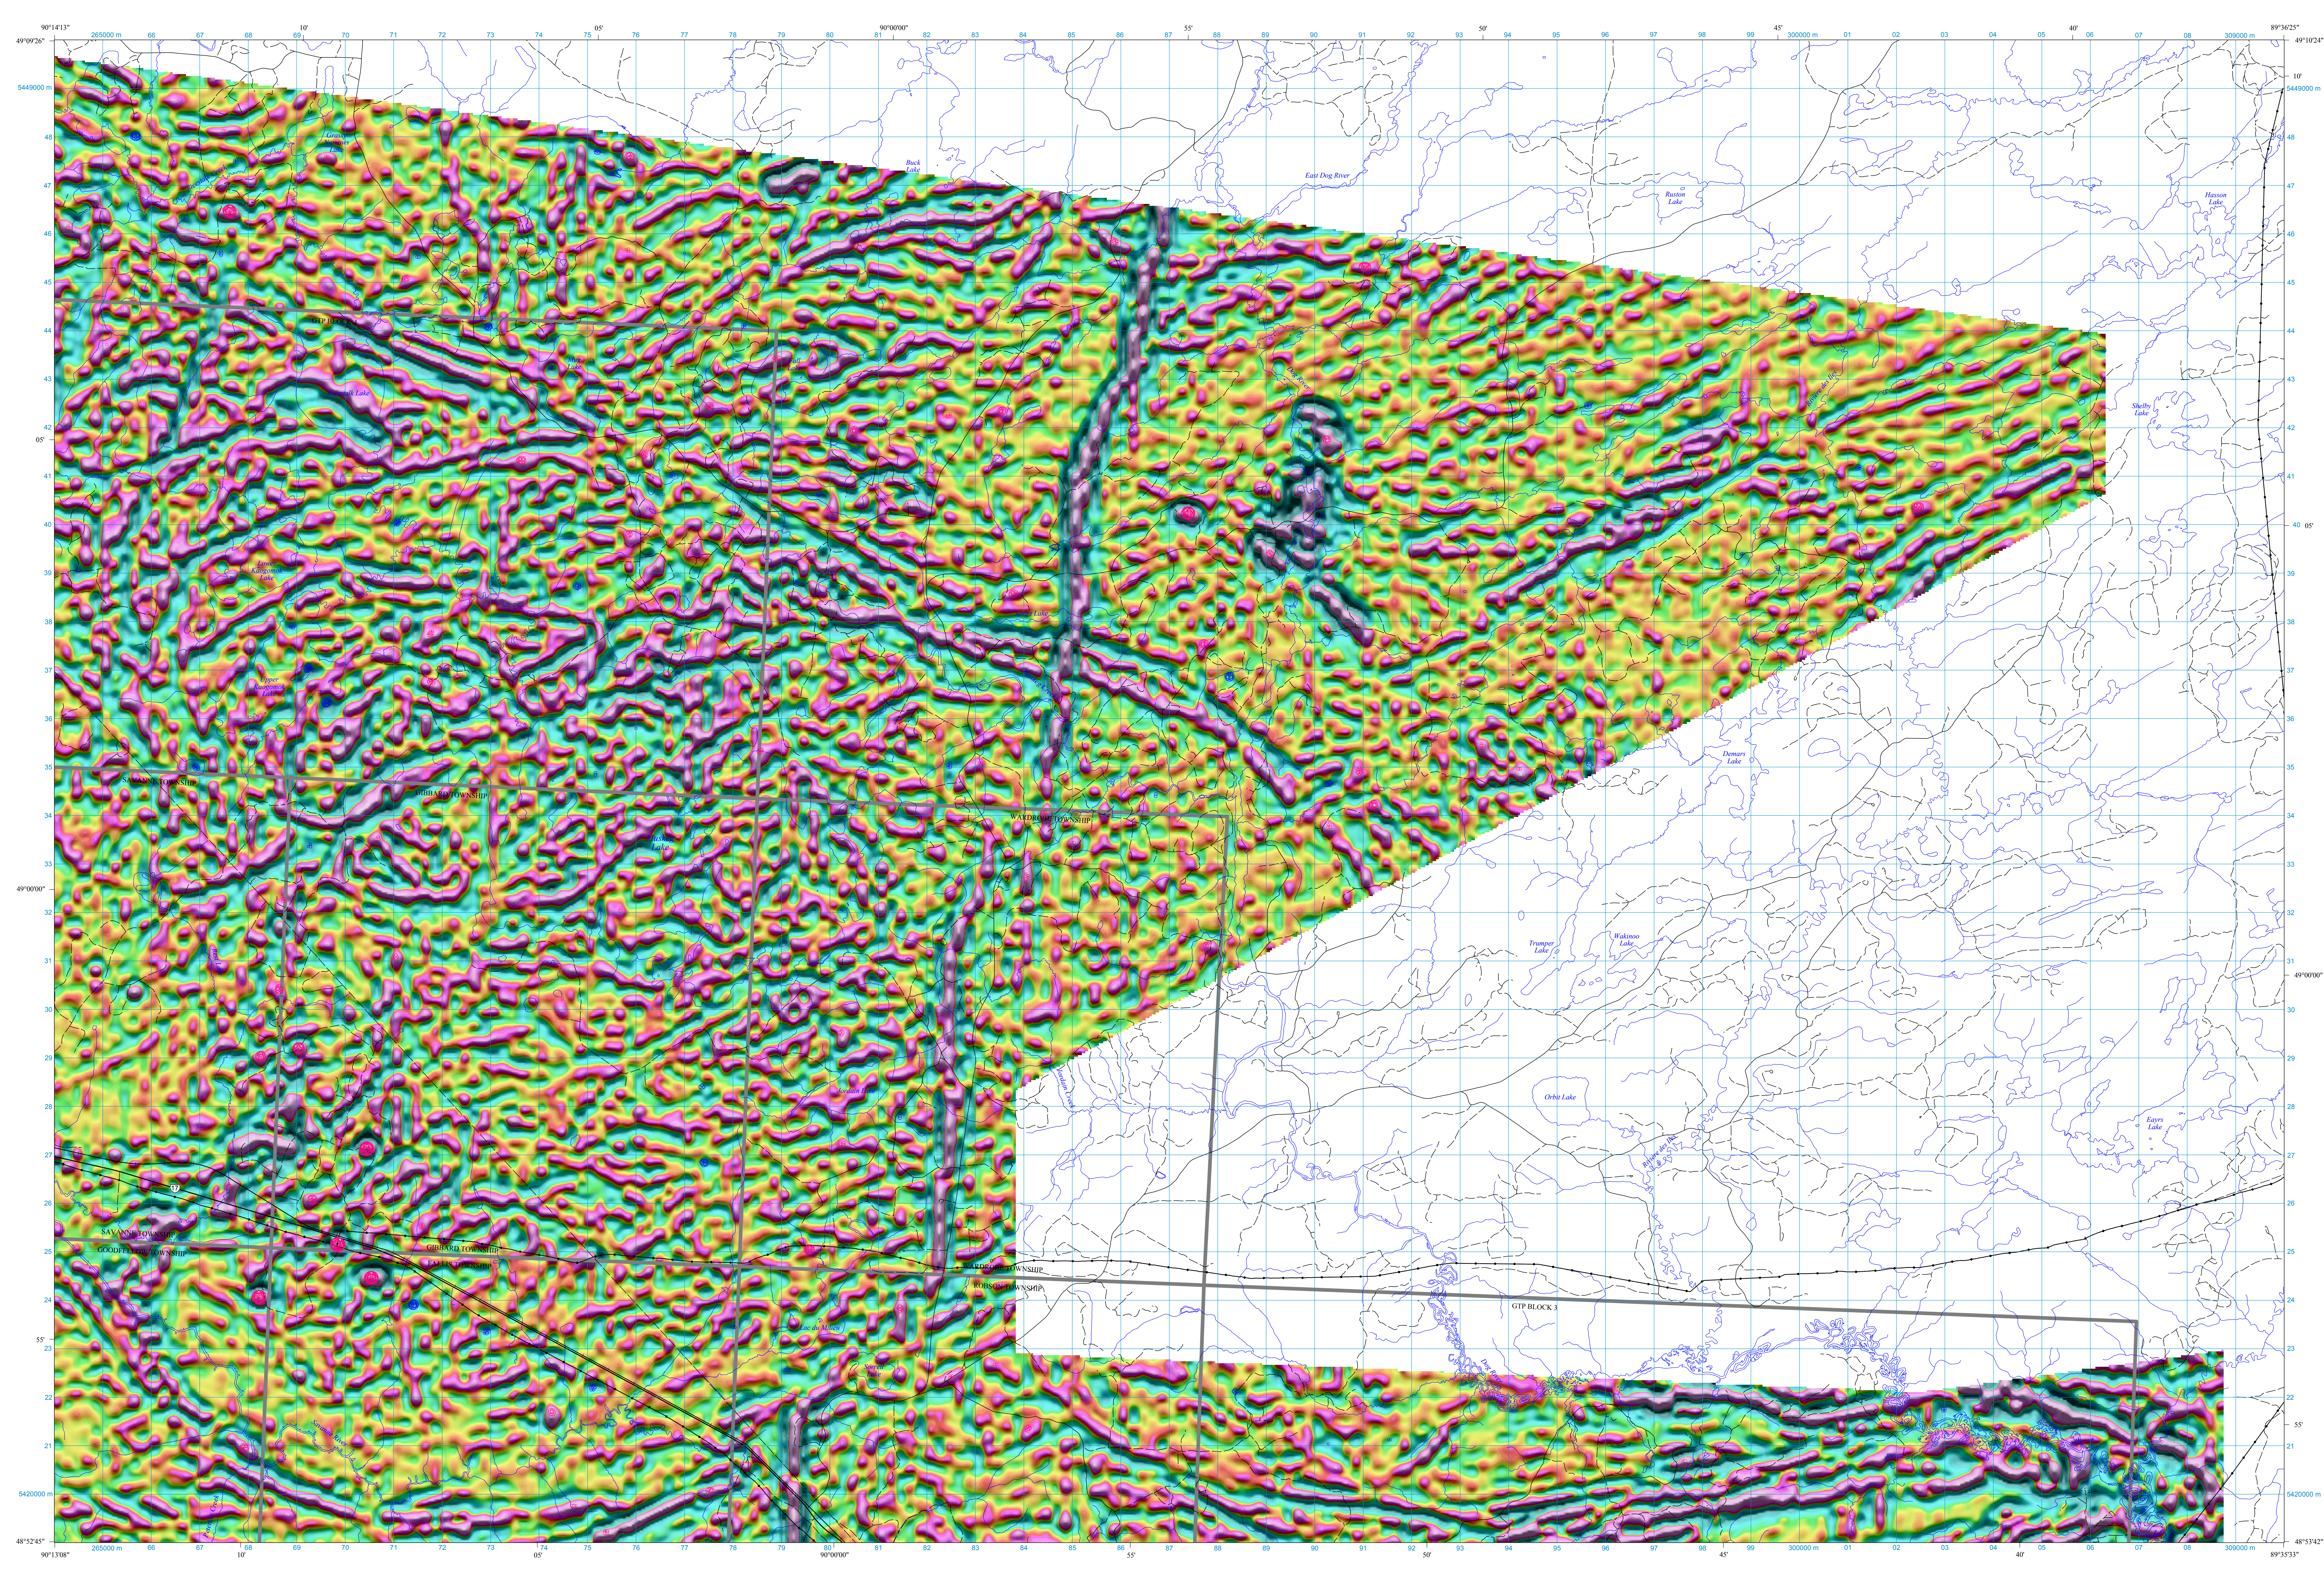
Ontario Geological Survey 2015. Airborne magnetic and gamma-ray spectrometric surveys, shaded colour image of the second vertical derivative of the residual magnetic field and Keating coefficients, Lac des Milles Lacs–Nagagami Lake area; Ontario Geological Survey, Map 82 694, scale 1:50 000.


**Use and Reproduction of Content:** The Content may be used and reproduced only in accordance with applicable intellectual property laws. *Non-commercial* use of unsubstantial excerpts of the Content is permitted provided that appropriate credit is given and Crown copyright is acknowledged. Any substantial reproduction of the Content or any *commercial* use of all or part of the Content is prohibited without the prior written permission of MNDM. Substantial reproduction includes the reproduction of any illustration or figure, such as, but not limited to graphs, charts and maps. Commercial use includes commercial distribution of the Content, the reproduction of multiple copies of the Content for any purpose whether or not commercial, use of the Content in commercial publications, and the creation of value-added products using the Content.

### Contact:

FOR FURTHER INFORMATION ON	PLEASE CONTACT:	BY TELEPHONE:	BY E-MAIL:
The Reproduction of the EIP or Content	MNDM Publication Services	Local: (705) 670-5691 Toll-Free: 1-888-415-9845, ext. 5691 (inside Canada, United States)	<a href="mailto:Pubsales.ndm@ontario.ca">Pubsales.ndm@ontario.ca</a>
The Purchase of MNDM Publications	MNDM Publication Sales	Local: (705) 670-5691 Toll-Free: 1-888-415-9845, ext. 5691 (inside Canada, United States)	<a href="mailto:Pubsales.ndm@ontario.ca">Pubsales.ndm@ontario.ca</a>
Crown Copyright	Queen’s Printer	Local: (416) 326-2678 Toll-Free: 1-800-668-9938 (inside Canada, United States)	<a href="mailto:Copyright@gov.on.ca">Copyright@gov.on.ca</a>







Ontario Geological Survey

MAP 82 694

AIRBORNE MAGNETIC AND  
GAMMA-RAY SPECTROMETRIC  
SURVEYS

Shaded colour image of the second vertical  
derivative of the residual magnetic field  
and Keating coefficients

LAC DES MILLE LACS–  
NAGAGAMI LAKE AREA


Scale 1:50 000

1 km 0 1 2 km

NTS References: 52 A/13; B/16; G/1; H/4

© Queen's Printer for Ontario, 2015.

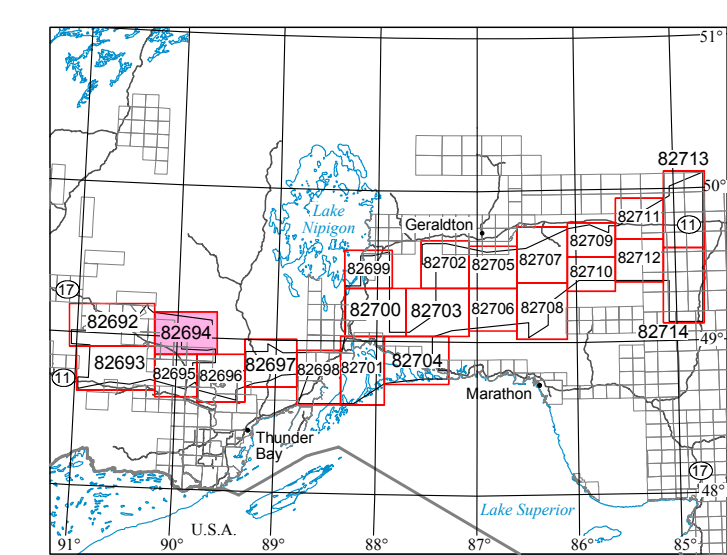This map is published with the permission of the Director,  
Ontario Geological Survey.



Location map  
1 cm equals 35 km

1 cm equals 35 km

**SURVEY PARAMETERS**

**AIRCRAFT**  
Type: Piper Navajo PA-31  
Registration: C-GJBB, C-GJBG

**MAGNETOMETER**  
Type: Geometrics cesium-vapour  
Sensitivity: 0.005 nT  
Noise level: 0.05 nT  
Sample interval: 10 readings per second  
Sensor locations: wingtips (transverse separation is 14.78 m)  
tail stinger (longitudinal separation is 9.75 m)  
Compensation: RMS KACCI  
Data Acquisition: GEDAS

**GAMMA-RAY SPECTROMETER SYSTEM**  
Type: Radiation Solutions RS-500  
Downward-looking crystal volume: 33.6 L  
Upward-looking crystal volume: 8.4 L  
Number of channels: 1024  
Sample interval: 1 reading per second  
Sensor location: near centre of aircraft  
Potassium window: 1570 to 1570 keV  
Uranium window: 1660 to 1860 keV  
Thorium window: 2410 to 2810 keV  
Total count window: 410 to 2810 keV

**NAVIGATION SYSTEM**  
GPS receiver: Novatel OEM4 ProPak  
GPS sample interval: 1 reading per second  
Radar altimeter: Thompson CFS 530A  
Radar sample interval: 10 readings per second  
Barometric altimeter: Setra 270  
Barometric sample interval: 10 readings per second  
Video flight path camera: Panasonic GPKR402 HRSV  
Navigation-Acquisition: GEDAS









**BASE STATION**  
Type: GEM System GSM-19W  
Magnetometer sample interval: 1 reading per second  
GPS sample interval: 1 reading per second

**SURVEY SPECIFICATIONS**  
Survey date: July 18 to October 29, 2014  
Nominal aircraft terrain clearance: 100 m  
Traverse line spacing: 200 m  
Control line spacing: 2000 m  
Traverse line direction: 0 degrees  
Control line direction: 90 degrees

**CO-ORDINATE SYSTEM**  
Projection: Universal Transverse Mercator  
Datum: NAD83  
Central meridian: 87°W (UTM zone 16N)  
Central scale factor: 0.9996  
False easting: 500 m  
False northing: 0 m

**LEGEND**

**KEATING COEFFICIENTS**

Positive correlation	Negative correlation
 90%	 90%
 85%	 85%
 80%	 80%
 75%	 75%

**SHADED IMAGE SUN ANGLE**

Illumination  
Declination = 0°

Illumination  
Inclination = 45°

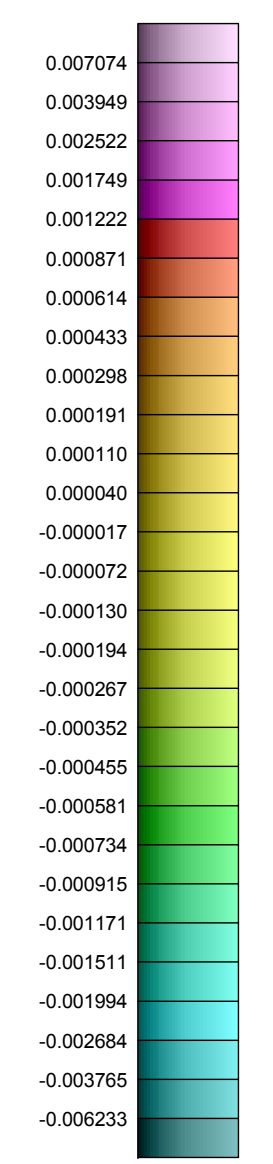
Plan view

Side view

Shaded image is produced by applying an artificial sun  
illumination to the first vertical derivative of the magnetic  
field grid.

**SECOND VERTICAL DERIVATIVE  
OF THE MAGNETIC FIELD GRID**

nanoteslas per metre²  
(nT/m²)



0.007074  
0.003949  
0.002522  
0.001749  
0.001022  
0.000871  
0.000614  
0.000433  
0.000298  
0.000191  
0.000110  
0.000040  
-0.000017  
-0.000072  
-0.000130  
-0.000194  
-0.000267  
-0.000332  
-0.000465  
-0.000581  
-0.000734  
-0.000915  
-0.001171  
-0.001511  
-0.001904  
-0.002384  
-0.003765  
-0.006233

**DESCRIPTIVE NOTES**

**Introduction**

The data comprising this map are derived from the results of an  
airborne magnetic and gamma-ray spectrometric survey carried  
out by Goldak Airborne Surveys. The survey was flown using 2  
Piper PA-31 Navajo aircraft. The aircraft were each equipped  
with 3 Geometrics magnetic sensors, Radiation Solutions  
gamma-ray spectrometers, GPS navigation systems and digital  
data acquisition systems.

**Second Vertical Derivative of the Magnetic Field**

The second vertical derivative of the magnetic field is the rate of  
change of the magnetic field in the vertical direction. Computation  
of the second vertical derivative removes long wavelength  
features of the magnetic field and significantly improves the  
resolution of closely spaced and superposed anomalies. The  
values for the second vertical derivative of the magnetic field  
were computed directly from the gridded gradient enhanced  
residual magnetic intensity data using a fast Fourier transform,  
combining the transfer functions of the first vertical derivative  
and an eighth-order Butterworth low-pass filter (250 m cut-off  
wavelength). The low-pass filter was aimed at attenuating  
unwanted high frequencies enhanced by the derivative operator.

**The shaded relief parameters are:**  
Shading inclination: 45°  
Shading declination: 0°

**Keating Correlation Coefficients**

Possible kimberlite targets have been identified from the residual  
magnetic intensity data, based on the identification of roughly  
circular anomalies. This procedure was automated by using a  
known pattern-recognition technique (Keating, 1995), which  
consists of computing, over a moving window, a first-order  
regression between a vertical cylinder model anomaly and the  
gridded magnetic data. Only the results where the absolute  
value of the correlation coefficient is above a threshold of 75%  
were retained. The results are depicted as circular symbols,  
scaled to reflect the correlation value. The most favourable  
targets are those that exhibit a cluster of high amplitude solutions.  
Correlation coefficients with a negative value correspond to  
reversely magnetized sources. It is important to be aware that  
other magnetic sources may correlate well with the vertical  
cylinder model, whereas some kimberlite pipes of irregular  
geometry may not.

**The cylinder model parameters are as follows:**  
Cylinder radius: 100 m  
Cylinder length: infinite  
Overburden thickness: 4 m  
Field inclination: 74.6°  
Field declination: -5.2°  
Window size: 17 x 17 cells

**SOURCES OF INFORMATION**

Base map information derived from the Land Information Ontario  
Data Warehouse, Land Information Ontario, Ministry of Natural  
Resources and Forestry, scale 1:50 000.

Magnetic declination for the centre of the map area was  
approximately 3°16'W in 2015.

Keating, P.B., 1995. A simple technique to identify magnetic  
anomalies due to kimberlite pipes; Exploration and Mining  
Geology, v.4, no.2, p.121-125.

**CREDITS**

Data acquisition, data compilation and map production by  
Goldak Airborne Surveys, Saskatoon, Saskatchewan.

Project management and quality assurance by Paterson,  
Grant and Watson Limited, Toronto, Ontario.

Contract management, base maps and map surrounds by the  
Ministry of Northern Development and Mines, Sudbury, Ontario.

Every possible effort has been made to ensure the accuracy of  
the information presented on this map; however, the Ministry of  
Northern Development and Mines does not assume liability for  
errors that may occur. Users should verify critical information.

Corresponding digital data for this survey are available from  
the following Ontario Geological Survey publication:

Ontario Geological Survey 2015. Ontario airborne geophysical  
surveys, magnetic and gamma-ray spectrometric data, grid and  
profile data (ASCII format) and vector data, Lac des Mille  
Lacs-Nagagami Lake area, Ontario Geological Survey, Geophysical  
Data Set 1078a.

Ontario Geological Survey 2015. Ontario airborne geophysical  
surveys, magnetic and gamma-ray spectrometric data, grid and  
profile data (Geosoft format) and vector data, Lac des Mille  
Lacs-Nagagami Lake area, Ontario Geological Survey,  
Geophysical Data Set 1078b.

Issued 2015.

Information from this publication may be quoted if given.  
It is recommended that reference be made in the following form:

Ontario Geological Survey 2015. Airborne magnetic and gamma-  
ray spectrometric surveys, shaded colour image of the second  
vertical derivative of the residual magnetic field and Keating  
coefficients, Lac des Mille Lacs-Nagagami Lake area, Ontario  
Geological Survey, Map 82 694, scale 1:50 000.

Users of OGS products are encouraged to contact those  
Aboriginal communities whose traditional territories may be  
located in the mineral exploration area to discuss their project.