

**REPORT ON A HELICOPTER-BORNE
VERSATILE TIME DOMAIN ELECTROMAGNETIC (VTEM)
GEOPHYSICAL SURVEY**

**Fripp Project
Timmins, Ontario, Canada**

**for
Amador Gold Corp.**

By

**Geotech Limited
30 Industrial Parkway South
Aurora, Ontario, Canada
Tel: 1.905.841.5004
Fax: 1.905.841.0611
www.geotechairborne.com**

Email: info@geotechairborne.com

Survey flown in May, 2006

**Project 661
August, 2006**

2.37463

TABLE OF CONTENTS

Executive Summary	3
1. INTRODUCTION	4
1.1 <i>General Considerations</i>	4
1.2 <i>Survey and System Specifications</i>	4
1.3 <i>Data Processing and Final Products</i>	5
1.4 <i>Topographic Relief</i>	5
2. DATA ACQUISITION	6
2.1 <i>Survey Area</i>	6
2.2 <i>Survey Operations</i>	6
2.3 <i>Flight Specifications</i>	7
2.4 <i>Aircraft and Equipment</i>	8
2.4.1 <i>Survey Aircraft</i>	8
2.4.2 <i>Electromagnetic System</i>	8
2.4.3 <i>Airborne magnetometer</i>	11
2.4.4 <i>Ancillary Systems</i>	11
2.4.5 <i>Base Station</i>	12
3. PERSONNEL	13
4. DATA PROCESSING AND PRESENTATION	14
4.1 <i>Flight Path</i>	14
4.2 <i>Electromagnetic Data</i>	14
4.3 <i>Magnetic Data</i>	15
4.4 <i>Digital Elevation Model</i>	15
5. DELIVERABLES	16
5.1 <i>Survey Report</i>	16
5.2 <i>Maps</i>	16
5.3 <i>Gridded Data</i>	16
5.4 <i>Digital Data</i>	17
6. CONCLUSIONS	20

APPENDICES

A. Survey block location maps	21
B. Survey block coordinates	22
C. General modeling results of the VTEM system	23
D. VTEM Waveform	24

REPORT ON A HELICOPTER-BORNE VERSATILE TIME DOMAIN ELECTROMAGNETIC SURVEY

Fripp Project, Timmins, Ontario, Canada

Executive Summary

During the period of May 8th to 14th, 2006, Geotech Limited carried out a helicopter-borne geophysical survey for Amador Gold Corp. over one block south of Timmins, Ontario, Canada.

Principal geophysical sensors included a versatile time domain electromagnetic (VTEM) system and a cesium magnetometer. Ancillary equipment included a GPS navigation system and a radar altimeter. A total of 203 line-km were flown.

In-field data processing involved quality control and compilation of data collected during the acquisition stage, using the in-field processing centre established at Timmins, Ontario. Preliminary and final data processing, including generation of final digital data products were done at the office of Geotech Limited in Aurora, Ontario.

The processed survey results are presented as electromagnetic stacked profiles and the following grids,

- Total magnetic field
- Apparent Conductivity
- Digital elevation model

Digital data includes all electromagnetic and magnetic products plus positional, altitude and raw data.

1. INTRODUCTION

1.1 *General Considerations*

These services are the result of the Agreement made between Geotech Limited and Amador Gold Corp. to perform a helicopter-borne geophysical survey over Fripp property, located south of Timmins, Ontario, Canada.

203 line-km of geophysical data were acquired during the survey.

John Keating, acted on behalf of Amador Gold Corp. during data acquisition and processing phases of this project.

The survey block is as shown in Appendix A.

The crew was based in Timmins, Ontario for the acquisition phase of the survey, as shown in Section 2 of this report.

The helicopter was based at Timmins airport for the duration of the survey. Survey flying was completed on May 14th, 2006. Preliminary data processing was carried out daily during the acquisition phase of the project. Final data presentation and data archiving was completed in the Aurora office of Geotech Limited by August, 2006.

1.2 *Survey and System Specifications*

The survey block was flown at nominal traverse line spacing of 100 metres, in north-east to south-west direction. Tie lines were flown perpendicular to traverse lines.

Where possible, the helicopter maintained a mean terrain clearance of 80 metres, which translated into an average height of 30 meters above ground for the bird-mounted VTEM system and 30 meters for the magnetic sensor.

The survey was flown using an Astar B2 helicopters, registration C-FBTW. The helicopter was operated by Gateway Helicopters Limited. Details of the survey specifications may be found in Section 2 of this report.

1.3. Data Processing and Final Products

Data compilation and processing were carried out by the application of Geosoft OASIS Montaj and programs proprietary to Geotech Limited.

Database, grid and maps of final products were presented to Amador Gold Corp.

The survey report describes the procedures for data acquisition, processing, final image presentation and the specifications for the digital data set.

1.4. Topographic Relief

The survey block is located approximately 25 kilometers south of Timmins, Ontario, as shown in Appendix A.

Topographically, the block exhibits a moderate relief, with elevation range from 325 metres to 405 metres above sea level.

Several rivers and lakes intersect the block in different directions. Swamp areas are also detected.

2. DATA ACQUISITION

2.1. Survey Area

The survey block (see location map, Appendix A) and general flight specifications are as follows:

Survey block	Line spacing (m)	Area (Km ²)	Line-km	Flight direction	Line number
Fripp	100	19.5	191.2	N56°E	L1000 - 1530
	1050		21.9	N147°E	T1900 - 1930

Table 1 - Survey block

Survey block boundaries co-ordinates are provided in Appendix B.

2.2. Survey Operations

Survey operations were based in Timmins, Ontario for the acquisition phase of the survey. The crew was housed at Days Inn Motel in Timmins for the survey period, as shown on table 2.

The following table shows the timing of the flying.

Date	Crew Location	Flight #	Km flown	Comments
8-May	Timmins		0.0	Mobilization
9-May	Timmins		0.0	Mobilization
10-May	Timmins	2	5.4	Production interrupted due to weather
11-May	Timmins		0.0	No production due to weather
12-May	Timmins		0.0	Test Flight
13-May	Timmins		0.0	Rain, wind
14-May	Timmins	3, 4	207.6	Survey completed

Table 2 - Survey schedule

2.3. Flight Specifications

The nominal EM sensor terrain clearance was 30 m (EM bird height above ground, i.e. helicopter is maintained 80 m above ground). Nominal survey speed was 80 km/hour. The data recording rates of the data acquisition was 0.1 second for electromagnetics and magnetometer, 0.2 second for altimeter and GPS. This translates to a geophysical reading about every 2 metres along flight track. Navigation was assisted by a GPS receiver and data acquisition system, which reports GPS co-ordinates as latitude/longitude and directs the pilot over a pre-programmed survey grid.

The operator was responsible for monitoring of the system integrity. He also maintained a detailed flight log during the survey, tracking the times of the flight as well as any unusual geophysical or topographic feature.

On return of the aircrew to the base camp the survey data was transferred from a compact flash card (PCMCIA) to the data processing computer.



2.4. Aircraft and Equipment

2.4.1. Survey Aircraft

An Astar B2 helicopter, registration C-FBTW - owned and operated by Gateway Helicopters Ltd. - was used for the survey. Installation of the geophysical and ancillary equipment was carried out by Geotech Ltd.

2.4.2. Electromagnetic System

The electromagnetic system was a Geotech Time Domain EM (VTEM) system. The configuration is as indicated in Figure 1 below.

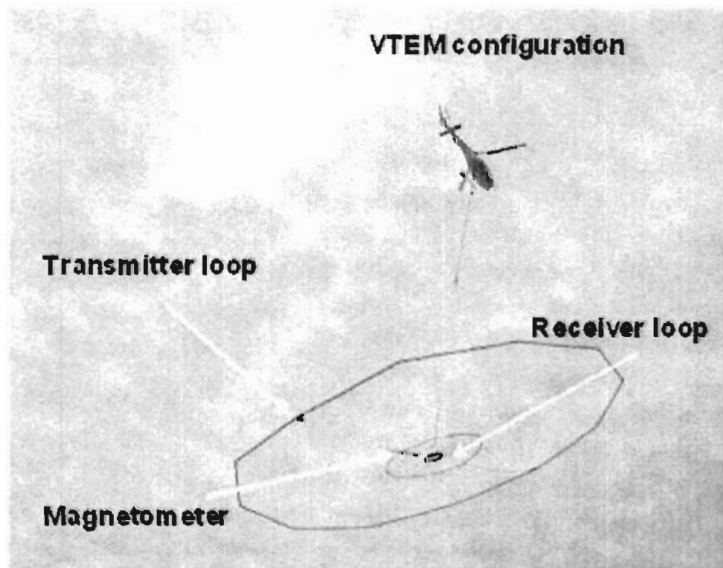


Figure 1 – VTEM configuration

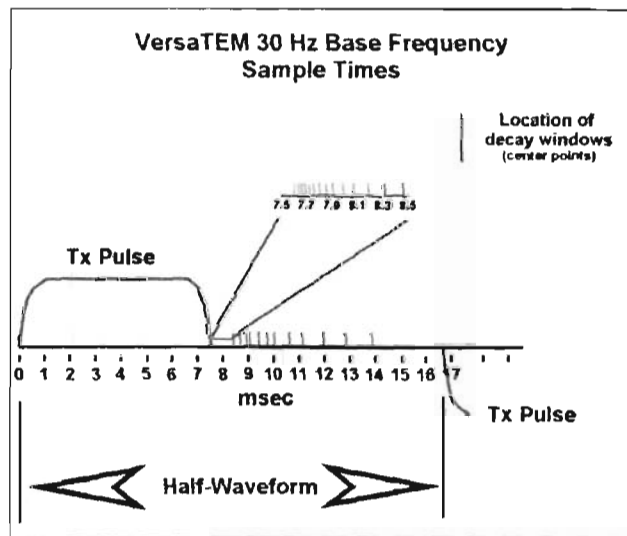


Figure 2 – sample times

Receiver and transmitter coils are concentric and Z-direction oriented. The receiver decay recording scheme is shown diagrammatically in Figure 2.

Twenty-eight measurement gates were used in the range from 90 μ s to 7540 μ s, as shown in table 3.

VTEM Decay Sampling scheme (Microseconds)			
Time gate	Start	End	Width
90	80	100	20
110	100	120	20
130	120	140	20
150	140	160	20
170	160	180	20
190	180	205	25
220	205	240	35
260	240	280	40
300	280	325	45
350	325	380	55
410	380	445	65
480	445	525	80

570	525	625	100
680	625	745	120
810	745	885	140
960	885	1045	160
1130	1045	1235	190
1340	1235	1470	235
1600	1470	1750	280
1900	1750	2070	320
2240	2070	2450	380
2660	2450	2920	470
3180	2920	3480	560
3780	3480	4120	640
4460	4120	4880	760
5300	4880	5820	940
6340	5820	6860	1040
7540	6860	8220	1360

Table 3 - VTEM decay sampling scheme

Transmitter coil diameter was 26 metres, the number of turns was 4.
 Transmitter pulse repetition rate was 30 Hz.
 Peak current was 179 Amp.
 Duty cycle was 37%.
 Peak dipole moment was 380,000 NIA.

Receiver coil diameter was 1.2 metre, the number of turns was 100.
 Receiver effective area was 113.1 m²
 Wave form – trapezoid.
 Recording sampling rate was 10 samples per second.

The EM bird was towed 50 m below the helicopter.

2.4.3. Airborne magnetometer

The magnetic sensor utilized for the survey was a Geometrics optically pumped cesium vapour magnetic field sensor, mounted behind the EM receiver loop, towed 50 m below the helicopter, as shown on figure 1. The sensitivity of the magnetic sensor is 0.02 nanoTesla (nT) at a sampling interval of 0.1 seconds. The magnetometer sends the measured magnetic field strength as nanoTeslas to the data acquisition system via the RS-232 port.

2.4.4. Ancillary Systems

2.4.4.1. Radar Altimeter

A Terra TRA 3000/TRI 40 radar altimeter was used to record terrain clearance. The antenna was mounted beneath the bubble of the helicopter cockpit.

2.4.4.2. GPS Navigation System

The navigation system used was a Geotech PC based navigation system utilizing a NovAtel's WAAS enable OEM4-G2-3151W GPS receiver, Geotech navigate software, a full screen display with controls in front of the pilot to direct the flight and an NovAtel GPS antenna mounted on the helicopter tail.

The co-ordinates of the block were set-up prior to the survey and the information was fed into the airborne navigation system.

2.4.4.3. Digital Acquisition System

A Geotech data acquisition system recorded the digital survey data on an internal compact flash card. Data is displayed on an LCD screen as traces to allow the operator to monitor the integrity of the system. The data type and sampling interval as provided in table 4.

DATA TYPE	SAMPLING
TDEM	0.1 sec
Magnetometer	0.1 sec
GPS Position	0.2 sec
RadarAltimeter	0.2 sec

Table 4 - Sampling Rates

2.4.5. Base Station

A combine magnetometer/GPS base station was utilized on this project. A Geometrics Cesium vapour magnetometer was used as a magnetic sensor with a sensitivity of 0.001 nT. The base station was recording the magnetic field together with the GPS time at 1 Hz on a base station computer.

The base station magnetometer sensor was installed in a local farm, about 2 kilometres south-east from the block; away from electric transmission lines and moving ferrous objects such as motor vehicles.

The magnetometer base station's data was backed-up to the data processing computer at the end of each survey day.

3. PERSONNEL

The following Geotech Ltd. personnel were involved in the project.

Field

Operator / Crew chief:	Graeme Lillie
Operator:	Ioan Serbu

The survey pilot and the mechanic engineer were employed directly by the helicopter operator – Gateway Helicopters Ltd.

Pilot:	Francois Briseboif
Mechanical Engineer:	Peter Libby

Office

Data Processing:	Neil Fiset
Data Processing / Reporting:	Marta Orta

Final data processing at the office of Geotech Limited in Aurora, Ontario was carried out under the supervision of Andrei Bagrianski, Surveys Manager.

Overall management of the survey was carried out from the Aurora office of Geotech Ltd. by Edward Morrison, President.

4. DATA PROCESSING AND PRESENTATION

4.1. Flight Path

The flight path, recorded by the acquisition program as WGS 84 latitude/longitude, was converted into the UTM coordinate system in Oasis Montaj.

The flight path was drawn using linear interpolation between x,y positions from the navigation system. Positions are updated every second and expressed as UTM eastings (x) and UTM northings (y).

4.2. Electromagnetic Data

A three stage digital filtering process was used to reject major sferic events and to reduce system noise. Local sferic activity can produce sharp, large amplitude events that cannot be removed by conventional filtering procedures. Smoothing or stacking will reduce their amplitude but leave a broader residual response that can be confused with geological phenomena. To avoid this possibility, a computer algorithm searches out and rejects the major sferic events. The filter used was a 16 point non-linear filter.

The signal to noise ratio was further improved by the application of a low pass linear digital filter. This filter has zero phase shift which prevents any lag or peak displacement from occurring, and it suppresses only variations with a wavelength less than about 1 second or 20 metres. This filter is a symmetrical 1 sec linear filter.

The results are presented as stacked profiles of EM voltages for the gate times, in linear - logarithmic scale.

Apparent Conductivity grid was calculated from the channel located 3.18 milliseconds after the termination of the impulse.

Generalized modeling results of the VTEM system, written by Geophysicist Roger Barlow, are shown in Appendix C.

Graphical representation of the VTEM output voltage of the receiver coil is shown in Appendix D.



4.3. Magnetic Data

The processing of the magnetic data involved the correction for diurnal variations by using the digitally recorded ground base station magnetic values. The base station magnetometer data was edited and merged into the Geosoft GDB database on a daily basis. The aeromagnetic data was corrected for diurnal variations by subtracting the observed magnetic base station deviations.

Tie line levelling was carried out by adjusting intersection points along the traverse lines. A micro-levelling procedure was then applied. This technique is designed to remove persistent low-amplitude components of flight-line noise remaining after tie line levelling.

The corrected magnetic data was interpolated between survey lines using a random point gridding method to yield x-y grid values for a standard grid cell size of approximately 0.2 cm at the mapping scale. The Minimum Curvature algorithm was used to interpolate values onto a rectangular regular spaced grid.

4.4. Digital Elevation Model

Subtracting the radar altimeter data from the GPS elevation data creates a digital elevation model. Any levelling errors are removed by application of tie line levelling and micro-levelling techniques.

The final digital elevation model data is interpolated onto a 20 metres square grid using a minimum curvature gridding algorithm.



5. DELIVERABLES

5.1. Survey Report

The survey report describes the data acquisition, processing, and final presentation of the survey results.

The survey report is provided in two paper copies and digitally in PDF format.

5.2. Maps

Final maps were produced at a scale of 1:20,000. The coordinate/projection system used was the WGS84, UTM zone 17 north. All maps show the flight path trace and topographic data. Latitude and longitude are also noted on maps.

The following maps are presented to Amador Gold Corp. on paper as results of the helicopter-borne geophysical survey carried out over Fripp property.

- Linear - logarithmic scale VTEM profiles, Time Gates 0.22 - 6.34 ms
- Apparent conductivity colour image, Time Gate 3.18 ms
- Total Magnetic Field contours and colour image

5.3. Gridded Data

The following grids are provided to Amador Gold Corp. in Geosoft GRD format,

- Total magnetic field
- Apparent Conductivity
- Digital elevation model

Grid cell size of 20 metres was used.

5.4. Digital Data

Two copies of CD-ROMs were prepared.

There are two (2) main directories,

Data	contains a database, grids and maps, as described below.
Report	contains a copy of the report and appendixes in PDF format.

- Database in Geosoft GDB format, containing the following channels:

X:	X positional data (meters – NAD83, utm zone 17 north)
Y:	Y positional data (meters – NAD83, utm zone 17 north)
Long:	Longitude data (degree – WGS84)
Lat:	Latitude data (degree – WGS84)
Z:	GPS antenna elevation (meters - ASL)
Gtime1:	GPS time (seconds of the day)
Radar:	Helicopter terrain clearance from radar altimeter (meters - AGL)
DEM:	Digital elevation model (meters)
Mag1:	Raw Total Magnetic field data (nT)
Basemag:	Magnetic diurnal variation data (nT)
Mag2:	Total Magnetic field diurnal variation corrected data (nT)
Mag3:	Leveled Total Magnetic field data (nT)
C90f:	Raw 90 microsecond time channel (pV/A/m ⁴)
C110f:	Raw 110 microsecond time channel (pV/A/m ⁴)
C130f:	Raw 130 microsecond time channel (pV/A/m ⁴)
C150f:	Raw 150 microsecond time channel (pV/A/m ⁴)
C170f:	Raw 170 microsecond time channel (pV/A/m ⁴)
C190f:	Raw 190 microsecond time channel (pV/A/m ⁴)
C220f:	Raw 220 microsecond time channel (pV/A/m ⁴)
C260f:	Raw 260 microsecond time channel (pV/A/m ⁴)
C300f:	Raw 300 microsecond time channel (pV/A/m ⁴)
C350f:	Raw 350 microsecond time channel (pV/A/m ⁴)
C410f:	Raw 410 microsecond time channel (pV/A/m ⁴)
C480f:	Raw 480 microsecond time channel (pV/A/m ⁴)
C570f:	Raw 570 microsecond time channel (pV/A/m ⁴)
C680f:	Raw 680 microsecond time channel (pV/A/m ⁴)
C810f:	Raw 810 microsecond time channel (pV/A/m ⁴)
C960f:	Raw 960 microsecond time channel (pV/A/m ⁴)
C1130f:	Raw 1130 microsecond time channel (pV/A/m ⁴)



C1340f: Raw 1340 microsecond time channel (pV/A/m⁴)
 C1600f: Raw 1600 microsecond time channel (pV/A/m⁴)
 C1900f: Raw 1900 microsecond time channel (pV/A/m⁴)
 C2240f: Raw 2240 microsecond time channel (pV/A/m⁴)
 C2660f: Raw 2660 microsecond time channel (pV/A/m⁴)
 C3180f: Raw 3180 microsecond time channel (pV/A/m⁴)
 C3780f: Raw 3780 microsecond time channel (pV/A/m⁴)
 C4460f: Raw 4460 microsecond time channel (pV/A/m⁴)
 C5300f: Raw 5300 microsecond time channel (pV/A/m⁴)
 C6340f: Raw 6340 microsecond time channel (pV/A/m⁴)
 C7540f: Raw 7540 microsecond time channel (pV/A/m⁴)
 D90f: Deconvolved 90 microsecond time channel (pV/A/m⁴)
 D110f: Deconvolved 110 microsecond time channel (pV/A/m⁴)
 D130f: Deconvolved 130 microsecond time channel (pV/A/m⁴)
 D150f: Deconvolved 150 microsecond time channel (pV/A/m⁴)
 D170f: Deconvolved 170 microsecond time channel (pV/A/m⁴)
 D190f: Deconvolved 190 microsecond time channel (pV/A/m⁴)
 D220f: Deconvolved 220 microsecond time channel (pV/A/m⁴)
 D260f: Deconvolved 260 microsecond time channel (pV/A/m⁴)
 D300f: Deconvolved 300 microsecond time channel (pV/A/m⁴)
 D350f: Deconvolved 350 microsecond time channel (pV/A/m⁴)
 D410f: Deconvolved 410 microsecond time channel (pV/A/m⁴)
 D480f: Deconvolved 480 microsecond time channel (pV/A/m⁴)
 D570f: Deconvolved 570 microsecond time channel (pV/A/m⁴)
 D680f: Deconvolved 680 microsecond time channel (pV/A/m⁴)
 D810f: Deconvolved 810 microsecond time channel (pV/A/m⁴)
 D960f: Deconvolved 960 microsecond time channel (pV/A/m⁴)
 D1130f: Deconvolved 1130 microsecond time channel (pV/A/m⁴)
 D1340f: Deconvolved 1340 microsecond time channel (pV/A/m⁴)
 D1600f: Deconvolved 1600 microsecond time channel (pV/A/m⁴)
 D1900f: Deconvolved 1900 microsecond time channel (pV/A/m⁴)
 D2240f: Deconvolved 2240 microsecond time channel (pV/A/m⁴)
 D2660f: Deconvolved 2660 microsecond time channel (pV/A/m⁴)
 D3180f: Deconvolved 3180 microsecond time channel (pV/A/m⁴)
 D3780f: Deconvolved 3780 microsecond time channel (pV/A/m⁴)
 D4460f: Deconvolved 4460 microsecond time channel (pV/A/m⁴)
 D5300f: Deconvolved 5300 microsecond time channel (pV/A/m⁴)
 D6340f: Deconvolved 6340 microsecond time channel (pV/A/m⁴)
 D7540f: Deconvolved 7540 microsecond time channel (pV/A/m⁴)
 Plinef: Power line monitor

- Grids in Geosoft GRD format, as follow,

Mag: Total Magnetic field (nT)
Cond: Apparent conductivity, time gate 3180 ms (S/m)
Dem: Digital elevation model (m)

A Geosoft .GRD file has a .GI metadata file associated with it, containing grid projection information.

Geosoft colour bar .ZON files are provided to visualize each grid.

- Maps at 1:10,000 scale in Geosoft MAP format, as follow,

Mag: Total Magnetic contours and colour image
Cond: Apparent conductivity colour image
LogProf: Linear - Logarithmic scale Time Gates 0.22 – 6.34 profiles

- ASCII file VTEM_Waveform.xyz in Geosoft format containing the following channel:

Volt: output voltage of the receiver coil
(volts, sampling rate 20 microseconds)

- Google Earth file 661_Flightpath_Fripp.kmz showing flight path of the block. Free version of Google Earth software can be downloaded from,

<http://earth.google.com/download-earth.html>

- A *readme.txt* file describing the content of digital data, as described above.

6. CONCLUSIONS

A helicopter-borne versatile time domain electromagnetic (VTEM) geophysical survey has been completed over Fripp property, located south of Timmins, Ontario, Canada.

The total area coverage is 19.5 km². Total survey line coverage is 203 line kilometres. The principal sensors included a Time Domain EM system and a magnetometer. Results have been presented as colour contour maps and stacked profiles at a scale of 1:10,000.

Final data processing at the office of Geotech Limited in Aurora, Ontario was carried out under the supervision of Andrei Bagrianski, Surveys Manager.

A number of EM anomaly groupings were identified. Ground follow-up of those anomalies should be carried out if favourably supported by other geoscientific data.


Respectfully submitted,



Marta Orta,
Geotech Limited

APPENDIX A

SURVEY BLOCK LOCATION MAP

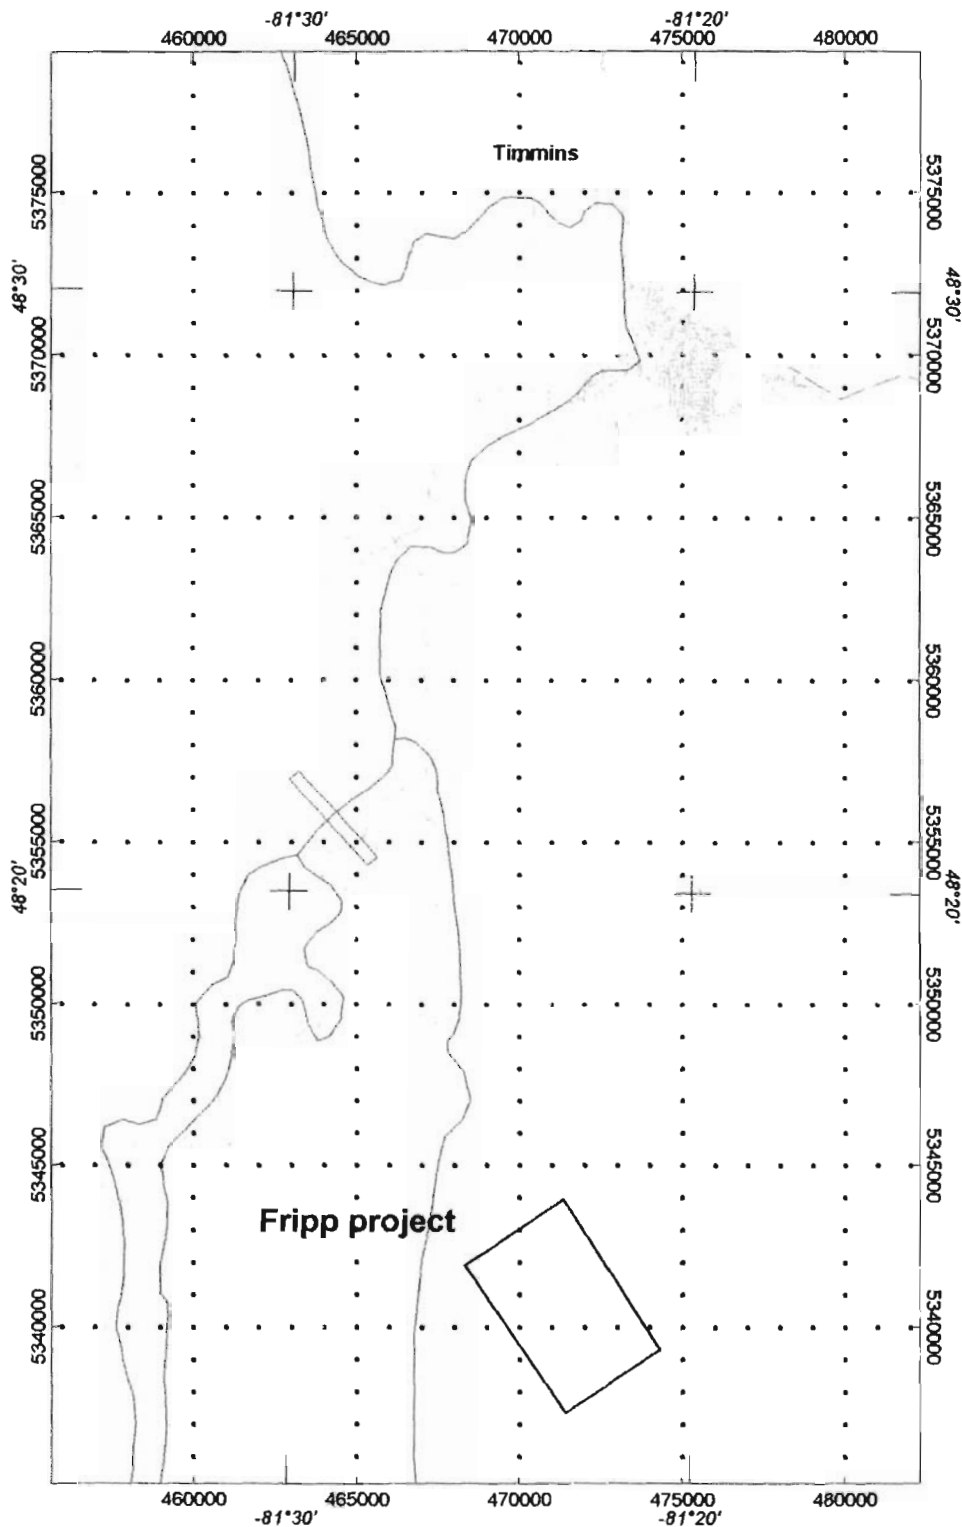

Contract 661 - Amador Gold Corp.

Ontario, Canada

Location map

Geotech VTEM System



metres
NAD83 / UTM zone 17N

APPENDIX B

SURVEY BLOCK COORDINATES
(NAD83, UTM zone 17N)

Fripp project


UTM eastings (x)	UTM northings (y)
471431	5337357
468329	5341900
471346	5343944
474311	5339309
471431	5337357

APPENDIX C

GENERALIZED MODELING RESULTS OF VTEM SYSTEM

APPENDIX D

VTEM WAVE FORM

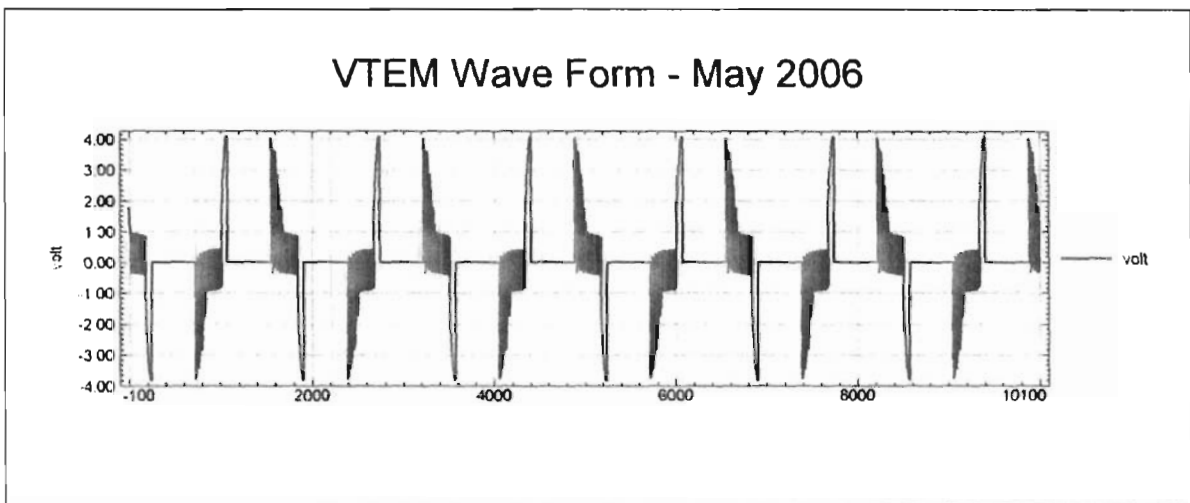

GENERALIZED MODELING RESULTS OF THE VTEM SYSTEM

Introduction

The VTEM system is based on a concentric or central loop design, whereby, the receiver is positioned at the centre of a 26.1 meters diameter transmitter loop that produces a dipole moment up to 625,000 NIA at peak current. The wave form is a bi-polar, modified square wave with a turn-on and turn-off at each end. With a base frequency of 30 Hz, the duration of each pulse is approximately 7.5 milliseconds followed by an off time where no primary field is present.

During turn-on and turn-off, a time varying field is produced (dB/dt) and an electro-motive force (emf) is created as a finite impulse response. A current ring around the transmitter loop moves outward and downward as time progresses. When conductive rocks and mineralization are encountered, a secondary field is created by mutual induction and measured by the receiver at the centre of the transmitter loop.

Measurements are made during the off-time, when only the secondary field (representing the conductive targets encountered in the ground) is present.

Efficient modeling of the results can be carried out on regularly shaped geometries, thus yielding close approximations to the parameters of the measured targets. The following is a description of a series of common models made for the purpose of promoting a general understanding of the measured results.

Variation of Plate Depth

Geometries represented by plates of different strike length, depth extent, dip, plunge and depth below surface can be varied with characteristic parameters like conductance of the target, conductance of the host and conductivity/thickness and thickness of the overburden layer.

Diagrammatic models for a vertical plate are shown in figures A and G at two different depths, all other parameters remaining constant. With this transmitter-receiver geometry, the classic **M** shaped response is generated. Figure A shows a plate where the top is near surface. Here, amplitudes of the dual peaks are higher and symmetrical with the zero centre positioned directly above the plate. Most important is the separation distance of the peaks. This distance is small when the plate is near surface and widens with a linear relationship as the plate (depth to top) increases. Figure G shows a much deeper plate where the separation distance of the peaks is much wider and the amplitudes of the channels have decreased.

Variation of Plate Dip

As the plate dips and departs from the vertical position, the peaks become asymmetrical. Figure B shows a near surface plate dipping 80°. Note that the direction of dip is toward the high shoulder of the response and the top of the plate remains under the centre minimum.

As the dip increases, the aspect ratio (Min/Max) decreases and this aspect ratio can be used as an empirical guide to dip angles from near 90° to about 30°. The method is not sensitive enough where dips are less than about 30°. Figure E shows a plate dipping 45° and, at this angle, the









minimum shoulder starts to vanish. In Figure D, a flat lying plate is shown, relatively near surface. Note that the twin peak anomaly has been replaced by a symmetrical shape with large, bell shaped, channel amplitudes which decay relative to the conductance of the plate.

Figure H shows a special case where two plates are positioned to represent a synclinal structure. Note that the main characteristic to remember is the centre amplitudes are higher (approximately double) compared to the high shoulder of a single plate. This model is very representative of tightly folded formations where the conductors were once flat lying.

Variation of Prism Depth

Finally, with prism models, another algorithm is required to represent current on the plate. A plate model is considered to be infinitely thin with respect to thickness and incapable of representing the current in the thickness dimension. A prism model is constructed to deal with this problem, thereby, representing the thickness of the body more accurately.

Figures C, F and I show the same prism at increasing depths. Aside from an expected decrease in amplitude, the side lobes of the anomaly show a widening with deeper prism depths of the bell shaped early time channels.

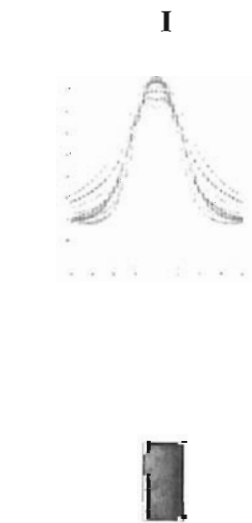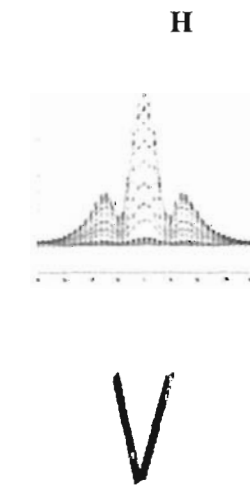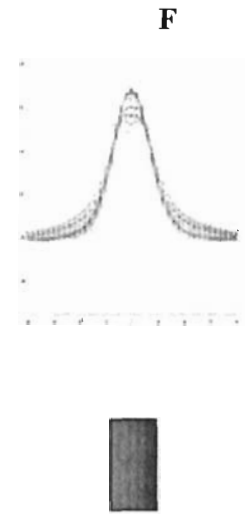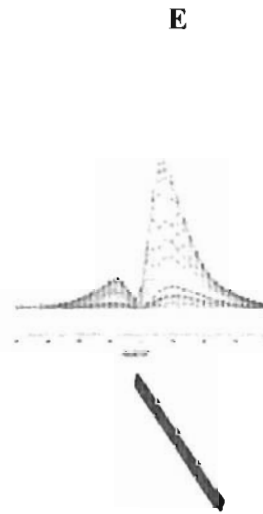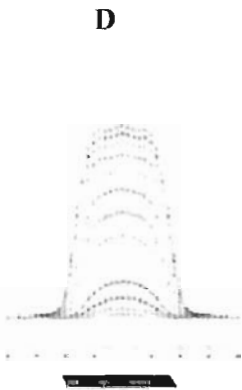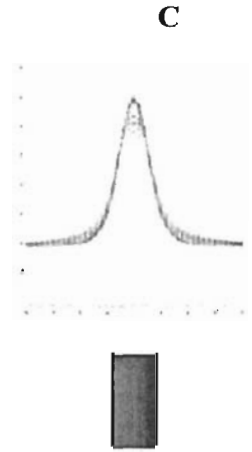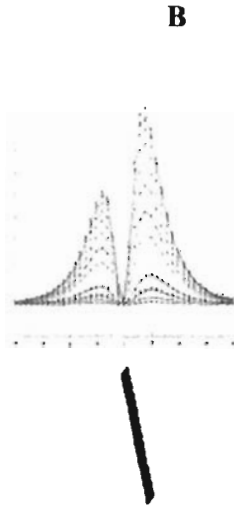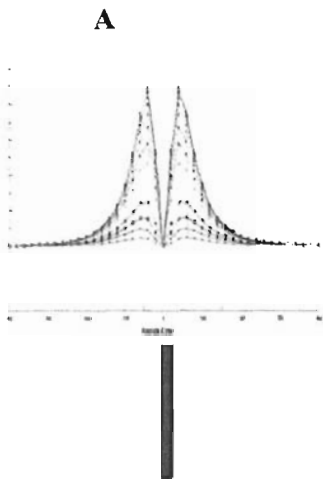

General Modeling Concepts

A set of models has been produced for the Geotech VTEM® system with explanation notes (see models A to I above). The reader is encouraged to review these models, so as to get a general understanding of the responses as they apply to survey results. While these models do not begin to cover all possibilities, they give a general perspective on the simple and most commonly encountered anomalies.

When producing these models, a few key points were observed and are worth noting as follows:

- For near vertical and vertical plate models, the top of the conductor is always located directly under the centre low point between the two shoulders in the classic **M** shaped response.
- As the plate is positioned at an increasing depth to the top, the shoulders of the **M** shaped response, have a greater separation distance.
- When faced with choosing between a flat lying plate and a prism model to represent the target (broad response) some ambiguity is present and caution should be exercised.
- With the concentric loop system and Z-component receiver coil, virtually all types of conductors and most geometries are most always well coupled and a response is generated (see model H). Only concentric loop systems can map this type of target.

The modelling program used to generate the responses was prepared by PetRos Eikon Inc. and is one of a very few that can model a wide range of targets in a conductive half space.

General Interpretation Principals

Magnetics

The total magnetic intensity responses reflect major changes in the magnetite and/or other magnetic minerals content in the underlying rocks and unconsolidated overburden. Precambrian rocks have often been subjected to intense heat and pressure during structural and metamorphic events in their history. Original signatures imprinted on these rocks at the time of formation have, in most cases, been modified, resulting in low magnetic susceptibility values.

The amplitude of magnetic anomalies, relative to the regional background, helps to assist in identifying specific magnetic and non-magnetic rock units (and conductors) related to, for example, mafic flows, mafic to ultramafic intrusives, felsic intrusives, felsic volcanics and/or sediments etc. Obviously, several geological sources can produce the same magnetic response. These ambiguities can be reduced considerably if basic geological information on the area is available to the geophysical interpreter.

In addition to simple amplitude variations, the shape of the response expressed in the wave length and the symmetry or asymmetry, is used to estimate the depth, geometric parameters and magnetization of the anomaly. For example, long narrow magnetic linears usually reflect mafic flows or intrusive dyke features. Large areas with complex magnetic patterns may be produced by intrusive bodies with significant magnetization, flat lying magnetic sills or sedimentary iron formation. Local isolated circular magnetic patterns often represent plug-like igneous intrusives such as kimberlites, pegmatites or volcanic vent areas.

Because the total magnetic intensity (TMI) responses may represent two or more closely spaced bodies within a response, the second derivative of the TMI response may be helpful for distinguishing these complexities. The second derivative is most useful in mapping near surface linears and other subtle magnetic structures that are partially masked by nearby higher amplitude magnetic features. The broad zones of higher magnetic amplitude, however, are severely attenuated in the vertical derivative results. These higher amplitude zones reflect rock units having strong magnetic susceptibility signatures. For this reason, both the TMI and the second derivative maps should be evaluated together.

Theoretically, the second derivative, zero contour or colour delineates the contacts or limits of large sources with near vertical dip and shallow depth to the top. The vertical gradient map also aids in determining contact zones between rocks with a susceptibility contrast, however, different, more complicated rules of thumb apply.

Concentric Loop EM Systems

Concentric systems with horizontal transmitter and receiver antennae produce much larger responses for flat lying conductors as contrasted with vertical plate-like conductors. The amount of current developing on the flat upper surface of targets having a substantial area in this dimension, are the direct result of the effective coupling angle, between the primary magnetic field and the flat surface area. One therefore, must not compare the amplitude/conductance of responses generated from flat lying bodies with those derived from near vertical plates; their ratios will be quite different for similar conductances.

Determining dip angle is very accurate for plates with dip angles greater than 30°. For angles less than 30° to 0°, the sensitivity is low and dips can not be distinguished accurately in the presence of normal survey noise levels.

A plate like body that has near vertical position will display a two shoulder, classic **M** shaped response with a distinctive separation distance between peaks for a given depth to top.

It is sometimes difficult to distinguish between responses associated with the edge effects of flat lying conductors and poorly conductive bedrock conductors. Poorly conductive bedrock conductors having low dip angles will also exhibit responses that may be interpreted as surficial overburden conductors. In some situations, the conductive response has line to line continuity and some magnetic correlation providing possible evidence that the response is related to an actual bedrock source.

The EM interpretation process used, places considerable emphasis on determining an understanding of the general conductive patterns in the area of interest. Each area has different characteristics and these can effectively guide the detailed process used.

The first stage is to determine which time gates are most descriptive of the overall conductance patterns. Maps of the time gates that represent the range of responses can be very informative.

Next, stacking the relevant channels as profiles on the flight path together with the second vertical derivative of the TMI is very helpful in revealing correlations between the EM and Magnetics.

Next, key lines can be profiled as single lines to emphasize specific characteristics of a conductor or the relationship of one conductor to another on the same line. Resistivity Depth sections can be constructed to show the relationship of conductive overburden or conductive bedrock with the conductive anomaly.