010

GEOLOGICAL REPORT
on the
Reeves Joint Venture Property
of
GOLDROCK RESOURCES INC.
and
GLEN AUDEN RESOURCES LIMITED
Reeves, Sewell, Penhorwood and Kenogaming Twps.
Porcupine Mining Division
by
Ron Burk, M.Sc.Eng.
October, 1987

TABLE

LIST OF FIGURES

INTRODUCTION

Geological mapping was done from May through September, 1987 on the 276 contiguous claims of the Reeves Joint Venture Property situated in Reeves, Sewell, Penhorwood and Kenogaming Townships, Porcupine Mining Division, Ontario. The property is held jointly by Goldrock Resources Incorporated and Glen Auden Resources Limited. Mapping was done by pace-and-compass method, and the accumulated information drafted at 1:2,500 scale. The fundamental objective of the mapping program was to identify any evidence of gold mineralization on the property.

PROPERTY LOCATION AND ACCESS

The Reeves Joint Venture (RJV) property encompasses approximately 4,400 hectares broadly centred on the contiguous four corners of Reeves, Sewell, Penhorwood and Kenogaming Townships, some 55 kilometers west of Timmins, Ontario (Figure 1). It is easily accessed via numerous logging roads branching southwards from Highway 101 which skirts the northern boundary of the property. A map showing the locations of all the claims forming the RJV property accompanies the report (see map envelope).

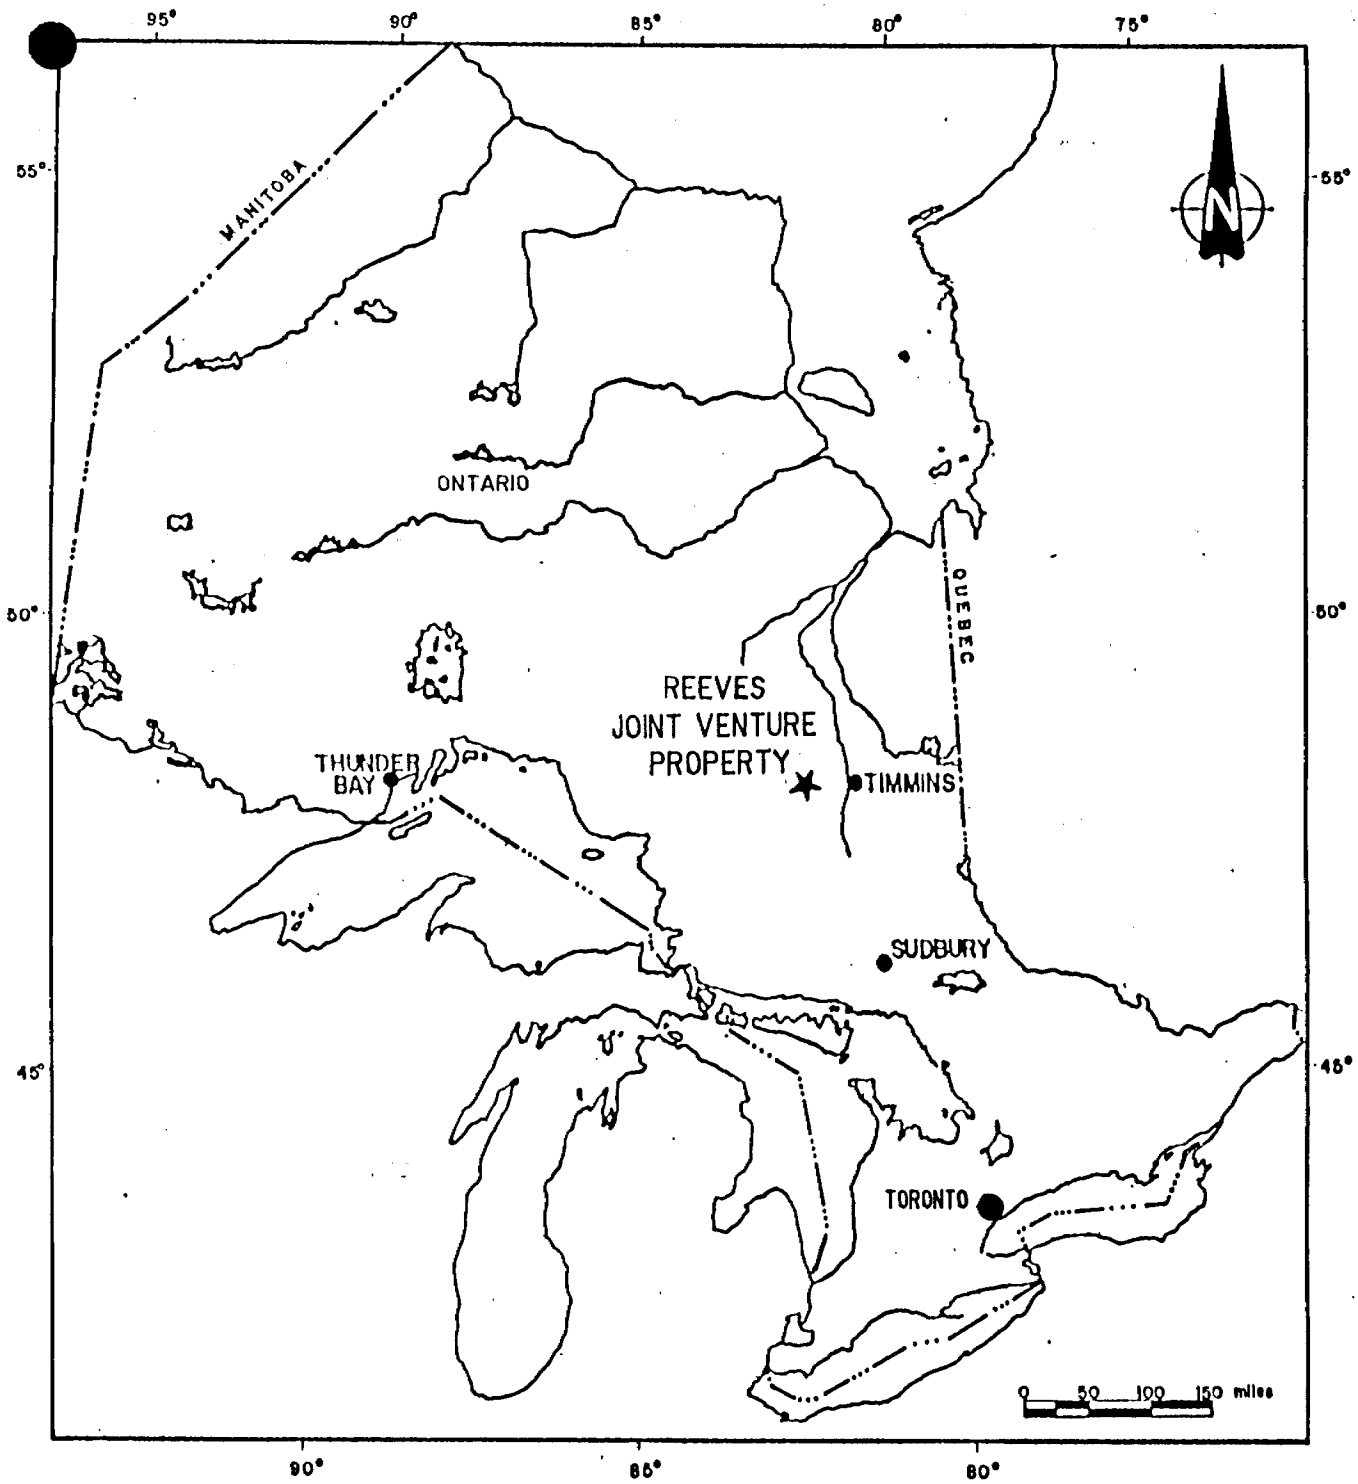

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.		
	for GOLDROCK RESOURCES INC./ GLEN AUDEN RESOURCES LTD. J.V.		
	Title PROPERTY LOCATION MAP Fig. 1		
	Date: Oct. 87	Scale: 1"=160mi.	N.T.S.:
	Drawn: B.S.B.	Approved:	File: M-223.

TOPOGRAPHY AND VEGETATION

There is generally little topographic relief on the property. As is common in this area of northeastern Ontario, low ridges are interspersed with broad low-lying areas. There are a number of small lakes on the claims. Deposits of glacial debris including eskers, sand hills and thick boulder tills form some of the more prominent topographic features on the property.

Logging has removed much of the original coniferous and mixed forest cover which has been replaced by secondary growth of poplar, birch and moose maple. Cedar woods are common in low-lying areas. Rock exposures constitute only a few percent of the total area, with the greatest concentration of outcrops occurring in the western part of the property where logging operations have been most recently carried out.

EXPLORATION HISTORY OF THE PROPERTY

Soon after prospectors began to venture westwards from the Porcupine mining camp gold was discovered in a quartz vein presently situated on a four-claim property that straddles the Reeves-Sewell township line (Figure 2), and is surrounded by the northernmost claims of the RJV property (see Lamport-Lumbers Property in Milne, 1972). The showing, referred to as the Gosselin Vein, consists of a north-northeast-striking zone of sheared and carbonatized mafic volcanic rock which hosts

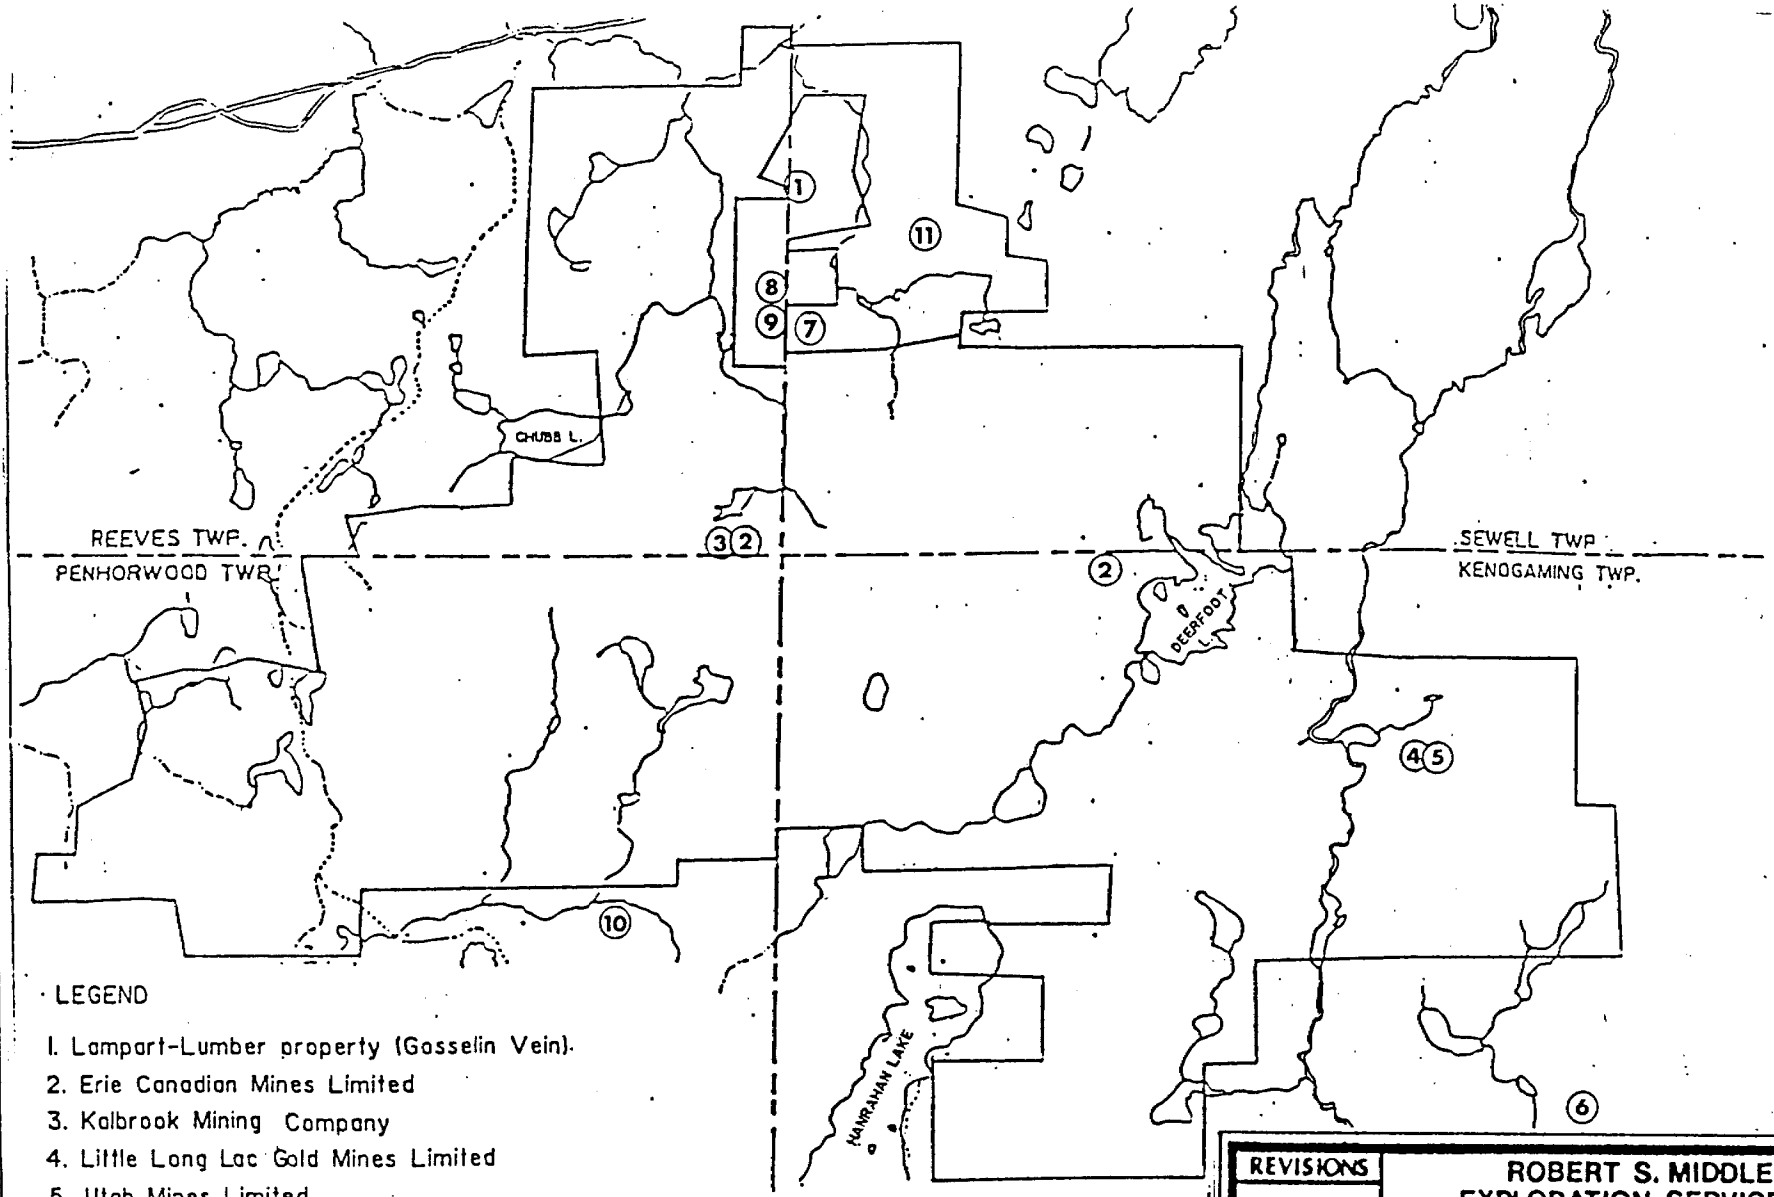

LEGEND

1. Lampart-Lumber property (Gosselin Vein).
2. Erie Canadian Mines Limited
3. Kalbrook Mining Company
4. Little Long Lac Gold Mines Limited
5. Utah Mines Limited
6. Dunvegan Mines Limited
7. Card Lake Mines Limited
8. Texas Gulf Canada Limited
9. Comstate Resources Limited
10. W. Karvinen (Quinterra Resources, Utah Mines)
11. Goldrock Resources Incorporated

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.		
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.		
	Title: PREVIOUS EXPLORATION WORK		Fig. 2
	Date: OCT. 87	Scale: 1 : 250	N.T.S.:
	Drawn: S.S.	Approved:	File: M-223

irregular masses of quartz containing minor pyrite, pyrrhotite, chalcopyrite, tourmaline and fuchsite. The altered rock enclosing the quartz is commonly impregnated with disseminated iron sulfides. The quartz-rich zone has been exposed for 800 meters and is locally 15 meters wide.

In 1935, trenching was done on claims staked by M. Therieault and optioned to Erie Canadian Mines Limited, which correspond to the current claims 932074 in the southeast corner of Reeves Township, and 947258 located west of Deerfoot Lake in Kenogaming Township (Figure 2). Trenching in the Reeves Township claim exposes well foliated, carbonatized and sericitized mafic to intermediate volcanic rock. The apparently sheared and altered rock locally contains narrow quartz veins or lenses with moderate amounts of disseminated pyrite in the enclosing schist. Black, pyritic quartz rubble containing visible gold and assaying about 0.14 oz/ton gold was collected from one of these trenches. Milne (1972) reports that in 1946 Kalbrook Mining Company put down 13 diamond drill holes in the vicinity of the "float" trench in the southeast corner of Reeves Township. Apparently no mineralization of economic significance was encountered, although drill logs are not available. The trench west of Deerfoot Lake contains a feldspar porphyry dike intruding foliated mafic volcanic rock with moderate sulfide mineralization spatially associated with quartz stringers in the dike and surrounding

mafic rock. No gold values are reported from this trench.

In 1947, Little Long Lac Gold Mines Limited did geological mapping and drilled about 600 meters in six holes on a 35-claim property located in Kenogaming Township in the southeast corner of the RJV property (Figure 2). Two of the drill holes were targeted on the Nat River iron formation close to an outcrop of banded magnetitie-chert iron formation in contact with a lens of massive pyrite and pyrrhotite up to 1.5 meters in width. The best assay value for the sulfide rock was 0.04 oz/ton gold. In 1972, Utah Mines Limited conducted a magnetometer survey on 22 claims once held by Little Long Lac Gold Mines (Figure 2). Magnetically-responsive iron formation was readily detected, and an asymmetric fold in the unit was interpreted to occur in the northwest corner of RJV claim 949105. No additional work was done by Utah Mines.

Through the 1950's, Dunvegan Mines Limited, originally Hoodoo Lake Mines Limited, held a 126-claim property west of Akweska Lake and south of the RVJ property in Kenogaming Township (Figure 2). Gold associated with sphalerite was discovered in a northwest-trending zone of pyritic, quartz-sericite schist located some 300 meters west of the south end of Akweskwa Lake. Northwest of the gold showing but still south of the RJV property, a large outcrop of strongly serpentinized and carbonatized peridotite was found to contain minor disseminated

iron sulfides with grab samples assaying up to 2.5 percent nickel. In addition to the drilling done on this showing, Dunvegan Mines drilled three holes in altered ultramafic rocks on RJV claims 949096 and 949090 in th southeastern part of the property. No significant mineralization was reported.

An antimony occurrence is located in southwest Sewell Township east of the Gosselin Vein (Figure 2) and was likely discovered by prospectors searching for gold early in the region's exploration history. In 1971, Card Lake Copper Mines Limited staked 16 contiguous claims covering the showing. Small blast pits on the occurrence show it to consist of a 1 to 2 meter wide, northwest-oriented shear zone less than 100 meters in length within pillowed mafic flow rock. Berthierite, an Sb-As sulfide, occurs with minor amounts of copper sulfides and arsenopyrite in the pervasively silicified core of the zone. Nine short holes were drilled into the mineralization, finding it to be of no economic importance. In 1977, Texas Gulf Canada Limited carried out magnetic and electromagnetic surveys as well as geological mapping on a 13-claim property straddling the Sewell-Reeves township line and north of, and including, the antimony showing. While the Sb-mineralization shear zone gives a very weak magnetic and electromagnetic expression, a 3 to 4 meter wide graphitic argillite unit containing disseminated pyrite and minor chalcopyrite was readily outlined. Apparently, Card Lake

Copper Mines drilled this graphitic unit in 1972 and intersected 5 meters of 25 to 65 percent pyrrhotite and pyrite. In 1984, Comstate Resources Limited undertook geological mapping and rock sampling on five claims which also straddled the Reeves-Sewell township line and included the antimony showing. Trace element and, specifically, gold values proved to be unremarkable.

Less than 500 meters south of the RJV property boundary in Penhorwood Township, W. Karvinen identified outcrops of highly carbonatized ultramafic rock in contact with a reddish coloured, quartz-porphyritic rock to the south and cut by narrow feldspar porphyry dikes (Figure 2). Locally there is extensive quartz veining, silicification and pyritization where grab samples with low gold contents have been collected. Also in the immediate area is a quartz-ankerite vein with about 10 percent pyrite in the form of narrow massive bands. A maximum gold value for samples of the vein rock is 665 ppb. Claims covering these outcrops were optioned from Karvinen by Quinterra Resources in 1983 and then in 1986 by Utah Mines Limited. Utah Mines conducted limited VLF-EM, horizontal-loop EM and induced polarization surveys on the claims.

In 1984, Dighem Geophysics Limited was contracted by MPH Consulting Limited for a Dr. Leo Shack to do an airborne magnetometer and electromagnetic survey over a 27-claim property held by Mr. Shack in north-central Kenogaming Township. As a

whole, the airborne survey covers much of the area presently forming the RJV property, and constitutes valuable information for the current exploration program.

In 1986, Goldrock Resources Inc. carried out magnetic and VLF-EM surveys in addition to geological mapping and rock sampling on 18 contiguous claims in west-central Sewell Township and two isolated claims located along the southern boundary of Reeves Township. The 18 claims cover the antimony showing in Sewell Township and surround the patented claims on which the Gosslin Vein occurs. All of the 20 claims have been incorporated into the RJV property.

A geological report on the northern part of the Swayze greenstone belt, with particular attention given to the area of the contiguous corners of Reeves, Sewell, Kenogaming and Penhorwood Townships, has been prepared by D. Pyke (1987) for the holders of the RJV property. Based on field examination and whole rock chemical analyses, Pyke compares the volcanic sequences on the RJV with the Tisdale and Delora Group volcanic rocks of the Timmins mining camp.

Finally, the preliminary stages of a lithogeochemical study being conducted on the rocks of the RJV property is reported on by Burk (1987).

REGIONAL GEOLOGY

The Reeves Joint Venture property lies in the northern part of the Archean Swayze Greenstone Belt (Figure 3) which comprises typical Archean supracrustal sequences of mafic submarine flows with less abundant intermediate to felsic volcanics and units of epiclastic sedimentary rocks (Milne, 1972). Two substantial units of oxide and sulfide facies banded iron formation occur in the region; the Radio Hill iron formation, with a strike length of about 5 kilometers and a maximum thickness of 200 meters, in northwestern Penhorwood Township and the 20-kilometer long Nat River iron formation which lies at the contact between mafic and felsic volcanic sequences in Kenogaming and Penhorwood Townships. Intrusive sheets and pods of ultramafic and mafic rocks are locally abundant, with the largest of these intrusions hosting the Steetley talc deposit in Reeves Township. Numerous dikes and lens-shaped bodies of feldspar, quartz-feldspar and quartz porphyry have intruded the supracrustal rocks of the belt, the largest being located along the northern boundary of Penhorwood Township. Large granodioritic plutons surround the Swayze belt and all but completely separate it from the Abitibi Greenstone Belt to the east. Proterozoic diabase dikes, generally 10 to 30 meters wide, intrude all rock types in the region and typically trend north-northwest.

Geological mapping and lithogeochemical analyses has led

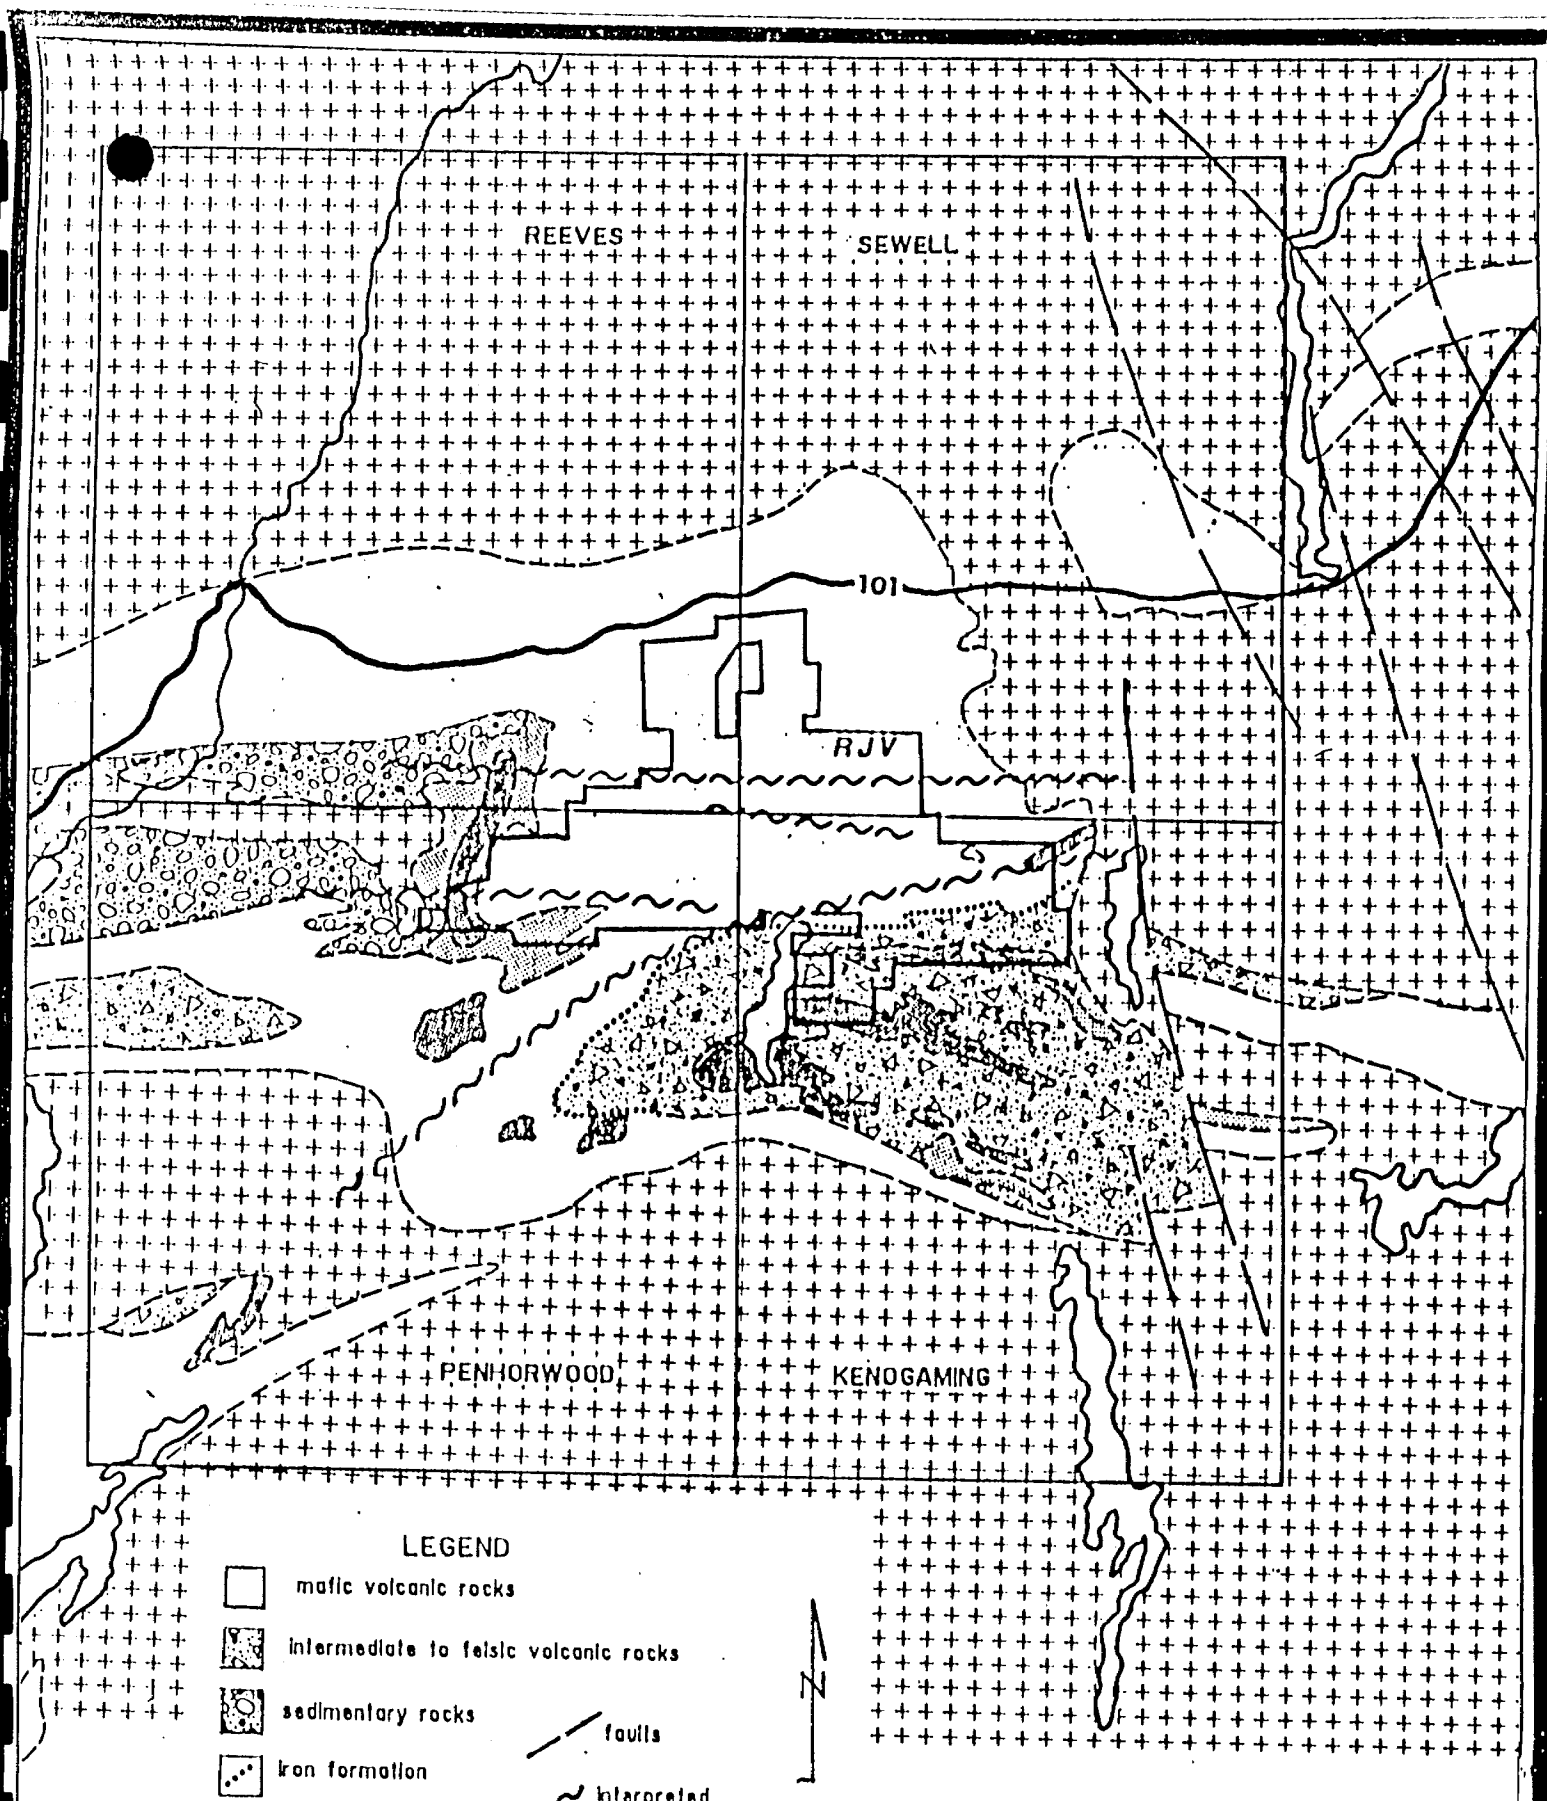

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.
	Title: GENERAL GEOLOGY
	Fig. 3
	Date: OCT, 87 | Scale: 1"=4mls | N.T.S.:
	Drawn: S.S. | Approved: | File: M-21

Pyke (1987) to propose that the supracrustal sequences in the northern part of the Swayze belt are similar, texturally and compositionally, to the volcanics of the Timmins mining camp. Specifically, the folded felsic volcanics of the Hanrahan Lake Volcanic Complex and the Nat River iron formation in Kenogaming Township are compared with Deloro Group rocks of the Timmins area, while the mafic volcanic rocks which underlie much of the property resemble Tisdale Group iron tholeiites.

Three major fault trends have been identified in the northern part of the Swayze belt: north-northwest; west-northwest to west; and east-northeast (Milne, 1972; Pyke, 1987). The north-northwest structures tend to display left-handed displacements and are commonly occupied by diabase dikes. A series of westerly-trending faults occur north of the southern boundaries of Sewell and Reeves Townships and are marked by zones of schistose, carbonatized and sericitized mafic volcanic rocks. Milne (1972) discusses the possibility that these structures represent the western extension of the Destor-Porcupine Fault. Other westerly oriented fault zones are interpreted by Pyke (1987) to follow the margins of the belt of sedimentary rocks in Penhorwood and Keith Townships. A major east-northeast-trending fault is proposed by Pyke (1987) to partially follow the northern margin of the HFV complex (Figure 3). This fault is apparently occupied locally by schistose, carbonatized ultramafic rocks

commonly hosting quartz-feldspar porphyry dikes and quartz-carbonate veins. Pyke suggests that this structure may in fact be the western extension of the Destor-Porcupine Fault, while the series of faults to the north mark a splay structure. A west-northwest-trending shear zone is interpreted to occur between Deerfoot Lake and the four contiguous corners of Sewell, Reeves, Kenogaming and Penhorwood Townhips (Milne, 1972).

Mineral exploration began in the region at the end of the last century when prospectors and then mining companies assessed the economic potential of the Radio Hill and Nat River iron formations. Isoclinal folding of oxide facies iron formation in the Radio Hill area has formed a subeconomic deposit of about 158 million tons grading 21 percent magnetic iron. The ultramafic intrusive bodies in the region have also proven to be of economic interest. There are numerous asbestos showings in serpentinized ultramafics in Reeves, Penhorwood and Kenogaming Townships, the most important of which is the Reeves Mine which is currently the site of the Steetley talc mine. In addition, nickel occurrences are reported from shear zones in ultramafic rocks in northeast Kenogaming Township. Nickeliferous sulfides are associated with disseminated pyrrhotite and carbonatized serpentinite. Gold showings in the region are typical of Archean greenstone-hosted gold deposits, generally occurring in shear zones which consist of pyritic, chlorite-carbonate schists in mafic volcanic

sequences and pyritic, sericite-carbonate schists in felsic volcanic rocks. Veins of quartz with or without carbonate are commonly present in the auriferous zones.

For a reasonably detailed account of the many mineral occurrences in the northern part of the Swayze greenstone belt the reader is referred to 'Geology of the Kakatush-Sewell Lake Area, District of Sudbury' (Milne, 1972).

PROPERTY GEOLOGY

Geological mapping of the RJV property, excluding the 20 claims originally held solely by Goldrock Resources Inc., was done by following claim lines and pace-and-compass-controlled traverses which bisected the claims. Maps of the observed geology are produced at the 1:2,500 scale. The size of the RJV property warranted its subdivision into eight individual map sheets, one being the previously-reported Goldrock Resources property geology map (see Figure 4).

In general, the geology of the RJV property comprises Archean supracrustal rocks which can be broadly subdivided into a thick sequence of mafic metavolcanic rocks underlying most of the northern half of the property and intermediate to felsic metavolcanic rocks on the southeastern part of the property. The latter group of volcanic rocks form the Hanrahan Lake Volcanic Complex (Milne, 1972) and is separated from the mafic volcanic

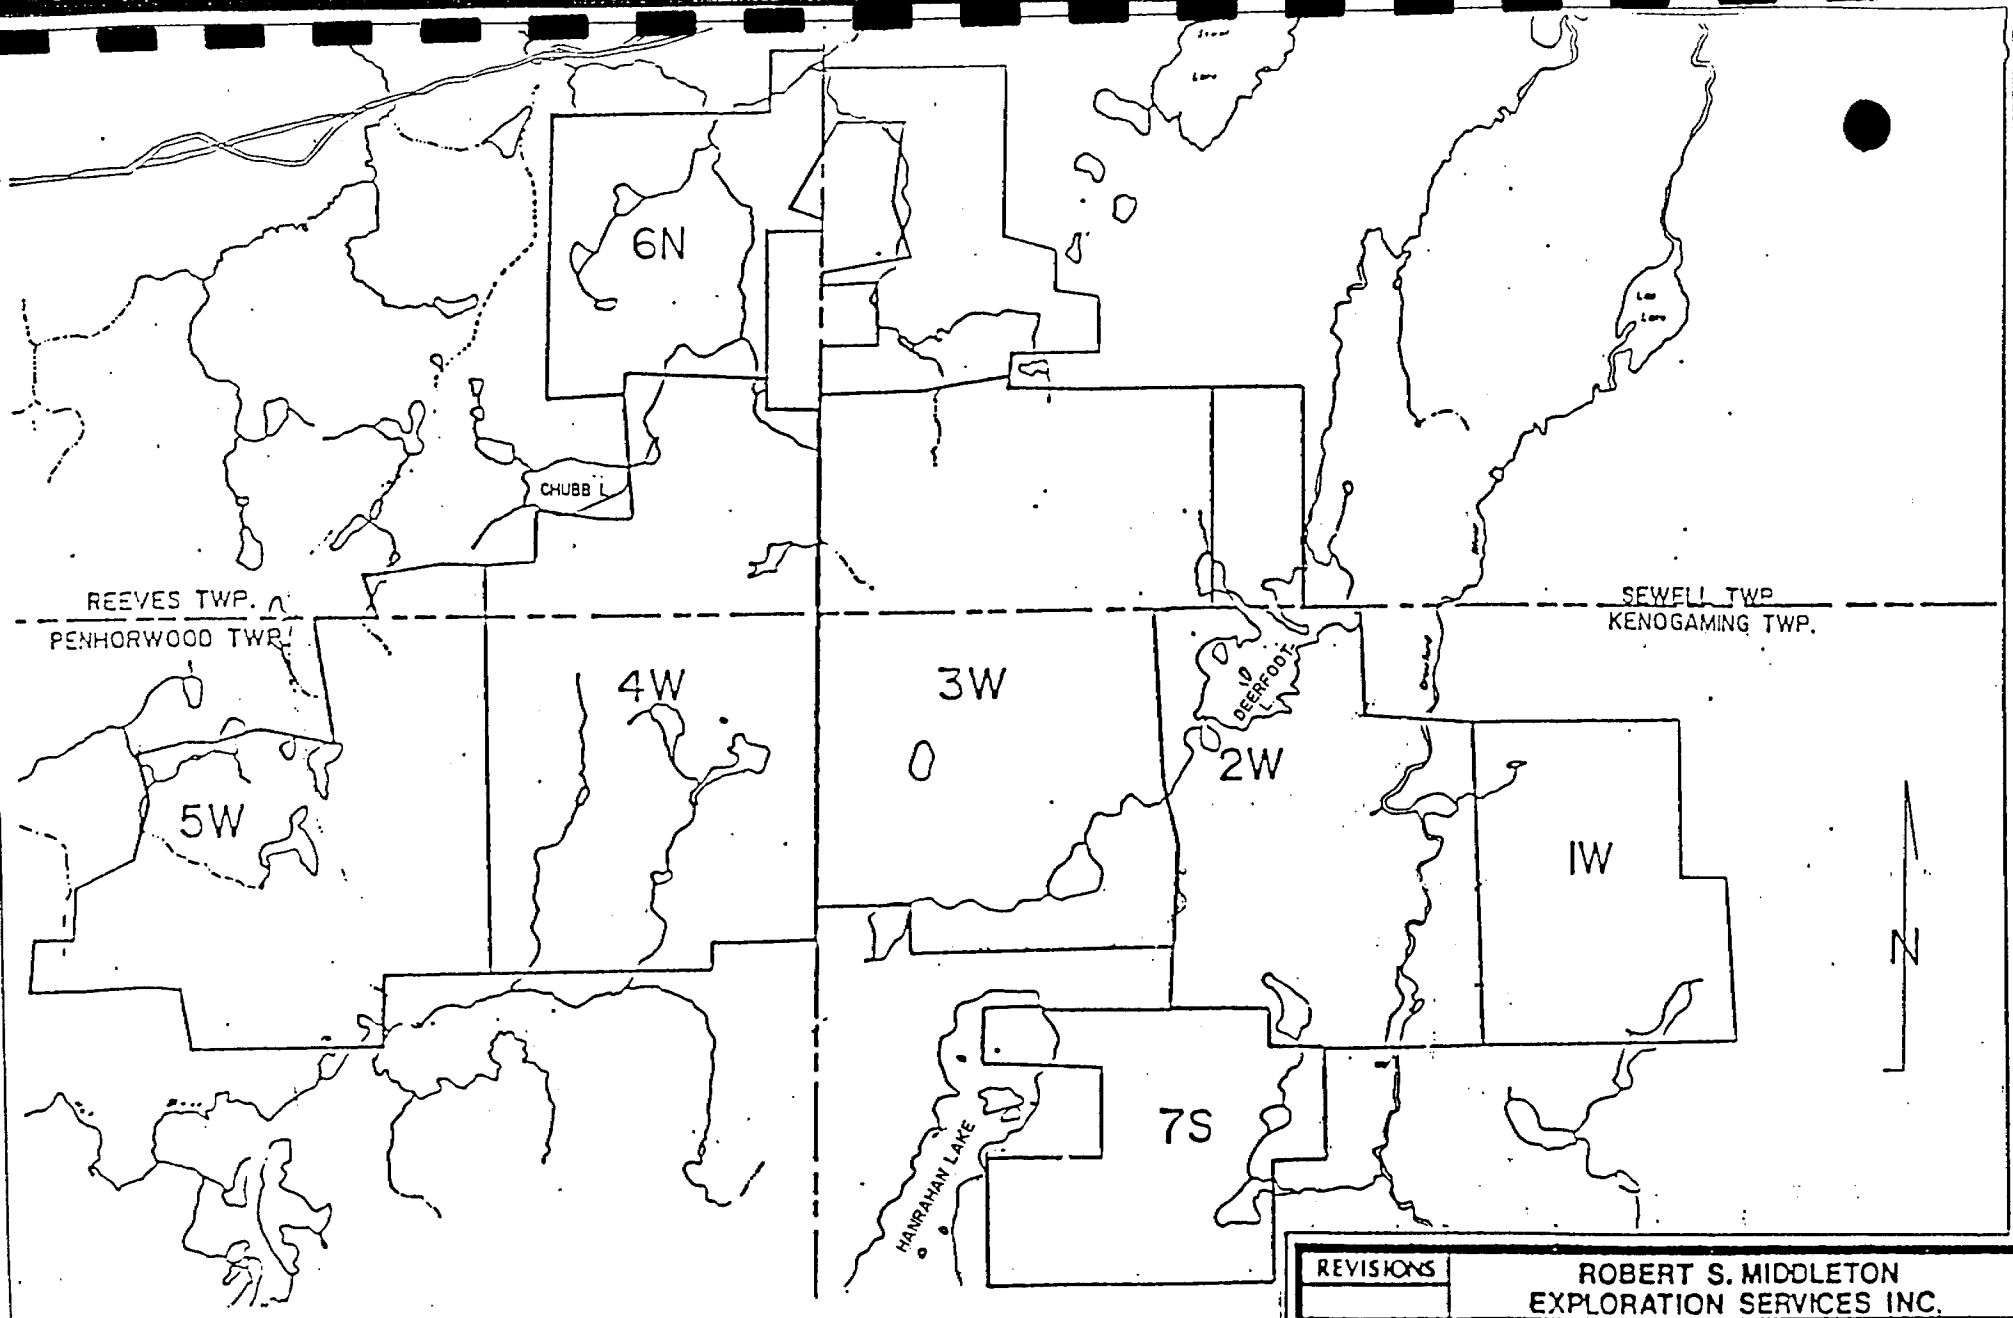

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.		
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.		
	Title: GEOLOGY INDEX MAP		Fig. 4
	Date: OCT/87	Scale: 1.5cm/2km	N.T.S.:
	Drawn: S.S.	Approved:	File: M-223

rocks to the north by a thin unit of banded iron formation which is continuous along strike for 15 kilometers or more. Numerous mafic and ultramafic sheets and pods intrude the Hanrahan Lake complex in Kenogaming Township, and mafic intrusive rocks are common on the westernmost claims in Reeves Township. Intermediate to felsic intrusive rocks are relatively uncommon. Late Proterozoic diabase dikes intrude all rock types on the property.

The mineralogical compositions of the volcanic rocks indicate that regional metamorphism reached greenschist facies rank. For ease of communication, however, the prefix 'meta-', as in metavolcanic, is omitted in this report.

ROCK TYPES

Mafic Volcanics

Mafic volcanic rock is by far the most common rock type on the RJV property, underlying all the claims in Sewell Township, most of those in Reeves and Penhorwood Townships and 50 percent of those in Kenogaming Township. Forming massive and pillowed flows, the mafic rocks are generally greenish-grey on fresh surfaces weathering to a light grey or buff colour, and are fine-grained and massive in texture. Exposures of relatively undeformed pillows show dark green, chloritic selvages with flow tops facing south to southwest. Variolitic flows are uncommon;

one is exposed just north of the four contiguous township corners. Mineralogically, actinolite (± chlorite) and plagioclase are the major components. The rocks contain visible amounts of magnetite or iron sulfides only very locally. A lithogeochemical study done by Pyke (1987) determined that the mafic flows consist primarily of iron tholeiitic basalts with some magnesian tholeiites present in the southernmost claims of the RJV property in Penhorwood Township (based on whole rock analyses evaluated using the Jensen Cation plot).

There are a number of broad but poorly defined, generally east-west-trending zones of carbonate, chlorite ± sericite alteration and increased fabric development. Interpreted as zones of relatively high strain deformation and, locally, fluid migration, they mark areas considered particularly prospective with respect to the localization of gold mineralization.

Intermediate to Felsic Volcanics

Intermediate to felsic volcanic rocks are most abundant in the southeast corner of the RJV property, underlying the southern half of the claim group in Kenogaming Township (Map 7S and 1W). These rocks form a portion of the Hanrahan Lake Volcanic Complex which makes up the core of a regional southwest-verging, northwest-plunging antiform fold. As described previously, mafic volcanic rocks surround the Hanrahan Lake complex on all sides

except in the east where trondjhemitic and granodioritic rocks truncate the fold.

The Hanrahan Lake Volcanic Complex on the RJV claims comprises primarily intermediate pyroclastics with less abundant dacitic flow rock. True felsic (rhyolitic) extrusive rocks were not positively recognized on the property, although outcrops of apparently siliceous tuff are mapped in the northwest corner of claim 987267. Fine-to medium-grained tuffs composed of plagioclase crystal fragments are the most common rock type in the complex. The tuffs are intercalated with units containing lapilli-to block-sized fragments of feldspathic and, less commonly, chloritic rock. Good exposures of an agglomerate unit were mapped in claims 987159, 987478 and 987147 close to the Nat River iron formation which marks the interface between the Hanrahan Lake complex and mafic volcanics to the north. A greenish-grey feldspar crystal tuff (pseudo-porphyritic in appearance) forms the matrix of the agglomerate, with angular volcanic rock clasts composed of fine-to medium-grained feldspar making up less than 20 percent of the rock. Long axes of the clasts are aligned roughly east-west. Intermediate ash and lapilli tuffs also occur within the mafic-dominated volcanic sequences north and west of the Hanrahan Lake Complex, specifically on claims 947104 and 947101 close to the west boundary of the RJV property in Penhorwood Township (Map 5W). A

feature of the intermediate tuffs in Penhorwood Township is the presence of thin chloritic lenses or clots up to about 2cm long which are interpreted to have originally been mafic lapilli-sized fragments.

Other than the alignment of coarse rock fragments and the development of weak foliations there are few indications of stratification of the pyroclastic rocks. In the northwest corner of the property on claim 947104 (Map 5W) there are outcrops of fine-grained intermediate rock displaying well developed cross-bedding, suggesting that the rock is a reworked tuff or tuffaceous sedimentary unit.

Clastic Sedimentary Rocks

Outcrops of clastic sedimentary rocks are common on the RJV property. A number of small exposures of fine-grained lithic wacke occur along a trail on claim 947094 in Sewell Township (Map 3W) and on claim 944914 in Penhorwood Township (Map 5W) where there is evidence of soft-sediment structures and folding on the outcrop scale. Sporadic outcrops of dark grey, slaty and apparently graphitic argillite were mapped on claims 901337 and 901329 in the southeast corner of Reeves Township (Map 4W). Minor amounts of pyrite were observed in a few of the outcrops. The argillite units appear to be thin, have undetermined strike lengths, and likely represent minor deposits of interflow

sediments which accumulated during pauses in the mafic volcanism.

Chemical Sedimentary Rocks (Cherts and Iron Formations)

The most conspicuous chemical sedimentary rock unit on the RJV property is the Nat River iron formation in Kenogaming Township. Lying at the contact between the Hanrahan Lake Volcanic Complex and mafic volcanic sequences to the north, the Nat River formation has a strike length on the property of about 6 kilometers and a maximum width of approximately 75 meters. The best exposures of the unit are in claims 987159, 987478 and 987147 south of Benbow Lake (Map 3W) and east of the Crawford River in claims 988388, 987262, 987267 and 987268 (Map 1W). The iron formation consists predominantly of banded magnetite-chert; fine-grained magnetite layers are typically less than one centimeter thick, while chert layers tend to be a few centimeters thick. East of the Crawford River, the magnetite and chert layers are locally interbedded with thin layers of greenish, tremolitic amphibole. Pyrite is commonly present in the magnetite-chert rock as disseminations, small clots and locally as thin massive layers. A more detailed description of the Nat River iron formation is given by Milne (1972; p.23-26).

In addition to the Nat River iron formation the mapping shows there to be two other narrow units of oxide facies banded iron formation on the property, both lying between basalt flows

in Penhorwood and Kenogaming Townships. Small, isolated outcrops of magnetite-chert rock were found on claim 944891 (Map 4W) and roughly 800 meters to the west, apparently along strike, in the vicinity of the #4 post of claim 944896 (Map 4W). The other iron formation is best exposed in an overgrown shallow trench located approximately 400 meters west of the four contiguous township corners. Apparently the same unit outcrops just west of Deerfoot Lake on claim 893527 (Map 3W). Pyrite-rich, sericitic beds a few centimeters thick have been observed with the magnetite-chert layers.

Mafic and Ultramafic Intrusive Rocks

Outcrops of gabbroic to dioritic rock are numerous on the southwestern portion of the RJV property in Penhorwood Township (Map 5W). These intrusive rocks are likely related to the large mafic-ultramafic complex centred on the Nat River in Penhorwood and southern Reeves Townships. Composed of varying proportions of typically medium-grained (2-5mm), equigranular plagioclase and green amphibole (pseudomorphing pyroxene crystals), freshly broken rock is light to dark green depending on the mafic mineral content and weathers to a pale greenish grey or cream colour. Generally, the gabbroic rocks do not attract a hand magnet, and the presence of accessory iron sulfides is uncommon. Outcrops of gabbroic rock with coarse pyroxene/amphibole crystals occur along

the southern boundaries of claims 947101 and 901360 (Map 5W). Other intrusive-looking mafic rocks are widely distributed across the portion of the property underlain by mafic flows, and are often difficult to distinguish from massive, medium-grained basalts. It is likely that some of the intrusives actually represent subvolcanic equivalents of the flows.

The greatest volume of mafic to ultramafic intrusive rock on the property occurs in the Hanrahan Lake Volcanic Complex, determined as much from an interpretation of aeromagnetic data (see assessment work file T-2877, Ontario Ministry of Natural Resources) as from mapping. Numerous outcrops of fine-to medium-grained, serpentinized and variably carbonatized peridotitic rock were located in the southernmost claims east of the Crawford River (Map 1W). Well exposed serpentinite also occurs north of the Nat River iron formation on claim 987262 (Map 1W). In the outcrop, a narrow zone of shearing and pervasive carbonatization is seen to contain approximately 5 percent pyrrhotite and pyrite. The only exposures of ultramafic intrusive rock mapped outside of the Hanrahan Lake complex are in the southwest corner of claim 947101 in Penhorwood Township (Map 5W). Here, a pyroxene cumulate texture can be recognized on some surfaces. High strain deformation and/or chemical alteration has locally converted the ultramafic rock to talc-chlorite-carbonate schist and to massive tremolitic rock.

Highly altered mafic to ultramafic rocks outcrop on claim 947253 (Map 4W). Situated within a proposed zone of shearing, one of the exposures is an old pit blasted into well foliated chlorite-fuchsite-ankerite rock with minor quartz-carbonate veining. Less than 50 meters from the pit is an outcrop of light brown talc-carbonate schist with chlorite lenses, 3 to 5 millimeters in length, aligned with the foliation. It is not clear if these schists represent altered intrusive rock, magnesian tholeiite or komateiitic rock.

Intermediate to Felsic Intrusive Rocks

Feldspar and quartz-feldspar-porphyry dikes are widely distributed but not abundant on the RJV property; the feldspar porphyries tend to be more common. The dikes are generally less than 50 centimeters wide and rarely greater than one meter in width. It is noteworthy that a narrow quartz-feldspar porphyry dike is present in an overgrown pit located roughly 400 meters west of Deerfoot Lake which is in carbonatized mafic volcanic rock hosting weak pyrite mineralization and quartz veining. Typical feldspar porphyry rock is composed of about 30 percent plagioclase phenocrysts in a dark grey matrix which becomes buff coloured when altered to carbonate and sericite. With the addition of bluish quartz grains the rock is identified as quartz-feldspar porphyry.

A boss of feldspar and/or quartz-feldspar porphyry with a diameter of about 500 meters is indicated by Milne (1972) to occur just north of the Nat River iron formation and west of Benbow Lake in Kenogaming Township. Interestingly, a magnetic 'high' corresponds with the indicated intrusion (see assessment work file T-2877, Ontario Ministry of Natural Resources).

Late Mafic Intrusive Rocks

The youngest rocks on the RJV property are northerly-trending Proterozoic diabase dikes. These dikes commonly form prominent ridges as seen on claim 915462 east of the Crawford River (Map 1W). Also, the dikes are readily discernible on the property-scale aeromagnetic map (file T-2877). The basaltic diabase rock is dark green to black, massive and coarse-grained in the core of a dike, becoming finer grained towards the margins.

STRUCTURE

The dominant regional structure in the area of the RJV property is the northwesterly plunging antiform well outlined by the Nat River iron formation, of which the core is occupied by the Hanrahan Lake Volcanic Complex (Milne, 1972). The absence of good marker horizons in the thick sequence of mafic volcanics north of the Hanrahan Lake Complex makes it difficult to

determine if the mafic flows are also folded around the antiform's southwesterly striking axial surface. Interpretation of the property-scale aeromagnetic map (file T-2877) does suggest that magnetically-responsive basalts strike in a westerly direction across the southern portion of the property in Penhorwood Township, trending away from the north limb of the antiform. It is possible that a major structural discordance exists close to, and perhaps along, the interface between the mafic volcanics on the property and the Hanrahan Lake complex. If a structural 'break' is in fact present, it would correspond with a proposed western extension of the Destor-Porcupine Fault (Pyke, 1987).

The paucity of well exposed sedimentary rocks precludes a conclusive determination of stratigraphic facings on the property. However, from a number of outcrops of relatively undeformed, pillowed basalts it appears that flow tops face south to southwest, an interpretation supported by mapping done by Pyke (1987) in the area. The suggestion that the mafic flows are southerly facing contradicts Milne's interpretation of the Nat River iron formation and the mafic volcanics to the north being younger than the intermediate volcanics of the Hanrahan Lake Volcanic Complex, unless a major structural break separates the two volcanic sequences.

While the mafic volcanics are generally massive to weakly

foliated, they do host a few poorly defined, east-west to east-southeast-trending zones of moderately to well foliated chloritic ($\pm$ sericitic) rock. The two most obvious zones are located between Deerfoot Lake and the four contiguous township corners (Map 3W) and parallel to the southern property boundary of Penhorwood Township (Map 4W). The zones are identified by the presence of highly strained or flattened pillow structures, diamond-shaped cleavage patterns and schistose rock. In addition to chlorite and sericite, rocks occurring within the high deformation zones typically contain carbonate, both calcite and ankerite, and locally combinations of talc, fuchsite, pyrite and quartz-carbonate veins. These zones likely mark shear structures, and may be splays off of the proposed western extension of the Destor-Porcupine Fault.

ECONOMIC GEOLOGY

Based on currently accepted gold deposit genetic models, the mapping has identified essentially two geologic settings considered here to have good potential for hosting gold mineralization: (1) areas with structurally deformed iron formation, and (2) carbonatized shear zones in mafic volcanic rocks.

The prime exploration target on the RJV property in terms of iron formation-hosted gold mineralization is the Z-type

asymmetric fold in the Nat River iron formation centred on the #1 post of claim 987262 (Milne, 1972; Map 1W). Gold can be precipitated from metalliferous hydrothermal fluids through the sulfidation of magnetite to pyrite as the fluids migrate through fractured iron formation. Evidence of this process having taken place, such as the presence of quartz veins with pyritic halos in iron formation were not observed on the property. The iron sulfide layers which are interbedded with the magnetite-chert layers are interpreted as syngenetic sulfide facies iron formation.

The two zones of high strain deformation and carbonate alteration described in the previous section dealing with structural aspects of the property geology are examples of the other geologic setting considered prospective for gold mineralization. These zones are henceforth referred to as the Deerfoot Lake Zone and, to the south, the Fuchsite Zone.

The Deerfoot Lake Zone is best exposed in two old pits, one located just west of the #1 post of claim 878419 (Map 3W), and the other about 200 meters west of the four contiguous township corners (Map 4W). In the pit west of Deerfoot Lake massive to weakly foliated mafic volcanic rock is pervasively carbonatized (ankeritized) with highly altered rock being a pale yellowish colour and host to 5 to 10 percent finely disseminated pyrite. A quartz-feldspar dike intrudes the altered mafic rock and is

itself carbonatized and pyritic. Irregular veinlets and pods of quartz are spatially associated with the porphyry dike. In the township corners pit the rock consists of greyish chlorite-sericite schist with ankerite laminations. Foliation surfaces display an orthogonal set of crenulations (with steep and subhorizontal plunge direcions). Quartz-carbonate veins commonly cross-cut the schistosity, and disseminated pyrite is most abundant in the vicinity of these veins. Trace amounts of chalcopyrite are found in some of the veins.

Outcrops of the Fuchsite Zone occur at the side of logging roads on claims 947253 and 947150 (Map 4W). The development of chlorite-fuchsite-ankerite and talc-ankerite schists suggests altered magnesian tholeiitic or ultramafic rocks occupy the deformation zone on these claims. Minor carbonate and quartz-carbonate veining was observed, but sulfide mineralization is rare or absent.

CONCLUSIONS

Mapping of the Reeves Joint Venture property at the 1:2,500 scale has generally confirmed the geological interpretation of the area presented by Milne (1972). In addition, the scale at which the mapping was done has expectedly given greater definition of the property geology than is shown on the government map. The following are key aspects of the RJV

property geology, many of which are deemed important in terms of their relationship to the potential of economic gold mineralization occurring on the property.

1. The RJV property is predominantly underlain by Archean metabasalts of tholeiitic composition. Intermediate to felsic pyroclastics and flows of the Hanrahan Lake Volcanic Complex occur in the southeastern portion of the property on about 20 percent of the total property area. The Nat River iron formation lies at the interface between the mafic and intermediate to felsic volcanic sequences. Numerous sheets and pods of mafic and ultramafic rock intrude the volcanics, with the ultramafics being most common in the Hanrahan Lake Complex.

2. The intermediate to felsic rocks of the Hanrahan Lake Complex generally lack structural features indicative of high strain deformation. The absence of sizeable zones of sheared or highly fractured rock which would focus the movement of mineralizing fluids, together with the paucity of hydrothermally altered rocks and gold-associated mineralization suggest that the Hanrahan Lake Complex on the property is not a particularly prospective geologic environment for gold.

3. Fold structures in the Nat River iron formation constitute potential sites for gold mineralization on the property which are analagous to the Little Long Lac mine of the Geraldton-Beardmore gold camp of north-central Ontario. However, extensive surface prospecting and diamond drilling of these targets have failed to discover any significant gold mineralization.

4. Zones of comparatively high strain deformation which also locally host chemically altered volcanic rocks have been identified in the mafic greenstones on the property. Two such zones, the Deerfoot Lake and Fuchsite Deformation Zones, are marked by planar fabric development of varying intensity, moderate to strong carbonate alteration, porphyry dike intrusion, quartz-carbonate veining and pyrite

mineralization. These same features are almost ubiquitous to not only gold deposits of the Timmins mining camp but many other gold deposits in the highly productive Abitibi Greenstone Belt.

RECOMMENDATIONS FOR FUTURE EXPLORATION

Based on the geologic data, it is recommended that a systematic gold exploration program be carried out on the Reeves Joint Venture property, primarily in areas underlain by mafic volcanic sequences. The deposit type for which the proposed exploration program is designed consists of sheared mafic rocks which are carbonatized, potentially silicified locally, and pyritic. Gold mineralization is typically associated with a quartz-carbonate vein system hosted by the altered rocks. The stages in the program are as follows:

1. Prospective shear structures are first to be delineated through detailed magnetic and VLF electromagnetic surveys centred on the deformation zones identified by geological mapping, particularly the Deerfoot Lake and Fuchsite Deformation Zones.

2. Induced polarization and resistivity surveys conducted over these structures will potentially outline disseminated sulfide mineralization and zones of relatively high resistivity corresponding to carbonatized and/or silicified host rocks.

3. Sections of the shear zones which may be mineralized can also be prospected for using geochemical exploration techniques. Specifically, rock sampling at surface on or close to the structures as well as sampling of glacial till down-ice of the zones may give direct indications of gold mineralization. This stage in the program may be done prior to the induced polarization and

resistivity surveys.

4. Contigent on the results of the previous stages, diamond drilling should be done on geophysically or geochemically defined targets, where coincident geophysical/geochemical anomalies would be of highest priority.

Respectfully submitted

Ron Burk, M.Sc.Eng.

REFERENCES

BURK, R.
1987 — Preliminary lithogeochemical study, Reeves Joint Venture property for Goldrock Resources Inc. and Glen Auden Resources Limited.

FROSTAD, S.
1986 — Report on the geological survey on the Goldrock Resources Inc., Sewell and Reeves Townships property.

MILNE, V.G.
1972 — Geology of the Kukatash - Sewell Lake area, District of Sudbury; Ontario Department of Mines Geological Report 7, 116p., Maps 2230 and 2231.

PYKE, D.R.
1987 — Geological report on the Kukatash River area, Reeves, Sewell, Penhorwood and Kenogaming Townships.

The following reports can be obtained from the Ministry of Natural Resources assessment work files in Timmins, Ontario.

T-145 — Erie Canadian Mines Limited, 1935: Report on the Therieault claims, Reeves and Kenogaming Townships.

63A.35 — Little Long Lac Gold Mines Limited, 1947: Report on the Nat River iron formation property, Kenogaming Township.

T-527 — Dunvegan Mines Limited, 1952: Geological report on the Dunvegan Mines property, Kenogaming Township.

T-44 — Card Lake Copper Mines Limited, 1971: Report on geophysical surveys, Sewell and Reeves Townships property, Timmins area, Ontario.

REFERENCES (Cont'd)

T-1519 Card Lake Copper Mines Limited, 1974: Report on diamond drilling, Sewell and Reeves Townships property.

T-1945 Texas Gulf Canada Limited, 1979: Report on geophysical surveys on Sewell 21

Texas Gulf Canada Limited, 1980; Report on geological mapping on Sewell 21

T-1988 Utah Mines Limited, 1980: Report on magnetometer survey, Nat River iron formation, Kenogaming Township

T-2877 Dighen Limited for MPH Consulting Limited, 1983: Dighem survey of the Foleyet area, Ontario.

T-2898 Comstate Resources Limited, 1984: Geochemical survey, Reeves-Sewell Township boundary, Porcupine Mining Division, Ontario

T-2814 Quinterra Resources Inc., 1984: Geology of the Nat River property, Penhorwood Township.

T-3005 Karvinen, W.O., 1985: Geology of the Nat River property, Penhorwood Township

Utah Mines Limited, 1986: Geophysical assessment report on the Nat River property, Penhorwood Township.

CERTIFICATION

I, Ron Burk of 29 Wardencourt Drive, Agincourt, Ontario certify that:

1. I am a graduate of the University of Toronto with a Bachelor of Applied Science in Geo-Engineering

2. I am a graduate of Queen's University with a Master of Science, Geological Engineering.

3. I have been practising my profession in Canada for 4 years.

4. I have no economic interests in the property covered by this report.

Dated this October 13, 1987
TIMMINS, Ontario

Ron Burk, M.Sc.Eng.

Ministry of Natural Resources
Ontario

Report of Work
(Geophysical, Geological, Geochemical and Expenditures)

198/87

42A04NW0018 2.10452 REEVES

900

Mining Act

Type of Survey(s): Geological	Township or Area: Reeves, Penhorwood Sewell, Kenogamisi
Claim Holder(s): Glen Auden Resources Limited	Prospector's Licence No.: T-1915
Address: c/o RS Middleton Exploration Services Inc. PO Box 1637 Timmins, Ontario P4N 7W8	
Survey Company: R.S. Middleton Exploration Services Inc.	Date of Survey (from & to): 10 Day 06 Mo. 87 Yr. — 31 Day 07 Mo. 87 Yr.
Total Miles of line Cut: N/A	
Name and Address of Author (of Geo-Technical report)	

Credits Requested per Each Claim in Columns at right

		Days per Claim
Special Provisions: For first survey: Enter 40 days. (This includes line cutting) For each additional survey: using the same grid: Enter 20 days (for each)	Geophysical	
	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	20
	Geochemical	
Man Days: Complete reverse side and enter total(s) here	Geophysical	Days per Claim
	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Airborne Credits: Note: Special provisions credits do not apply to Airborne Surveys.		Days per Claim
	Electromagnetic	
	Magnetometer	
	Radiometric	

Mining Claims Traversed (List in numerical sequence)

Mining Claim Prefix	Mining Claim Number	Expend. Days Cr.	Mining Claim Prefix	Mining Claim Number	Expend. Days Cr.
P	901327		P	944894	
	901328			944895	
	901329			944896	
	901330			944897	
	901331			944898	
	901332			944899	
	901333			944900	
	901334				
	901335				
	901336				
	901337				
	944882				
	944883				
	944884				
	944885				
	944886				
	944887				
	944888				
	944889				
	944890				
	944891				
	944892				
	944893				

RECEIVED
SEP 21 1987
MINING LANDS SECTION

RECORDED
SEP - 3 1987

Total number of mining claims covered by this report of work: 30

Expenditures (excludes power stripping)

Type of Work Performed

Performed on Claim(s)

RECEIVED
SEP 3 1987

Calculation of Expenditure Days Credits

Total Expenditures: $ ÷ 15 = Total Days Credits

Instructions
Total Days Credits may be apportioned at the claim holder's choice. Enter number of days credits per claim selected in columns at right.

For Office Use Only		
Total Days Cr. Recorded: 600	Date Recorded: Sept 3/87	Mining Recorder: Stanley
	Date Approved as Recorded: See remarks	Branch Director: Stanley

Date: Sept. 3/87 — Recorded Holder or Agent (Signature): [signature]

Certification Verifying Report of Work

I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Postal Address of Person Certifying: Dan Farrow Box 1637 Timmins Ont. P4N 7W8

Date Certified: Sept 3/87 — Certified by (Signature): [signature]

1362 (81/9)

Ministry of Northern Development and Mines

Ontario

Report of Work

(Geophysical, Geological, Geochemical and Expenditures)

192/87

Oct. 17

Mining Act 2.10452

Instructions: – Please type or print.
– If number of mining claims *traversed* exceeds space on this form, attach a list.
Note: – Only days credits calculated in the "Expenditures" section may be entered in the "Expend. Days Cr." columns.
– Do not use shaded areas below.

Type of Survey(s)	Township or Area
Geological	REEVES, PENHORWOOD SEWELL, KENOGAMING

Claim Holder(s)	Prospector's Licence No.
Glen Auden Resources Limited	T-1915

Address: c/o R.S. Middleton Exploration Services Inc. PO Box 1637 Timmins, Ontario P4N 7W8

Survey Company	Date of Survey (from & to)	Total Miles of line Cut
R.S. Middleton Exploration Services Inc.	10 06 87 (Day Mo. Yr.) 31 07 87 (Day Mo. Yr.)	N/A

Name and Address of Author (of Geo-Technical report)

Credits Requested per Each Claim in Columns at right

		Days per Claim
Special Provisions: For first survey: Enter 40 days. (This includes line cutting) For each additional survey: using the same grid: Enter 20 days (for each)	Geophysical	
	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	20
	Geochemical	
Man Days: Complete reverse side and enter total(s) here	Geophysical	Days per Claim
	- Electromagnetic	
	- Magnetometer	
	- Radiometric	
	- Other	
	Geological	
	Geochemical	
Airborne Credits: Note: Special provisions credits do not apply to Airborne Surveys.		Days per Claim
	Electromagnetic	
	Magnetometer	
	Radiometric	

PORCUPINE MINING DIVISION RECEIVED AUG 28 1987

Mining Claims Traversed (List in numerical sequence)

Mining Claim Prefix	Mining Claim Number	Expend. Days Cr.	Mining Claim Prefix	Mining Claim Number	Expend. Days Cr.
	See attached list.				

RECEIVED SEP 21 1987 MINING LANDS SECTION

RECORDED AUG 26 1987

Total number of mining claims covered by this report of work: ~~174~~ 173

Expenditures (excludes power stripping)

Type of Work Performed

Performed on Claim(s)

Calculation of Expenditure Days Credits

Total Expenditures $ ÷ 15 = Total Days Credits

Instructions: Total Days Credits may be apportioned at the claim holder's choice. Enter number of days credits per claim selected in columns at right.

For Office Use Only		
Total Days Cr. Recorded: 3,460	Date Recorded: Aug 26/87	Mining Recorder: Stanley
	Date Approved as Recorded: See Remarks	Branch Director: Statement

Date	Recorded Holder or Agent (Signature)
Aug 26/87	

Certification Verifying Report of Work

I hereby certify that I have a personal and intimate knowledge of the facts set forth in the Report of Work annexed hereto, having performed the work or witnessed same during and/or after its completion and the annexed report is true.

Name and Postal Address of Person Certifying: Dan Farrow Box 1637 Timmins Ontario P4N 7W8

Date Certified	Certified by (Signature)
Aug 26/87	

P- 878419 ✓
893525
893526
893527
893528
893529 ✗✓
901339
901340
901341
901342
901343
901344
901345
901346
901347
901348
901349
901350
901351
901352
901353
901354
901355
901356
901357
901358
901359
901360 ✗✓
~~915453~~
915454
915455
915456
915457
915458
915459
915460
915461
915462
915463 ✗✓

P- 921399
921400 ✗✓
929606
929607
929608
929609
929610
929611
929612 ✗✓
933528 ✓
933563 ✓
933564 ✓
~~933544~~
933545 ✓
933546 ✓
933559
933560
933561
933562
933565
933566
933567
933568
933569
933570
933571
933572
933573
933574
933575
933576 ✓
944901 ✗
944902
944903
944904
944905
944906
944907
944908

P- 944909
944910
944911
944912
944913
944914
944915
944916
944917 ✗✓
947085
947088
947089
947090
947091
947092
947093
947094
~~947095~~
947096
947097
947098
947099
947100
947101
947102
947103
947104
947105
947106
947107
947108
947109 ✗✓
947131
947148
947149
947150
947251
947252
947253 ✗✓

P- 947255
947256
947257
947258
947259
947260
947261
947262
947263
947264
947265
947266
947267
947268
947269 ✗✓
949061
949062
949063
949064
949065
949066
949067
949068
949069 ✓✓
949070
949089
949090
949091
949092
949093
949094
949095
949096
949097
949098
949099
949100
949101
949104

P-949105
949106
949107
949108
949109
~~949272~~
~~949273~~
949110
949111
949112
949113
949114
949115
949116
949117
949118
949120
949121
949122
949123
950272
950273

December 2, 1987

Your File: 192-87,
198-87
Our File: 2.10452

Mining Recorder
Ministry of Northern Development and Mines
60 Wilson Avenue
Timmins, Ontario
P4N 2S7

Dear Sir:

RE: Notice of Intent dated November 17, 1987
Geological Survey on Mining Claims P 878419 et al in the
Townships of Kenogaming, Penhorwood, Reeves and Sewell

The assessment work credits, as listed with the above-mentioned Notice of Intent, have been approved as of the above date.

Please inform the recorded holder of these mining claims and so indicate on your records.

Yours sincerely,

W.R. Cowan, Manager
Mining Lands Section
Mines and Minerals Division

Whitney Block, Room 6610
Queen's Park
Toronto, Ontario
M7A 1W3

Telephone: (416) 965-4888

RM:pl
Enclosure: Technical Assessment Work Credits

cc: Mr. G.H. Ferguson
Mining & Lands Commissioner
Toronto, Ontario

Resident Geologist
Timmins, Ontario

Glen Auden Resources Ltd.
c/o R.S. Middleton Exploration Services Inc.
P.O. Box 1637
Timmins, Ontario
P4N 7W8

Ministry of Northern Development and Mines
Ontario

Technical Assessment Work Credits

File: 2.10452

Date: November 17,1987

Mining Recorder's Report of Work No.: 192/87

Recorded Holder: Glen Auden Resources Limited

Township ~~or Area~~: Kenogaming, Penhorwood, Reeves, Sewell

Type of survey and number of Assessment days credit per claim	Mining Claims Assessed
Geophysical	P 878419
Electromagnetic _____ days	893525-529 inclusive
Magnetometer _____ days	901339-360 inclusive
Radiometric _____ days	915454-463 inclusive
Induced polarization _____ days	921399-400 inclusive
Other _____ days	929606-612 inclusive
Section 77 (19) See "Mining Claims Assessed" column	933528
Geological 20 days	933563-64 inclusive
Geochemical _____ days	933545-546 inclusive
Man days ☐ Airborne ☐	933559-562 inclusive
Special provision ☒ Ground ☒	933565-576 inclusive
☐ Credits have been reduced because of partial coverage of claims.	944901-917 inclusive
☐ Credits have been reduced because of corrections to work dates and figures of applicant.	947085
	947088-094 inclusive
	947096-109 inclusive
	947148-253 inclusive
	947255-265 inclusive
	947267-269 inclusive
	949061-070 inclusive
	949089-101 inclusive
	949104-110 inclusive
	949112-118 inclusive
	949120-123 inclusive

Special credits under section 77 (16) for the following mining claims

15 Days Geological	5 Days Geological
P 947266	P 947131
P 949111	

No credits have been allowed for the following mining claims

☒ not sufficiently covered by the survey ☐ insufficient technical data filed

P 950272
950233

The Mining Recorder may reduce the above credits if necessary in order that the total number of approved assessment days recorded on each claim does not exceed the maximum allowed as follows: Geophysical - 80; Geologocal - 40; Geochemical - 40; Section 77(19) - 60.

Ministry of Northern Development and Mines

Ontario

Technical Assessment Work Credits

File: 2.10452

Date: November 16, 1987

Mining Recorder's Report of Work No.: 198-87

Recorded Holder: Glen Auden Resources Limited

Township ~~or Area~~: Kenogaming, Penhorwood, Reeves, Sewell

Type of survey and number of Assessment days credit per claim	Mining Claims Assessed
Geophysical	P 901327-337 inclusive 944882-886 inclusive 944888-900 inclusive
Electromagnetic _____ days	
Magnetometer _____ days	
Radiometric _____ days	
Induced polarization _____ days	
Other _____ days	
Section 77 (19) See "Mining Claims Assessed" column	
Geological 20 days	
Geochemical _____ days	
Man days ☐ Airborne ☐	
Special provision ☒ Ground ☒	
☐ Credits have been reduced because of partial coverage of claims.	
☐ Credits have been reduced because of corrections to work dates and figures of applicant.	

Special credits under section 77 (16) for the following mining claims

15 Days Geological

P 944887

No credits have been allowed for the following mining claims

☐ not sufficiently covered by the survey ☐ insufficient technical data filed

The Mining Recorder may reduce the above credits if necessary in order that the total number of approved assessment days recorded on each claim does not exceed the maximum allowed as follows: Geophysical - 80; Geologocal - 40; Geochemical - 40; Section 77(19) - 60.

828 (85/12)

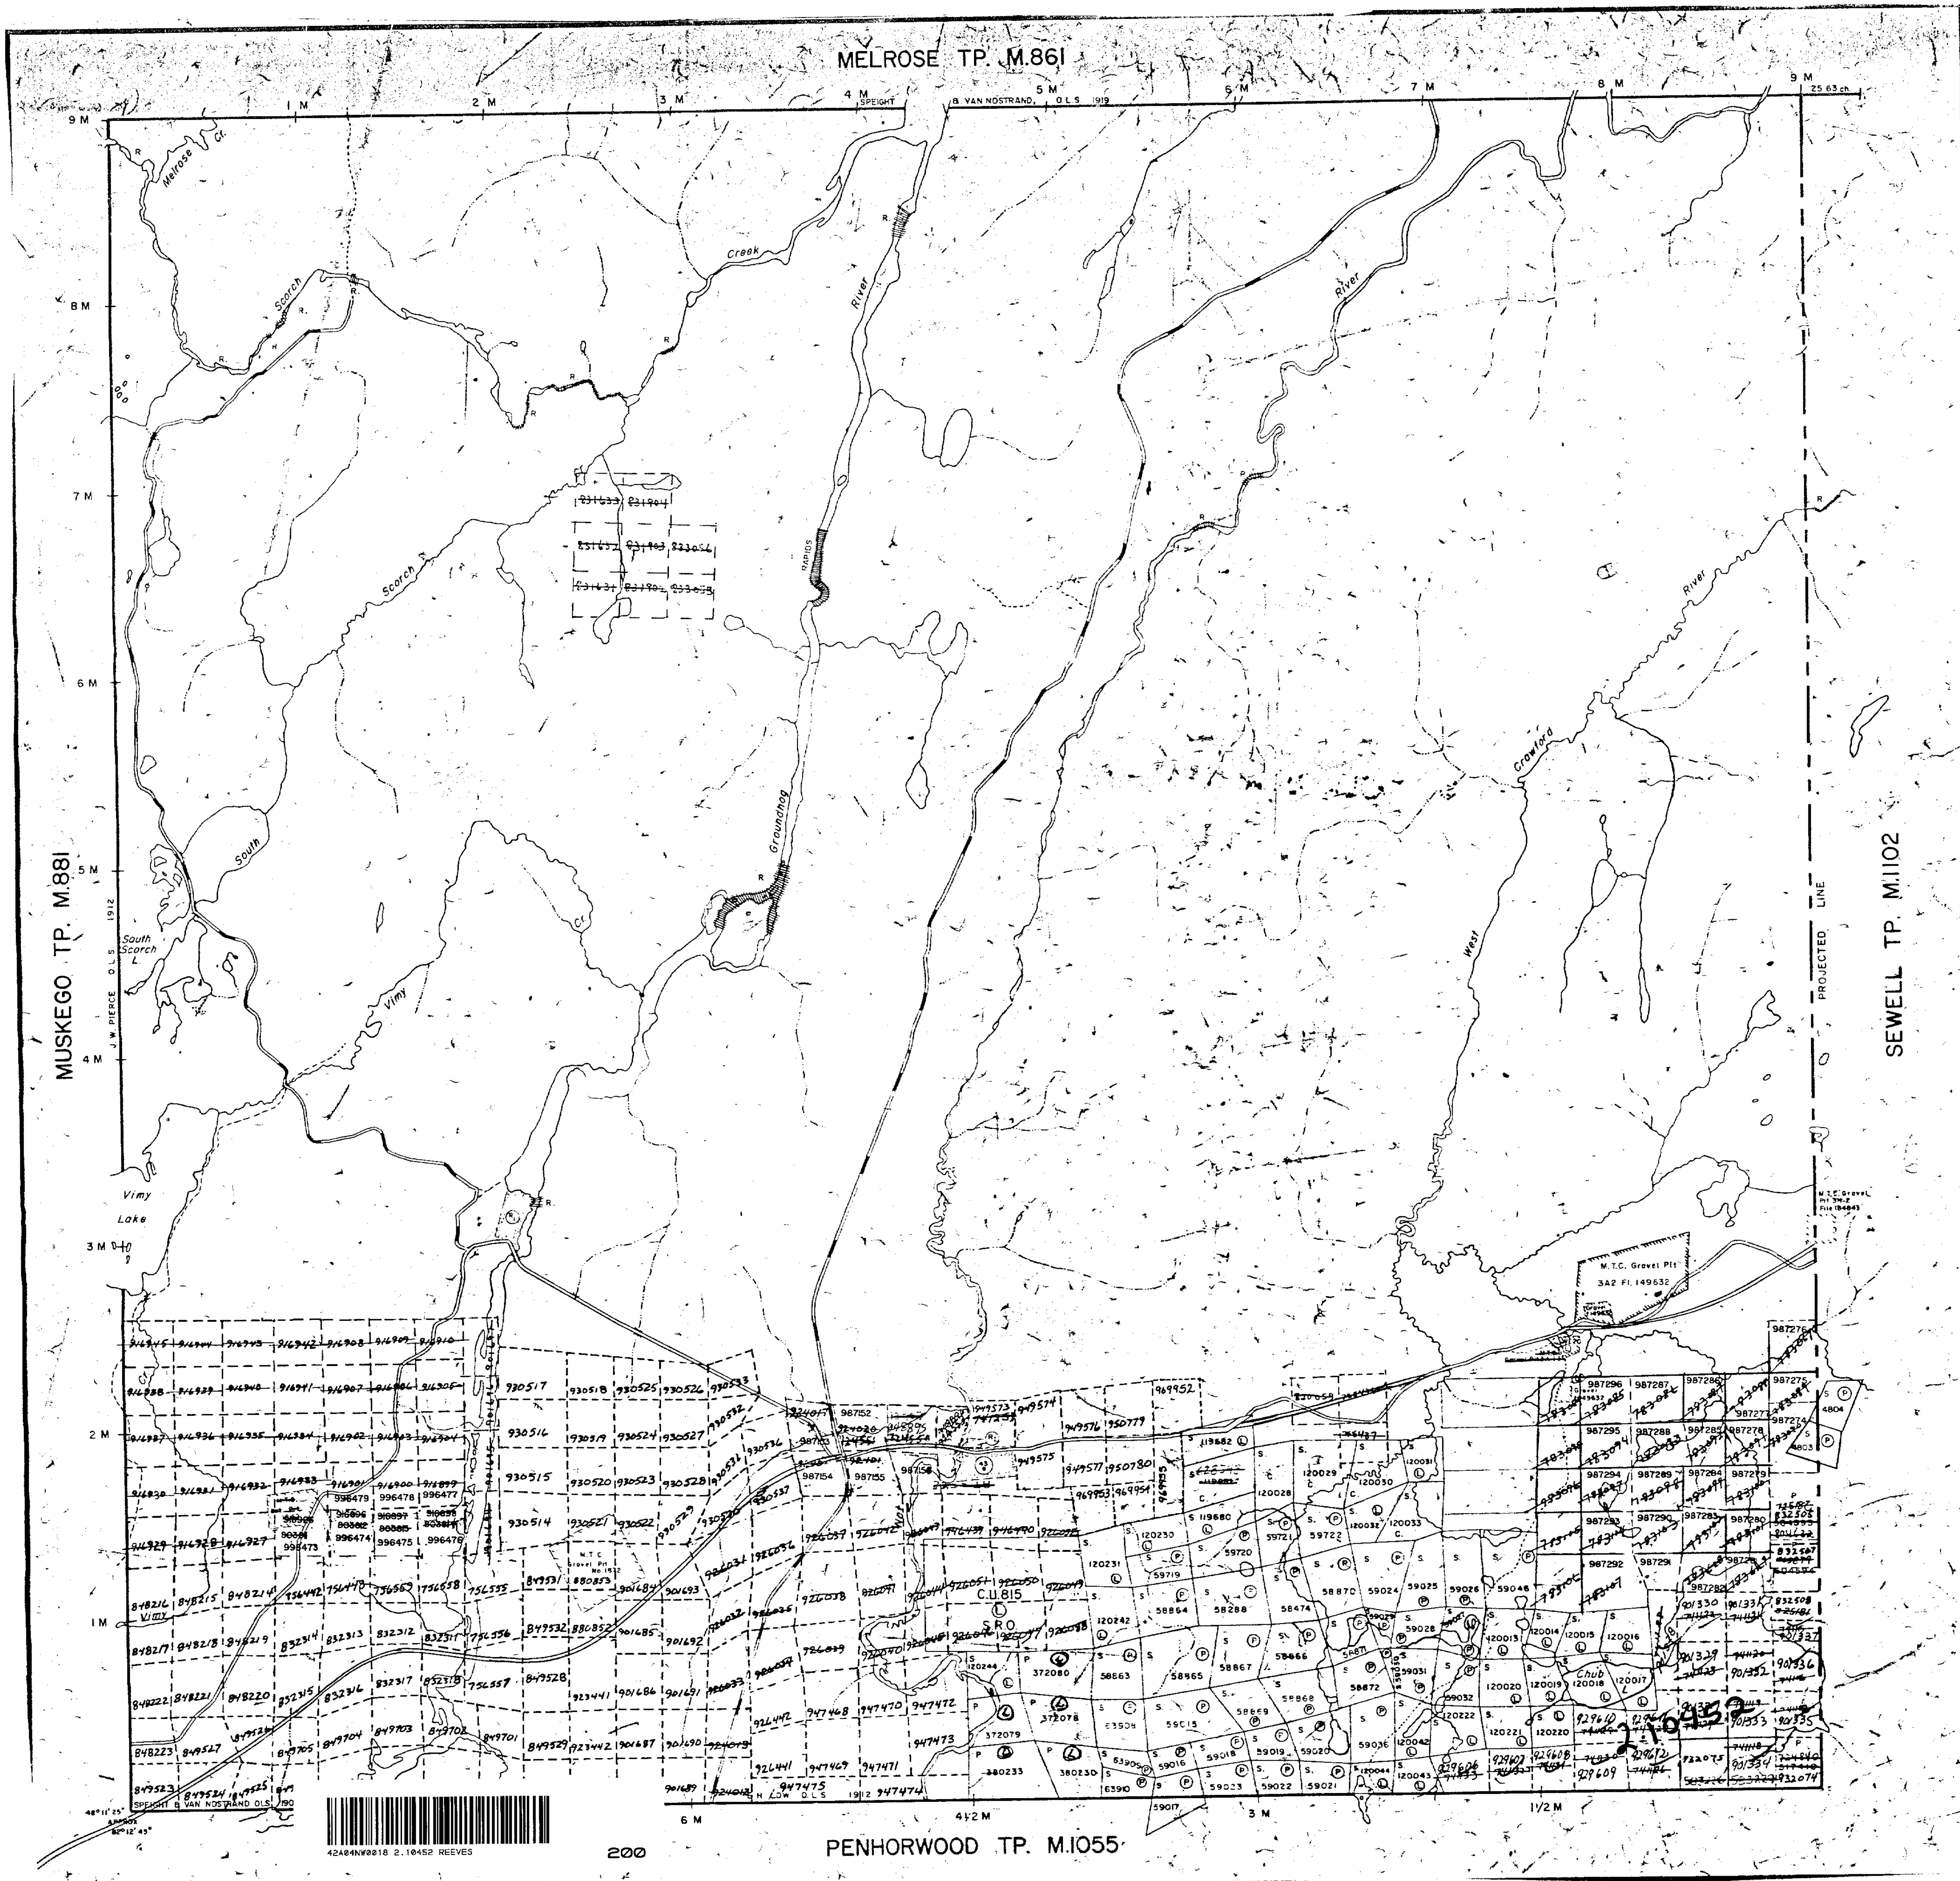

THE TOWNSHIP OF REEVES

2.10452

DISTRICT OF SUDBURY

PORCUPINE MINING DIVISION

SCALE: 1-INCH = 40 CHAINS

LEGEND

PATENTED LAND	● or (P)
CROWN LAND SALE	C.S.
LEASES	(L)
LOCATED LAND	Loc.
LICENSE OF OCCUPATION	L.O.
MINING RIGHTS ONLY	M.R.O.
SURFACE RIGHTS ONLY	S.R.O.
ROADS	
IMPROVED ROADS	
KING'S HIGHWAYS	
RAILWAYS	
POWER LINES	
MARSH OR MUSKEG	
MINES	
CANCELLED	C.
PATENTED S.R.O.	

NOTES

400' surface rights reservation along the shores of all lakes and rivers.

Areas withdrawn from staking under Section 43 of the Mining Act (R.S.O. 1970)

Order No.	File	Date	Disposition
(43)	163002	27/7/72	S R & M R

(R) S.R.O. withdrawn from staking under Sec 34(d) of the Mining Act (R.S.O. 1960). File 163006

PORCUPINE MINING DIVISION
RECEIVED
SEP 15 1987

Rec. Feb. 11/80

PLAN NO. M.1074

ONTARIO
MINISTRY OF NATURAL RESOURCES
SURVEYS AND MAPPING BRANCH

REFERENCES

AREAS WITHDRAWN FROM DISPOSITION

M.R.O. – MINING RIGHTS ONLY
S.R.O. – SURFACE RIGHTS ONLY
M.+S. – MINING AND SURFACE RIGHTS

	Description	Order No.	Date	Disposition	File
(R1)	SEC 43/70	W. 30/77	11/3/77	S.R.O.	135748
(R2)	SEC 43/70	W. 19/78	10/4/78	S.R.O. + M.R.O	188563
(R3)	SEC. 43/70	W. 10/78	14/11/78	S.R.O.	135748
(R4)	DUMP ATTENUATION ZONE				
(R5)	SEC. 36/80	W. 46/83	14/8/83	M. + S.	
(R6)	Not open for staking AWAITING INSPECTION 71/86				
(R7)	"FILED ONLY" D-26/86				
(R8)	NOT OPEN FOR STAKING - BONA FIDE APPLICATION UNDER PUBLIC LANDS ACT PENDING 21/01/87				

SAND AND GRAVEL

(G1)	GRAVEL	FILE	135748
(G2)	M.T.C.	PIT	1577
(G3)	M.T.C	PIT	3H-1 FILE 135748
(G4)	M.T.C	PIT	1576
(G5)	M.T.C.	PIT	3H-2 FILE 184702
(G6)	M.T.C	PIT	1243

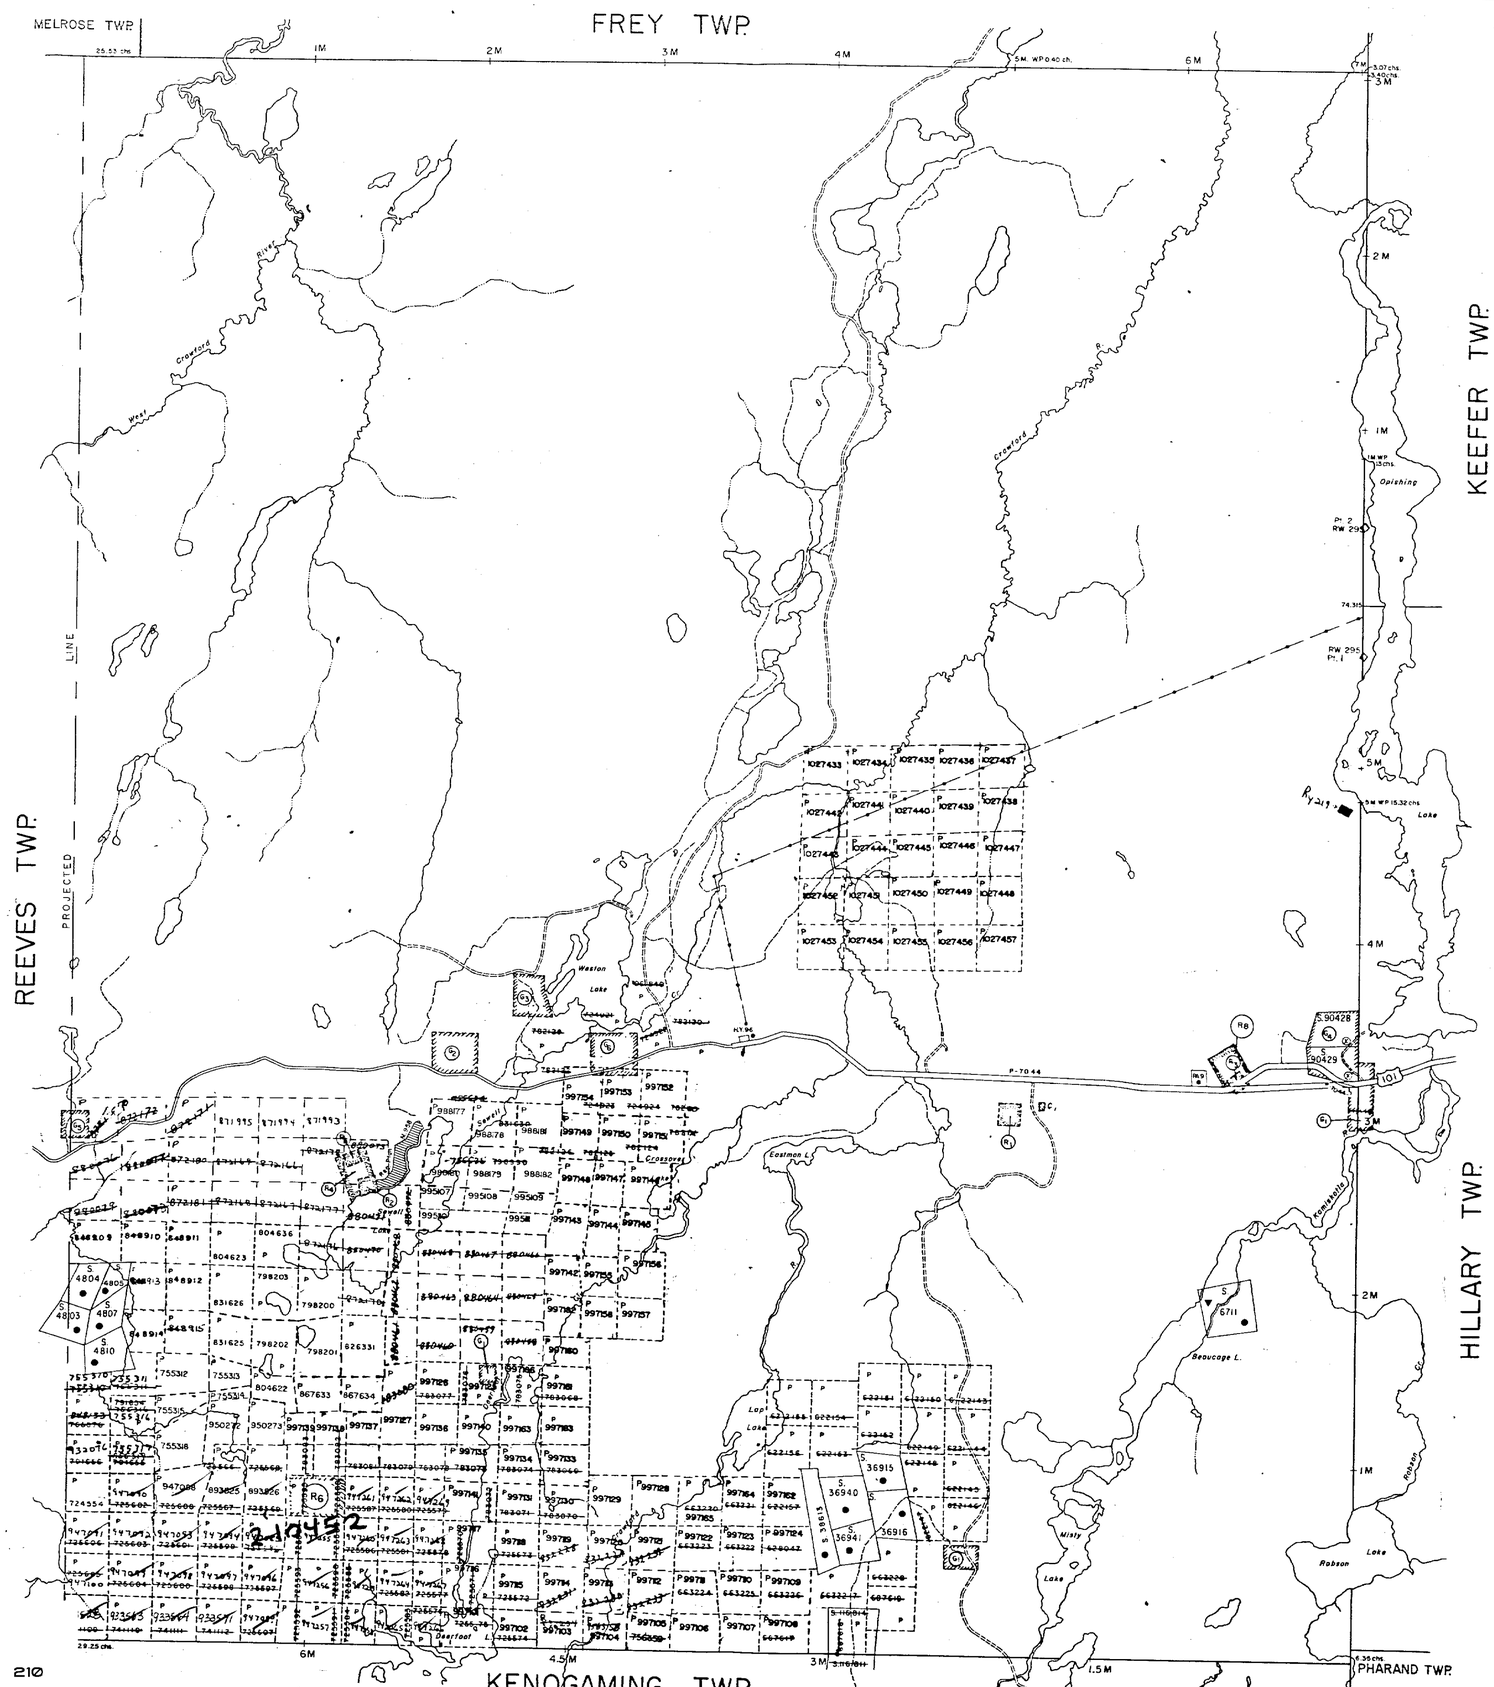

LEGEND

- HIGHWAY AND ROUTE No.
- OTHER ROADS
- TRAILS
- SURVEYED LINES:
  - TOWNSHIPS, BASE LINES, ETC.
  - LOTS, MINING CLAIMS, PARCELS, ETC.
- UNSURVEYED LINES:
  - LOT LINES
  - PARCEL BOUNDARY
  - MINING CLAIMS ETC.
- RAILWAY AND RIGHT OF WAY
- UTILITY LINES
- NON-PERENNIAL STREAM
- FLOODING OR FLOODING RIGHTS
- SUBDIVISION OR COMPOSITE PLAN
- RESERVATIONS
- ORIGINAL SHORELINE
- MARSH OR MUSKEG
- MINES
- TRAVERSE MONUMENT

DISPOSITION OF CROWN LANDS

TYPE OF DOCUMENT	SYMBOL
PATENT, SURFACE & MINING RIGHTS	●
" , SURFACE RIGHTS ONLY	◒
" , MINING RIGHTS ONLY	◓
LEASE, SURFACE & MINING RIGHTS	■
" , SURFACE RIGHTS ONLY	◪
" , MINING RIGHTS ONLY	◩
LICENCE OF OCCUPATION	▼
ORDER-IN-COUNCIL	OC
RESERVATION	(R)
CANCELLED	⊗
SAND & GRAVEL	(G)

NOTE: MINING RIGHTS IN PARCELS PATENTED PRIOR TO MAY 6, 1913, VESTED IN ORIGINAL PATENTEE BY THE PUBLIC LANDS ACT, R.S.O. 1970, CHAP. 380, SEC. 63, SUBSEC 1.

SCALE: 1 INCH = 40 CHAINS

FEET 0 1000 2000 4000 6000 8000
METRES 0 200 1000 (1 KM) 2000 (2 KM)

TOWNSHIP
SEWELL 2.10452

M.N.R. ADMINISTRATIVE DISTRICT
TIMMINS
MINING DIVISION
PORCUPINE
LAND TITLES / REGISTRY DIVISION
SUDBURY

Ministry of Natural Resources — Land Management Branch
Ontario

Date	Number
MARCH, 1985	G-3247

REFERENCE

AREAS WITHDRAWN FROM DISPOSITION

M.R.O. – MINING RIGHTS ONLY
S.R.O. – SURFACE RIGHTS ONLY
M.+ S. – MINING AND SURFACE RIGHTS

	Description	Order No.	Date	Disposition	File
(R1)	400' RESERVE			S.R.O.	135537
(R2)	SEC. 43/70	W.91/72	27/12/72	S.R.O.	153006 V.2
(R3)	SEC. 36/80		11/7/81	S.R.O.	135537
(R4)	ORDER OF THE MINISTER #33/87 DATED MARCH 30/87 WITHDRAWS MINING AND SURFACE RIGHTS UNDER SECTION 36 OF THE MINING ACT, RSO 1980				

SAND AND GRAVEL

(G1) GRAVEL .... FILE 38729
(G2) GRAVEL PIT .... FILE 13555 V.6
(G3) GRAVEL .... FILE 106274
(G4) QUARRY PERMIT # 22805 ISSUED FOR THE REMOVAL OF QUARTZ JULY 1, 1987.
(G5) QUARRY PERMIT # 22808 ISSUED FOR THE REMOVAL OF QUARTZ SEPT. 10, 1987.

NOTES

FLOODING RIGHTS ON HORWOOD LAKE RESERVED TO ONTARIO HYDRO TO CONTOUR ELEVATION 117' .... L.O. 7746

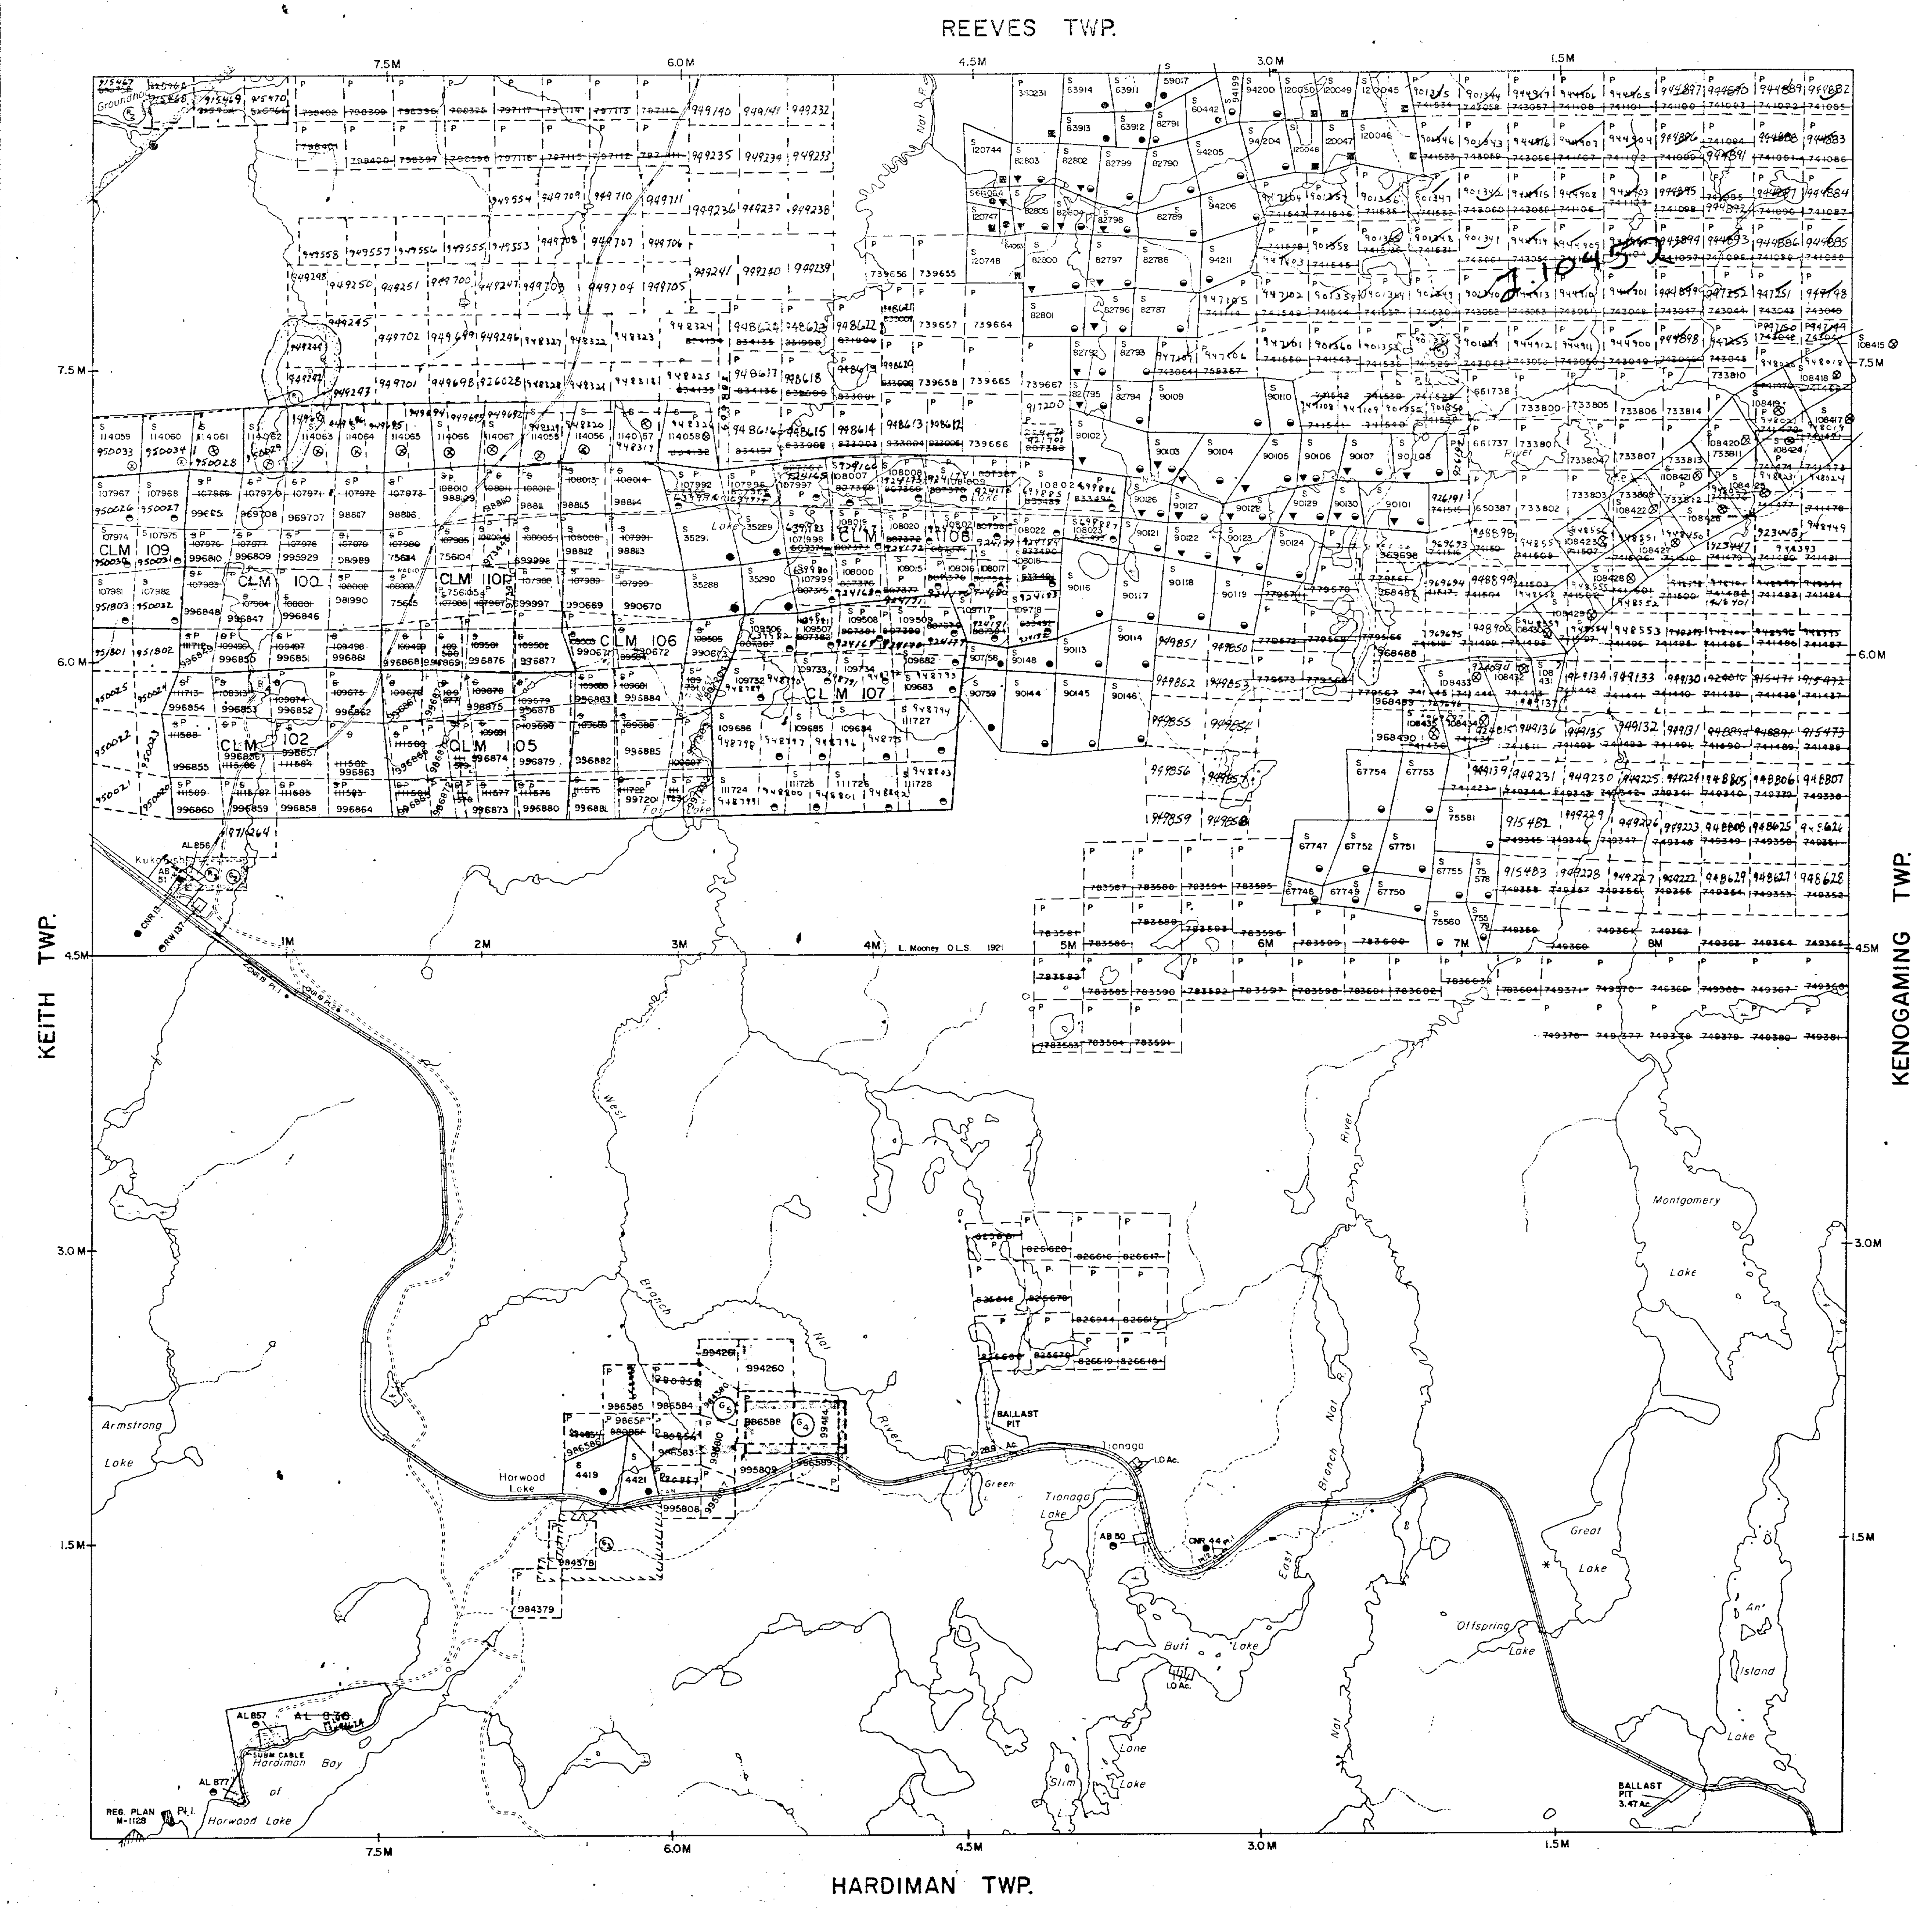

LEGEND

HIGHWAY AND ROUTE No.	
OTHER ROADS	
TRAILS	
SURVEYED LINES:	
TOWNSHIPS, BASE LINES, ETC.	
LOTS, MINING CLAIMS, PARCELS, ETC.	
UNSURVEYED LINES:	
LOT LINES	
PARCEL BOUNDARY	
MINING CLAIMS ETC.	
RAILWAY AND RIGHT OF WAY	
UTILITY LINES	
NON-PERENNIAL STREAM	
FLOODING OR FLOODING RIGHTS	
SUBDIVISION OR COMPOSITE PLAN	
RESERVATIONS	
ORIGINAL SHORELINE	
MARSH OR MUSKEG	
MINES	⚒
TRAVERSE MONUMENT	⌖

DISPOSITION OF CROWN LANDS

TYPE OF DOCUMENT	SYMBOL
PATENT, SURFACE & MINING RIGHTS	●
" , SURFACE RIGHTS ONLY	◓
" , MINING RIGHTS ONLY	◒
LEASE, SURFACE & MINING RIGHTS	■
" , SURFACE RIGHTS ONLY	⬒
" , MINING RIGHTS ONLY	⬓
LICENCE OF OCCUPATION	▼
ORDER-IN-COUNCIL	OC
RESERVATION	(R)
CANCELLED	⊗
SAND & GRAVEL	(G)
LAND USE PERMIT	*

NOTE: MINING RIGHTS IN PARCELS PATENTED PRIOR TO MAY 6, 1913, VESTED IN ORIGINAL PATENTEE BY THE PUBLIC LANDS ACT, R.S.O. 1970, CHAP. 380, SEC 63, SUBSEC 1.

SCALE: 1 INCH = 40 CHAINS

FEET 0 1000 2000 4000 6000 8000
METRES 0 200 1000 (1 KM) 2000 (2 KM)

TOWNSHIP 2.10452

PENHORWOOD

M.N.R. ADMINISTRATIVE DISTRICT
CHAPLEAU
MINING DIVISION
PORCUPINE
LAND TITLES / REGISTRY DIVISION
SUDBURY

Ontario
Ministry of Natural Resources
Land Management Branch

Date MARCH 1985
Checked June 14/85 L.P. L.N.

Number G-3244

REFERENCE

AREAS WITHDRAWN FROM DISPOSITION

M.R.O. – MINING RIGHTS ONLY
S.R.O. – SURFACE RIGHTS ONLY
M.+ S. – MINING AND SURFACE RIGHTS

Description	Order No.	Date	Disposition	File

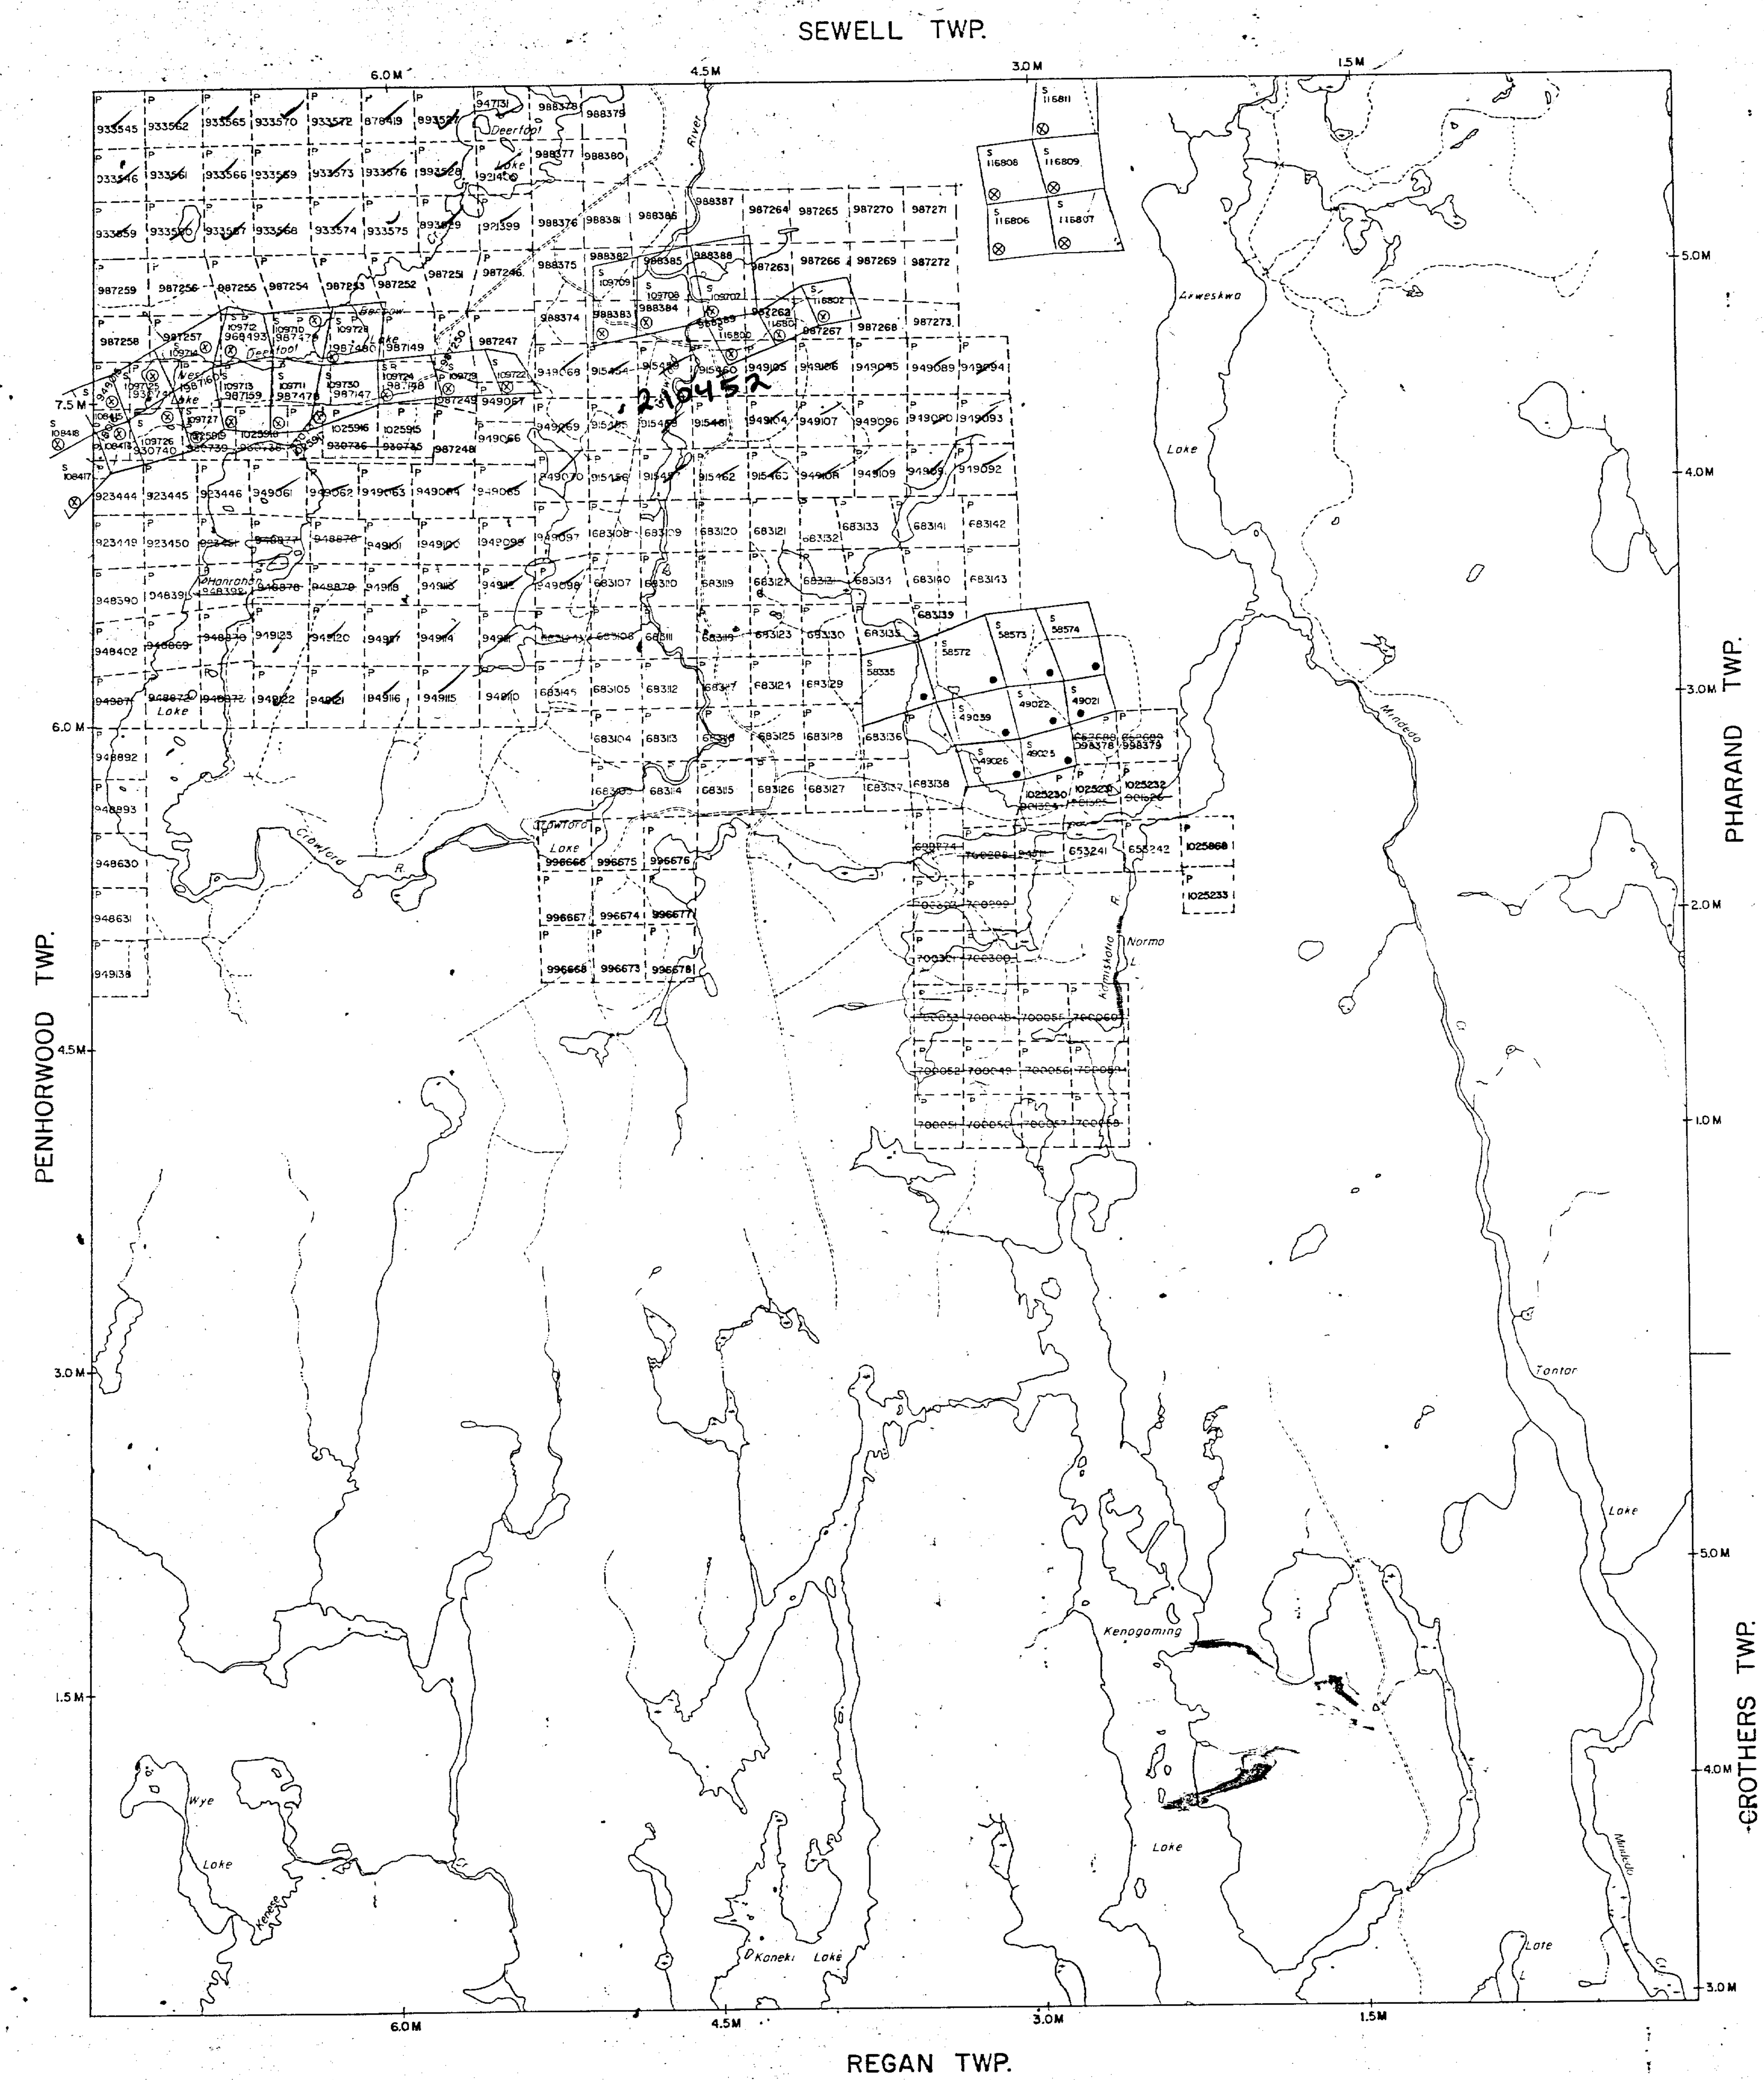

LEGEND

HIGHWAY AND ROUTE No.
OTHER ROADS
TRAILS
SURVEYED LINES:
TOWNSHIPS, BASE LINES, ETC.
LOTS, MINING CLAIMS, PARCELS, ETC.
UNSURVEYED LINES
LOT LINES
PARCEL BOUNDARY
MINING CLAIMS ETC.
RAILWAY AND RIGHT OF WAY
UTILITY LINES
NON-PERENNIAL STREAM
FLOODING OR FLOODING RIGHTS
SUBDIVISION OR COMPOSITE PLAN
RESERVATIONS
ORIGINAL SHORELINE
MARSH OR MUSKEG
MINES
TRAVERSE MONUMENT

DISPOSITION OF CROWN LANDS

TYPE OF DOCUMENT	SYMBOL
PATENT, SURFACE & MINING RIGHTS	●
" , SURFACE RIGHTS ONLY	◓
" , MINING RIGHTS ONLY	○
LEASE, SURFACE & MINING RIGHTS	■
" , SURFACE RIGHTS ONLY	⬒
" , MINING RIGHTS ONLY	□
LICENCE OF OCCUPATION	▼
ORDER-IN-COUNCIL	OC
RESERVATION	Ⓡ
CANCELLED	⊗
SAND & GRAVEL	Ⓢ

NOTE: MINING RIGHTS IN PARCELS PATENTED PRIOR TO MAY 6, 1913, VESTED IN ORIGINAL PATENTEE BY THE PUBLIC LANDS ACT, R.S.O. 1970, CHAP. 380, SEC. 63, SUBSEC. 1.

SCALE: 1 INCH = 40 CHAINS

FEET 0 1000 2000 4000 6000 8000
METRES 0 200 1000 (1 KM) 2000 (2 KM)

PORCUPINE MINING DIVISION
RECEIVED
OCT 21 1987

TOWNSHIP 2.10452

KENOGAMING

M.N.R. ADMINISTRATIVE DISTRICT
TIMMINS
MINING DIVISION
PORCUPINE
LAND TITLES / REGISTRY DIVISION
SUDBURY

Ontario
Ministry of Natural Resources
Land Management Branch

Date APRIL 1985
RECEIVED APR.22/87

Number G-3239

42A04NW0018 2.10452 REEVES

230

REEVES TWP.

PENHORWOOD TWP.

SEWELL TWP.

KENOGAMING TWP.

Sewell Lake

Lac Lake

Chubb Lake

Deerfoot Lake

Crawford River

Hanrahan Lake

Crawford Lake

No.1 River

N

1 inch = 1/2 mile

0 1/2 1 1 1/2 2 miles

0 1 2 3 kilometres

2.10452

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.		
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.		
	Title REEVES JOINT VENTURE PROPERTY CLAIM MAP		
	Date: Oct. 87	Scale: 1:32500	N.T.S.:
	Drawn: B.S.B.	Approved:	File: M-223

42A04NW0018 2.10452 REEVES

LEGEND

LATE INTRUSIVE ROCKS

6 Proterozoic diabase

7 EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

6 EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphritic rock
6c diorite
6d feldspar porphyry

5 ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komateiitic rock
5d carbonatized ultramafic rock

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

120340 whole rock and trace element sample

120341 trace element analysis only

4 SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

3 FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

2 INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed post)

TREES

adr alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

988387 988388 988389 915460 915461 987262 987263 987264 987265 987266 987267 987268 987269 987270 987271 987272 987273 949104 949105 949106 949107 949095 949096 949089 949090 949094 949093 CRAWFORD RIVER

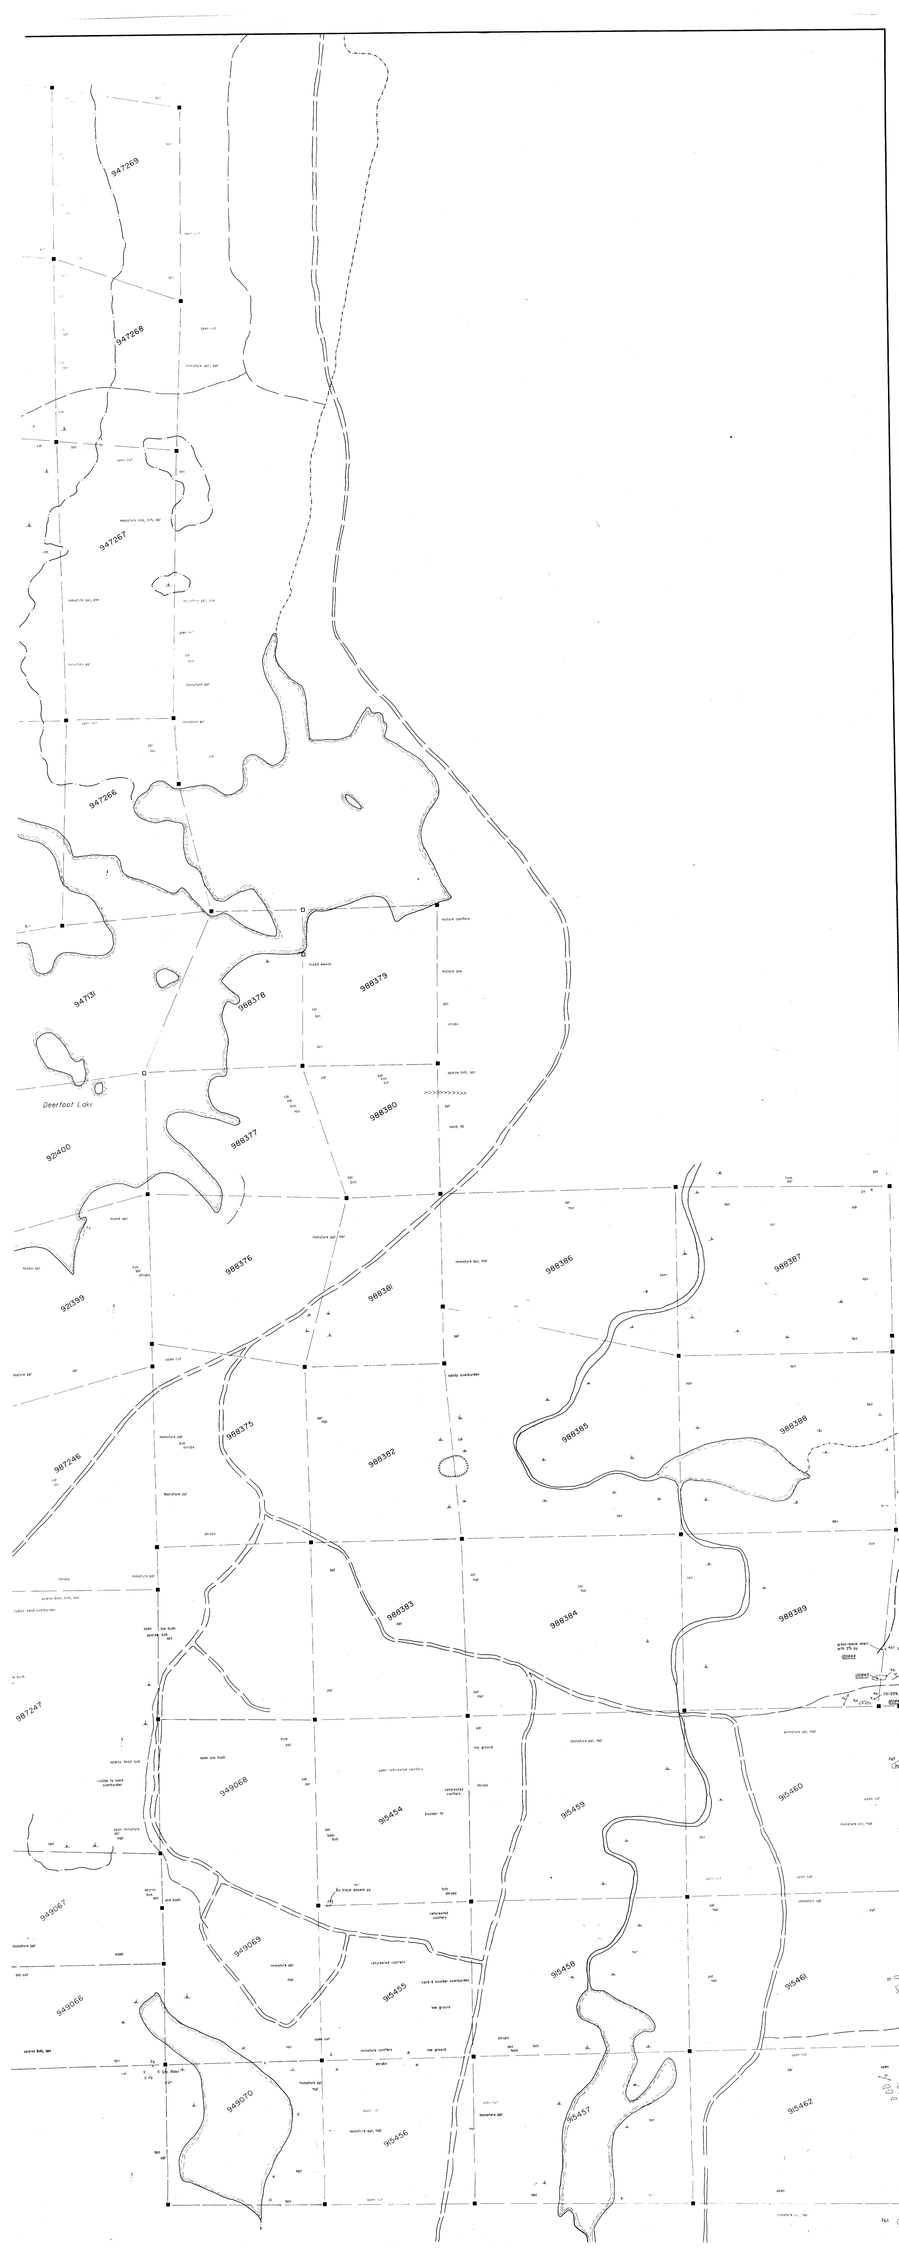

SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f greywacke

FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2i reworked tuff (tuffaceous sedimentary rock)

MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porph-yritic
1g pyroclastic

qtz quartz
qv quartz vein
sil silicified
carb carbonate
ser sericite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
hbl hornblende
mag magnetite
py pyrite
po porphyrite
cly chalcopyrite

GO740 whole rock and trace element sample
GO740 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
x rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines
(assumed post)

TREES

ald alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pine pine

REVISIONS:

ROBERT S. MIDDLETON
EXPLORATION SERVICES INC.

for GOLDROCK RESOURCES INC.
& GLEN ALDEN RESOURCES LTD.

Title REEVES PROPERTY JOINT VENTURE

GEOLOGY MAP 2W

Date: OCT/87 | Scale: 1:2500 | N.T.S.:
Drawn: B.S.B./S.S. | Approved: | File: M-223

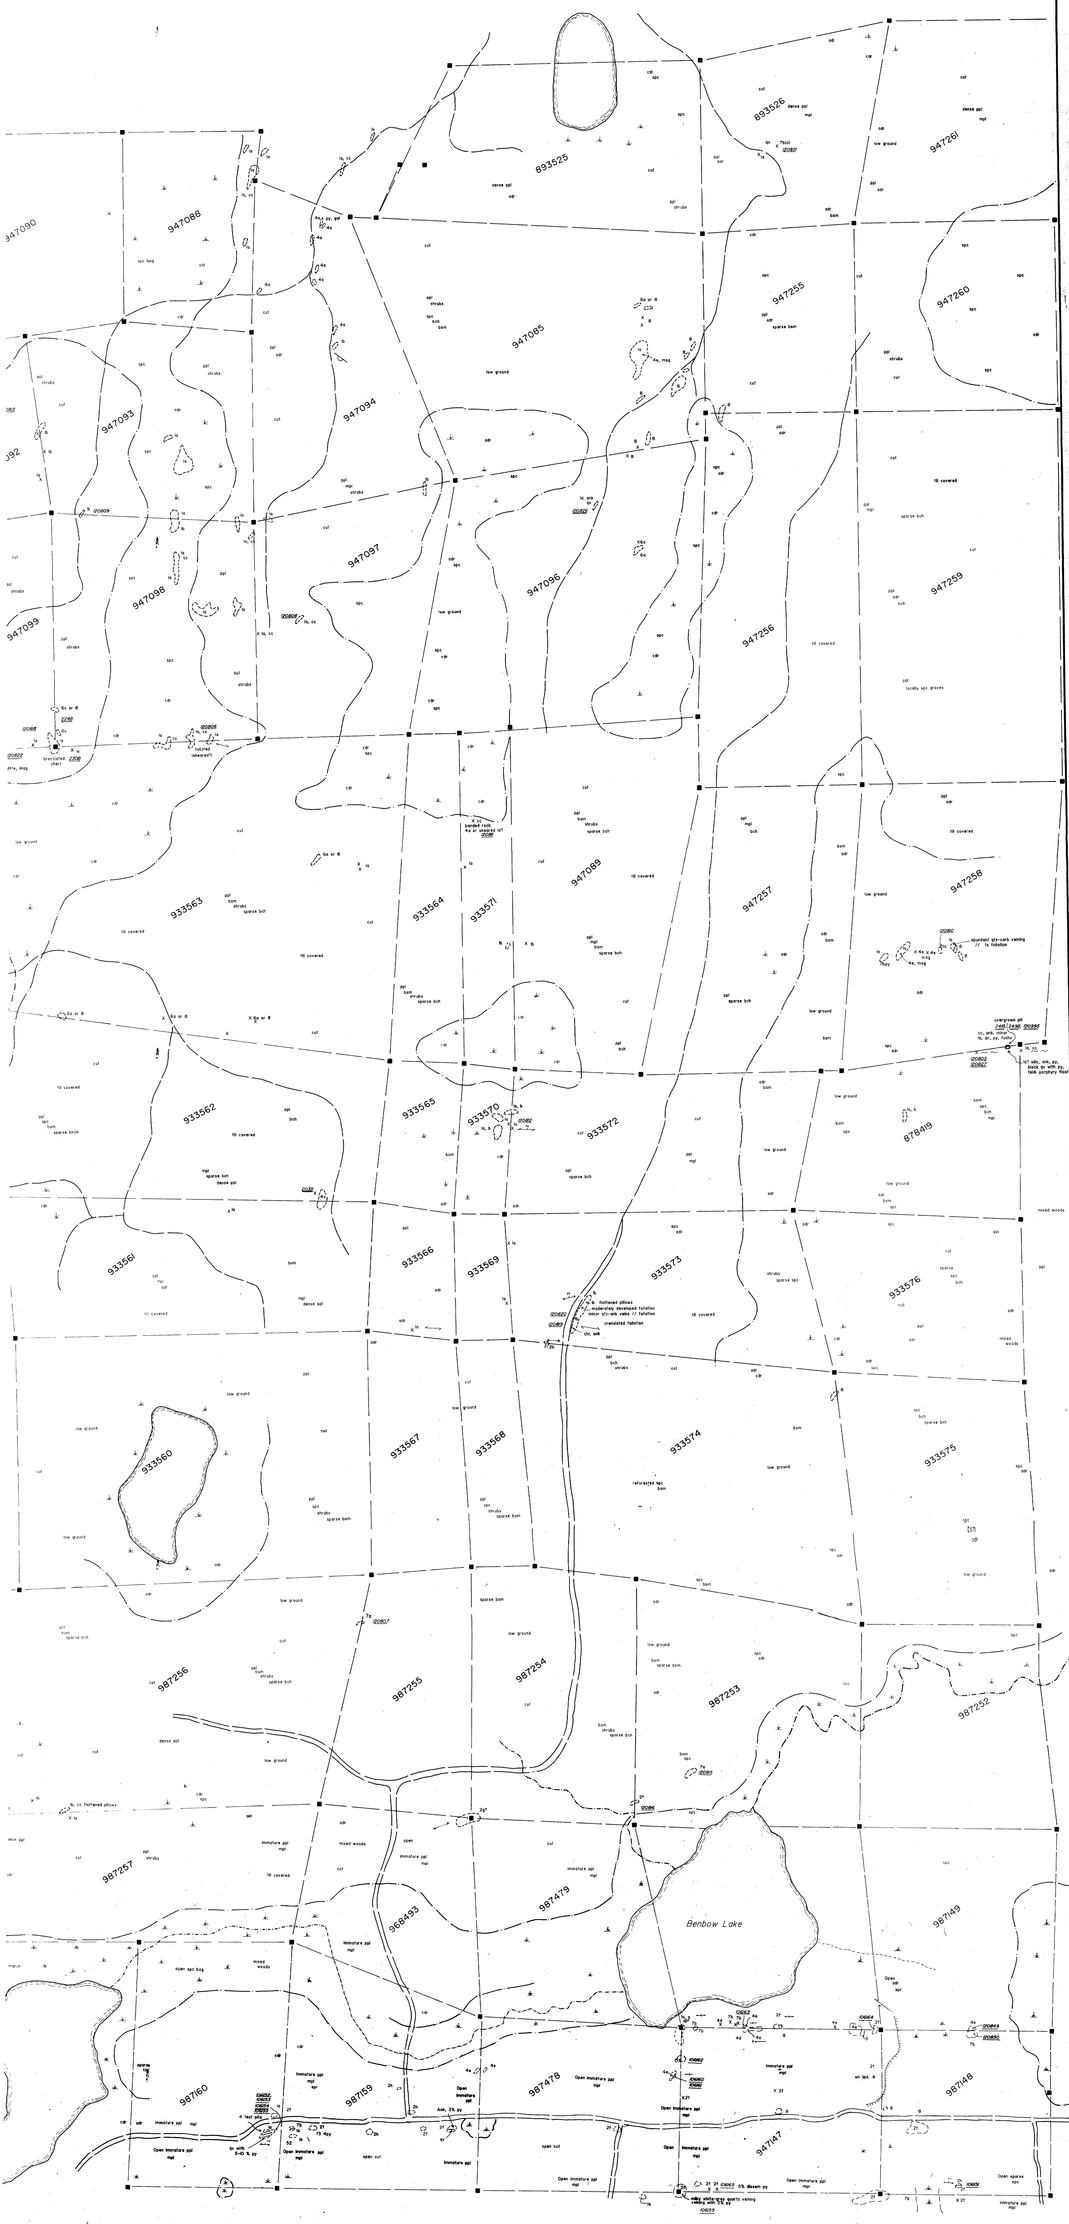

SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

FELSIC VOLCANIC ROCKS

1a massive flow or undifferentiated
1b flow breccia
1c porphyritic flow
1d tuff, crystal tuff
1e lapilli tuff

INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

MAFIC VOLCANIC ROCKS

3a massive pillow or undifferentiated
3b pillowed flow
3c pillow or flow breccia
3d amygdaloidal
3e variolitic
3f porphyritic
3g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
ser sericite
fsp feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

00340 whole rock and trace element sample

00341 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
x rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed post)

TREES

odr alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

2.1045R

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.	
	for	GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.
	Title	REEVES PROPERTY JOINT VENTURE
		GEOLOGY MAP 3W
	Date: OCT/87	Scale: 1 : 2500 N.T.S.:
	Drawn: R.S.B./S.S.	Approved: File: M-223

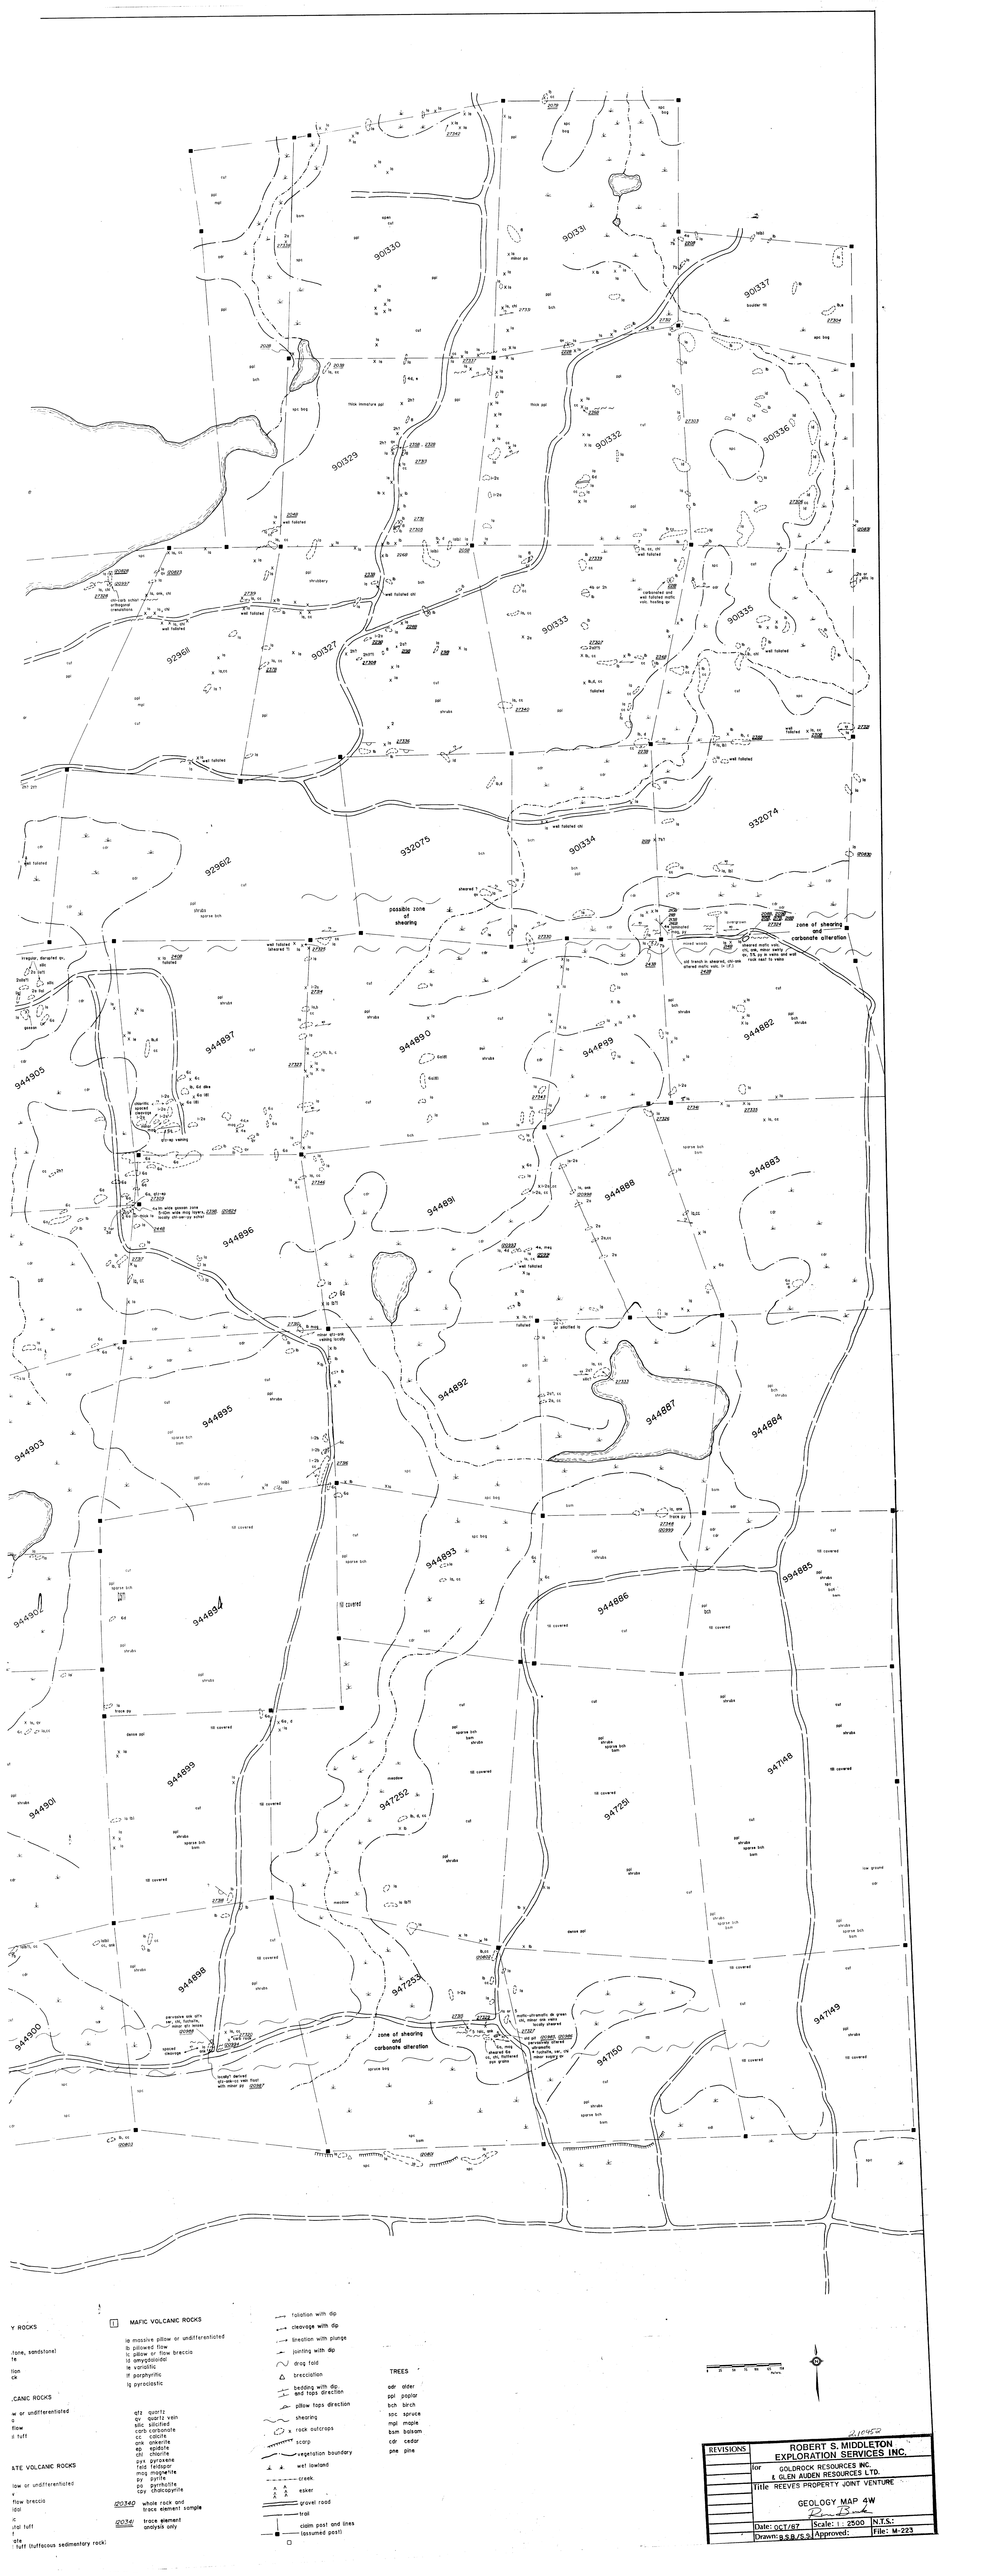

Y ROCKS

tone, sandstone
te
tion
ck

/CANIC ROCKS

w or undifferentiated
s
flow
d tuff

ATE VOLCANIC ROCKS

low or undifferentiated
v
flow breccia
idal
c
idal tuff
t
ate
tuff (tuffaceous sedimentary rock)

MAFIC VOLCANIC ROCKS

- la massive pillow or undifferentiated
- lb pillowed flow
- lc pillow or flow breccia
- ld amygdaloidal
- le variolitic
- lf porphyritic
- lg pyroclastic

qtz quartz
qv quartz vein
sillic silicified
carb carbonate
cc calcite
dol dolomite
ep epidote
chl chlorite
pyrt pyrrotite
feld feldspar
mag magnetite
py pyrite
cpy chalcopyrite

00340 whole rock and trace element sample

00340 trace element analysis only

- foliation with dip
- cleavage with dip
- brecition with plunge
- jointing with dip
- drag fold
- brecciation
- bedding with dip and tops direction
- pillow tops direction
- shearing
- rock outcrops
- scarp
- vegetation boundary
- wet lowland
- creek
- esker
- gravel road
- trail
- claim post and lines
- (assumed geol)

TREES

adr alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

Scale: 1 : 2500
Metres

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.
	Title REEVES PROPERTY JOINT VENTURE
	GEOLOGY MAP 4W
	Date: OCT/87 Scale: 1 : 2500 N.T.S.
	Drawn: B.S.B./S.J. Approved: File: M-223

FELSIC VOLCANIC ROCKS

a massive flow or undifferentiated
b flow breccia
c porphyritic flow
d tuff, crystal tuff
e lapilli tuff

INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffacous sedimentary rock)

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

120340 whole rock and trace element sample
120341 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing

rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines
(assumed post)

TREES

adr alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

2.10452

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.		
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.		
	Title REEVES PROPERTY JOINT VENTURE GEOLOGY MAP 5W		
	Date: OCT/87	Scale: 1:2500	N.T.S.:
	Drawn: B.S.B./S.S.	Approved:	File: M-223

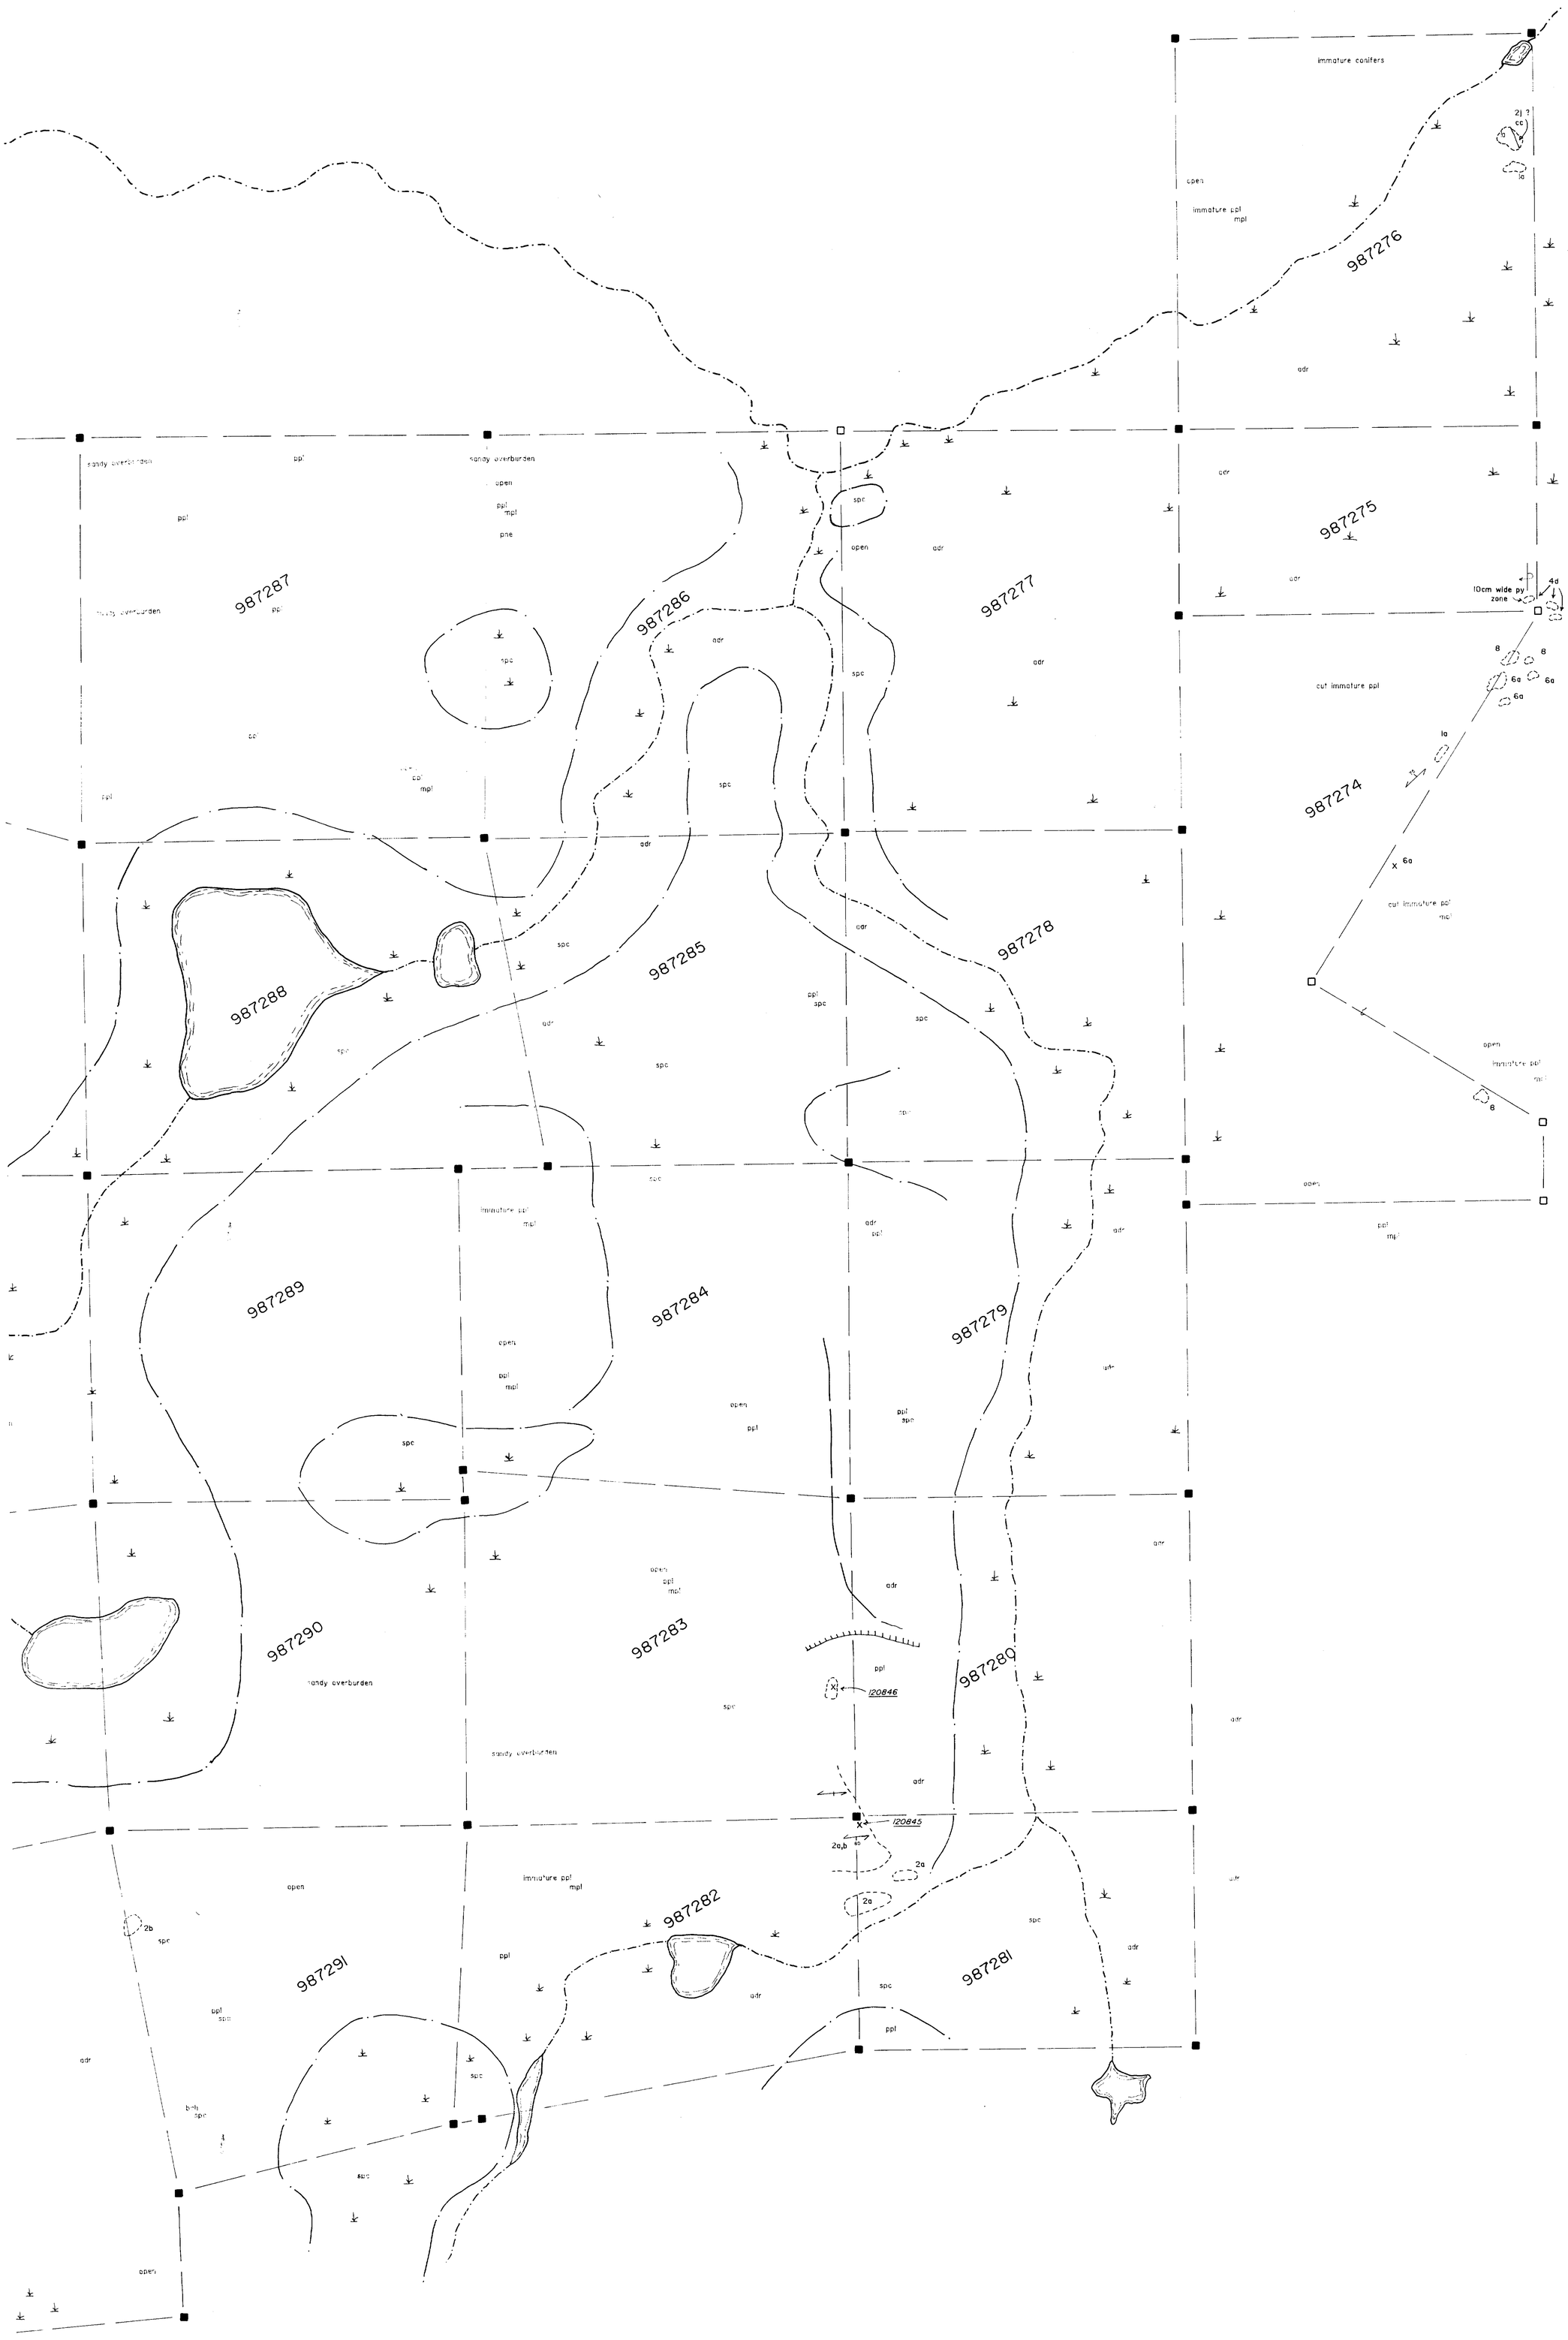

)CKS

, sandstone)

C ROCKS

undifferentiated

OLCANIC ROCKS

undifferentiated

eccia

iffacous sedimentary rock)

MAFIC VOLCANIC ROCKS

- la massive pillow or undifferentiated
- lb pillowed flow
- lc pillow or flow breccia
- ld amygdaloidal
- le variolitic
- lf porphyritic
- lg pyroclastic

- qtz quartz
- qv quartz vein
- silic silicified
- carb carbonate
- cc calcite
- ank ankerite
- ep epidote
- chl chlorite
- pyx pyroxene
- feld feldspar
- mag magnetite
- py pyrite
- po pyrrhotite
- cpy chalcopyrite

120340 whole rock and trace element sample

120341 trace element analysis only

- foliation with dip
- cleavage with dip
- lineation with plunge
- jointing with dip
- drag fold
- brecciation
- bedding with dip and tops direction
- pillow tops direction
- shearing
- x rock outcrops
- scarp
- vegetation boundary
- wet lowland
- creek.
- esker
- gravel road
- trail
- claim post and lines (assumed post)

TREES

- adr alder
- ppl poplar
- bch birch
- spc spruce
- mpl maple
- bsm balsam
- cdr cedar
- pne pine

0 25 50 75 100 125 150 Meters.

2.10452

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.		
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.		
	Title REEVES PROPERTY JOINT VENTURE GEOLOGY MAP 6N		
	Date: OCT/87	Scale: 1 : 2500	N.T.S.:
	Drawn: B.S.B./S.S.	Approved:	File: M-223

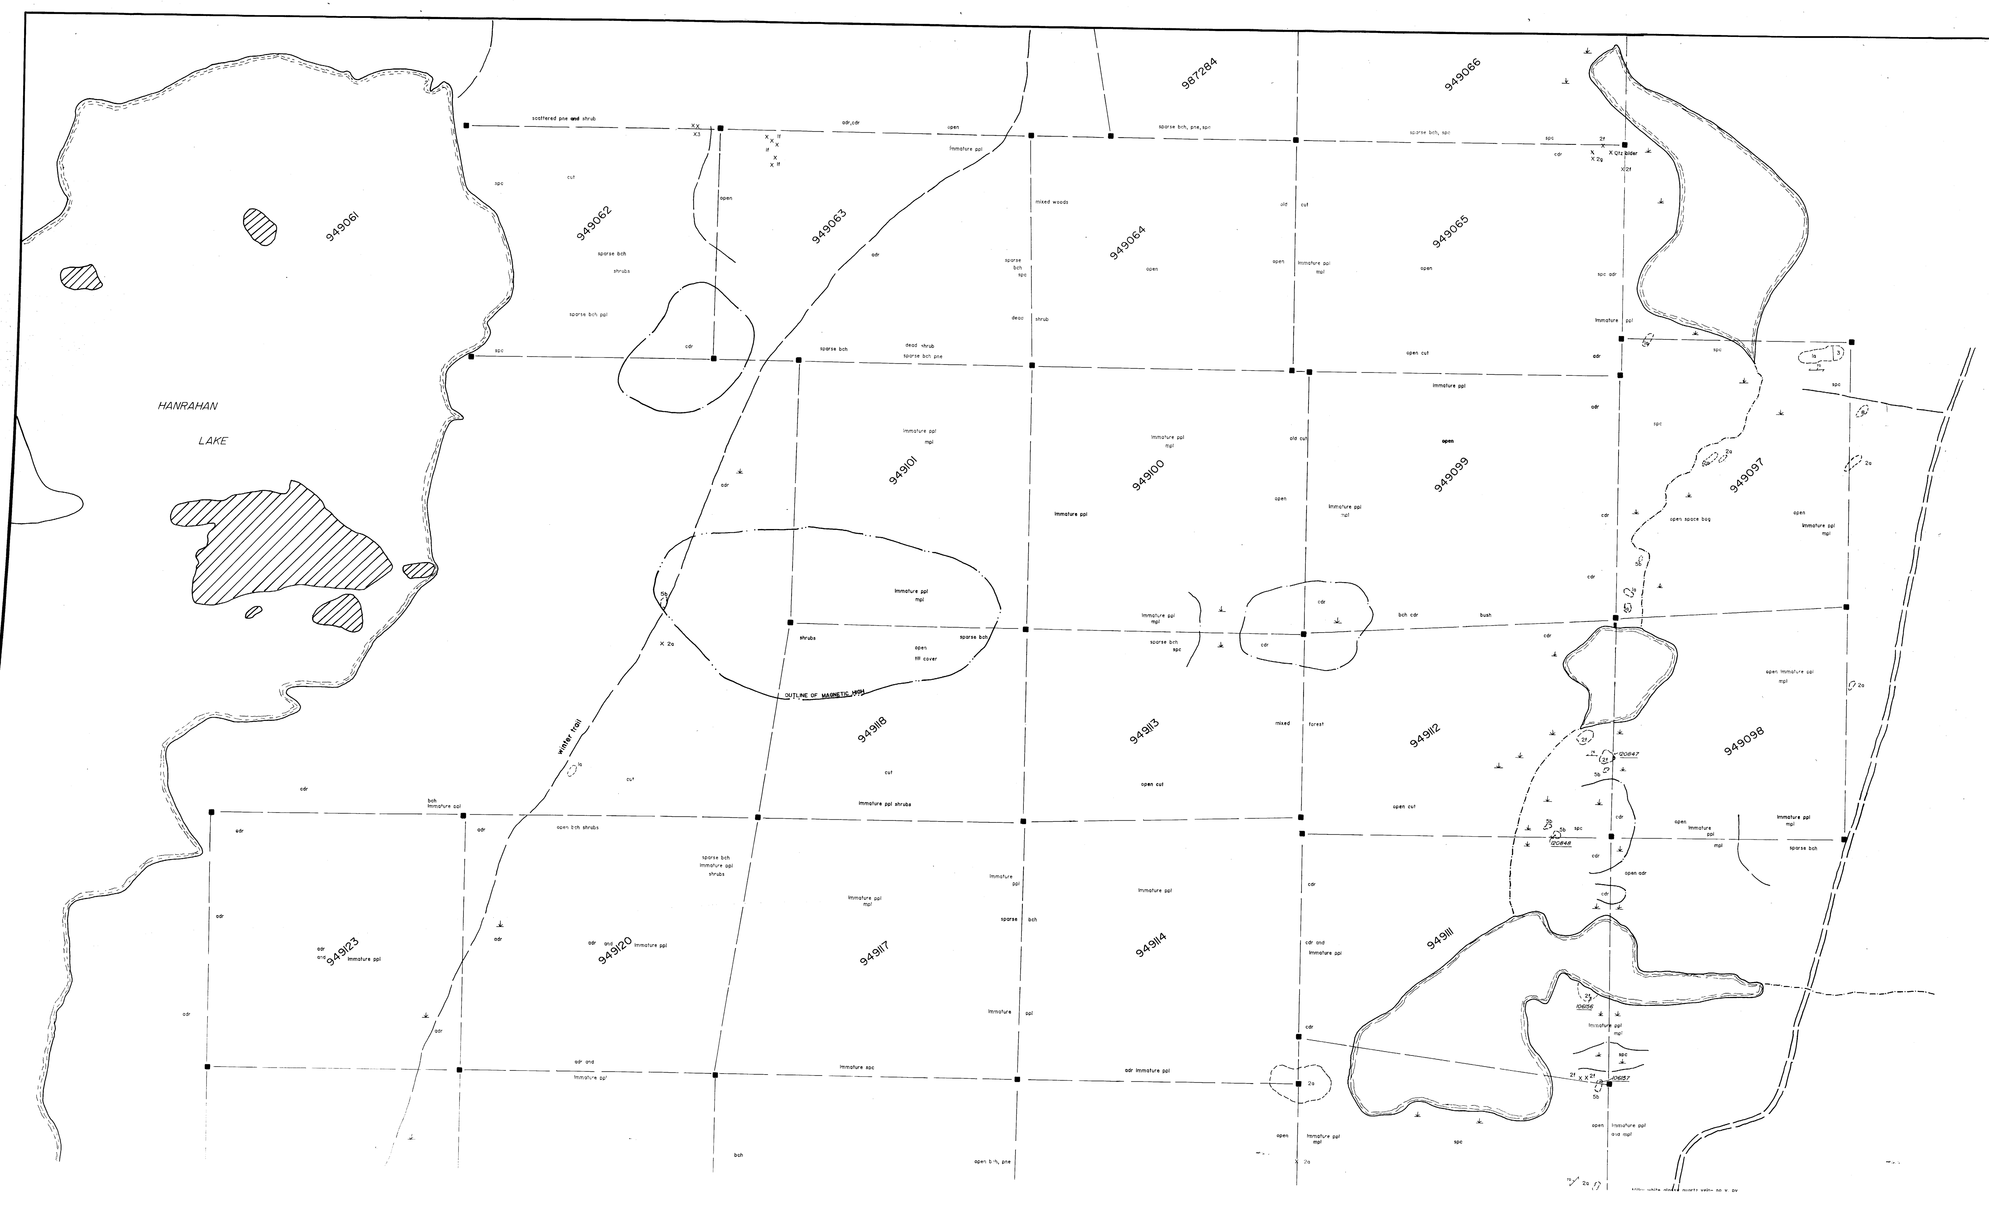

LEGEND

LATE INTRUSIVE ROCKS

8 Proterozoic diabase

7 EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

6 EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphritic rock
6c diorite
6d feldspar porphyry

5 ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
onk onkerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite

4 SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

3 FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

2 INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
x rock outcrops
scarp
vegetation boundary
wet lowland

TREES

odr older
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

MAFIC VOLCANIC ROCKS

- 1a massive pillow or undifferentiated
- 1b pillowed flow
- 1c pillow or flow breccia
- 1d amygdaloidal
- 1e variolitic
- 1f porphyritic
- 1g pyroclastic

- qtz quartz
- qv quartz vein
- silic silicified
- carb carbonate
- cc calcite
- ank ankerite
- ep epidote
- chl chlorite
- pyx pyroxene
- feld feldspar
- mag magnetite
- py pyrite
- po pyrrhotite
- cpy chalcopyrite

120340 whole rock and trace element sample

120341 trace element analysis only

- foliation with dip
- cleavage with dip
- lineation with plunge
- jointing with dip
- drag fold
- brecciation
- bedding with dip and tops direction
- pillow tops direction
- shearing
- x rock outcrops
- scarp
- vegetation boundary
- wet lowland
- creek
- esker
- gravel road
- trail
- claim post and lines (assumed post)

TREES

- adr alder
- ppl poplar
- bch birch
- spc spruce
- mpl maple
- bsm balsam
- cdr cedar
- pne pine

CRANFORD RIVER

988388 988389 915460 915461 915462 915463 987262 987263 987266 987267 987268 987269 987272 287273 949105 949106 949095 949089 949094 949104 949107 949096 949090 949093 949108 949109 949091 949092

120835 120837 120836 120841 120840 120839 120844 120842 120832 120833 120838 120834

0 25 50 75 100 125 150 Metres

N

915459

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.
	Title REEVES PROPERTY JOINT VENTURE
	GEOLOGY MAP IW
	Date: OCT/87 | Scale: 1 : 2500 | N.T.S.:
	Drawn: B.S.B./S.S. | Approved: | File: M-223

250

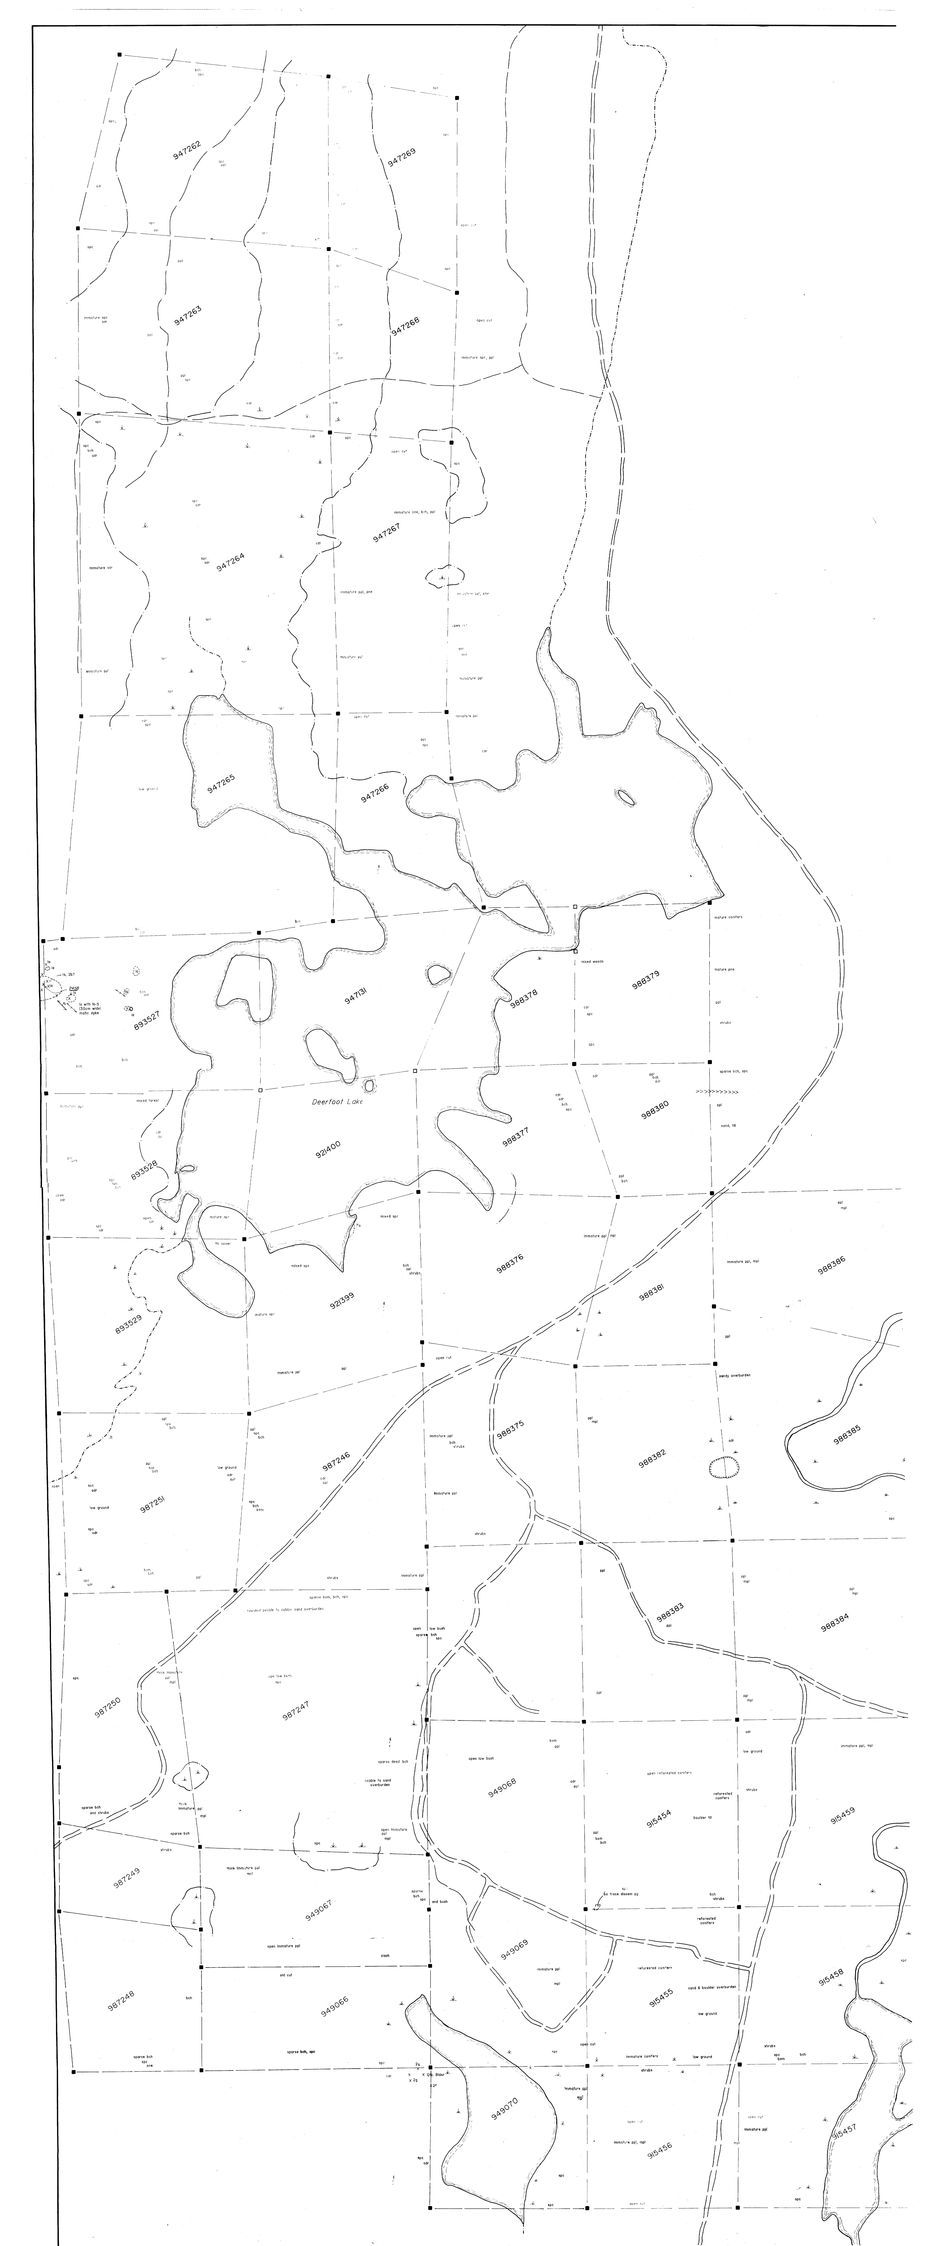

LEGEND

LATE INTRUSIVE ROCKS

8 Proterozoic diabase

EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphiritic rock
6c diorite
6d feldspar porphyry

ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4x graphitic rock

FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2i reworked tuff (tuffaceous sedimentary rock)

MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e varioitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
sio silicification
cbn carbonate
cc calcite
ank ankerite
ser sericite
chl chlorite
pyx pyroxene
fsd feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

GO740 whole rock and trace element sample

GO740 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed posit)

TREES

adr alder
ppr popular
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

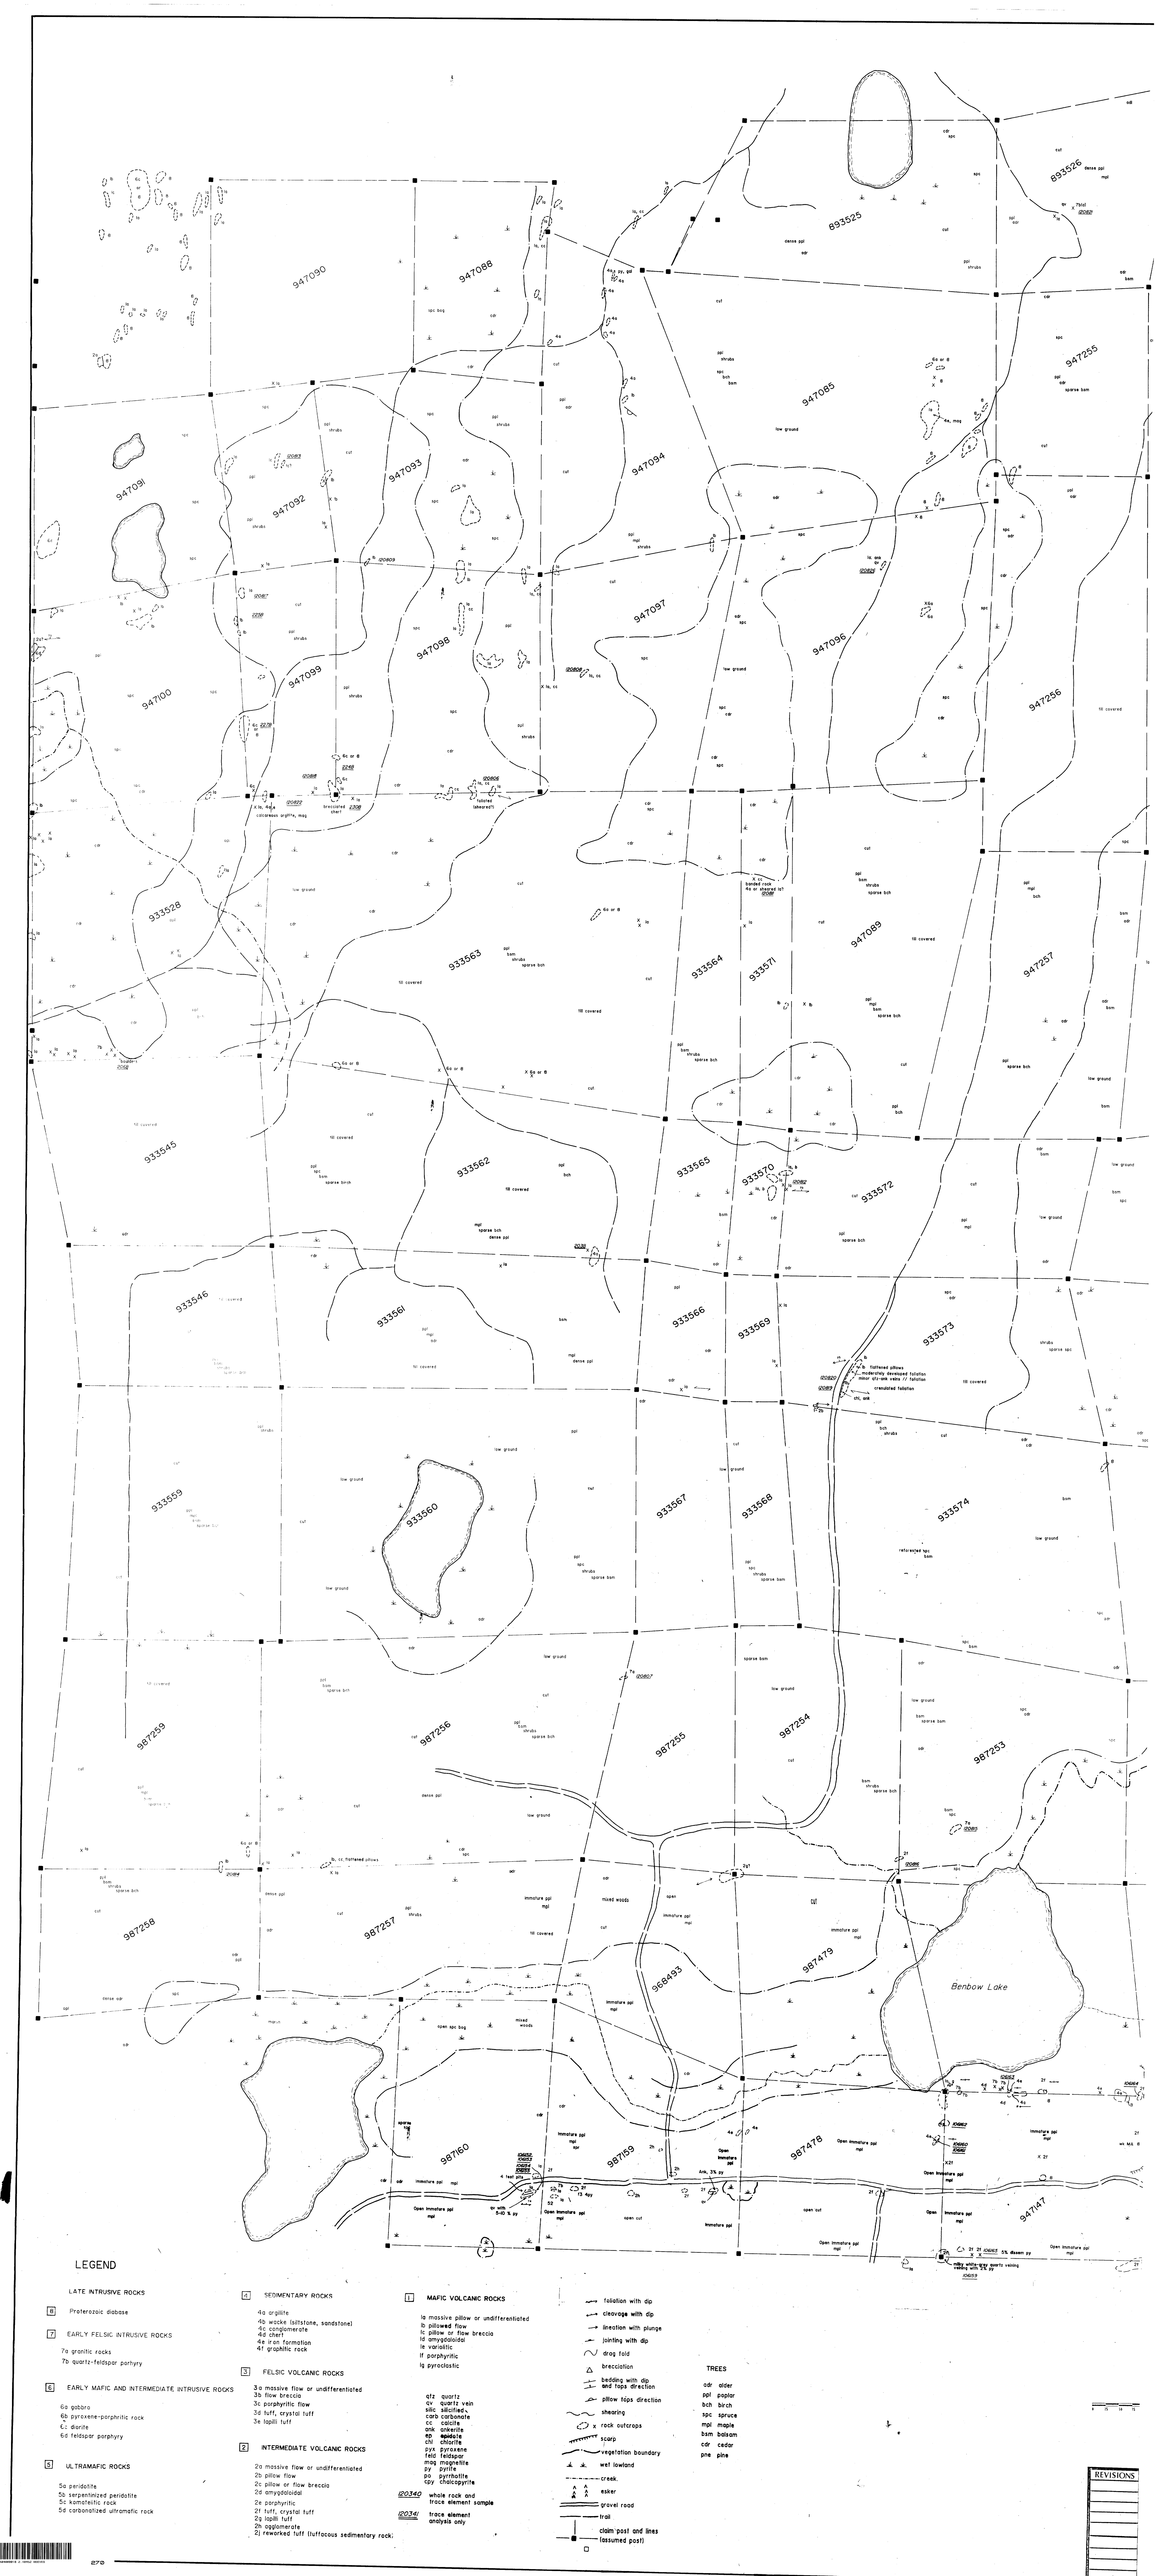

LEGEND

LATE INTRUSIVE ROCKS

[8] Proterozoic diabase

[7] EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

[6] EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphiritic rock
6c diorite
6d feldspar porphyry

[5] ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

[4] SEDIMENTARY ROCKS

4a argilite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

[3] FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

[2] INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2i reworked tuff (tuffaceous sedimentary rock)

[1] MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
cv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
dol dolomite
py pyrite
pyx pyroxene
feld feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

(20340) whole rock and trace element sample

(20340) trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
x rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed post)

TREES

adr alder
ppl poplar
bch birch
spc spruce
mgl maple
bam balsam
cdr cedar
pne pine

REVISIONS

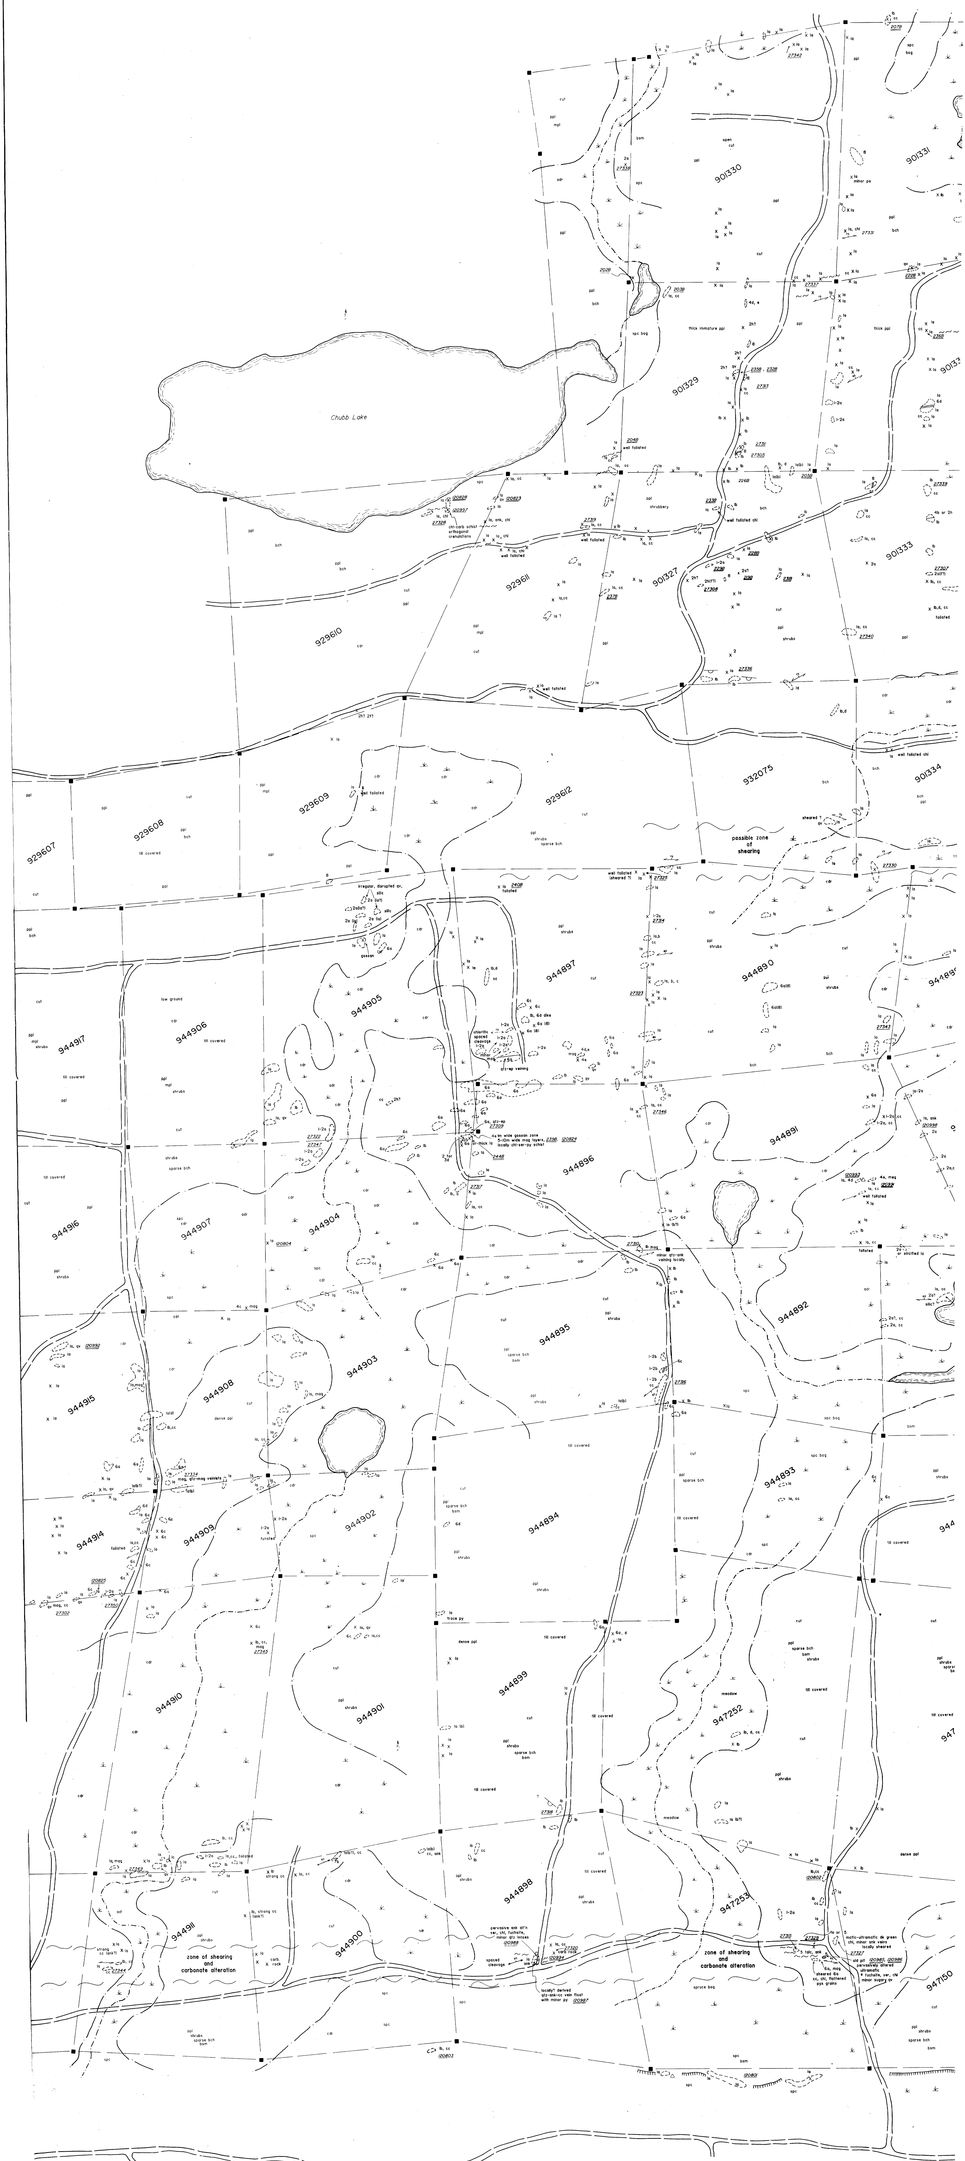

LATE INTRUSIVE ROCKS

6 Proterozoic diabase

7 EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

6 EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-plagioclase rock
6c diorite
6d feldspar porphyry

5 ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

4 SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

3 FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

2 INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloid
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2i reworked tuff (tuffaceous sedimentary rock)

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloide
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

AD340 whole rock and trace element sample

AD347 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
breccation
bedding with dip and tops direction
pillow tops direction
shearing
rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed post)

TREES

adr alder
pop poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

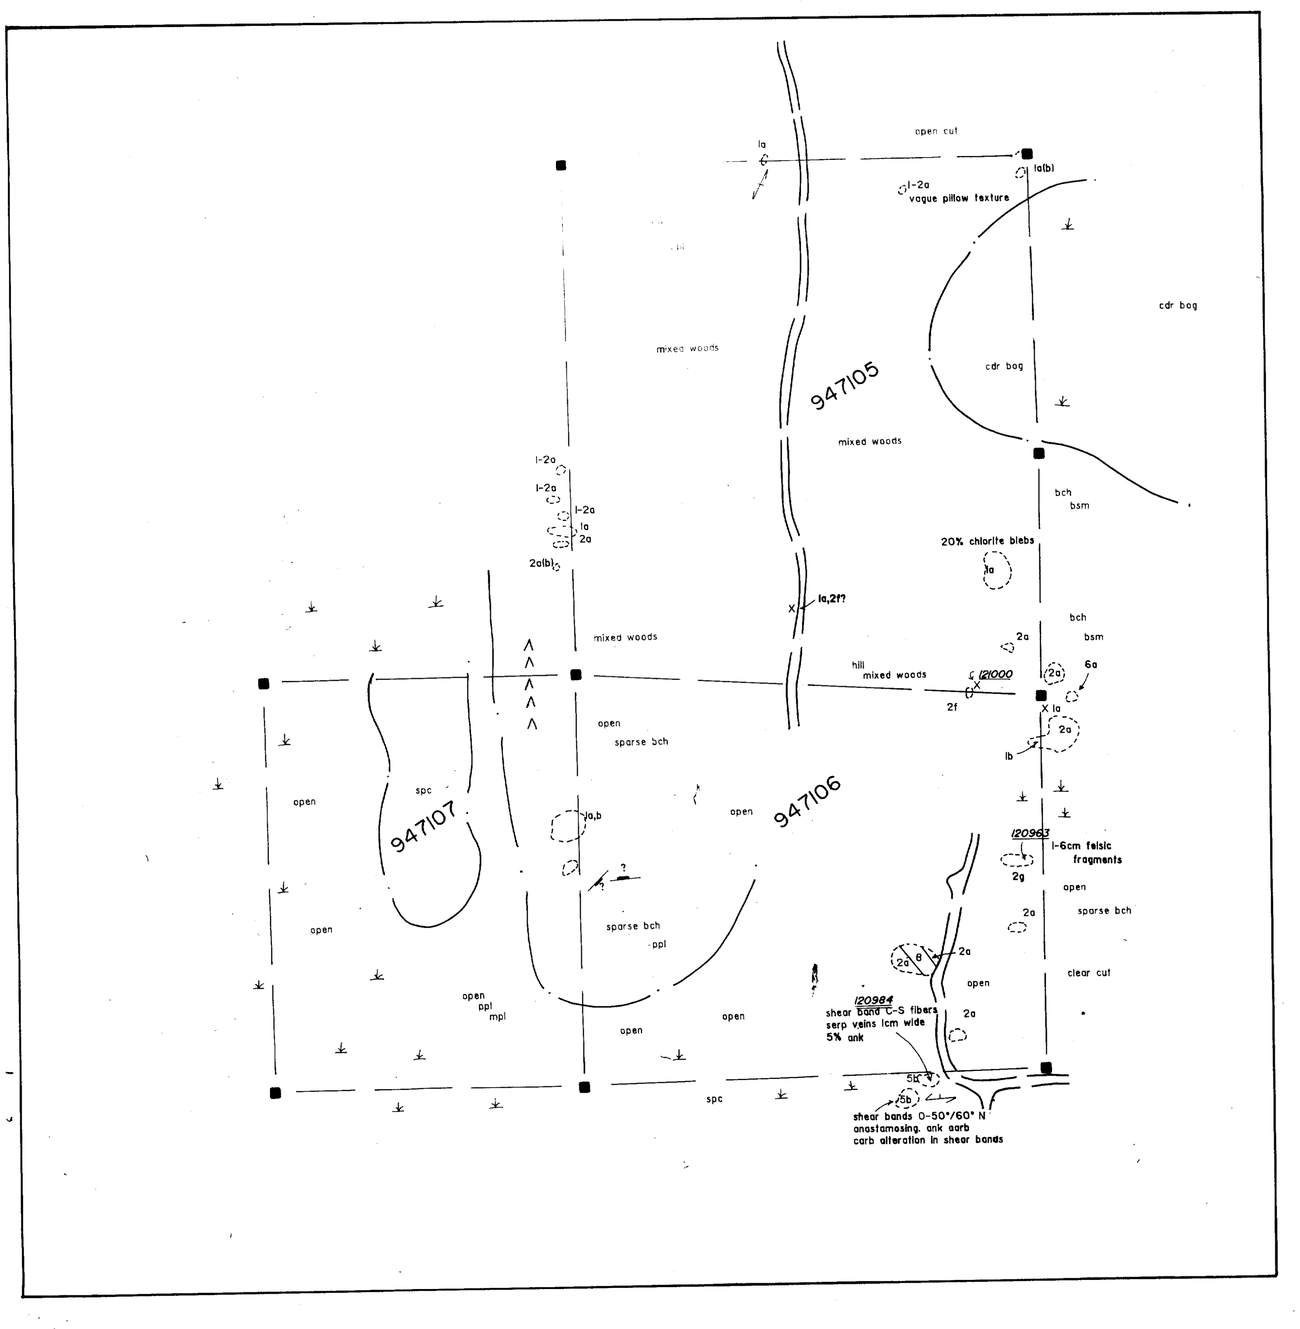

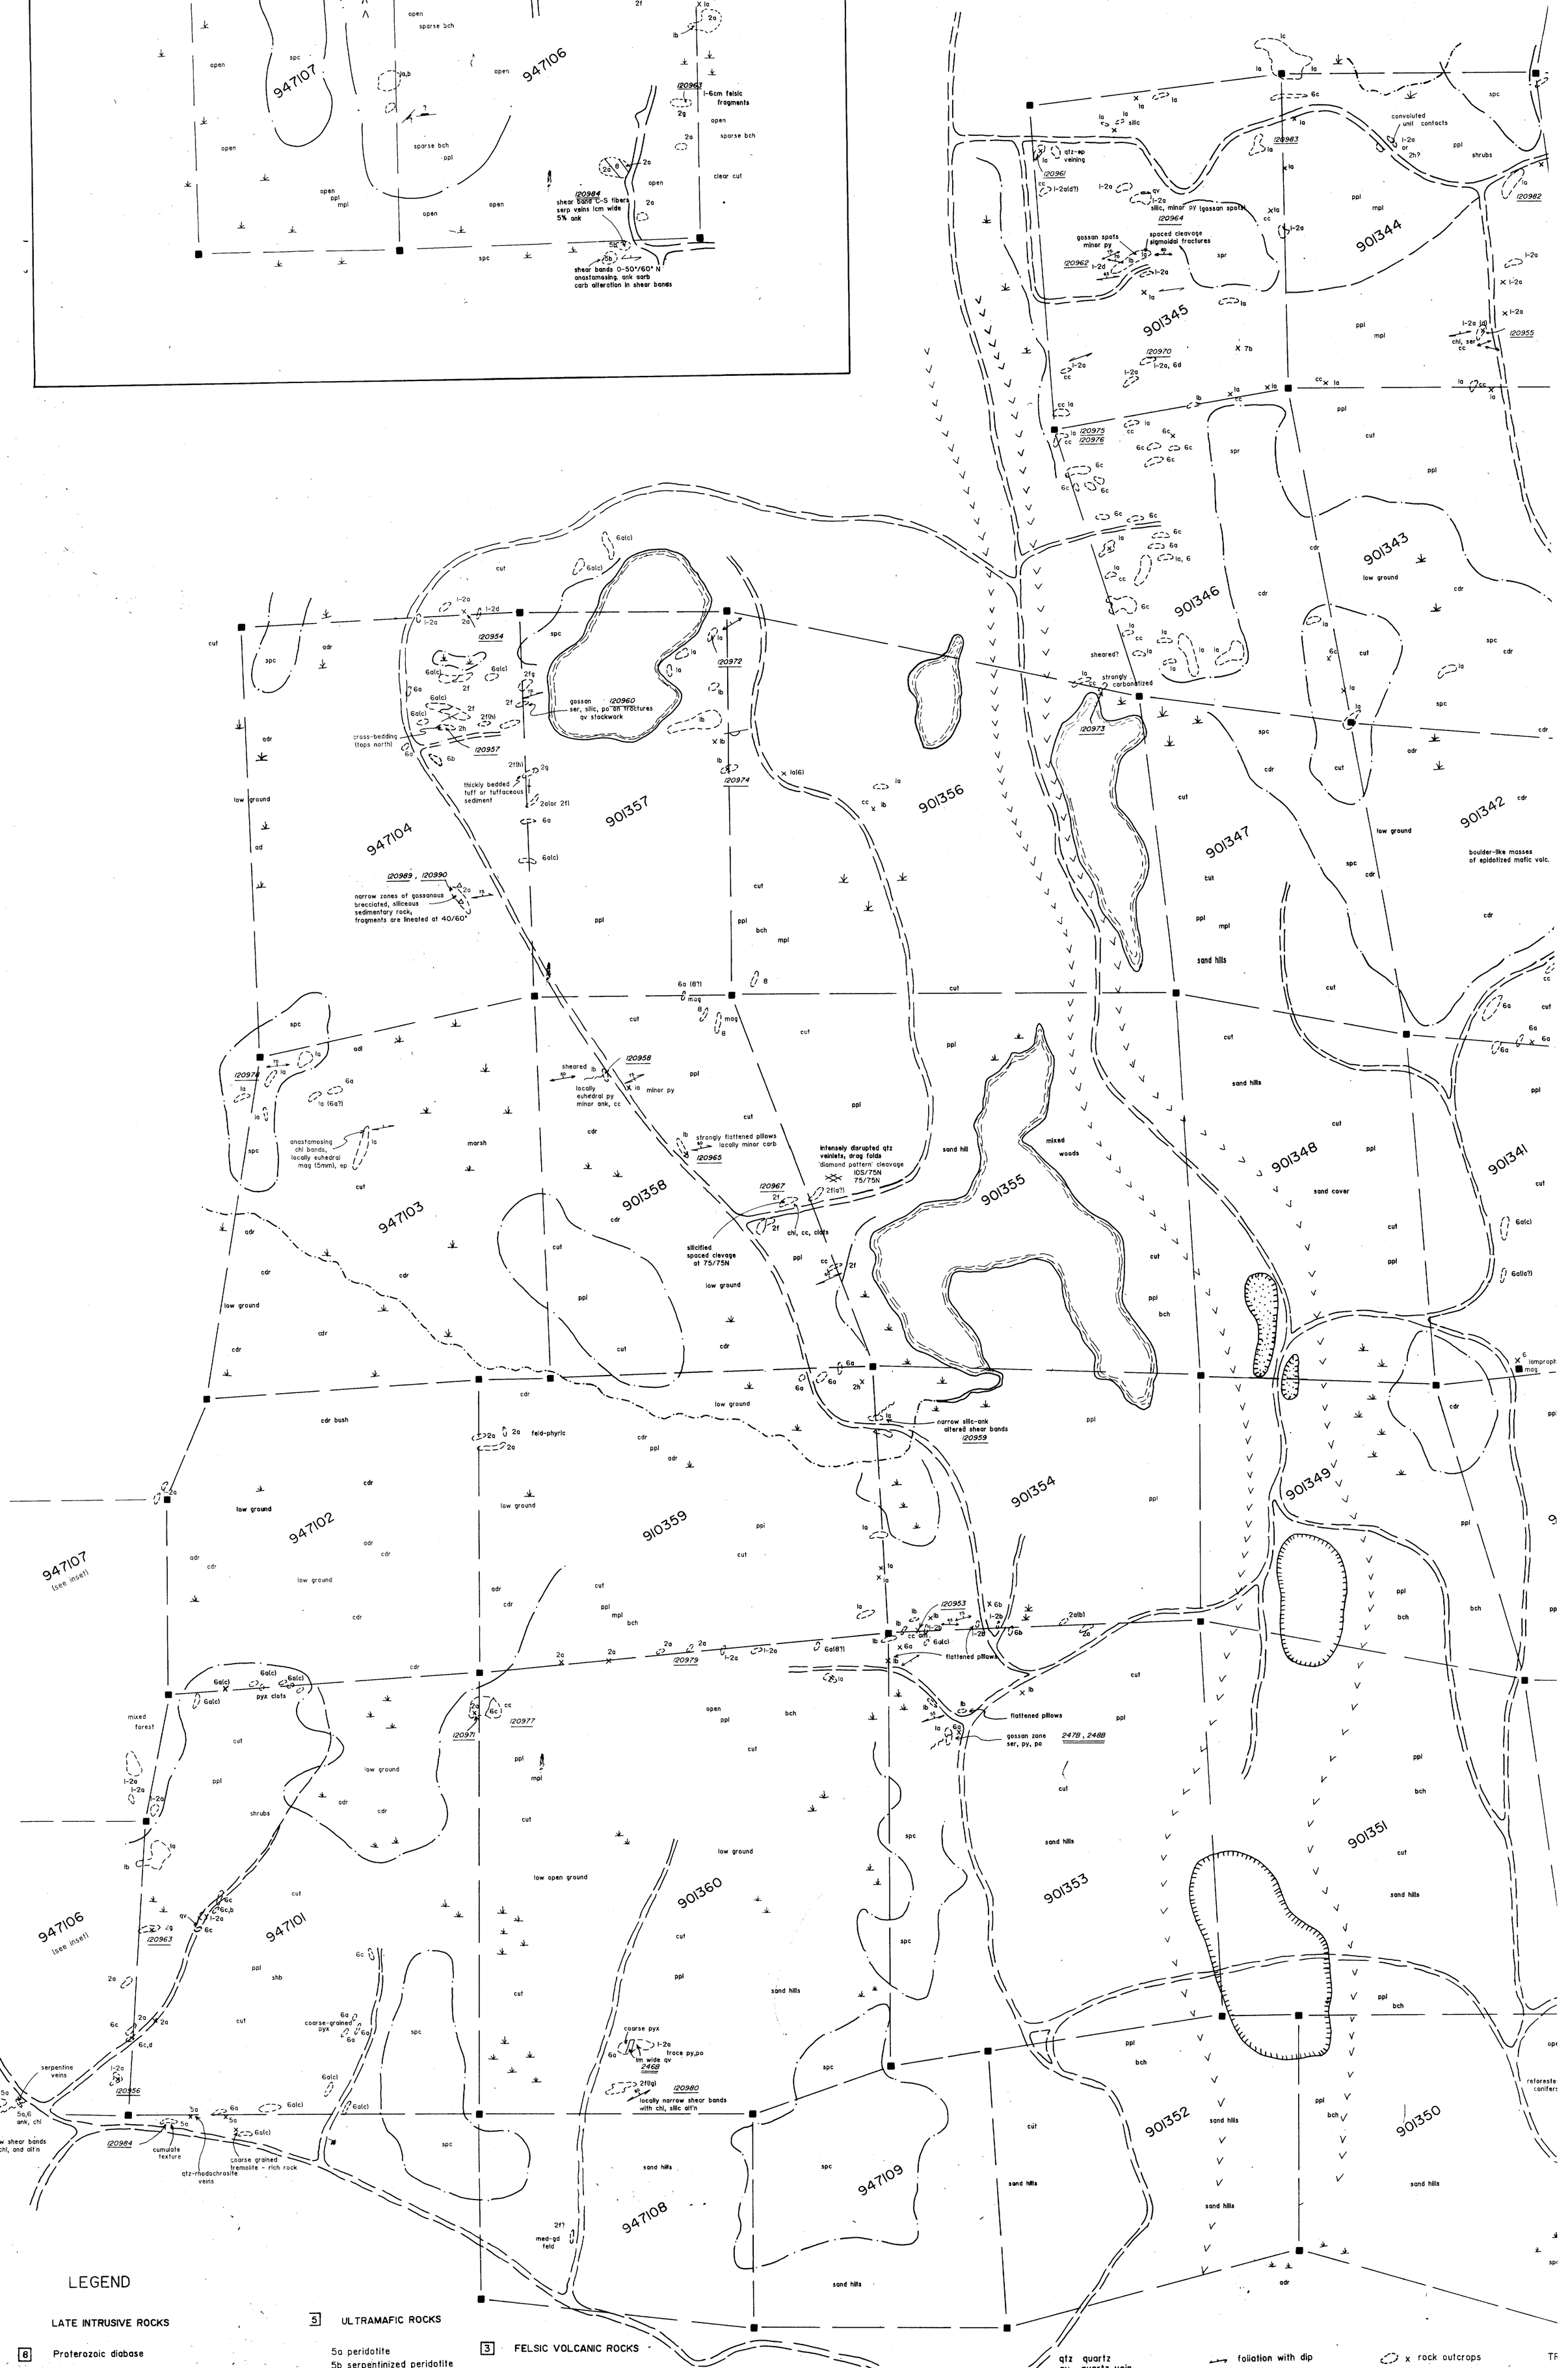

LEGEND

LATE INTRUSIVE ROCKS

6 Proterozoic diabase

7 EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphritic rock
6c diorite
6d feldspar porhyry

4 SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

5 ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

3 FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

2 INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite
py pyrrhotite
po pyrrhotite
cpy chalcopyrite

120340 whole rock and trace element sample
120341 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing

x rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed post)

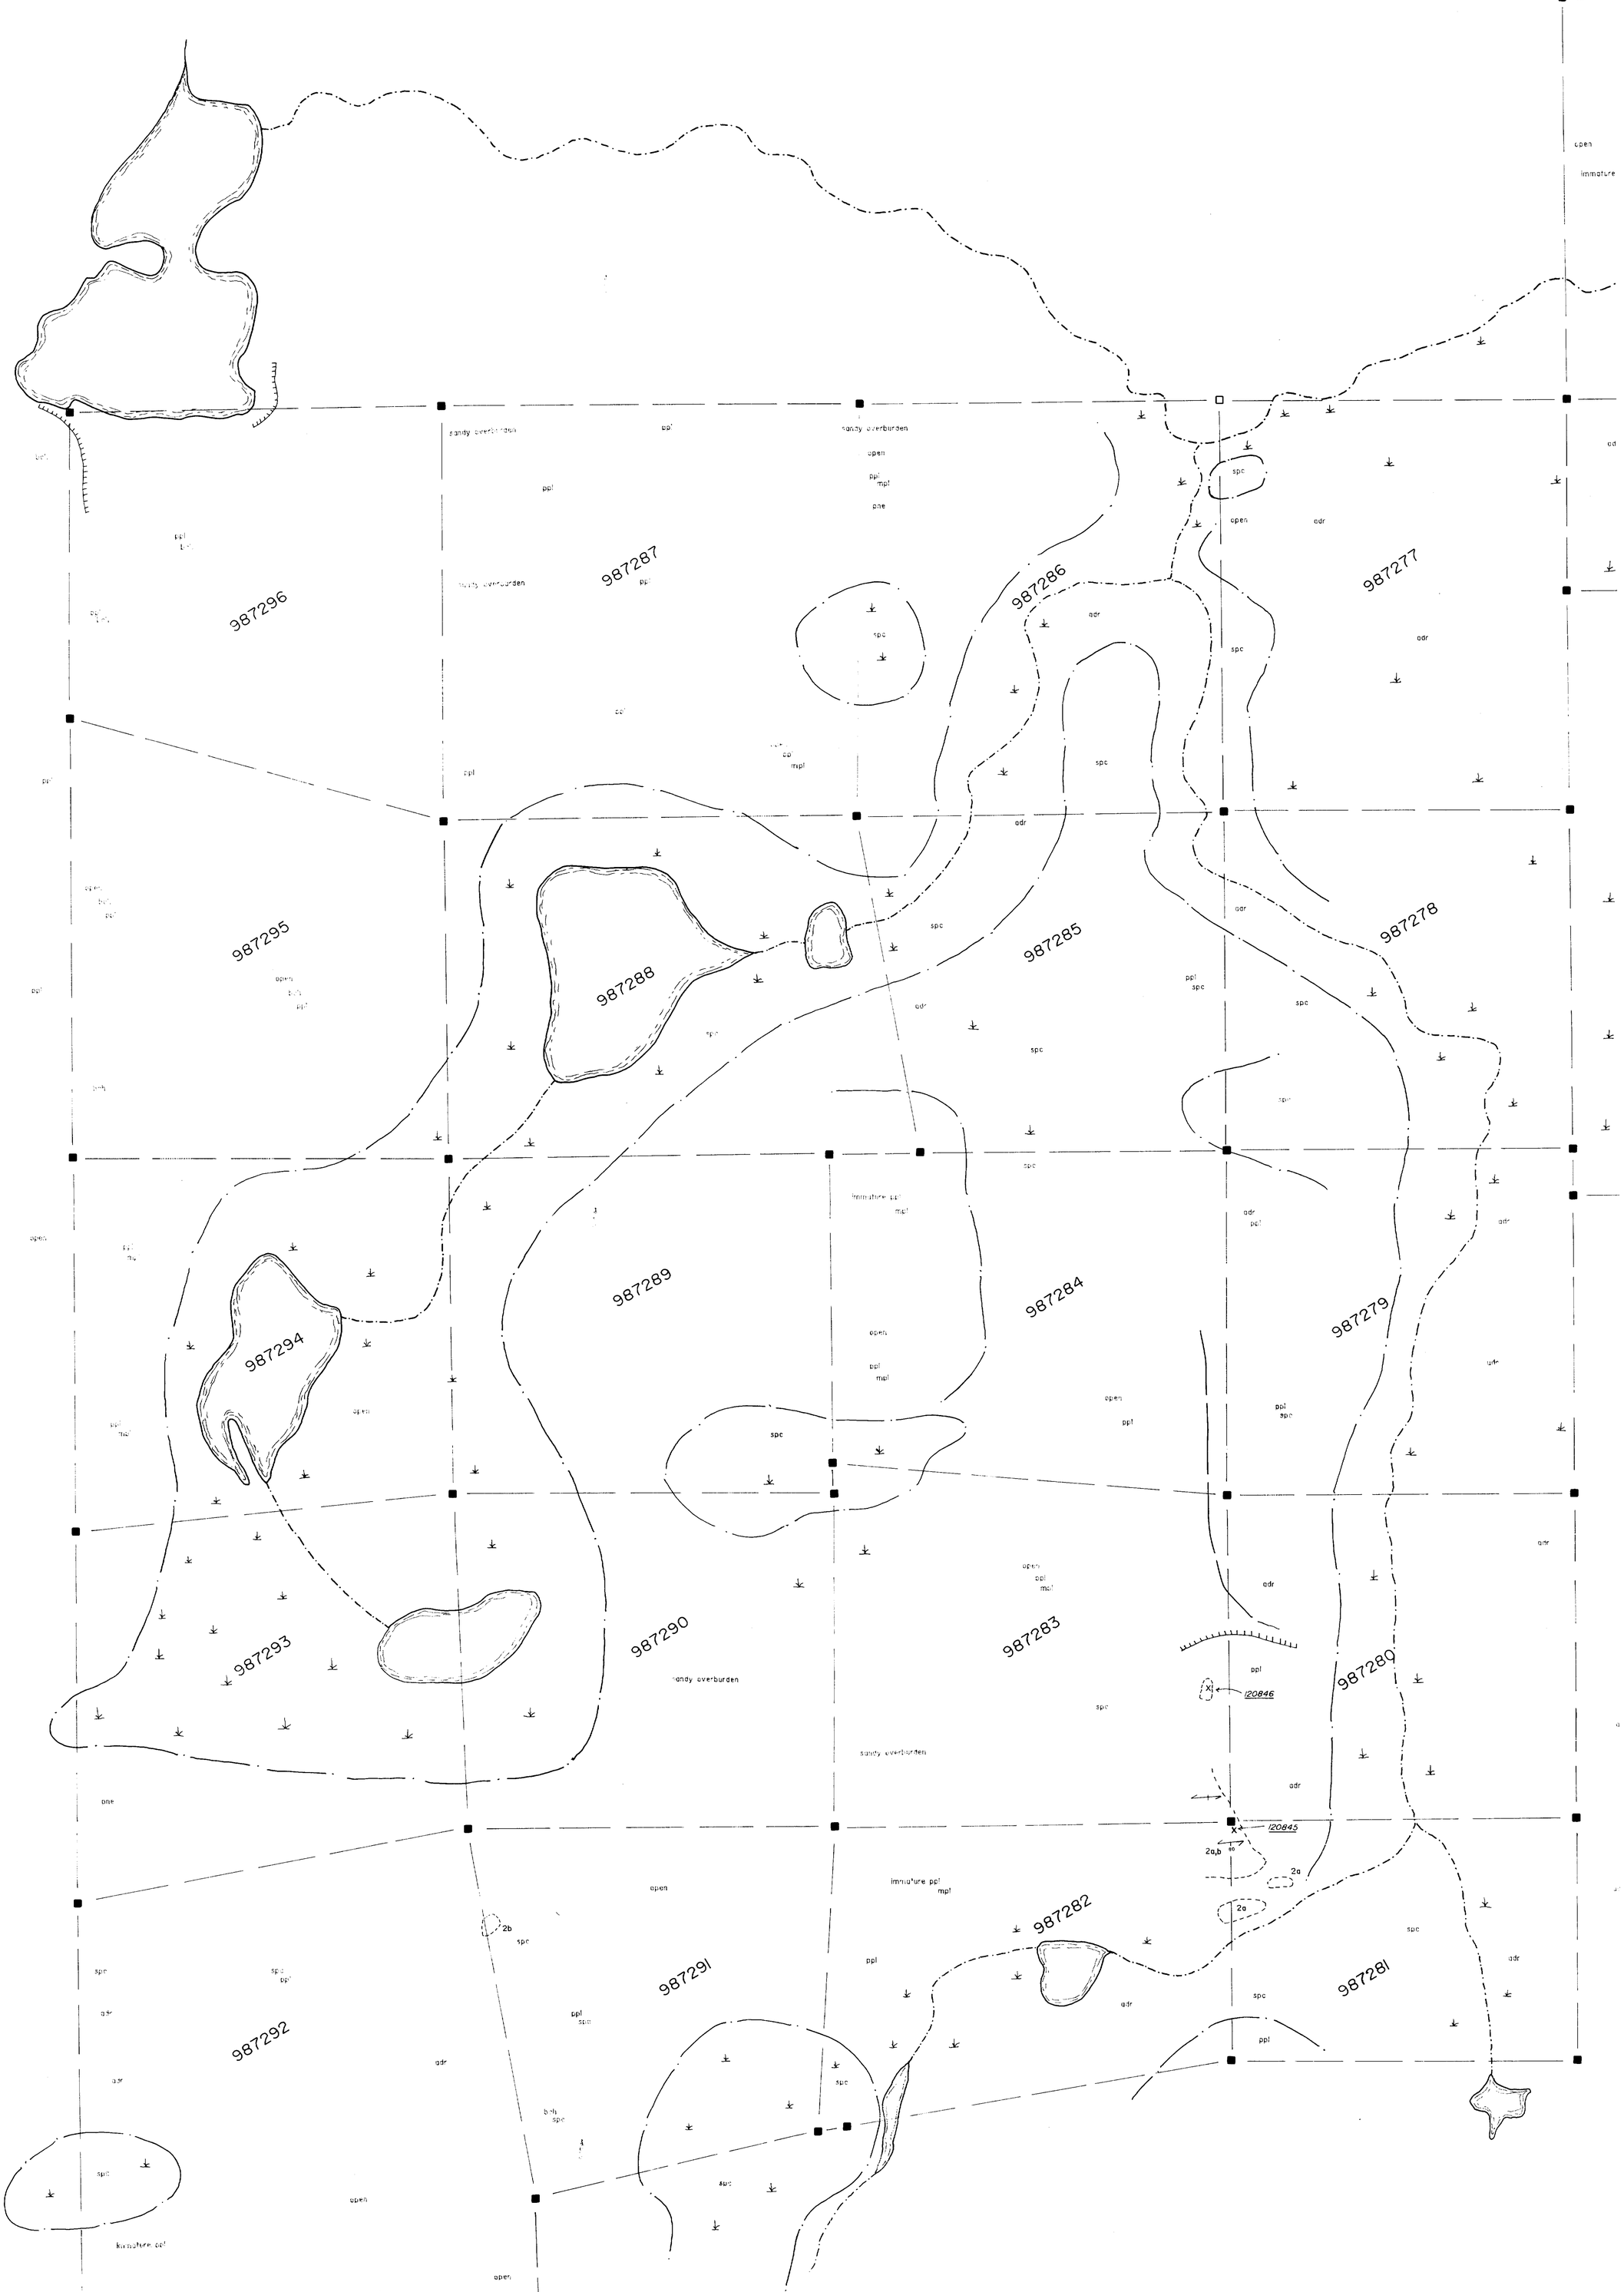

LEGEND

LATE INTRUSIVE ROCKS

8 Proterozoic diabase

7 EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

6 EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphritic rock
6c diorite
6d feldspar porphyry

5 ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

4 SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

3 FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

2 INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

qtz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

120340 whole rock and trace element sample

120341 trace element analysis only

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
x rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines
(assumed post)

TREES

adr alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

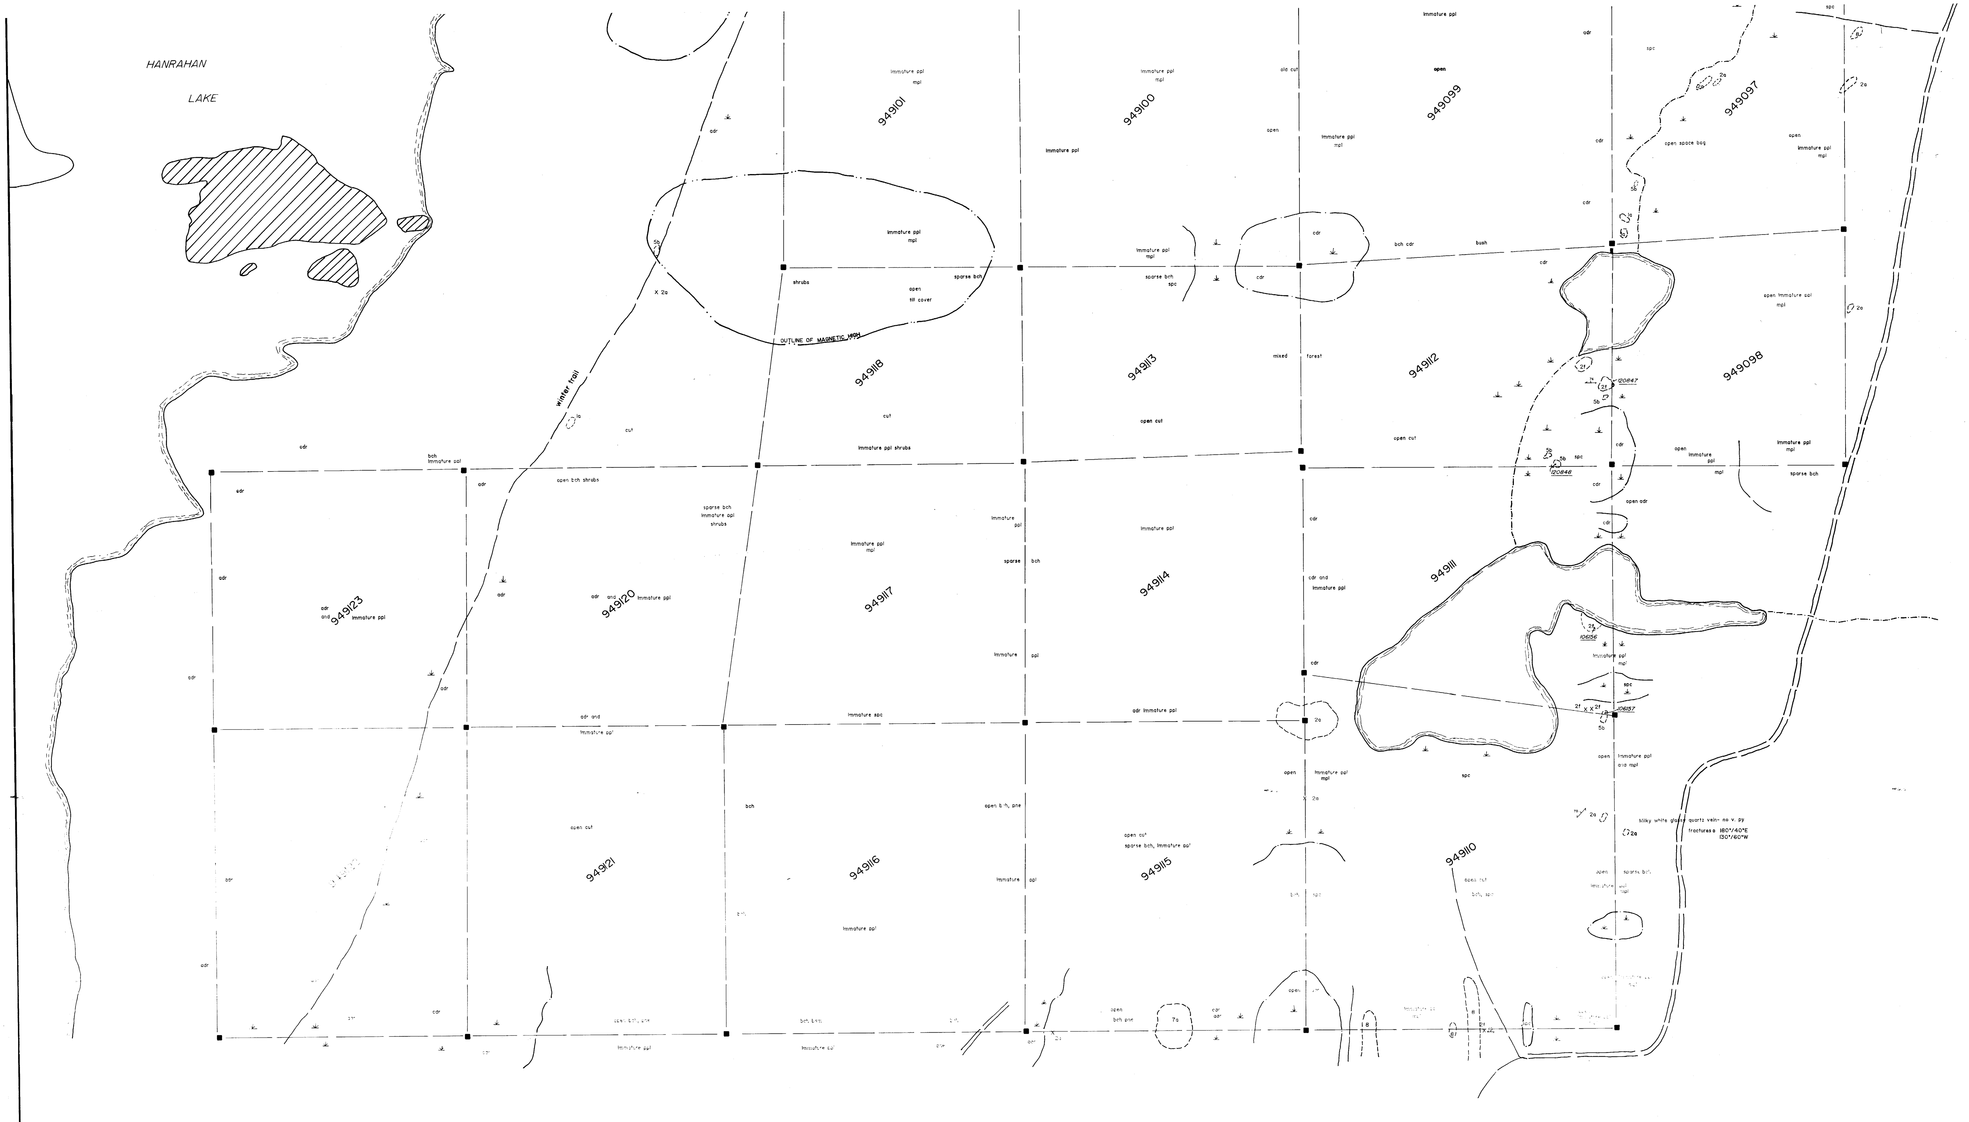

LEGEND

LATE INTRUSIVE ROCKS

8 Proterozoic diabase

7 EARLY FELSIC INTRUSIVE ROCKS

7a granitic rocks
7b quartz-feldspar porhyry

6 EARLY MAFIC AND INTERMEDIATE INTRUSIVE ROCKS

6a gabbro
6b pyroxene-porphritic rock
6c diorite
6d feldspar porphyry

5 ULTRAMAFIC ROCKS

5a peridotite
5b serpentinized peridotite
5c komatiitic rock
5d carbonatized ultramafic rock

1 MAFIC VOLCANIC ROCKS

1a massive pillow or undifferentiated
1b pillowed flow
1c pillow or flow breccia
1d amygdaloidal
1e variolitic
1f porphyritic
1g pyroclastic

atz quartz
qv quartz vein
silic silicified
carb carbonate
cc calcite
ank ankerite
ep epidote
chl chlorite
pyx pyroxene
feld feldspar
mag magnetite
py pyrite
po pyrrhotite
cpy chalcopyrite

120340 whole rock and trace element sample

120341 trace element analysis only

4 SEDIMENTARY ROCKS

4a argillite
4b wacke (siltstone, sandstone)
4c conglomerate
4d chert
4e iron formation
4f graphitic rock

3 FELSIC VOLCANIC ROCKS

3a massive flow or undifferentiated
3b flow breccia
3c porphyritic flow
3d tuff, crystal tuff
3e lapilli tuff

2 INTERMEDIATE VOLCANIC ROCKS

2a massive flow or undifferentiated
2b pillow flow
2c pillow or flow breccia
2d amygdaloidal
2e porphyritic
2f tuff, crystal tuff
2g lapilli tuff
2h agglomerate
2j reworked tuff (tuffaceous sedimentary rock)

foliation with dip
cleavage with dip
lineation with plunge
jointing with dip
drag fold
brecciation
bedding with dip and tops direction
pillow tops direction
shearing
x rock outcrops
scarp
vegetation boundary
wet lowland
creek
esker
gravel road
trail
claim post and lines (assumed post)

TREES

adr alder
ppl poplar
bch birch
spc spruce
mpl maple
bsm balsam
cdr cedar
pne pine

2.10452

REVISIONS	ROBERT S. MIDDLETON EXPLORATION SERVICES INC.
	for GOLDROCK RESOURCES INC. & GLEN AUDEN RESOURCES LTD.
	Title REEVES PROPERTY JOINT VENTURE
	GEOLOGY MAP 7S
	R. Bark
	Date: OCT/87 Scale: 1 : 2500 N.T.S.:
	Drawn: B.S.B./S.S Approved: File: M-223